

HIOKI

AC CLAMP POWER METER CM3286-50

*Precisely identify
electricity theft*



Electrical energy measurement	Values	
	Predicted Value	0.03
	Difference	-0.03
	Ratio	95 %
	Integration Start	2017-04-19 17:03:56
	Integration Stop	2017-04-19 17:04:01

AC RMS V
Voltage

AC RMS A
Current

W
 $V \times I$
Power

COS
 ϕ
Power factor

L1 L2 L3
Phase detection

Wh
Simple integral power consumption

Hz
Frequency

Peak value
Peak

Harmonics
Harmonics



3 year
Warranty

Bluetooth
When Z3210 is installed

Wireless Adapter Compatible


CAT IV 600 V
CAT III 1000 V

Operating temperature
-25°C to +65°C

*Harmonic can be displayed with the GENNECT Cross dedicated application software.

Accurately detect electricity theft


- The CM3286 is ideal for verifying electricity theft since it can measure both AC power and current.
- The instrument's electricity theft detection-and-report function can be used to quickly and easily make measurements and generate reports.

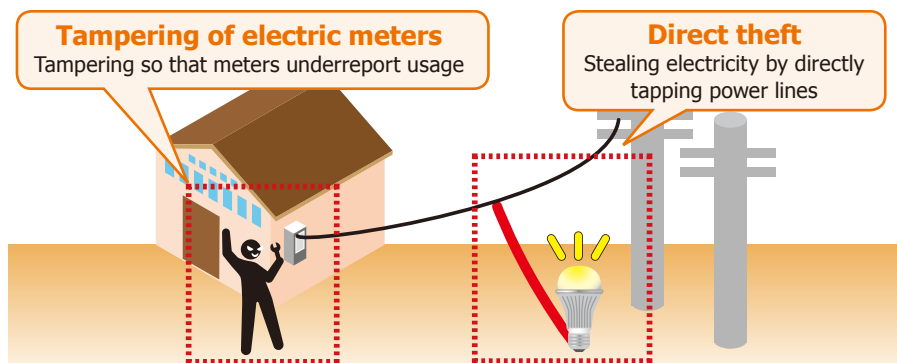


Meter tampering

Detect by comparing electric meter readings and measurements


Proper operation of electric meters can be confirmed by comparing meter readings and actual values.

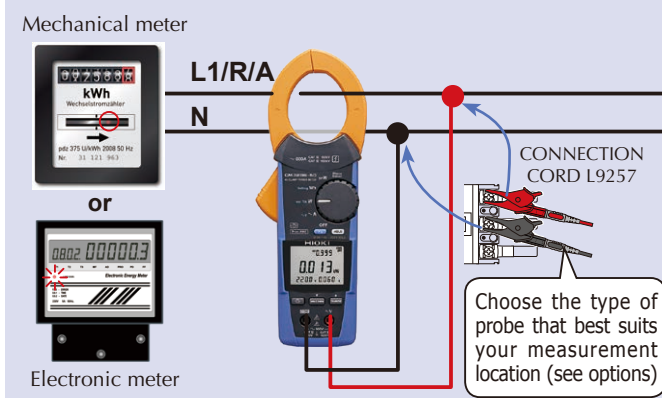

[Proper operation]

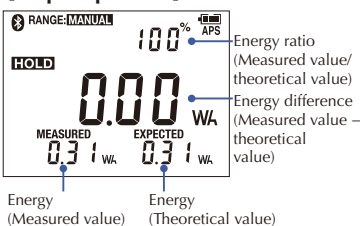

[Faulty operation]




Direct theft

Detect by measuring current


Electricity theft can be detected by measuring current on the power supply side of the illegal connection.



[Proper operation]



[Faulty operation]




*Screen values represent example measurements.

Quick and easy data recording using Bluetooth® communication with the Z3210

Available for Android and iOS devices



When you freeze the measured value, it is automatically transferred to a smartphone or tablet, eliminating the need to jot down readings by hand. You can also create a simple PDF report right there in the field, and save data in CSV format for later editing in Excel.

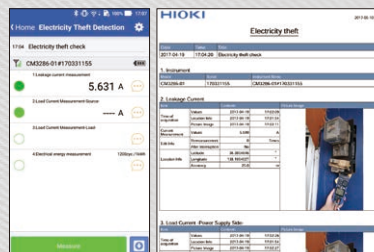

Electricity theft detection-and-report function

Simply follow the measurement procedure to take measurements and photographs at four locations and the instrument will automatically generate a report, complete with photos.

Since the report is generated automatically in the field based on captured measurement data, it's impossible for others to alter the data.

Delivering a broad range of measurements at sites from manufacturing plants to households

- Accurately measure power from 5 W at a current as low as 60 mA to 360 kW at a maximum of 600 A (single-phase power measurement).
- In addition to current, voltage, and power, measure simple integral power consumption and phase sequence.
- Obtain accurate readings with true RMS measurement.

Measurement line

Measure power in single-phase to balanced three-phase circuits (with estimated values)
1-phase/ 2-wire
1-phase/ 3-wire
balanced 3-phase/3-wire
balanced 3-phase/4-wire

**The instrument generates estimated power values when measuring 3-phase circuits.*



Rotary switch that can be turned with a single hand

White backlight

All related parameters are shown on a single screen



[Power display]

PF 0.999
0.100 kW
100.0 V 100.0 A
Voltage RMS value Current RMS value


[Current display]

60.0 Hz
10.00 A
1.42 PEAK A
Current frequency Current value Current peak value

Simple wiring guide


The CM3286 provides a simple on-screen guide indicating how to connect it to a 3-phase circuit.

Example: 3-phase AC measurement (3P3W, balanced)

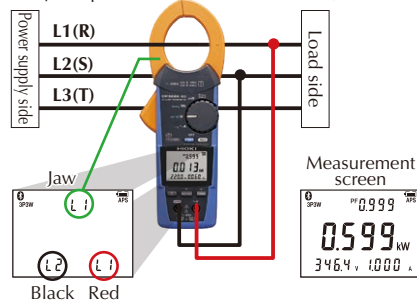

AUTO HOLD


The clamp meters beep when the measured value stabilizes and then automatically hold the display value. This is useful when using the instrument in locations where it is difficult to see the display or press the hold button.

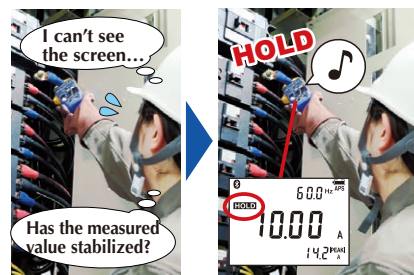

Easily check power supply fluctuations


Since it can display maximum (MAX), minimum (MIN), and average (AVG) values, the CM3286 is useful when you need to ascertain the magnitude of fluctuations.

And since it can also measure crest (PEAK) values, you can use it to check fluctuations at the crest value level.

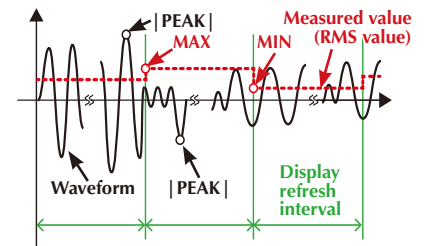

Quickly check for unbalance

The CM3286 can measure unbalanced power in a 3-phase/ 3-wire circuit by measuring the single-phase power twice and then automatically adding the results. (The instrument can also measure 3-phase/4-wire circuits in three separate measurements.)

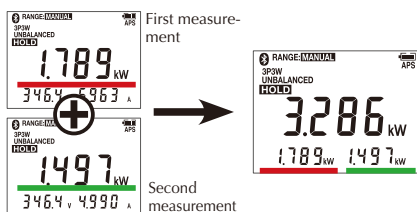

Double warnings with sound and light

When the clamp power meter detects excessively over current or voltage input during a continuity check, it alerts you with a red backlight and beeping tone in order to help prevent accidents.




CAT IV 600 V

The CM3286 can safely measure service wires with a wire-to-ground voltage of up to 600 V as well as wires found in distribution panels. The clamp meters also feature a safe design that can withstand a transient overvoltage of 8 kV in case of a lightning strike.




GENNECT Cross (freeware) is required to use instruments with a smartphone or tablet. GENNECT Cross available from the Google Play or Apple Store.




General measurement

Tap "Save measured value" in the app or press the HOLD key on the measuring instrument to save the data. Measured values from multiple channels can be saved.



Simple logging function


Convenient for observing fluctuations over a short period of time when it's not practical to set up large-scale recording equipment.



Harmonic measurement function

The CM3286-01 can measure the harmonic level, content percentage, and total harmonic distortion of voltage or current for the 1st through 30th orders.

Instantly create reports



Specifications

Accuracy guaranteed for 1 year, product warranty period for 3 years

Measurement line	Single-phase, Three-phase (should be balanced with no distortion)
Measurement items	Voltage, Current, Voltage/ current peak, Active/ reactive/ apparent power, Power factor, Phase angle*1, Frequency, Simple Active Energy Consumption (Single-phase), Voltage/ current harmonic levels
AC voltage	[Measurement range] 80.0 V to 600.0 V, Single range, Basic accuracy 45 Hz - 66 Hz: $\pm 0.7\%$ rdg. ± 3 dgt. (Frequency characteristics: 45 Hz to 1 kHz, True RMS)
AC current	[Measurement range] 0.060 A to 600.0 A, 3 range, Basic accuracy 45 Hz - 66 Hz: $\pm 1.3\%$ rdg. ± 3 dgt. (Frequency characteristics: 45 Hz to 1 kHz, True RMS)
Power	[Single phase] 0.005 kW to 360.0 kW Basic accuracy: $\pm 2.0\%$ rdg. ± 7 dgt. (50/ 60 Hz, Power factor=1) [Balanced three-phase 3-wire] 0.020 kW to 623.5 kW Basic accuracy: $\pm 3.0\%$ rdg. ± 10 dgt. (50/ 60 Hz, Power factor=1) [Balanced three-phase 4-wire] 0.040 kW to 1080 kW Basic accuracy: $\pm 2.0\%$ rdg. ± 3 dgt. (50/ 60 Hz, Power factor=1)
Harmonic*2	Voltage/ current harmonic levels up to 30th, Content factor, Total harmonic distortion ratio
Other functions	[Phase angle *1] lead -180.0° to lag 179.9°, [Power factor] -1.000 to 1.000 [Frequency] 45.0 Hz to 999.9 Hz, PEAK, phase detection, max/min/avg value display, auto hold, electric meter comparison, unbalanced 3-phase power estimate display, etc.
Maximum rated voltage to earth Maximum rated voltage to terminal	600 V AC (Measurement category IV) 1000 V AC (Measurement category III)
Crest factor	6 A/ 60 A range 3 or less, 600 A/ 600 V range 1.6 or less
Operating and storage temperature and humidity ranges	-25°C to 65°C or less (-13.0°F to 149.0°F) 80% RH or less (no condensation, less than 40°C)
Dustproof and waterproof*3	Grip: IP50

Bluetooth® communication	Available When WIRELESS ADAPTER Z3210 (Option) is attached
Standards	Safety: EN61010, EMC: EN61326
Power supply	LR03 Alkaline battery x2
Continuous operating time	Approx. 25 hours (Backlight OFF, Bluetooth® OFF) Approx. 18 hours (Backlight OFF, Bluetooth® ON)
Core jaw diameter	φ 46 mm (1.81 in)
Dimensions and Mass	65 mm (2.56in) W × 241 mm (9.49in) H × 35 mm (1.38in) D, 450 g (15.9 oz)

*1) Phase angle obtained from zero cross of current / voltage.

*2) Harmonic can be displayed by dedicated application software (Gennect Cross).

WIRELESS ADAPTER Z3210 (Option) is required

*3) While in storage, or when measuring an insulated conductor. Do not use when wet.

*The indicated value for three-phase power is based on the assumption of a balanced condition and sine wave without distortion at 50/60 Hz. Accurate measurement is not possible on an unbalanced or inverter controlled three-phase line. Also, if the phase (zero cross) cannot be detected due to significant waveform distortion, it cannot be measured nor displayed.

*The power factor / phase angle are values obtained from the zero cross of the current and voltage. If the phase (zero cross) cannot be detected due to significant waveform distortion, it cannot be measured nor displayed.

Order code/ Options

Model No. (Order Code)
CM3286-50
CM3286-90 Includes WIRELESS ADAPTER Z3210

Accessories

- CONNECTION CORD L9257 x1
- CARRYING CASE C0203 x1
- LR03 Alkaline battery x2
- Instruction manual x1



L9257



C0203



WIRELESS ADAPTER Z3210

Model CM3286-90 Includes
WIRELESS ADAPTER Z3210 as a set

Options (Test leads)

CONNECTION CABLE SET
L4930
(1.2m)

EXTENSION CABLE SET
L4931
(1.5m, Expands the length of the L4930)

Options (for L9257, L4930, L4931)

Tip options (Red/ Black: 1 each). Attaches to the tip of the banana plug cable.

TEST PIN SET
L4938

ALLIGATOR CLIP SET
L4935

BUS BAR CLIP SET
L4936

MAGNETIC ADAPTER SET
L4937

BREAKER PIN SET
L4939

TEST PIN SET
L4932

GRABBER CLIP
L9243

MAGNETIC ADAPTER
9804

Options (Clamp adapter)

CLAMP ON ADAPTER
9290-10
(1000 A AC, φ55 mm,
CT ratio of 10:1)

Options (Test leads)

TEST LEAD
L9207-10

TEST LEAD
L9300

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

HIOKI
HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all
regional contact
information

DISTRIBUTED BY

CALPLUS
Die Kompetenz in der Messtechnik

CalPlus GmbH - Zentrale
Heerstraße 32
14052 Berlin
Tel.: 030 214982-0
Fax: 030 214982-50
office@calplus.de
www.calplus.de

CalPlus GmbH
Normannenweg 30
20537 Hamburg
Tel.: 040 3039595-0
Fax: 040 3039595-50
scopeshop@calplus.de
www.calplus.de