

SignalVu-PC

Vector Analysis Software

Programmer Manual

Register now!

Click the following link to protect your product.

www.tek.com/register



Copyright © 2026, Tektronix, Inc. All rights reserved. Licensed software products are owned by Tektronix or its subsidiaries or suppliers, and are protected by national copyright laws and international treaty provisions. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specifications and price change privileges reserved.

TEKTRONIX and TEK are registered trademarks of Tektronix, Inc.

These are the original instructions in English.

Go to tek.com/eula to read the Tektronix End User License Agreement.



Contacting Tektronix

Tektronix, Inc.
13725 SW Karl Braun Drive
P.O. Box 500
Beaverton, OR 97077
USA

For product information, sales, service, and technical support:

In North America, call 1-800-833-9200.

Worldwide, visit www.tek.com to find contacts in your area.

Contents

Preface	106
Related documentation.....	106
Getting Started	106
Overview of the Manual.....	106
Syntax and Commands.....	107
Status and Events.....	107
Setting up remote communications.....	108
Measurement support.....	111
Syntax and Commands	116
Command syntax.....	116
Backus-Naur Form Definition.....	116
SCPI Commands and Queries.....	117
IEEE 488.2 Common Commands.....	121
Constructed Mnemonics.....	121
Command groups.....	122
Functional groups.....	122
Programming hints.....	123
IEEE common commands.....	123
Obsolete commands.....	124
Abort commands.....	125
Calculate commands.....	126
Marker mnemonics.....	157
Calibration commands.....	158
Display commands.....	159
Fetch commands.....	194
Initiate commands.....	227
Input commands.....	227
Mass memory commands.....	228
Specifying the File.....	239
Output commands.....	239
Read commands.....	241
Sense commands.....	273
Status commands.....	359
Source commands.....	363
System commands.....	363
Trace commands.....	366
Trace mnemonics.....	377
Trigger commands.....	378
Unit commands.....	382
Retrieving response message.....	382

Command descriptions	383
ABORT (No query form)	383
*CAL (Query only)	384
Calculate commands	384
CALCulate[:SEARCh]:TEST]:LIMit[:STATe]:MATCh:FILE:LOCation	384
CALCulate[:SEARCh]:TEST]:LIMit[:STATe]:MATCh:FILE: NAME:BASE	385
CALCulate:ACPower:MARKer<x>:DELTA:X? (Query Only)	385
CALCulate:ACPower:MARKer<x>:DELTA:Y? (Query Only)	386
CALCulate:ACPower:MARKer<x>:MAXimum (No Query Form)	386
CALCulate:ACPower:MARKer<x>:PEAK:LEFT (No Query Form)	386
CALCulate:ACPower:MARKer<x>:PEAK:RIGHT (No Query Form)	387
CALCulate:ACPower:MARKer<x>:X	387
CALCulate:ACPower:MARKer<x>:Y? (Query Only)	388
CALCulate:{AM FM PM}:MARKer<x>:DELTA:X? (Query Only)	388
CALCulate:{AM FM PM}:MARKer<x>:DELTA:Y? (Query Only)	389
CALCulate:{AM FM PM}:MARKer<x>:MAXimum (No Query Form)	389
CALCulate:{AM FM PM}:MARKer<x>:PEAK:HIGHer (No Query Form)	390
CALCulate:{AM FM PM}:MARKer<x>:PEAK:LEFT (No Query Form)	390
CALCulate:{AM FM PM}:MARKer<x>:PEAK:LOWer (No Query Form)	391
CALCulate:{AM FM PM}:MARKer<x>:PEAK:RIGHT (No Query Form)	391
CALCulate:{AM FM PM}:MARKer<x>:X	392
CALCulate:{AM FM PM}:MARKer<x>:Y? (Query Only)	392
CALCulate:AUDio:HARMonic:HNUMber	393
CALCulate:AUDio:HARMonic:NHNumber	393
CALCulate:AUDio:NHARmonic:EXCursion	393
CALCulate:AUDio:NHARmonic:IGNore	394
CALCulate:AUDio:NHARmonic:THReshold	394
CALCulate:AUDio:SPECTrum:MARKer<x>:DELTA:X? (Query Only)	395
CALCulate:AUDio:SPECTrum:MARKer<x>:DELTA:Y? (Query Only)	395
CALCulate:AUDio:SPECTrum:MARKer<x>:MAXimum (No Query Form)	396
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:HIGHer (No Query Form)	396
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LEFT (No Query Form)	397
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LOWer (No Query Form)	397
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:RIGHT (No Query Form)	398
CALCulate:AUDio:SPECTrum:MARKer<x>:TRACe	398
CALCulate:AUDio:SPECTrum:MARKer<x>:X	398
CALCulate:AUDio:SPECTrum:MARKer<x>:Y? (Query Only)	399
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)	399
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)	400
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)	401
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)	401
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)	402
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)	402
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)	403
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:TRACe	403
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:X	404
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only)	404

CALCulate:BLUEtooth:CONStE:MARKer<x>:DELTA:X[:TIME]? (Query only)	405
CALCulate:BLUEtooth:CONStE:MARKer<x>:FDEViation? (Query Only)	405
CALCulate:BLUEtooth:CONStE:MARKer<x>:MAGNitude? (Query Only)	406
CALCulate:BLUEtooth:CONStE:MARKer<x>:MAXimum (No Query Form)	407
CALCulate:BLUEtooth:CONStE:MARKer<x>:PEAK:LEFT (No Query Form)	407
CALCulate:BLUEtooth:CONStE:MARKer<x>:PEAK:RIGHT (No Query Form)	408
CALCulate:BLUEtooth:CONStE:MARKer<x>:PHASe? (Query Only)	408
CALCulate:BLUEtooth:CONStE:MARKer<x>:SYMBol? (Query Only)	409
CALCulate:BLUEtooth:CONStE:MARKer<x>:Trace	409
CALCulate:BLUEtooth:CONStE:MARKer<x>:VALue? (Query Only)	410
CALCulate:BLUEtooth:CONStE:MARKer<x>:X	410
CALCulate:BLUEtooth:EDlagram:MARKer<x>:DELTA:X[:TIME]? (Query Only)	411
CALCulate:BLUEtooth:EDlagram:MARKer<x>:DELTA:Y? (Query Only)	411
CALCulate:BLUEtooth:EDlagram:MARKer<x>:MAXimum (No Query Form)	412
CALCulate:BLUEtooth:EDlagram:MARKer<x>:PEAK:HIGHer (No Query Form)	412
CALCulate:BLUEtooth:EDlagram:MARKer<x>:PEAK:LEFT (No Query Form)	413
CALCulate:BLUEtooth:EDlagram:MARKer<x>:PEAK:LOWer (No Query Form)	413
CALCulate:BLUEtooth:EDlagram:MARKer<x>:PEAK:RIGHT (No Query Form)	414
CALCulate:BLUEtooth:EDlagram:MARKer<x>:TRACe	414
CALCulate:BLUEtooth:EDlagram:MARKer<x>:X[:TIME]	415
CALCulate:BLUEtooth:EDlagram:MARKer<x>:Y? (Query Only)	415
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:X[:TIME]? (Query Only)	416
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:Y? (Query Only)	416
CALCulate:BLUEtooth:FDVTime:MARKer<x>:MAXimum (No Query Form)	417
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:HIGHer (No Query Form)	417
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LEFT (No Query Form)	418
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LOWer (No Query Form)	418
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:RIGHT (No Query Form)	419
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:X[:TIME]	419
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:Y	420
CALCulate:BOBW:MARKer<x>:DELTA:X? (Query Only)	420
CALCulate:BOBW:MARKer<x>:DELTA:Y? (Query Only)	421
CALCulate:BOBW:MARKer<x>:MAXimum (No Query Form)	421
CALCulate:BOBW:MARKer<x>:PEAK:HIGHer (No Query Form)	422
CALCulate:BOBW:MARKer<x>:PEAK:LEFT (No Query Form)	422
CALCulate:BOBW:MARKer<x>:PEAK:LOWer (No Query Form)	423
CALCulate:BOBW:MARKer<x>:PEAK:RIGHT (No Query Form)	423
CALCulate:BOBW:MARKer<x>[:SET]:CENTer (No Query Form)	423
CALCulate:BOBW:MARKer<x>:X	424
CALCulate:BOBW:MARKer<x>:Y? (Query Only)	424
CALCulate:CONStE[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)	425
CALCulate:CONStE[:MEASview<y>]:MARKer<x>:FDEViation? (Query only)	425
CALCulate:CONStE[:MEASview<y>]:MARKer<x>:MAGNitude? (Query only)	426
CALCulate:CONStE[:MEASview<y>]:MARKer<x>:MAXimum (No query form)	427
CALCulate:CONStE[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)	427
CALCulate:CONStE[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)	428
CALCulate:CONStE[:MEASview<y>]:MARKer<x>:PHASe? (Query only)	429

CALCulate:CONSt[e]:MEASview<y>]:MARKer<x>:SYMBol? (Query only)	429
CALCulate:CONSt[e]:MEASview<y>]:MARKer<x>:VALue? (Query only)	430
CALCulate:CONSt[e]:MEASview<y>]:MARKer<x>:X.	431
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)	431
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)	432
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:MAXimum (No query form)	433
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)	433
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)	434
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)	434
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)	435
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:TRACe.	436
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:Y? (Query only)	436
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:X[:TIME].	437
CALCulate:DPX:MARKer<x>:DELTA:X:AMPLitude? (Query Only)	438
CALCulate:DPX:MARKer<x>:DELTA:X[:FREQuency]? (Query Only)	438
CALCulate:DPX:MARKer<x>:DELTA:Y? (Query Only)	439
CALCulate:DPX:MARKer<x>:MAXimum (No Query Form)	439
CALCulate:DPX:MARKer<x>:PEAK:HIGHer (No Query Form)	440
CALCulate:DPX:MARKer<x>:PEAK:LEFT (No Query Form)	440
CALCulate:DPX:MARKer<x>:PEAK:LOWer (No Query Form)	441
CALCulate:DPX:MARKer<x>:PEAK:RIGHT (No Query Form)	441
CALCulate:DPX:MARKer<x>:POWer:DENSity? (Query Only)	441
CALCulate:DPX:MARKer<x>:POWer:IDensity? (Query Only)	442
CALCulate:DPX:MARKer<x>:POWer:INTEgrated? (Query Only)	442
CALCulate:DPX:MARKer<x>[:SET]:CENTer (No Query Form)	443
CALCulate:DPX:MARKer<x>:TRACe.	443
CALCulate:DPX:MARKer<x>:X:AMPLitude.	444
CALCulate:DPX:MARKer<x>:X[:FREQuency].	444
CALCulate:DPX:MARKer<x>:X:PHASe.	445
CALCulate:DPX:MARKer<x>:X:TIME.	445
CALCulate:DPX:MARKer<x>:Y? (Query Only)	446
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)	446
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)	447
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:MAXimum (No query form)	448
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)	448
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)	449
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)	449
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)	450
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:TRACe.	451
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:X[:TIME].	451
CALCulate:EDlagram[:MEASview<y>]:MARKer<x>:Y? (Query only)	452
CALCulate:EMC:MARKer<x>:DELTA:X? (Query Only)	453
CALCulate:EMC:MARKer<x>:DELTA:Y? (Query Only)	453
CALCulate:EMC:MARKer<x>:MAXimum (No Query Form)	454
CALCulate:EMC:MARKer<x>:PEAK:HIGHer (No Query Form)	454
CALCulate:EMC:MARKer<x>:PEAK:LEFT (No Query Form)	454
CALCulate:EMC:MARKer<x>:PEAK:LOWer (No Query Form)	455

CALCulate:EMC:MARKer<x>:PEAK:RIGHT (No Query Form).	455
CALCulate:EMC:MARKer<x>[:SET]:CENTer (No Query Form).	456
CALCulate:EMC:MARKer<x>:X.	456
CALCulate:EMC:MARKer<x>:Y.	457
CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:X? (Query only).	457
CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only).	458
CALCulate:EVM[:MEASview<y>]:MARKer<x>:MAXimum (No query form).	459
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form).	459
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form).	460
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form).	460
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form).	461
CALCulate:EVM[:MEASview<y>]:MARKer<x>:X.	462
CALCulate:EVM[:MEASview<y>]:MARKer<x>:Y? (Query only).	462
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only).	463
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only).	463
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:MAXimum (No query form).	464
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form).	465
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form).	465
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form).	466
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form).	466
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:X[:TIME].	467
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:Y? (Query only).	468
CALCulate:{FSETtling PSETtling}:MARKer<x>:DELTA:X? (Query only).	468
CALCulate:{FSETtling PSETtling}:MARKer<x>:DELTA:Y? (Query only).	469
CALCulate:{FSETtling PSETtling}:MARKer<x>:MAXimum (No Query Form).	469
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:HIGHer (No Query Form).	470
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:LEFT (No Query Form).	470
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:LOWer (No Query Form).	471
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:RIGHT (No Query Form).	471
CALCulate:{FSETtling PSETtling}:MARKer<x>:TRACe.	472
CALCulate:{FSETtling PSETtling}:MARKer<x>:X.	472
CALCulate:{FSETtling PSETtling}:MARKer<x>:Y? (Query Only).	473
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only).	473
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only).	474
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form).	474
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form).	475
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form).	475
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form).	476
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form).	476
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:X.	477
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only).	477
CALCulate:HARMonic:APPLy (No Query Form).	478
CALCulate:HARMonic:MARKer<x>:FACTOR.	478
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only).	479
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only).	480
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form).	480
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form).	481

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form).	481
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form).	482
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form).	483
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:TRACe.	483
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:X.	484
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only).	484
CALCulate:LTE:ACLR:MARKer<x>:PEAK:HIGHer (No Query Form).	485
CALCulate:LTE:ACLR:MARKer<x>:DELTA:X? (Query Only).	485
CALCulate:LTE:ACLR:MARKer<x>:DELTA:Y? (Query Only).	486
CALCulate:LTE:ACLR:MARKer<x>:MAXimum (No Query Form).	486
CALCulate:LTE:ACLR:MARKer<x>:PEAK:LEFT (No Query Form).	486
CALCulate:LTE:ACLR:MARKer<x>:PEAK:LOWer (No Query Form).	487
CALCulate:LTE:ACLR:MARKer<x>:PEAK:RIGHT (No Query Form).	487
CALCulate:LTE:ACLR:MARKer<x>:SET:CENTer (No Query Form).	488
CALCulate:LTE:ACLR:MARKer<x>:X.	488
CALCulate:LTE:ACLR:MARKer<x>:Y? (Query Only).	489
CALCulate:LTE:CHSPpectrum:MARKer<x>:DELTA:X? (Query Only).	489
CALCulate:LTE:CHSPpectrum:MARKer<x>:DELTA:Y? (Query Only).	489
CALCulate:LTE:CHSPpectrum:MARKer<x>:MAXimum (No Query Form).	490
CALCulate:LTE:CHSPpectrum:MARKer<x>:PEAK:LEFT (No Query Form).	490
CALCulate:LTE:CHSPpectrum:MARKer<x>:PEAK:RIGHT (No Query Form).	491
CALCulate:LTE:CHSPpectrum:MARKer<x>:X.	491
CALCulate:LTE:CHSPpectrum:MARKer<x>:Y? (Query Only).	492
CALCulate:LTE:CONSt:MARKer<x>:FREQuency.	492
CALCulate:LTE:CONSt:MARKer<x>:MAGNitude? (Query Only).	493
CALCulate:LTE:CONSt:MARKer<x>:PHASe? (Query Only).	493
CALCulate:LTE:CONSt:MARKer<x>:TIME.	493
CALCulate:LTE:CONSt:MARKer<x>:TYPE? (Query Only).	494
CALCulate:LTE:PVTime:MARKer<x>:PEAK:HIGHer (No Query Form).	494
CALCulate:LTE:PVTime:MARKer<x>:DELTA:X? (Query Only).	495
CALCulate:LTE:PVTime:MARKer<x>:DELTA:Y? (Query Only).	495
CALCulate:LTE:PVTime:MARKer<x>:MAXimum (No Query Form).	496
CALCulate:LTE:PVTime:MARKer<x>:PEAK:LEFT (No Query Form).	496
CALCulate:LTE:PVTime:MARKer<x>:PEAK:LOWer (No Query Form).	497
CALCulate:LTE:PVTime:MARKer<x>:PEAK:RIGHT (No Query Form).	497
CALCulate:LTE:PVTime:MARKer<x>:X.	497
CALCulate:LTE:PVTime:MARKer<x>:Y? (Query Only).	498
CALCulate:MARKer:ADD (No Query Form).	498
CALCulate:MARKer:AOff (No Query Form).	499
CALCulate:MARKer:DELeTe (No Query Form).	499
CALCulate:MARKer:DENSity:EXCurSion.	500
CALCulate:MARKer:DENSity:SMOothing.	501
CALCulate:MARKer:DENSity:THReshold.	501
CALCulate:MARKer:DRAG:SEARCh:STATe.	501
CALCulate:MARKer:MODE.	502
CALCulate:MARKer:NOISe:MODE.	502
CALCulate:MARKer:PEAK:EXCurSion.	503

CALCulate:MARKer:PEAK:THReshold.	503
CALCulate:MCPower:MARKer<x>:DELta:X? (Query Only).	503
CALCulate:MCPower:MARKer<x>:DELta:Y? (Query Only).	504
CALCulate:MCPower:MARKer<x>:MAXimum (No Query Form).	505
CALCulate:MCPower:MARKer<x>:PEAK:LEFT (No Query Form).	505
CALCulate:MCPower:MARKer<x>:PEAK:RIGHT (No Query Form).	505
CALCulate:MCPower:MARKer<x>:X.	506
CALCulate:MCPower:MARKer<x>:Y? (Query Only).	506
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:X? (Query only).	507
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:Y? (Query only).	507
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:MAXimum (No query form).	508
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form).	509
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form).	509
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form).	510
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form).	510
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:X.	511
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:Y? (Query only).	512
CALCulate:MARKer:MODE.	512
CALCulate:NOISe:FIGure:MARKer<x>:DELta:X? (Query Only).	513
CALCulate:NOISe:FIGure:MARKer<x>:DELta:Y? (Query only).	513
CALCulate:NOISe:FIGure:MARKer<x>:MAXimum (No Query Form).	514
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer (No Query Form).	514
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT (No Query Form).	515
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer (No Query Form).	515
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT (No Query Form).	516
CALCulate:NOISe:FIGure:MARKer<x>:TRACe.	516
CALCulate:NOISe:FIGure:MARKer<x>:X? (Query Only).	517
CALCulate:NOISe:FIGure:MARKer<x>:Y? (Query Only).	518
CALCulate:NOISe:GAIN:MARKer<x>:DELta:X? (Query Only).	518
CALCulate:NOISe:GAIN:MARKer<x>:DELta:Y? (Query Only).	519
CALCulate:NOISe:GAIN:MARKer<x>:MAXimum? (Query Only).	519
CALCulate:NOISe:GAIN:MARKer<x>:PEAK:HIGHer? (Query Only).	520
CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LEFT? (Query Only).	520
CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LOWer? (Query Only).	521
CALCulate:NOISe:GAIN:MARKer<x>:PEAK:RIGHT? (Query Only).	521
CALCulate:NOISe:GAIN:MARKer<x>:TRACe.	522
CALCulate:NOISe:GAIN:MARKer<x>:X? (Query Only).	522
CALCulate:NOISe:GAIN:MARKer<x>:Y? (Query Only).	523
CALCulate:NOISe:TEMPerature:MARKer<x>:DELta:X? (Query Only).	523
CALCulate:NOISe:TEMPerature:MARKer<x>:DELta:Y? (Query Only).	524
CALCulate:NOISe:TEMPerature:MARKer<x>:MAXimum? (Query Only).	524
CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:HIGHer? (Query Only).	525
CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LEFT? (Query Only).	526
CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LOWer? (Query Only).	526
CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:RIGHT? (Query Only).	527
CALCulate:NOISe:TEMPerature:MARKer<x>:TRACe.	527
CALCulate:NOISe:TEMPerature:MARKer<x>:X? (Query Only).	528

CALCulate:NOISe:TEMPerature:MARKer<x>:Y? (Query Only)	528
CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:X? (Query Only)	529
CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:Y? (Query Only)	529
CALCulate:NOISe:YFACTOR:MARKer<x>:MAXimum (No Query Form)	530
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:HIGHer? (Query Only)	530
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LEFT? (Query Only)	531
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LOWer? (Query Only)	531
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:RIGHT? (Query Only)	532
CALCulate:NOISe:YFACTOR:MARKer<x>:TRACE	533
CALCulate:NOISe:YFACTOR:MARKer<x>:X? (Query Only)	533
CALCulate:NOISe:YFACTOR:MARKer<x>:Y? (Query Only)	534
CALCulate:OBWidth:MARKer<x>:DELTA:X? (Query Only)	534
CALCulate:OBWidth:MARKer<x>:DELTA:Y? (Query Only)	535
CALCulate:OBWidth:MARKer<x>:MAXimum (No Query Form)	535
CALCulate:OBWidth:MARKer<x>:PEAK:HIGHer (No Query Form)	536
CALCulate:OBWidth:MARKer<x>:PEAK:LEFT (No Query Form)	536
CALCulate:OBWidth:MARKer<x>:PEAK:LOWer (No Query Form)	536
CALCulate:OBWidth:MARKer<x>:PEAK:RIGHT (No Query Form)	537
CALCulate:OBWidth:MARKer<x>[:SET]:CENTER (No Query Form)	537
CALCulate:OBWidth:MARKer<x>:X	538
CALCulate:OBWidth:MARKer<x>:Y? (Query Only)	538
CALCulate:OFDM:CONSt:MARKer<x>:FREQuency	539
CALCulate:OFDM:CONSt:MARKer<x>:MAGNitude? (Query Only)	539
CALCulate:OFDM:CONSt:MARKer<x>:PHASe? (Query Only)	540
CALCulate:OFDM:CONSt:MARKer<x>:TIME	540
CALCulate:OFDM:CONSt:MARKer<x>:TYPE? (Query Only)	540
CALCulate:OFDM:CONSt:MARKer<x>:VALue? (Query Only)	541
CALCulate:OFDM:CRESPonse:MARKer<x>:DELTA:X? (Query Only)	541
CALCulate:OFDM:CRESPonse:MARKer<x>:DELTA:Y? (Query Only)	542
CALCulate:OFDM:CRESPonse:MARKer<x>:MAXimum (No Query Form)	542
CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:HIGHer (No Query Form)	543
CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:LEFT (No Query Form)	543
CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:LOWer (No Query Form)	544
CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:RIGHT (No Query Form)	544
CALCulate:OFDM:CRESPonse:MARKer<x>:X	544
CALCulate:OFDM:CRESPonse:MARKer<x>:Y? (Query Only)	545
CALCulate:OFDM:FLATness:MARKer<x>:MAXimum (No Query Form)	545
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:HIGHer (No Query Form)	546
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LEFT (No Query Form)	546
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LOWer (No Query Form)	547
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:RIGHT (No Query Form)	547
CALCulate:OFDM:FLATness:MARKer<x>:X	547
CALCulate:OFDM:FLATness:MARKer<x>:Y? (Query Only)	548
CALCulate:OFDM:TABLE:MARKer<x>:FREQuency	548
CALCulate:OFDM:TABLE:MARKer<x>:TIME	549
CALCulate:OFDM:TABLE:MARKer<x>:VALue? (Query Only)	549
CALCulate:P25:CONSt:MARKer<x>:DELTA:X[:TIME]? (Query Only)	550

CALCulate:P25:CONStE:MARKer<x>:FDEVIation? (Query Only)	550
CALCulate:P25:CONStE:MARKer<x>:MAGNitude? (Query Only)	551
CALCulate:P25:CONStE:MARKer<x>:MAXimum (No Query Form)	551
CALCulate:P25:CONStE:MARKer<x>:PEAK:LEFT (No Query Form)	551
CALCulate:P25:CONStE:MARKer<x>:PEAK:RIGHT (No Query Form)	552
CALCulate:P25:CONStE:MARKer<x>:PHASe? (Query Only)	552
CALCulate:P25:CONStE:MARKer<x>:SYMBol? (Query Only)	553
CALCulate:P25:CONStE:MARKer<x>:Trace	553
CALCulate:P25:CONStE:MARKer<x>:VALue? (Query Only)	554
CALCulate:P25:CONStE:MARKer<x>:X	554
CALCulate:P25:EDlagram:MARKer<x>:DELTA:X[:TIME]? (Query Only)	555
CALCulate:P25:EDlagram:MARKer<x>:DELTA:Y? (Query Only)	555
CALCulate:P25:EDlagram:MARKer<x>:MAXimum (No Query Form)	556
CALCulate:P25:EDlagram:MARKer<x>:PEAK:HIGHer (No Query Form)	556
CALCulate:P25:EDlagram:MARKer<x>:PEAK:LEFT (No Query Form)	557
CALCulate:P25:EDlagram:MARKer<x>:PEAK:LOWer (No Query Form)	558
CALCulate:P25:EDlagram:MARKer<x>:PEAK:RIGHT (No Query Form)	558
CALCulate:P25:EDlagram:MARKer<x>:TRACe	559
CALCulate:P25:EDlagram:MARKer<x>:X	560
CALCulate:P25:EDlagram:MARKer<x>:Y	560
CALCulate:P25:PVTime:MARKer<x>:DELTA:X[:TIME]? (Query Only)	561
CALCulate:P25:PVTime:MARKer<x>:DELTA:Y[:TIME]? (Query Only)	561
CALCulate:P25:PVTime:MARKer<x>:Maximum (No Query Form)	562
CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer (No Query Form)	562
CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT (No Query Form)	563
CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer (No Query Form)	564
CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT (No Query Form)	564
CALCulate:P25:PVTime:MARKer<x>:X	565
CALCulate:P25:PVTime:MARKer<x>:Y	565
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:X? (Query only)	566
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)	567
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:MAXimum (No query form)	567
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)	568
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)	568
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)	569
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)	570
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:X	570
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:Y? (Query only)	571
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)	571
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)	572
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)	572
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)	573
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)	573
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)	574
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)	575
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:X	575
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only)	576

CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:X.	576
CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:Y (Query Only).	577
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime: DELTa:X (Query Only).	577
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime: DELTa:Y (Query Only).	578
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime: MAXimum (No Query Form).	578
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:X.	579
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:Y (Query Only).	579
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime: DELTa:X (Query Only).	580
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime: DELTa:Y (Query Only).	580
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>: TVTime:MAXimum (No Query Form).	581
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:X.	581
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:Y (Query Only).	582
CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:X.	583
CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:Y? (Query)Only.	583
CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:X.	584
CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:Y? (Query Only).	584
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELTA:X?.	585
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELTA:Y?.	585
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:MAXimum.	586
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>: PEAK:HIGHer.	586
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:LEFT.	587
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>: PEAK:LOWer.	588
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>: PEAK:RIGHT.	588
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:X.	589
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:Y?.	589
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:X.	590
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:Y.	590
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:MAXimum.	591
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:HIGHer.	591
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LEFT.	592
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LOWer.	592
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:RIGHT.	593
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:X.	593
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:Y.	594
CALCulate:SEARCh:LIMit:FAIL? (Query Only).	595
CALCulate:SEARCh:LIMit:MATCh:BEEP[:STATe].	595
CALCulate:SEARCh:LIMit:MATCh:SACQuire[:STATe].	595
CALCulate:SEARCh:LIMit:MATCh:SDATa[:STATe].	596
CALCulate:SEARCh:LIMit:MATCh:SPICture[:STATe].	596
CALCulate:SEARCh:LIMit:MATCh:STRace[:STATe].	597
CALCulate:SEARCh:LIMit:OPERation.	598
CALCulate:SEARCh:LIMit:OPERation:FEED.	599
CALCulate:SEARCh:LIMit:OPERation:MASK:LOAD (No Query Form).	599
CALCulate:SEARCh:LIMit:OPERation:MASK:STORE (No Query Form).	600
CALCulate:SEARCh:LIMit:OPERation:SLIMit.	600
CALCulate:SEARCh:LIMit:REPort:DATA? (Query Only).	601
CALCulate:SEARCh:LIMit:REPort:POINts? (Query Only).	601

CALCulate:SEARCh:LIMit:STATe.	602
CALCulate:SEARCh:LIMit:STATe:MATCH:ACQuisition:FORMat.	602
CALCulate:SEARCh:LIMit:STATe:MATCH:BEEP:STATe.	602
CALCulate:SEARCh:LIMit:STATe:MATCH:COUNt:STATe.	603
CALCulate:SEARCh:LIMit:STATe:MATCH:COUNt:STATe:MAXimum.	603
CALCulate:SEARCh:LIMit:STATe:MATCH:FILE:LOCation.	604
CALCulate:SEARCh:LIMit:STATe:MATCH:FILE:NAME:BASE.	604
CALCulate:SEARCh:LIMit:STATe:MATCH:PICTure:FORMat.	605
CALCulate:SEARCh:LIMit:STATe:MATCH:SACQuire:STATe.	605
CALCulate:SEARCh:LIMit:STATe:MATCH:SDATa:STATe.	606
CALCulate:SEARCh:LIMit:STATe:MATCH:SPICture:STATe.	606
CALCulate:SEARCh:LIMit:STATe:MATCH:STRace:STATe.	607
CALCulate:SEARCh:LIMit:STATe:OPERation.	607
CALCulate:SEARCh:LIMit:STATe:OPERation:FEED.	608
CALCulate:SEARCh:LIMit:STATe:OPERation:MASK:LOAD (No Query Form).	609
CALCulate:SEARCh:LIMit:STATe:OPERation:MASK:LOWer:STATe.	609
CALCulate:SEARCh:LIMit:STATe:OPERation:MASK:NEW:AUTO (No Query Form).	610
CALCulate:SEARCh:LIMit:STATe:OPERation:MASK:STORE (No Query Form).	611
CALCulate:SEARCh:LIMit:STATe:OPERation:MASK:UPPer:STATe.	611
CALCulate:SEARCh:LIMit:STATe.	612
CALCulate:SEM:MARKer<x>:DELTA:X? (Query Only).	612
CALCulate:SEM:MARKer<x>:DELTA:Y? (Query Only).	613
CALCulate:SEM:MARKer<x>:MAXimum (No Query Form).	613
CALCulate:SEM:MARKer<x>:PEAK:HIGHer (No Query Form).	613
CALCulate:SEM:MARKer<x>:PEAK:LEFT (No Query Form).	614
CALCulate:SEM:MARKer<x>:PEAK:LOWer (No Query Form).	614
CALCulate:SEM:MARKer<x>:PEAK:RIGHT (No Query Form).	615
CALCulate:SEM:MARKer<x>[:SET]:CENTer (No Query Form).	615
CALCulate:SEM:MARKer<x>:X.	615
CALCulate:SEM:MARKer<x>:Y? (Query Only).	616
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:X: FREQuency.	616
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME] (Query Only).	617
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:Y (Query Only).	617
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form).	618
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form).	618
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form).	619
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form).	619
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form).	620
CALCulate:SGRam[:MEASview<y>]:MARKer<x>[:SET]:CENTer (No Query Form).	621
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X:FREQuency.	621
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X[:TIME].	622
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:Y (Query Only).	622
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only).	623
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only).	623
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:MAXimum.	624
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form).	624
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form).	625

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)	625
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)	626
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWER:DENSity? (Query Only)	626
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWER:IDENSity?	627
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWER:INTEgrated? (Query Only)	628
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>[:SET]:CENTer (No Query Form)	628
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:TRACe	629
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:X	629
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:Y? (Query Only)	630
CALCulate:SPURious:MARKer<x>:DELTA:X? (Query Only)	631
CALCulate:SPURious:MARKer<x>:DELTA:Y? (Query Only)	631
CALCulate:SPURious:MARKer<x>:MAXimum (No Query Form)	632
CALCulate:SPURious:MARKer<x>:PEAK:HIGHer (No Query Form)	632
CALCulate:SPURious:MARKer<x>:PEAK:LEFT (No Query Form)	632
CALCulate:SPURious:MARKer<x>:PEAK:LOWer (No Query Form)	633
CALCulate:SPURious:MARKer<x>:PEAK:RIGHT (No Query Form)	633
CALCulate:SPURious:MARKer<x>[:SET]:CENTer (No Query Form)	633
CALCulate:SPURious:MARKer<x>:X	634
CALCulate:SPURious:MARKer<x>:Y? (Query Only)	634
CALCulate:SYNC:MARKer<x>:MEASurement	635
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)	635
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)	636
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:MAXimum (No query form)	637
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)	637
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)	638
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)	638
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)	639
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:X[:TIME]	639
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:Y? (Query only)	640
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)	641
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)	641
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)	642
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)	642
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)	643
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)	643
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)	644
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:X	644
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:Y? (Query Only)	645
CALCulate:TXGain:MARKer<x>:DELTA:X? (Query Only)	646
CALCulate:TXGain:MARKer<x>:DELTA:Y? (Query Only)	646
CALCulate:TXGain:MARKer<x>:MAXimum (No Query Form)	646
CALCulate:TXGain:MARKer<x>:PEAK:HIGHer (No Query Form)	647
CALCulate:TXGain:MARKer<x>:PEAK:LEFT (No Query Form)	647
CALCulate:TXGain:MARKer<x>:PEAK:LOWer (No Query Form)	648
CALCulate:TXGain:MARKer<x>:PEAK:RIGHT (No Query Form)	648
CALCulate:TXGain:MARKer<x>:TRACe	649
CALCulate:TXGain:MARKer<x>:X	649

CALCulate:TXGain:MARKer<x>:Y? (Query Only)	650
CALCulate:WLAN:AD:CONSte:MARKer<x>:DELTA:X[:TIME]? (Query Only)	650
CALCulate:WLAN:AD:CONSte:MARKer<x>:MAGNitude? (Query Only)	651
CALCulate:WLAN:AD:CONSte:MARKer<x>:PHASe? (Query Only)	651
CALCulate:WLAN:AD:CONSte:MARKer<x>:SYMBol? (Query Only)	651
CALCulate:WLAN:AD:CONSte:MARKer<x>:TYPE? (Query Only)	652
CALCulate:WLAN:AD:CONSte:MARKer<x>:VALue? (Query Only)	652
CALCulate:WLAN:AD:CONSte:MARKer<x>:X	653
CALCulate:WLAN:AD:EVM:MARKer<x>:DELTA:X? (Query Only)	653
CALCulate:WLAN:AD:EVM:MARKer<x>:DELTA:Y? (Query Only)	654
CALCulate:WLAN:AD:EVM:MARKer<x>:MAXimum (No Query Form)	654
CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:HIGHer (No Query Form)	655
CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:LEFT (No Query Form)	655
CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:LOWer (No Query Form)	656
CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:RIGHT (No Query Form)	656
CALCulate:WLAN:AD:EVM:MARKer<x>:X	657
CALCulate:WLAN:AD:EVM:MARKer<x>:Y? (Query Only)	657
CALCulate:WLAN:AY:CONSte:MARKer<x>:DELTA:X[:TIME]? (Query Only)	658
CALCulate:WLAN:AY:CONSte:MARKer<x>:MAGNitude? (Query Only)	658
CALCulate:WLAN:AY:CONSte:MARKer<x>:PHASe? (Query Only)	659
CALCulate:WLAN:AY:CONSte:MARKer<x>:SYMBol? (Query Only)	659
CALCulate:WLAN:AY:CONSte:MARKer<x>:TYPE? (Query Only)	659
CALCulate:WLAN:AY:CONSte:MARKer<x>:VALue? (Query Only)	660
CALCulate:WLAN:AY:CONSte:MARKer<x>:X	660
CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:X	661
CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:Y	661
CALCulate:WLAN:AY:EVM:MARKer<x>:MAXimum (No Query Form)	662
CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:HIGHer (No Query Form)	663
CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:LEFT (No Query Form)	663
CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:LOWer (No Query Form)	664
CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:RIGHT (No Query Form)	664
CALCulate:WLAN:AY:EVM:MARKer<x>:X	665
CALCulate:WLAN:AY:EVM:MARKer<x>:Y	665
CALCulate:WLAN:CONSte:MARKer<x>:FREQuency	666
CALCulate:WLAN:CONSte:MARKer<x>:MAGNitude? (Query Only)	667
CALCulate:WLAN:CONSte:MARKer<x>:PHASe? (Query Only)	667
CALCulate:WLAN:CONSte:MARKer<x>:TIME	668
CALCulate:WLAN:CONSte:MARKer<x>:TYPE? (Query Only)	668
CALCulate:WLAN:CONSte:MARKer<x>:VALue? (Query Only)	669
CALCulate:WLAN:CRESPonse:MARKer<x>:DELTA:X? (Query Only)	669
CALCulate:WLAN:CRESPonse:MARKer<x>:DELTA:Y? (Query Only)	670
CALCulate:WLAN:CRESPonse:MARKer<x>:MAXimum (No Query Form)	670
CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:HIGHer (No Query Form)	671
CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:LEFT (No Query Form)	671
CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:LOWer (No Query Form)	672
CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:RIGHT (No Query Form)	672
CALCulate:WLAN:CRESPonse:MARKer<x>:X	673

CALCulate:WLAN:CRESPonse:MARKer<x>:Y? (Query Only)	673
CALCulate:WLAN:EVM:MARKer<x>:AVERage:SUBCarrier? (Query Only)	674
CALCulate:WLAN:EVM:MARKer<x>:AVERage:SYMBol? (Query Only)	674
CALCulate:WLAN:EVM:MARKer<x>:DELTA:SUBCarrier? (Query Only)	675
CALCulate:WLAN:EVM:MARKer<x>:DELTA:SYMBol? (Query Only)	675
CALCulate:WLAN:EVM:MARKer<x>:DELTA:Y? (Query Only)	676
CALCulate:WLAN:EVM:MARKer<x>:FREQuency	676
CALCulate:WLAN:EVM:MARKer<x>:TIME	677
CALCulate:WLAN:EVM:MARKer<x>:VALue? (Query Only)	678
CALCulate:WLAN:FLATness:MARKer<x>:MAXimum (No Query Form)	678
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:HIGHer (No Query Form)	679
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LEFT (No Query Form)	679
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LOWer (No Query Form)	680
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:RIGHT (No Query Form)	680
CALCulate:WLAN:FLATness:MARKer<x>:X	681
CALCulate:WLAN:FLATness:MARKer<x>:Y? (Query Only)	681
CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SUBCarrier? (Query Only)	682
CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SYMBol? (Query Only)	682
CALCulate:WLAN:MERRor:MARKer<x>:DELTA:SUBCarrier? (Query Only)	683
CALCulate:WLAN:MERRor:MARKer<x>:DELTA:SYMBol? (Query Only)	683
CALCulate:WLAN:MERRor:MARKer<x>:DELTA:Y? (Query Only)	684
CALCulate:WLAN:MERRor:MARKer<x>:FREQuency	685
CALCulate:WLAN:MERRor:MARKer<x>:TIME	685
CALCulate:WLAN:MERRor:MARKer<x>:VALue? (Query Only)	686
CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SUBCarrier? (Query Only)	687
CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SYMBol? (Query Only)	687
CALCulate:WLAN:PERRor:MARKer<x>:DELTA:SUBCarrier? (Query Only)	688
CALCulate:WLAN:PERRor:MARKer<x>:DELTA:SYMBol? (Query Only)	688
CALCulate:WLAN:PERRor:MARKer<x>:DELTA:Y? (Query Only)	689
CALCulate:WLAN:PERRor:MARKer<x>:FREQuency	689
CALCulate:WLAN:PERRor:MARKer<x>:TIME	690
CALCulate:WLAN:PERRor:MARKer<x>:VALue? (Query Only)	691
CALCulate:WLAN:PVTime:MARKer<x>:DELTA:X? (Query Only)	691
CALCulate:WLAN:PVTime:MARKer<x>:DELTA:Y? (Query Only)	692
CALCulate:WLAN:PVTime:MARKer<x>:MAXimum (No Query Form)	692
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:HIGHer (No Query Form)	693
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LEFT (No Query Form)	693
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LOWer (No Query Form)	694
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:RIGHT (No Query Form)	694
CALCulate:WLAN:PVTime:MARKer<x>:X	694
CALCulate:WLAN:PVTime:MARKer<x>:Y? (Query Only)	695
CALCulate:WLAN:TABLE:MARKer<x>:FREQuency	695
CALCulate:WLAN:TABLE:MARKer<x>:TIME	696
CALCulate:WLAN:TABLE:MARKer<x>:VALue? (Query Only)	697
Calibration commands	697

CALibration:ABORt (No query form).	697
CALibration:AUTO.	698
CALibration:CORRection:EXTErnal:EDIT<x>:LABEl.	698
CALibration:CORRection:EXTErnal:EDIT<x>:NEW (No query form).	698
CALibration:CORRection:EXTErnal:EDIT<x>:STATe.	699
CALibration:CORRection:EXTErnal:GAIN[:MAGNitude].	700
CALibration:CORRection:EXTErnal:GAIN:STATe.	700
CALibration:CORRection:EXTErnal:PROBe:CONNEct? (Query only).	701
CALibration:CORRection:EXTErnal:PROBe[:MAGNitude]? (Query only).	701
CALibration:CORRection:EXTErnal:PROBe:STATe.	702
CALibration:CORRection:EXTErnal:TYPE.	702
CALibration:TXGain:ABORt (No query form).	703
CALibration:TXGain[:ALL] (No query form).	703
CALibration:TXGain:FINish? (Query only).	703
CALibration:TXGain:STATe? (Query only).	704
*CLS (No Query Form).	704
Display commands.	705
DISPlay:ACPower:MARKer:SHOW:STATe.	705
DISPlay:ACPower:PLEVel:SHOW:STATe.	706
DISPlay:ACPower:RESet:SCALe (No Query Form).	706
DISPlay:ACPower:WINDow:TRACe:GRATicule:GRID:STATe.	706
DISPlay:ACPower:X[:SCALe].	707
DISPlay:ACPower:X[:SCALe]:AUTO (No Query Form).	707
DISPlay:ACPower:X[:SCALe]:OFFSet.	708
DISPlay:ACPower:Y[:SCALe].	708
DISPlay:ACPower:Y[:SCALe]:AUTO (No Query Form).	709
DISPlay:ACPower:Y[:SCALe]:OFFSet.	709
DISPlay:ADEMod:MEASview:DELeTe (No Query Form).	710
DISPlay:ADEMod:MEASview:NEW (No Query Form).	710
DISPlay:ADEMod:MEASview:SElect.	711
DISPlay:{AM FM PM}:MARKer:SHOW:STATe.	711
DISPlay:{AM FM PM}:WINDow:TRACe:GRATicule:GRID:STATe.	712
DISPlay:{AM FM PM}:X:RSCALe (No Query Form).	712
DISPlay:{AM FM PM}:X[:SCALe]:AUTO (No Query Form).	713
DISPlay:{AM FM PM}:X[:SCALe]:FULL.	713
DISPlay:{AM FM PM}:X[:SCALe]:OFFSet.	713
DISPlay:{AM FM PM}:Y:RSCALe (No Query Form).	714
DISPlay:{AM FM PM}:Y[:SCALe].	714
DISPlay:{AM FM PM}:Y[:SCALe]:OFFSet.	715
DISPlay:ANTenna:AZIMuth:SHOW:STATe.	716
DISPlay:AUDio:MEASview:DELeTe (No Query Form).	716
DISPlay:AUDio:MEASview:NEW (No Query Form).	716
DISPlay:AUDio:MEASview:SElect.	717
DISPlay:AUDio:SPECTrum:FREQuency:AUTO (No Query Form).	717
DISPlay:AUDio:SPECTrum:FREQuency:[SCALe]:START.	718
DISPlay:AUDio:SPECTrum:FREQuency:[SCALe]:STOP.	718
DISPlay:AUDio:SPECTrum:MARKer:SHOW:STATe.	719

DISPlay:AUDio:SPECTrum:RESet:SCALe (No Query Form)	719
DISPlay:AUDio:SPECTrum:SCALe:LOG:STATe	719
DISPlay:AUDio:SPECTrum:SHOW:NHARmonic:THReshold	720
DISPlay:AUDio:SPECTrum:TABLE:SHOW:STATe	720
DISPlay:AUDio:SPECTrum:WINDow:TRACe:GRATicule:GRID:STATe	721
DISPlay:AUDio:SPECTrum:Y:[SCALe]	721
DISPlay:AUDio:SPECTrum:Y:[SCALe]:AUTO (No Query Form)	722
DISPlay:AUDio:SPECTrum:Y:[SCALe]:OFFSet	722
DISPlay:AVTime[:MEASview<y>]:LEGend:STATe	722
DISPlay:AVTime[:MEASview<y>]:SELEct:FIRSt	723
DISPlay:AVTime[:MEASview<y>]:SELEct:SECOnd	723
DISPlay:AVTime[:MEASview<y>]:SELEct:THIRd	724
DISPlay:AVTime[:MEASview<y>]:SELEct:FOURth	725
DISPlay:AVTime[:MEASview<y>]:MARKer:SHOW:STATe	725
DISPlay:AVTime[:MEASview<y>]:RESet (No Query Form)	726
DISPlay:AVTime[:MEASview<y>]:TRIGger:LEVel:STATe	726
DISPlay:AVTime[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe	727
DISPlay:AVTime[:MEASview<y>]:X:RSCale (No Query Form)	727
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:AUTO (No Query Form)	728
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:AUTO:STATe	728
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:FULL	729
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:MAXimum? (Query Only)	729
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:MINimum? (Query Only)	730
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:OFFSet	730
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:OFFSet:MAXimum? (Query Only)	731
DISPlay:AVTime[:MEASview<y>]:X:[SCALe]:OFFSet:MINimum? (Query Only)	732
DISPlay:AVTime[:MEASview<y>]:Y:RSCale (No Query Form)	732
DISPlay:AVTime[:MEASview<y>]:Y:[SCALe]:FULL	733
DISPlay:AVTime[:MEASview<y>]:Y:[SCALe]:OFFSet	733
DISPlay:BIBEmissions:MARKer<x>:SHOW:STATe	734
DISPlay:BIBEmissions:PLEVel:SHOW:STATe	734
DISPlay:BIBEmissions:RESet:SCALe (No Query Form)	735
DISPlay:BIBEmissions:WINDow:TRACe:GRATicule:GRID:STATe	735
DISPlay:BIBEmissions:X:[SCALe]	736
DISPlay:BIBEmissions:X:[SCALe]:AUTO (No Query Form)	736
DISPlay:BIBEmissions:X:[SCALe]:OFFSet	737
DISPlay:BIBEmissions:Y:[SCALe]	737
DISPlay:BIBEmissions:Y:[SCALe]:AUTO (No Query Form)	738
DISPlay:BIBEmissions:Y:[SCALe]:OFFSet	738
DISPlay:BLUEtooth:CONSte:TRACe:GRATicule:GRID:STATe	739
DISPlay:BLUEtooth:CONSte:WINDow:TRACe:GRATicule:GRID:STATe	739
DISPlay:BLUEtooth:EDIagram:WINDow:TRACe:GRATicule:GRID:STATe	740
DISPlay:BLUEtooth:EDIagram:Y:[SCALe]	740
DISPlay:BLUEtooth:EDIagram:Y:[SCALe]:AUTO (No Query Form)	741
DISPlay:BLUEtooth:EDIagram:Y:[SCALe]:OFFSet	741
DISPlay:BLUEtooth:FDVTime:WINDow:TRACe:GRATicule:GRID:STATe	741
DISPlay:BLUEtooth:FDVTime:Y:[SCALe]:AUTO (No Query Form)	742

DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:OFFSet.	742
DISPlay:BLUEtooth:MEASview:DELeTe (No Query Form).	743
DISPlay:BLUEtooth:MEASview:NEW (No Query Form).	743
DISPlay:BLUEtooth:MEASview:SELeCt.	744
DISPlay:BOBW:SELeCted:BANDwidth.	745
DISPlay:CCDF:LEGend:STATe.	745
DISPlay:CCDF:WINDow:TRACe:GRATicule:GRID:STATe.	746
DISPlay:CONSte[:MEASview<y>]:MPHase.	746
DISPlay:CONSte[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	747
DISPlay:DDEMod[:MEASview<y>]:DELeTe (No query form).	748
DISPlay:DDEMod:MEASview<y>[:SOURce<x>]:NEW (No query form).	749
DISPlay:DDEMod[:MEASview<y>]:SELeCt.	749
DISPlay:DDEMod[:SOURce<x>]:RADix.	750
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE].	750
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:AUTO (No query form).	751
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:AUTO:STATe.	751
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:MAXimum? (Query only).	752
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:MINimum? (Query only).	752
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]: OFFSet.	753
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:OFFSet:MAXimum? (Query only).	754
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:OFFSet:MINimum? (Query only).	754
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:RESet (No query form).	754
DISPlay:DIAGram:X[:SCALE].	755
DISPlay:DIAGram:X[:SCALE]:RESet (No Query Form).	755
DISPlay:DIQVtime[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	756
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALE].	756
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALE]:AUTO (No query form).	757
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALE]:OFFSet.	757
DISPlay:DPX:DGRam:TIME[:SCALE]:OFFSet:DIVision.	758
DISPlay:DPX:DGRam:TIME[:SCALE]:PDIVision.	758
DISPlay:DPX:DGRam:TIME[:SCALE]:RESet (No Query Form).	759
DISPlay:DPX:DGRam:TSTamp:STATe.	759
DISPlay:DPX:DGRam:Y[:SCALE]:AUTO (No Query Form).	760
DISPlay:DPX:DGRam:Y[:SCALE]:RESet (No Query Form).	760
DISPlay:DPX:LEGend:STATe.	761
DISPlay:DPX:PHASe:Y[:SCALE]:AXIS.	761
DISPlay:DPX:PHASe:Y[:SCALE]:AXIS:OFFSet.	762
DISPlay:DPX:WINDow:TRACe:GRATicule:GRID:STATe.	762
DISPlay:DPX:Y[:SCALE]:OFFSet.	763
DISPlay:DPX:Y[:SCALE]:PDIVision.	763
DISPlay:EDlagram[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	764
DISPlay:EDlagram[:MEASview<y>]:Y[:SCALE].	764
DISPlay:EDlagram[:MEASview<y>]:Y[:SCALE]:AUTO (No query form).	765
DISPlay:EDlagram[:MEASview<y>]:Y[:SCALE]:OFFSet.	765
DISPlay:EMC:INCLude:MARGIN.	766
DISPlay:EMC:MARKer:SHOW:STATe.	766
DISPlay:EMC:RESet:SCALE (No Query Form).	767

DISPlay:EMC:SCALe:LOG:STATe.	767
DISPlay:EMC:SELEct:SPOT:NUMBer.	768
DISPlay:EMC:SHOW:LIMit.	768
DISPlay:EMC:SHOW:LIMit:LEGEnd.	769
DISPlay:EMC:SHOW:SPOT:INDIcator.	769
DISPlay:EMC:SHOW:WIZArD.	770
DISPlay:EMC:SPOT<x>:SELEct.	770
DISPlay:EMC:TRACe:LEGEnd.	771
DISPlay:EMC:WINDow:TRACe:GRATicule:GRID:STATe.	771
DISPlay:EMC:X[:SCALe]:AUTO (No Query Form).	772
DISPlay:EMC:X[:SCALe]:STARt.	772
DISPlay:EMC:X[:SCALe]:STOP.	773
DISPlay:EMC:Y[:SCALe].	773
DISPlay:EMC:Y[:SCALe]:AUTO (No Query Form).	773
DISPlay:EMC:Y[:SCALe]:OFFSet.	774
DISPlay:EVM[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe.	774
DISPlay:EVM[:MEASview<y>]:Y[:SCALe].	775
DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:AUTO (No query form).	776
DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:OFFSet.	776
DISPlay:FDVTime[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	777
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALe].	777
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALe]:AUTO (No query form).	778
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALe]:OFFSet.	779
DISPlay:{FSETtling PSETtling}:MARKer:SHOW:STATe.	779
DISPlay:{FSETtling PSETtling}:TIME:DECimal.	780
DISPlay:{FSETtling PSETtling}:WINDow:TRACe:GRATicule: GRID:STATe.	780
DISPlay:{FSETtling PSETtling}:X[:SCALe].	781
DISPlay:{FSETtling PSETtling}:X[:SCALe]:AUTO (No Query Form).	781
DISPlay:{FSETtling PSETtling}:X[:SCALe]:AUTO:STATe.	782
DISPlay:{FSETtling PSETtling}:X[:SCALe]:MAXimum? (Query Only).	782
DISPlay:{FSETtling PSETtling}:X[:SCALe]:MINimum? (Query Only).	783
DISPlay:{FSETtling PSETtling}:X[:SCALe]:OFFSet.	783
DISPlay:{FSETtling PSETtling}:X[:SCALe]:OFFSet:MAXimum? (Query Only).	784
DISPlay:{FSETtling PSETtling}:X[:SCALe]:OFFSet:MINimum? (Query Only).	784
DISPlay:{FSETtling PSETtling}:Y[:SCALe].	785
DISPlay:{FSETtling PSETtling}:Y[:SCALe]:AUTO (No Query Form).	785
DISPlay:{FSETtling PSETtling}:Y[:SCALe]:OFFSet.	786
DISPlay:{FSETtling PSETtling}:Y[:SCALe]:PDIVision.	786
DISPlay:FVTime[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	787
DISPlay:FVTime[:MEASview<y>]:X[:SCALe].	787
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:AUTO (No Query Form).	788
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe.	789
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:MAXimum? (Query Only).	789
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:MINimum? (Query Only).	790
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:OFFSet.	790
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum? (Query Only).	791
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MINimum? (Query Only).	792

DISPlay:FVTime[:MEASview<y>]:Y[:SCALe].	792
DISPlay:FVTime[:MEASview<y>]:Y[:SCALe]:AUTO (No Query Form).	793
DISPlay:FVTime[:MEASview<y>]:Y[:SCALe]:OFFSet.	793
DISPlay:GENeral:MEASview<y>:DELeTe (No Query Form).	794
DISPlay:GENeral:MEASview<y>[:SOURce<x>]:NEW (No Query Form).	795
DISPlay:GENeral:MEASview<y>:SELeCt.	795
DISPlay:GPRF:MEASview:DELeTe (No Query Form).	796
DISPlay:GPRF:MEASview:NEW (No Query Form).	797
DISPlay:GPRF:MEASview:SELeCt.	798
DISPlay:IQVTime[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	799
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe].	799
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe]:AUTO (No Query Form).	800
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe.	801
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe]:MAXimum? (Query Only).	801
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe]:MINimum? (Query Only).	802
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe]:OFFSet.	802
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum? (Query Only).	803
DISPlay:IQVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MINimum? (Query Only).	804
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALe].	804
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALe]:AUTO (No Query Form).	805
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALe]:OFFSet.	805
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALe]:RESCale (No Query Form).	806
DISPlay:LTE:ACLR:MARKer:SHOW:STATe.	806
DISPlay:LTE:ACLR:RESet:SCALe (No Query Form).	807
DISPlay:LTE:ACLR:SHOW:LIMit.	807
DISPlay:LTE:ACLR:WINDow:TRACe:GRATicule:GRID:STATe.	808
DISPlay:LTE:ACLR:WINDow:TRACe:POWer:LEVEl:STATe.	808
DISPlay:LTE:ACLR:X:SCALe.	809
DISPlay:LTE:ACLR:X:SCALe:AUTO (No Query Form).	809
DISPlay:LTE:ACLR:X:SCALe:OFFSet.	809
DISPlay:LTE:ACLR:Y:SCALe:AUTO (No Query Form).	810
DISPlay:LTE:ACLR:Y:SCALe:OFFSet.	810
DISPlay:LTE:ACLR:Y:SCALe.	811
DISPlay:LTE:CHSPectrum:MARKer:SHOW:STATe.	811
DISPlay:LTE:CHSPectrum:RESet:SCALe (No Query Form).	812
DISPlay:LTE:CHSPectrum:WINDow:TRACe:GRATicule:GRID:STATe.	812
DISPlay:LTE:CHSPectrum:X:SCALe.	813
DISPlay:LTE:CHSPectrum:X:SCALe:AUTO (No Query Form).	813
DISPlay:LTE:CHSPectrum:X:SCALe:OFFSet.	814
DISPlay:LTE:CHSPectrum:Y:SCALe.	814
DISPlay:LTE:CHSPectrum:Y:SCALe:AUTO (No Query Form).	814
DISPlay:LTE:CHSPectrum:Y:SCALe:OFFSet.	815
DISPlay:LTE:CONSte:SCALe.	815
DISPlay:LTE:CONSte:X:OFFSet.	816
DISPlay:LTE:CONSte:Y:OFFSet.	816
DISPlay:LTE:MEASview:DELeTe (No Query Form).	817
DISPlay:LTE:MEASview:NEW (No Query Form).	817

DISPlay:LTE:MEASview:SElect.	818
DISPlay:LTE:PVTime:MARKer:SHOW:STATe.	818
DISPlay:LTE:PVTime:WINDow:TRACe:GRATicule:GRID:STATe.	819
DISPlay:LTE:PVTime:X:SCALE.	819
DISPlay:LTE:PVTime:X:SCALE:AUTO (No Query Form).	820
DISPlay:LTE:PVTime:X:SCALE:RESet (No Query Form).	820
DISPlay:LTE:PVTime:Y:SCALE.	820
DISPlay:LTE:PVTime:Y:SCALE:AUTO (No Query Form).	821
DISPlay:LTE:PVTime:Y:SCALE:OFFSet.	821
DISPlay:LTE:PVTime:Y:SCALE:PDIVision.	822
DISPlay:LTE:PVTime:Y:SCALE:RESet (No Query Form).	822
DISPlay:MCPower:MARKer:SHOW:STATe.	823
DISPlay:MCPower:PLEVel:SHOW:STATe.	823
DISPlay:MCPower:RESet:SCALE (No Query Form).	823
DISPlay:MCPower:WINDow:TRACe:GRATicule:GRID:STATe.	824
DISPlay:MCPower:X[:SCALE].	824
DISPlay:MCPower:X[:SCALE]:AUTO (No Query Form).	825
DISPlay:MCPower:X[:SCALE]:OFFSet.	825
DISPlay:MCPower:Y[:SCALE].	826
DISPlay:MCPower:Y[:SCALE]:AUTO (No Query Form).	826
DISPlay:MCPower:Y[:SCALE]:OFFSet.	827
DISPlay:MERRor[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	827
DISPlay:MERRor[:MEASview<y>]:Y[:SCALE].	828
DISPlay:MERRor[:MEASview<y>]:Y[:SCALE]:AUTO (No query form).	828
DISPlay:MERRor[:MEASview<y>]:Y[:SCALE]:OFFSet.	829
DISPlay:NOISe:FIGure[:SCALE]:AUTO (No Query Form).	829
DISPlay:NOISe:FIGure:WINDow:TRACe:GRATicule:GRID:STATe.	830
DISPlay:NOISe:FIGure:WINDow:TRACe:LEGend:STATe.	830
DISPlay:NOISe:FIGure:WINDow:TRACe:MEASpoints:STATe.	831
DISPlay:NOISe:FIGure:X:AUTO (No Query Form).	831
DISPlay:NOISe:FIGure:X:OFFSet.	832
DISPlay:NOISe:FIGure:X[:SCALE].	832
DISPlay:NOISe:FIGure:Y:AUTO (No Query Form).	833
DISPlay:NOISe:FIGure:Y:AUTO:STATe.	833
DISPlay:NOISe:FIGure:Y:PDIVision.	834
DISPlay:NOISe:FIGure:Y:POSition.	834
DISPlay:NOISe:FIGure:Y:SCALE.	835
DISPlay:NOISe:FIGure:Y:SCALE:LINear:STATe.	835
DISPlay:NOISe:GAIN[:SCALE]:AUTO (No Query Form).	836
DISPlay:NOISe:GAIN:WINDow:TRACe:GRATicule:GRID:STATe.	836
DISPlay:NOISe:GAIN:WINDow:TRACe:LEGend:STATe.	837
DISPlay:NOISe:GAIN:WINDow:TRACe:MEASPoints:STATe.	837
DISPlay:NOISe:GAIN:X:AUTO (No Query Form).	838
DISPlay:NOISe:GAIN:X:OFFSet.	838
DISPlay:NOISe:GAIN:X:SCALE.	838
DISPlay:NOISe:GAIN:Y:AUTO (No Query Form).	839
DISPlay:NOISe:GAIN:Y:AUTO:STATe.	839

DISPlay:NOISe:GAIN:Y:PDIVision.	840
DISPlay:NOISe:GAIN:Y:POSition.	841
DISPlay:NOISe:GAIN:Y:SCALE.	841
DISPlay:NOISe:MEASview:DELeTe (No Query Form).	842
DISPlay:NOISe:MEASview:NEW (No Query Form).	842
DISPlay:NOISe:MEASview:SELeCt.	843
DISPlay:NOISe:POWeR:LINear:STATe.	844
DISPlay:NOISe:TEMPerature[:SCALE]:AUTO (No Query Form).	844
DISPlay:NOISe:TEMPerature:WINDow:TRACe:GRATicule:GRID:STATe.	844
DISPlay:NOISe:TEMPerature:WINDow:TRACe:LEGend:STATe.	845
DISPlay:NOISe:TEMPerature:WINDow:TRACe:MEASPoints:STATe.	846
DISPlay:NOISe:TEMPerature:X:AUTO (No Query Form).	846
DISPlay:NOISe:TEMPerature:X:OFFSet.	847
DISPlay:NOISe:TEMPerature:X[:SCALE].	847
DISPlay:NOISe:TEMPerature:X:STARt.	848
DISPlay:NOISe:TEMPerature:X:STOP.	848
DISPlay:NOISe:TEMPerature:Y:AUTO (No Query Form).	849
DISPlay:NOISe:TEMPerature:Y:AUTO:STATe.	849
DISPlay:NOISe:TEMPerature:Y:PDIVision.	849
DISPlay:NOISe:TEMPerature:Y:POSition.	850
DISPlay:NOISe:TEMPerature:Y:SCALE.	851
DISPlay:NOISe:UNCERTainty:RESult:GAIN? (Query Only).	851
DISPlay:NOISe:UNCERTainty:RESult:NFIGure? (Query Only).	851
DISPlay:NOISe:YFACtor[:SCALE]:AUTO (No Query Form).	852
DISPlay:NOISe:YFACtor:WINDow:TRACe:GRATicule:GRID:STATe.	852
DISPlay:NOISe:YFACtor:WINDow:TRACe:LEGend:STATe.	853
DISPlay:NOISe:YFACtor:WINDow:TRACe:MEASPoints:STATe.	853
DISPlay:NOISe:YFACtor:X:AUTO (No Query Form).	854
DISPlay:NOISe:YFACtor:X:OFFSet.	854
DISPlay:NOISe:YFACtor:X[:SCALE].	855
DISPlay:NOISe:YFACtor:X:STARt.	855
DISPlay:NOISe:YFACtor:X:STOP.	856
DISPlay:NOISe:YFACtor:Y:AUTO (No Query Form).	856
DISPlay:NOISe:YFACtor:Y:AUTO:STATe.	857
DISPlay:NOISe:YFACtor:Y:PDIVision.	857
DISPlay:NOISe:YFACtor:Y:POSition.	858
DISPlay:NOISe:YFACtor:Y:SCALE.	858
DISPlay:OBWidth:MARKer:SHOW:STATe.	859
DISPlay:OBWidth:RESet:SCALE (No Query Form).	859
DISPlay:OBWidth:SELeCted:BANDwidth.	860
DISPlay:OBWidth:WINDow:TRACe:GRATicule:GRID:STATe.	860
DISPlay:OBWidth:X[:SCALE].	860
DISPlay:OBWidth:X[:SCALE]:AUTO (No Query Form).	861
DISPlay:OBWidth:X[:SCALE]:OFFSet.	861
DISPlay:OBWidth:Y[:SCALE].	862
DISPlay:OBWidth:Y[:SCALE]:AUTO (No Query Form).	862
DISPlay:OBWidth:Y[:SCALE]:OFFSet.	863

DISPlay:OFDM:CONStE[:SCALe].	863
DISPlay:OFDM:CONStE:X:OFFSet.	864
DISPlay:OFDM:CONStE:Y:OFFSet.	864
DISPlay:OFDM:CRESPonse:FREQuency:AUTO (No Query Form).	864
DISPlay:OFDM:CRESPonse:FREQuency:OFFSet.	865
DISPlay:OFDM:CRESPonse:FREQuency[:SCALe].	865
DISPlay:OFDM:CRESPonse:MAGNitude:AUTO (No Query Form).	866
DISPlay:OFDM:CRESPonse:MAGNitude:OFFSet.	866
DISPlay:OFDM:CRESPonse:MAGNitude:PDIVision.	866
DISPlay:OFDM:CRESPonse:PHASe:AUTO (No Query Form).	867
DISPlay:OFDM:CRESPonse:PHASe:OFFSet.	867
DISPlay:OFDM:CRESPonse:PHASe[:SCALe].	868
DISPlay:OFDM:CRESPonse:WINDow:SElect:PLOT.	868
DISPlay:OFDM:CRESPonse:WINDow:TRACe:GRATicule:GRID:STATe.	868
DISPlay:OFDM:EVM:FREQuency:AUTO (No Query Form).	869
DISPlay:OFDM:EVM:FREQuency:OFFSet.	869
DISPlay:OFDM:EVM:FREQuency[:SCALe].	870
DISPlay:OFDM:EVM:MARKer:SHOW:STATe.	870
DISPlay:OFDM:EVM:TIME:AUTO (No Query Form).	870
DISPlay:OFDM:EVM:TIME:OFFSet.	871
DISPlay:OFDM:EVM:TIME[:SCALe].	871
DISPlay:OFDM:EVM:WINDow:SElect:PLOT.	872
DISPlay:OFDM:EVM:WINDow:TRACe:GRATicule:GRID:STATe.	872
DISPlay:OFDM:EVM:Y:AUTO (No Query Form).	872
DISPlay:OFDM:EVM:Y:OFFSet.	873
DISPlay:OFDM:EVM:Y[:SCALe].	873
DISPlay:OFDM:FLATness:AUTO (No Query Form).	874
DISPlay:OFDM:FLATness:X:AUTO (No Query Form).	874
DISPlay:OFDM:FLATness:X:OFFSet.	874
DISPlay:OFDM:FLATness:X[:SCALe].	875
DISPlay:OFDM:FLATness:Y:AUTO (No Query Form).	875
DISPlay:OFDM:FLATness:Y:OFFSet.	876
DISPlay:OFDM:FLATness:Y[:SCALe].	876
DISPlay:OFDM:MEASview:DELeTe (No Query Form).	877
DISPlay:OFDM:MEASview:NEW (No Query Form).	877
DISPlay:OFDM:MEASview:SElect.	878
DISPlay:OFDM:MERRor:FREQuency[:SCALe].	879
DISPlay:OFDM:MERRor:FREQuency[:SCALe]:AUTO (No Query Form).	879
DISPlay:OFDM:MERRor:FREQuency[:SCALe]:OFFSet.	879
DISPlay:OFDM:MERRor:MARKer:SHOW:STATe.	880
DISPlay:OFDM:MERRor:TIME[:SCALe].	880
DISPlay:OFDM:MERRor:TIME[:SCALe]:AUTO (No Query Form).	881
DISPlay:OFDM:MERRor:TIME[:SCALe]:OFFSet.	881
DISPlay:OFDM:MERRor:WINDow:SElect:PLOT.	881
DISPlay:OFDM:MERRor:WINDow:TRACe:GRATicule:GRID:STATe.	882
DISPlay:OFDM:MERRor:Y:AUTO (No Query Form).	882
DISPlay:OFDM:MERRor:Y:OFFSet.	883

DISPlay:OFDM:MERRor:Y[:SCALe].	883
DISPlay:OFDM:PERRor:FREQuency[:SCALe].	883
DISPlay:OFDM:PERRor:FREQuency[:SCALe]:AUTO (No Query Form).	884
DISPlay:OFDM:PERRor:FREQuency[:SCALe]:OFFSet.	884
DISPlay:OFDM:PERRor:MARKer:SHOW:STATe.	885
DISPlay:OFDM:PERRor:TIME[:SCALe].	885
DISPlay:OFDM:PERRor:TIME[:SCALe]:AUTO (No Query Form).	885
DISPlay:OFDM:PERRor:TIME[:SCALe]:OFFSet.	886
DISPlay:OFDM:PERRor:WINDow:SElect:PLOT.	886
DISPlay:OFDM:PERRor:WINDow:TRACe:GRATicule:GRID:STATe.	887
DISPlay:OFDM:PERRor:Y:AUTO (No Query Form).	887
DISPlay:OFDM:PERRor:Y:OFFSet.	887
DISPlay:OFDM:PERRor:Y[:SCALe].	888
DISPlay:OFDM:POWer:FREQuency[:AUTO] (No Query Form).	888
DISPlay:OFDM:POWer:FREQuency[:OFFSet].	889
DISPlay:OFDM:POWer:FREQuency[:SCALe].	889
DISPlay:OFDM:POWer:MARKer:SHOW:STATe.	889
DISPlay:OFDM:POWer:TIME[:AUTO] (No Query Form).	890
DISPlay:OFDM:POWer:TIME:OFFSet.	890
DISPlay:OFDM:POWer:TIME[:SCALe].	891
DISPlay:OFDM:POWer:WINDow:SElect:PLOT.	891
DISPlay:OFDM:POWer:WINDow:TRACe:GRATicule:GRID:STATe.	891
DISPlay:OFDM:POWer:Y:AUTO (No Query Form).	892
DISPlay:OFDM:POWer:Y:OFFSet.	892
DISPlay:OFDM:POWer:Y[:SCALe].	893
DISPlay:P25:CONSte:WINDow:TRACe:GRATicule:GRID:STATe.	893
DISPlay:P25:EDlagram:WINDow:TRACe:GRATicule:GRID:STATe.	893
DISPlay:P25:EDlagram:Y[:SCALe].	894
DISPlay:P25:EDlagram:Y[:SCALe]:AUTO (No Query Form).	895
DISPlay:P25:EDlagram:Y[:SCALe]:OFFSet.	895
DISPlay:P25:MEASview:DELeTe (No Query Form).	895
DISPlay:P25:MEASview:NEw (No Query Form).	896
DISPlay:P25:MEASview:SElect.	897
DISPlay:P25:PVTime:BURSt:X[:SCALe].	897
DISPlay:P25:PVTime:BURSt:X[:SCALe]:AUTO (No Query Form).	898
DISPlay:P25:PVTime:BURSt:X[:SCALe]:OFFSet.	898
DISPlay:P25:PVTime:BURSt:X[:SCALe]:RESet (No Query Form).	899
DISPlay:P25:PVTime:FALL:X[:SCALe].	899
DISPlay:P25:PVTime:FALL:X[:SCALe]:AUTO (No Query Form).	900
DISPlay:P25:PVTime:FALL:X[:SCALe]:OFFSet.	900
DISPlay:P25:PVTime:FALL:X[:SCALe]:RESet (No Query Form).	901
DISPlay:P25:PVTime:MARKer:SHOW:STATe.	901
DISPlay:P25:PVTime:RISE:X[:SCALe].	902
DISPlay:P25:PVTime:RISE:X[:SCALe]:AUTO (No Query Form).	902
DISPlay:P25:PVTime:RISE:X[:SCALe]:OFFSet.	903
DISPlay:P25:PVTime:RISE:X[:SCALe]:RESet (No Query Form).	903
DISPlay:P25:PVTime:WINDow:SElect:PLOT.	904

DISPlay:P25:PVTime:WINDow:TRACe:GRATicule:GRID:STATe.	904
DISPlay:P25:PVTime:Y[:SCALe].	905
DISPlay:P25:PVTime:Y[:SCALe]:AUTO (No Query Form).	905
DISPlay:P25:PVTime:Y[:SCALe]:OFFSet.	906
DISPlay:P25:PVTime:Y[:SCALe]:PDIVision.	906
DISPlay:P25:RADix.	907
DISPlay:PERRor[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	907
DISPlay:PERRor[:MEASview<y>]:Y[:SCALe].	908
DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:AUTO (No query form).	909
DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:OFFSet.	909
DISPlay:PHVTime[:MEASview<y>]:WINDow:TRACe:GRATicule: GRID:STATe.	910
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe].	910
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:AUTO (No Query Form).	911
DISPlay:PHVTime[:MEASview?]:Y[:SCALe]:AXIS:ENABLE:REFerence {set and query}.	911
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe.	912
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:MAXimum? (Query Only).	912
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:MINimum? (Query Only).	913
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:OFFSet.	914
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum? (Query Only).	914
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MINimum? (Query Only).	915
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe].	915
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:AUTO (No Query Form).	916
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:AXIS.	916
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:AXIS:REFerence.	917
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:OFFSet.	917
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:RESCale (No Query Form).	918
DISPlay:PNOise:LEGend:STATe.	918
DISPlay:PNOise:MARKer:SHOW:STATe.	919
DISPlay:PNOise:RESet:SCALe (No Query Form).	919
DISPlay:PNOise:WINDow:TRACe:GRATicule:GRID:STATe.	919
DISPlay:PNOise:X[:SCALe]:AUTO (No Query Form).	920
DISPlay:PNOise:X[:SCALe]:START.	920
DISPlay:PNOise:X[:SCALe]:STOP.	921
DISPlay:PNOise:Y[:SCALe].	921
DISPlay:PNOise:Y[:SCALe]:AUTO (No Query Form).	921
DISPlay:PNOise:Y[:SCALe]:OFFSet.	922
DISPlay:PNOise:Y[:SCALe]:PDIVision.	922
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:CURRent:BIN.	923
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALe:AUTO (No Query Form).	923
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALe:RESEt (No Query Form).	924
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALe:X:AUTO (No Query Form).	924
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALe:X:NUMBer.	925
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALe:X:OFFSet.	925
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALe:X:RSCale (No Query Form).	926
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALe:Y:AUTO (No Query Form).	926
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALe:Y:FULL.	927
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALe:Y:OFFSet.	927

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALE:Y:RSCale (No Query Form).	928
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]: SCALE:Y:STOP? (Query Only).	928
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:WINDow: TRACe:GRATicule:GRID:STATe.	929
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFReqrerror.	929
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:ATX.	930
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:AVERage.	930
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DRODb.	931
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DROOp.	931
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTPct.	932
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTRatio.	932
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FABS.	933
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FALL.	933
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FDELta.	934
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FRDeviation.	934
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:IRAMplitude.	935
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:IRTime.	936
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MPHerror.	936
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVEDb.	937
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVERshoot.	937
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PHDeviation.	938
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFD.	938
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFRequency.	939
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPOWER.	939
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPD.	940
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPHase.	940
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RINTerval.	941
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPDb.	941
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPple.	942
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RISE.	943
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSFrequererror.	943
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFReqrerror.	944
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSPherror.	944
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RRATe.	945
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:WIDTh.	945
DISPlay:PULSe:MEASview<y>:DELeTe (No Query Form).	946
DISPlay:PULSe:MEASview<y>[:SOURce<x>]:NEW (No Query Form).	946
DISPlay:PULSe:MEASview<y>:SELeCt.	947
DISPlay:PULSe:OGRAM[:MEASview<y>].	948
DISPlay:PULSe:OGRAM[:MEASview<y>]:FRAME:INFORmation.	948
DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:FRAME.	949
DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:SHOW:STATe.	949
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQUency:STARt.	950
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQUency:STOP.	950
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:RSCale (No Query Form).	951
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:RSCale (No Query Form).	951
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime (No Query Form).	952
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime:OFFSet (No Query Form).	952

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime:RSCale (No Query Form).	953
DISPlay:PULSe:OGRAM[:MEASview<y>]:FVTime:DETection.	953
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:RSCale.	954
DISPlay:PULSe:OGRAM[:MEASview<y>]:WINDow:TRACe: GRATicule:GRID:STATe.	954
DISPlay:PULSe:OGRAM[:MEASview<y>]:TRACE:POINts.	955
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:Y:FRAMe:FULL.	955
DISPlay:PULSe:OGRAM:SCALE:Y:FRAMe:OFFSet.	956
DISPlay:PULSe:OGRAM[:MEASview<y>]:TVTime:SMOOth:POINts.	956
DISPlay:PULSe:OGRAM[:MEASview<y>].	957
DISPlay:PULSe:RESult[:MEASview<y>]:ATX.	957
DISPlay:PULSe:RESult[:MEASview<y>]:AVERAge.	958
DISPlay:PULSe:RESult[:MEASview<y>]:DRODb.	958
DISPlay:PULSe:RESult[:MEASview<y>]:DROOp.	959
DISPlay:PULSe:RESult[:MEASview<y>]:DUTPct.	959
DISPlay:PULSe:RESult[:MEASview<y>]:DUTRatio.	960
DISPlay:PULSe:RESult[:MEASview<y>]:FABS.	960
DISPlay:PULSe:RESult[:MEASview<y>]:FALL.	961
DISPlay:PULSe:RESult[:MEASview<y>]:FDELta.	961
DISPlay:PULSe:RESult[:MEASview<y>]:FRDeviAtion.	962
DISPlay:PULSe:RESult[:MEASview<y>]:IRAMplitude.	962
DISPlay:PULSe:RESult[:MEASview<y>]:IRTime.	963
DISPlay:PULSe:RESult[:MEASview<y>]:MFReqerror.	963
DISPlay:PULSe:RESult[:MEASview<y>]:MPHerror.	964
DISPlay:PULSe:RESult[:MEASview<y>]:OVEDb.	964
DISPlay:PULSe:RESult[:MEASview<y>]:OVERshoot.	965
DISPlay:PULSe:RESult[:MEASview<y>]:PHDeviAtion.	965
DISPlay:PULSe:RESult[:MEASview<y>]:PPPD.	966
DISPlay:PULSe:RESult[:MEASview<y>]:PPFD.	966
DISPlay:PULSe:RESult[:MEASview<y>]:PPFRequency.	967
DISPlay:PULSe:RESult[:MEASview<y>]:PPOWER.	967
DISPlay:PULSe:RESult[:MEASview<y>]:PPPHase.	968
DISPlay:PULSe:RESult[:MEASview<y>]:RINTerval.	968
DISPlay:PULSe:RESult[:MEASview<y>]:RIPDb.	969
DISPlay:PULSe:RESult[:MEASview<y>]:RIPple.	969
DISPlay:PULSe:RESult[:MEASview<y>]:RISE.	970
DISPlay:PULSe:RESult[:MEASview<y>]:RMSFrequerror.	970
DISPlay:PULSe:RESult[:MEASview<y>]:RMSPherror.	971
DISPlay:PULSe:RESult[:MEASview<y>]:RRATe.	971
DISPlay:PULSe:RESult[:MEASview<y>]:TIME.	972
DISPlay:PULSe:RESult[:MEASview<y>]:WIDTh.	972
DISPlay:PULSe[:MEASview<y>]:SElect:NUMBer.	973
DISPlay:PULSe[:MEASview<y>]:SElect:RESult.	973
DISPlay:PULSe[:MEASview<y>]:SElect:RESult.	975
DISPlay:PULSe:STATistics[:MEASview<y>]:MARKer<x>:SHOW:STATe.	976
DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT.	977
DISPlay:PULSe:STATistics[:MEASview<y>]:WINDow:TRACe: GRATicule:GRID:STATe.	977
DISPlay:PULSe:STATistics[:MEASview<y>]:X:RSCale (No Query Form).	978

DISPlay:PULSe:STATistics[:MEASview<y>]:X[:SCALe]:NUMBer.	978
DISPlay:PULSe:STATistics[:MEASview<y>]:X:SCALe:OFFSet.	979
DISPlay:PULSe:STATistics[:MEASview<y>]:Y:RSCale (No Query Form).	980
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALe]:FULL.	980
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALe]:OFFSet.	981
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALe]:STOP? (Query Only).	982
DISPlay:PULSe:TRACe[:MEASview<y>]:MARKer:SHOW:STATe.	983
DISPlay:PULSe:TRACe[:MEASview<y>]:POINT:SHOW.	983
DISPlay:PULSe:TRACe[:MEASview<y>]:WINDow:TRACe: GRATICule:GRID:STATe.	984
DISPlay:PULSe:TRACe[:MEASview<y>]:X:RSCale.	984
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe].	985
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:FULL.	985
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:OFFSet.	986
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:PDIVision.	986
DISPlay:PULSe:TRACe[:MEASview<y>]:Y:RSCale.	987
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALe]:FULL.	987
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALe]:OFFSet.	988
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALe]:STOP.	988
DISPlay:SEM:MARKer:SHOW:STATe.	989
DISPlay:SEM:RESet:SCALe (No Query Form).	989
DISPlay:SEM:SHOW:LIMit.	990
DISPlay:SEM:WINDow:TRACe:GRATICule:GRID:STATe.	990
DISPlay:SEM:X[:SCALe]:AUTO (No Query Form).	991
DISPlay:SEM:X[:SCALe]:START.	991
DISPlay:SEM:X[:SCALe]:STOP.	991
DISPlay:SEM:Y[:SCALe].	992
DISPlay:SEM:Y[:SCALe]:AUTO (No Query Form).	992
DISPlay:SEM:Y[:SCALe]:OFFSet.	993
DISPlay:SGRam[:MEASview<y>]:FREQuency:AUTO (No Query Form).	993
DISPlay:SGRam[:MEASview<y>]:FREQuency:OFFSet.	993
DISPlay:SGRam[:MEASview<y>]:FREQuency[:SCALe].	994
DISPlay:SGRam[:MEASview<y>]:MARKer:SHOW:STATe.	995
DISPlay:SGRam[:MEASview<y>]:SELeCted:TIMestamp.	995
DISPlay:SGRam[:MEASview<y>]:TIME:AUTO (No Query Form).	996
DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet.	996
DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet:DIVisions.	997
DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap.	997
DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap:PERCent.	998
DISPlay:SGRam[:MEASview<y>]:TIME[:SCALe].	998
DISPlay:SGRam[:MEASview<y>]:TIME[:SCALe]:PER:DIVision.	999
DISPlay:SGRam[:MEASview<y>]:TIME:SPECTrums:PERLine (Query Only).	1000
DISPlay:SIGClass:REGion? (Query only).	1000
DISPlay:SIGClass:REGion:ADD (No query form).	1000
DISPlay:SPECTrum[:MEASview<y>]:FREQuency:AUTO (No Query Form).	1001
DISPlay:SPECTrum[:MEASview<y>]:FREQuency:OFFSet.	1001
DISPlay:SPECTrum[:MEASview<y>]:FREQuency[:SCALe].	1002
DISPlay:SPECTrum[:MEASview<y>]:MARKer:NOISe:MODE.	1003

DISPlay:SPECTrum[:MEASview<y>][:SCALE]:LOG:STATe.	1003
DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe: GRATICule:GRID:STATe.	1004
DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe:LEGend:STATe.	1004
DISPlay:SPECTrum[:MEASview<y>]:X:LABel.	1005
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE].	1005
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:AUTO (No Query Form).	1006
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:OFFSet.	1006
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:PDIVision.	1007
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:RESet (No Query Form).	1007
DISPlay:SPURious:MARKer:SHOW:STATe.	1008
DISPlay:SPURious:RESet:SCALE (No Query Form).	1008
DISPlay:SPURious:SCALE:LOG:STATe.	1009
DISPlay:SPURious:SElect:NUMBer.	1009
DISPlay:SPURious:SHOW:LIMit.	1009
DISPlay:SPURious:WINDow:TRACe:GRATICule:GRID:STATe.	1010
DISPlay:SPURious:X[:SCALE]:AUTO (No Query Form).	1010
DISPlay:SPURious:X[:SCALE]:START.	1011
DISPlay:SPURious:X[:SCALE]:STOP.	1011
DISPlay:SPURious:Y[:SCALE].	1012
DISPlay:SPURious:Y[:SCALE]:AUTO (No Query Form).	1012
DISPlay:SPURious:Y[:SCALE]:OFFSet.	1013
DISPlay:TDIagram[:MEASview<y>]:WINDow:TRACe:GRATICule: GRID:STATe.	1013
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE].	1014
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:AUTO (No query form).	1014
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:OFFSet.	1015
DISPlay:TG:MEASview:DELeTe TXGain (No Query Form).	1015
DISPlay:TG:MEASview:NEW TXGain (No Query Form).	1016
DISPlay:TG:MEASview:SElect TXGain.	1016
DISPlay:TOVerview[:MEASview<y>]:WINDow:NAVigator:STATe.	1016
DISPlay:TOVerview[:MEASview<y>]:WINDow:TIME:MODE.	1017
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:GRATICule: GRID:STATe.	1018
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:LEGend:STATe.	1018
DISPlay:TOVerview[:MEASview<y>]:X[:SCALE].	1019
DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]:AUTO (No Query Form).	1019
DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]:OFFSet.	1020
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE].	1020
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:AUTO (No Query Form).	1021
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:OFFSet.	1021
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:RESCale (No Query Form).	1022
DISPlay:TXGain:MARKer:SHOW:STATe.	1022
DISPlay:TXGain[:SCALE]:AUTO (No Query Form).	1023
DISPlay:TXGain:WINDow:TRACe:GRATICule:GRID:STATe.	1023
DISPlay:TXGain:WINDow:TRACe:POINts:SHOW:STATe.	1023
DISPlay:TXGain:X[:SCALE]:AUTO (No Query Form).	1024
DISPlay:TXGain:X[:SCALE]:LOG:STATe.	1024
DISPlay:TXGain:X[:SCALE]:START.	1025
DISPlay:TXGain:X[:SCALE]:STOP.	1025

DISPlay:TXGain:Y[:SCALe].	1026
DISPlay:TXGain:Y[:SCALe]:AUTO (No Query Form).	1026
DISPlay:TXGain:Y[:SCALe]:BOTTom.	1027
DISPlay:TXGain:Y[:SCALe]:PDIVision.	1027
DISPlay:TXGain:Y[:SCALe]:POSition.	1028
DISPlay:TXGain:Y[:SCALe]:TOP.	1028
:DISPlay:WINDow:ACQuisition:BANdwidth:SHOw:STATe {set and query}.	1028
DISPlay:WINDow:ACTive:MEASurement? (Query Only).	1029
DISPlay:WINDow:APPLY:SOURce:COLOR {set and query}.	1031
DISPlay:WINDow:COLor:SCHeMe.	1031
DISPlay:WINDow:OPTimized:MEASurement? (Query Only).	1032
DISPlay:WLAN:AD:CONSte:WINDow:TRACe:GRATicule:GRID:STATe.	1033
DISPlay:WLAN:AD:CONSte:WINDow:TRACe:MARKer:STATe.	1033
DISPlay:WLAN:AD:CONSte:ZOOM:SCALe.	1034
DISPlay:WLAN:AD:CONSte:ZOOM[:SCALe]:X:OFFSet.	1034
DISPlay:WLAN:AD:CONSte:ZOOM[:SCALe]:Y:OFFSet.	1035
DISPlay:WLAN:AD:DATA:RADix.	1035
DISPlay:WLAN:AD:EVM:SCALe:AUTO (No Query Form).	1036
DISPlay:WLAN:AD:EVM:WINDow:TRACe:GRATicule:GRID:STATe.	1036
DISPlay:WLAN:AD:EVM:WINDow:TRACe:MARKer:STATe.	1037
DISPlay:WLAN:AD:EVM:X:SCALe.	1037
DISPlay:WLAN:AD:EVM:X:SCALe:AUTO (No Query Form).	1038
DISPlay:WLAN:AD:EVM:X:SCALe:OFFSet.	1038
DISPlay:WLAN:AD:EVM:Y:SCALe.	1039
DISPlay:WLAN:AD:EVM:Y:SCALe:AUTO (No Query Form).	1039
DISPlay:WLAN:AD:EVM:Y:SCALe:OFFSet.	1039
DISPlay:WLAN:AD:MEASview:DELeTe (No Query Form).	1040
DISPlay:WLAN:AD:MEASview:NEW (No Query Form).	1040
DISPlay:WLAN:AD:MEASview:SELeCt.	1041
DISPlay:WLAN:AY:CONSte:WINDow:TRACe:GRATicule:GRID:STATe.	1042
DISPlay:WLAN:AY:CONSte:WINDow:TRACe:MARKer:STATe.	1042
DISPlay:WLAN:AY:CONSte:ZOOM:SCALe.	1043
DISPlay:WLAN:AY:CONSte:ZOOM[:SCALe]:X:OFFSet.	1043
DISPlay:WLAN:AY:CONSte:ZOOM[:SCALe]:Y:OFFSet.	1044
DISPlay:WLAN:AY:DATA:RADix.	1044
DISPlay:WLAN:AY:EVM:SCALe:AUTO (No Query Form).	1045
DISPlay:WLAN:AY:EVM:WINDow:TRACe:GRATicule:GRID:STATe.	1045
DISPlay:WLAN:AY:EVM:WINDow:TRACe:MARKer:STATe.	1046
DISPlay:WLAN:AY:EVM:X:SCALe.	1046
DISPlay:WLAN:AY:EVM:X:SCALe:AUTO (No Query Form).	1047
DISPlay:WLAN:AY:EVM:X:SCALe:OFFSet.	1047
DISPlay:WLAN:AY:EVM:Y:SCALe.	1048
DISPlay:WLAN:AY:EVM:Y:SCALe:AUTO (No Query Form).	1048
DISPlay:WLAN:AY:EVM:Y:SCALe:OFFSet.	1048
DISPlay:WLAN:AY:MEASview:DELeTe (No Query Form).	1049
DISPlay:WLAN:AY:MEASview:NEW (No Query Form).	1049
DISPlay:WLAN:AY:MEASview:SELeCt.	1050

DISPlay:WLAN:CONStE[:SCALe].	1051
DISPlay:WLAN:CONStE:X:OFFSet.	1051
DISPlay:WLAN:CONStE:Y:OFFSet.	1052
DISPlay:WLAN:CRESPonse:AUTO (No Query Form).	1052
DISPlay:WLAN:CRESPonse:FREQuency:AUTO (No Query Form).	1053
DISPlay:WLAN:CRESPonse:FREQuency:StARt.	1053
DISPlay:WLAN:CRESPonse:FREQuency:StOP.	1054
DISPlay:WLAN:CRESPonse:MAGNitude:AUTO (No Query Form).	1054
DISPlay:WLAN:CRESPonse:MAGNitude:OFFSet.	1055
DISPlay:WLAN:CRESPonse:MAGNitude[:SCALe].	1055
DISPlay:WLAN:CRESPonse:MARKer:SHOW:StAtE.	1055
DISPlay:WLAN:CRESPonse:PHASe:AUTO (No Query Form).	1056
DISPlay:WLAN:CRESPonse:PHASe:OFFSet.	1056
DISPlay:WLAN:CRESPonse:PHASe[:SCALe].	1057
DISPlay:WLAN:CRESPonse:WINDow:SElect:PLOT.	1057
DISPlay:WLAN:CRESPonse:WINDow:TRACe:GRATicule:GRID:StAtE.	1058
DISPlay:WLAN:EVM:FREQuency:AUTO (No Query Form).	1058
DISPlay:WLAN:EVM:FREQuency:RESet (No Query Form).	1059
DISPlay:WLAN:EVM:FREQuency:StARt.	1059
DISPlay:WLAN:EVM:FREQuency:StOP.	1060
DISPlay:WLAN:EVM:MARKer:SHOW:StAtE.	1060
DISPlay:WLAN:EVM[:SCALe]:AUTO (No Query Form).	1060
DISPlay:WLAN:EVM:TIME:AUTO (No Query Form).	1061
DISPlay:WLAN:EVM:TIME:AUTO:StAtE.	1061
DISPlay:WLAN:EVM:TIME:RESet (No Query Form).	1062
DISPlay:WLAN:EVM:TIME:StARt.	1062
DISPlay:WLAN:EVM:TIME:StOP.	1063
DISPlay:WLAN:EVM:WINDow:SElect:PLOT.	1063
DISPlay:WLAN:EVM:WINDow:TRACe:GRATicule:GRID:StAtE.	1064
DISPlay:WLAN:EVM:Y:AUTO (No Query Form).	1064
DISPlay:WLAN:EVM:Y:OFFSet.	1064
DISPlay:WLAN:EVM:Y:RESet (No Query Form).	1065
DISPlay:WLAN:EVM:Y[:SCALe].	1065
DISPlay:WLAN:FLATness:AUTO (No Query Form).	1066
DISPlay:WLAN:FLATness:X:AUTO (No Query Form).	1066
DISPlay:WLAN:FLATness:X:OFFSet.	1067
DISPlay:WLAN:FLATness:X[:SCALe].	1067
DISPlay:WLAN:FLATness:Y:AUTO (No Query Form).	1068
DISPlay:WLAN:FLATness:Y:OFFSet.	1068
DISPlay:WLAN:FLATness:Y[:SCALe].	1069
DISPlay:WLAN:MEASview:DELeTe (No Query Form).	1069
DISPlay:WLAN:MEASview:NEw (No Query Form).	1070
DISPlay:WLAN:MEASview:SElect.	1071
DISPlay:WLAN:MERRor:FREQuency:AUTO (No Query Form).	1072
DISPlay:WLAN:MERRor:FREQuency:RESet (No Query Form).	1072
DISPlay:WLAN:MERRor:FREQuency:StARt.	1072
DISPlay:WLAN:MERRor:FREQuency:StOP.	1073

DISPlay:WLAN:MERRor:MARKer:SHOW:STATe.	1073
DISPlay:WLAN:MERRor[:SCALe]:AUTO (No Query Form).	1074
DISPlay:WLAN:MERRor:TIME:AUTO (No Query Form).	1074
DISPlay:WLAN:MERRor:TIME:AUTO:STATe.	1075
DISPlay:WLAN:MERRor:TIME:RESet (No Query Form).	1075
DISPlay:WLAN:MERRor:TIME:START.	1076
DISPlay:WLAN:MERRor:TIME:STOP.	1076
DISPlay:WLAN:MERRor:WINDow:SElect:PLOT.	1076
DISPlay:WLAN:MERRor:WINDow:TRACe:GRATicule:GRID:STATe.	1077
DISPlay:WLAN:MERRor:Y:AUTO (No Query Form).	1077
DISPlay:WLAN:MERRor:Y:OFFSet.	1078
DISPlay:WLAN:MERRor:Y:RESet (No Query Form).	1078
DISPlay:WLAN:MERRor:Y[:SCALe].	1079
DISPlay:WLAN:PERRor:FREQuency:AUTO (No Query Form).	1079
DISPlay:WLAN:PERRor:FREQuency:RESet (No Query Form).	1080
DISPlay:WLAN:PERRor:FREQuency:START.	1080
DISPlay:WLAN:PERRor:FREQuency:STOP.	1081
DISPlay:WLAN:PERRor:MARKer:SHOW:STATe.	1081
DISPlay:WLAN:PERRor[:SCALe]:AUTO (No Query Form).	1082
DISPlay:WLAN:PERRor:TIME:AUTO (No Query Form).	1082
DISPlay:WLAN:PERRor:TIME:AUTO:STATe.	1082
DISPlay:WLAN:PERRor:TIME:RESet (No Query Form).	1083
DISPlay:WLAN:PERRor:TIME:START.	1083
DISPlay:WLAN:PERRor:TIME:STOP.	1084
DISPlay:WLAN:PERRor:WINDow:SElect:PLOT.	1084
DISPlay:WLAN:PERRor:WINDow:TRACe:GRATicule:GRID:STATe.	1085
DISPlay:WLAN:PERRor:Y:AUTO (No Query Form).	1085
DISPlay:WLAN:PERRor:Y:OFFSet.	1086
DISPlay:WLAN:PERRor:Y:RESet (No Query Form).	1086
DISPlay:WLAN:PERRor:Y[:SCALe].	1087
DISPlay:WLAN:PVTime:BURSt:X[:SCALe].	1087
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:AUTO (No Query Form).	1087
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:OFFSet.	1088
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:RESet (No Query Form).	1088
DISPlay:WLAN:PVTime:FALL:X[:SCALe].	1089
DISPlay:WLAN:PVTime:FALL:X[:SCALe]:AUTO (No Query Form).	1089
DISPlay:WLAN:PVTime:FALL:X[:SCALe]:OFFSet.	1090
DISPlay:WLAN:PVTime:FALL:X[:SCALe]:RESet (No Query Form).	1090
DISPlay:WLAN:PVTime:MARKer:SHOW:STATe.	1091
DISPlay:WLAN:PVTime:RISE:X[:SCALe].	1091
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:AUTO (No Query Form).	1091
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:OFFSet.	1092
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:RESet (No Query Form).	1092
DISPlay:WLAN:PVTime:WINDow:SElect:PLOT.	1093
DISPlay:WLAN:PVTime:WINDow:TRACe:GRATicule:GRID:STATe.	1093
DISPlay:WLAN:PVTime:Y[:SCALe].	1094
DISPlay:WLAN:PVTime:Y[:SCALe]:AUTO (No Query Form).	1094

DISPlay:WLAN:PVTime:Y[:SCALE]:OFFSet.	1095
DISPlay:WLAN:PVTime:Y[:SCALE]:PDIVision.	1095
DISPlay:WLAN:PVTime:Y[:SCALE]:RESet (No Query Form).	1095
DISPlay:WLAN:SUMMary:EVMUnits.	1096
*ESE.	1096
*ESR? (Query Only).	1097
Fetch commands.	1098
FETCh:ACPower? (Query Only).	1098
FETCh:ACPower:CHANnel:POWer? (Query Only).	1098
FETCh:ACPower:SPECtrum? (Query Only).	1099
FETCh:{AM FM PM}? (Query Only).	1099
FETCh:AM:AMINdex? (Query Only).	1100
FETCh:AM:AMNegative? (Query Only).	1100
FETCh:AM:AMPositive? (Query Only).	1101
FETCh:AM:RESult? (Query Only).	1101
FETCh:AUDio:FERRor? (Query Only).	1102
FETCh:AUDio:FREQuency? (Query Only).	1102
FETCh:AUDio:HARMonic:COUNT? (Query Only).	1103
FETCh:AUDio:HARMonic<x>:AMPLitude? (Query Only).	1103
FETCh:AUDio:HARMonic<x>:FREQuency? (Query Only).	1104
FETCh:AUDio:HNOise? (Query Only).	1104
FETCh:AUDio:HNREFerence? (Query Only).	1105
FETCh:AUDio:HPTPeak? (Query Only).	1106
FETCh:AUDio:MODDist? (Query Only).	1106
FETCh:AUDio:NHARmonic:COUNT? (Query Only).	1107
FETCh:AUDio:NHARmonic<x>:AMPLitude? (Query Only).	1107
FETCh:AUDio:NHARmonic<x>:FREQuency? (Query Only).	1108
FETCh:AUDio:PNEGative? (Query Only).	1108
FETCh:AUDio:POWer? (Query Only).	1109
FETCh:AUDio:PPOSitive? (Query Only).	1109
FETCh:AUDio:RMS? (Query Only).	1110
FETCh:AUDio:SINad? (Query Only).	1110
FETCh:AUDio:SNOise? (Query Only).	1111
FETCh:AUDio:SPECtrum:TRACe<x>? (Query Only).	1111
FETCh:AUDio:THDist? (Query Only).	1112
FETCh:AUDio:THDist:DB? (Query Only).	1112
FETCh:AUDio:TNHDist? (Query Only).	1113
FETCh:AUDio:TNHDist:DB? (Query Only).	1113
FETCh:AVTime[:MEASview<y>]:AVERage? (Query Only).	1114
FETCh:AVTime[:MEASview<y>]:{FIRSt SECond THIRd FOURth}? (Query Only).	1114
FETCh:AVTime[:MEASview<y>]:MAXimum? (Query Only).	1115
FETCh:AVTime[:MEASview<y>]:MAXLocation? (Query Only).	1116
FETCh:AVTime[:MEASview<y>]:MINimum? (Query Only).	1116
FETCh:AVTime[:MEASview<y>]:MINLocation? (Query Only).	1117
FETCh:AVTime[:MEASview<y>]:RESult? (Query Only).	1117
:FETCh:AVTime[:MEASview<y>]:AVERage:{FIRSt SECond THIRd FOURth}.	1118
:FETCh:AVTime[:MEASview<y>]:MAXimum:{FIRSt SECond THIRd FOURth}.	1119

:FETCh:AVTime[:MEASview<y>]:MAXLocation:{FIRSt SECond THIRd FOURth}	1119
:FETCh:AVTime[:MEASview<y>]:MINimum:{FIRSt SECond THIRd FOURth}	1120
:FETCh:AVTime[:MEASview<y>]:MINLocation:{FIRSt SECond THIRd FOURth}	1120
:FETCh:AVTime[:MEASview<y>]:RESult:{FIRSt SECond THIRd FOURth}	1121
FETCh:BIBEmissions:FTX? (Query Only)	1122
FETCh:BIBEmissions:POWEr? (Query Only)	1122
FETCh:BIBEmissions:RESUlts:STATus? (Query Only)	1123
FETCh:BLUEtooth:CONSte:FERRor? (Query Only)	1123
FETCh:BLUEtooth:CONSte:TRACe? (Query Only)	1124
FETCh:BLUEtooth:EDlagram:FDEviation? (Query Only)	1124
FETCh:BLUEtooth:EDlagram:FERRor? (Query Only)	1125
FETCh:BLUEtooth:EDlagram:HORIZ:SCALE? (Query Only)	1125
FETCh:BLUEtooth:EDlagram:I? (Query Only)	1126
FETCh:BLUEtooth:EDlagram:Q? (Query Only)	1126
FETCh:BLUEtooth:FDVTime:TRACe? (Query Only)	1127
FETCh:BLUEtooth:FREQuency:ERRor? (Query Only)	1127
FETCh:BLUEtooth:FREQuency:ERRor:TYPE? (Query Only)	1128
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:F1FZero? (Query Only)	1128
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFN5? (Query Only)	1129
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFN5:INTERval? (Query Only)	1129
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFZERO? (Query Only)	1130
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFZERO:INTERval? (Query Only)	1130
FETCh:BLUEtooth:FREQuency:OFFSet:MAX? (Query Only)	1131
FETCh:BLUEtooth:FREQuency:OFFSet:MAX:INTERval? (Query Only)	1131
FETCh:BLUEtooth:FREQuency:OFFSet:PREAmble? (Query Only)	1132
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:F? (Query Only)	1132
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:F2F1ratio? (Query Only)	1133
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:FONE? (Query Only)	1133
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:FTWO? (Query Only)	1134
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:COUNt? (Query Only)	1134
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:F1FZero? (Query Only)	1134
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:F1FZero: STATus? (Query Only)	1135
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:FNFN5? (Query Only)	1135
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:FNFN5: STATus? (Query Only)	1136
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:FNFZero? (Query Only)	1136
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:FNFZero: STATus? (Query Only)	1137
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:LECoded: CODIng:SCHEme (Query Only)	1137
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:LECoded: F0FThree (Query Only)	1138
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:LECoded: F0FThree:STATus (Query Only)	1138
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:LECoded: F1FFour (Query Only)	1139
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:LECoded: F1FFour:STATus (Query Only)	1139
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:LECoded: FNFN3 (Query Only)	1140
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFT:LECoded: FNFN3:STATus (Query Only)	1140
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:MAX? (Query Only)	1141
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:MAX:STATus? (Query Only)	1142
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:PREAmble? (Query Only)	1142
FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:PREAmble:STATus? (Query Only)	1143

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: DELTa:F:MAX:PERCentage:COUNT? (Query Only).	1143
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: DELTa:FONE:MAX:PERCentage:COUNT? (Query Only).	1144
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: DELTa:FTWO:MAX:PERCentage:COUNT? (Query Only).	1144
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: DELTa:FTWO:MAX:PERCentage? (Query Only).	1145
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: DELTa:FTWO:MAX:PERCentage:STATus? (Query Only).	1145
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:F? (Query Only).	1146
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: F2F1ratio? (Query Only).	1146
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: F2F1ratio:STATus? (Query Only).	1147
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: FONE? (Query Only).	1147
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: FONE:STATus? (Query Only).	1148
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: FTWO? (Query Only).	1148
FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:INDeX (Query Only).	1149
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:AVErage? (Query Only).	1149
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:AVErage:STATus? (Query Only).	1150
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:COUNt? (Query Only).	1150
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:EDR:COUNt? (Query Only).	1151
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:EDR:DPSK? (Query Only).	1151
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:EDR:GPSK? (Query Only).	1152
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:PEAK? (Query Only).	1152
FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:PEAK:STATus? (Query Only).	1153
FETCh:BLUEtooth:SUMMary:PACKet:BDR:CRC? (Query Only).	1153
FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:ARQN? (Query Only).	1154
FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:FLOW? (Query Only).	1154
FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:HEC? (Query Only).	1155
FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:LT:ADDReSS? (Query Only).	1155
FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:SEQN? (Query Only).	1156
FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:TYPE? (Query Only).	1156
FETCh:BLUEtooth:SUMMary:PACKet:BDR:PAYLoad:LENGth? (Query Only).	1157
FETCh:BLUEtooth:SUMMary:PACKet:BDR:PREAmble? (Query Only).	1157
FETCh:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD? (Query Only).	1158
FETCh:BLUEtooth:SUMMary:PACKet:BDR:TYPE? (Query Only).	1158
FETCh:BLUEtooth:SUMMary:PACKet:BLE:ACCeSS:ADDReSS? (Query Only).	1159
FETCh:BLUEtooth:SUMMary:PACKet:BLE:CRC? (Query Only).	1159
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:CHANnel: SElect (Query Only).	1160
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:LENGth? (Query Only).	1160
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:LLID (Query Only).	1161
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:MD (Query Only).	1161
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:NESN (Query Only).	1162
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:RX:ADDReSS? (Query Only).	1162
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:SN (Query Only).	1163
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TX:ADDReSS? (Query Only).	1163
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TYPE? (Query Only).	1164
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PREAmble? (Query Only).	1164
FETCh:BLUEtooth:SUMMary:PACKet:BLE:TYPE? (Query Only).	1164

FETCh:CCDF? (Query Only)	1165
FETCh:CCDF:{FIRSt SECond THIRd}:X? (Query Only)	1166
FETCh:CCDF:{FIRSt SECond THIRd}:XY? (Query Only)	1166
FETCh:CCDF:{FIRSt SECond THIRd}:Y? (Query Only)	1167
FETCh:CONSt[:MEASview<y>]:FERRor? (Query only)	1168
FETCh:CONSt[:MEASview<y>]:RESults? (Query only)	1168
FETCh:CONSt[:MEASview<y>]:TRACe? (Query only)	1169
FETCh:DDEMod[:MEASview<y>]:STABle? (Query only)	1170
FETCh:DDEMod:SYNCh:WORD:LENGth? (Query only)	1170
FETCh:DDEMod:SYNCh:WORD:POSition? (Query Only)	1171
FETCh:DIQVtime[:MEASview<y>]:FERRor? (Query only)	1171
FETCh:DIQVtime[:MEASview<y>]:I? (Query only)	1172
FETCh:DIQVtime[:MEASview<y>]:Q? (Query only)	1173
FETCh:DPX:DDENSity? (Query Only)	1173
FETCh:DPX:DGRam:LINE:COUNT? (Query Only)	1174
FETCh:DPX:DGRam:TIME[:SCALE]:OFFSet? (Query Only)	1174
FETCh:DPX:RESults:TRACe<x>? (Query Only)	1175
FETCh:DPX:TDM:FREQuency:TXBer:BER? (Query Only)	1175
FETCh:DPX:TDM:FREQuency:TXBer:BITS? (Query Only)	1176
FETCh:DPX:TDM:FREQuency:TXBer:ERRors? (Query Only)	1176
FETCh:DPX:TDM:FREQuency:TXBer:STATe? (Query Only)	1177
FETCh:DPX:TRACe:AVERAge? (Query Only)	1177
FETCh:DPX:TRACe:BITMap? (Query Only)	1178
FETCh:DPX:TRACe:MATH? (Query Only)	1178
FETCh:DPX:TRACe:MAXimum? (Query Only)	1179
FETCh:DPX:TRACe:MINimum? (Query Only)	1179
FETCh:EDlagram[:MEASview<y>]:FDEViation? (Query only)	1180
FETCh:EDlagram[:MEASview<y>]:FERRor? (Query only)	1181
FETCh:EDlagram[:MEASview<y>]:I? (Query only)	1181
FETCh:EDlagram[:MEASview<y>]:Q? (Query only)	1182
FETCh:EMC:COUNt? (Query only)	1182
FETCh:EMC:EMISsion:RESults:STATus? (Query Only)	1183
FETCh:EMC:SPOT<x>:AMBlent:AMPLitude? (Query Only)	1183
FETCh:EMC:SPOT<x>:AMBlent:DELTA? (Query Only)	1184
FETCh:EMC:SPOT<x>:AMBlent:PASS? (Query Only)	1184
FETCh:EMC:SPOT<x>:FREQuency? (Query Only)	1185
FETCh:EMC:SPOT<x>:PASS? (Query Only)	1185
FETCh:EMC:SPOT<x>:RANGe? (Query Only)	1186
FETCh:EMC:SPOT<x>:RECALL:AMPLitude? (Query Only)	1186
FETCh:EMC:SPOT<x>:RECALL:DELTA? (Query Only)	1187
FETCh:EMC:SPOT<x>:RECALL:PASS? (Query Only)	1187
FETCh:EMC:SPOT<x>:SCDEtector<y>:AMPLitude? (Query Only)	1188
FETCh:EMC:SPOT<x>:SCDEtector<y>:DELTA? (Query Only)	1188
FETCh:EMC:SPOT<x>:SCDEtector<y>:PASS? (Query Only)	1189
FETCh:EMC:SPOT<x>:SPDEtector<y>:AMPLitude? (Query Only)	1190
FETCh:EMC:SPOT<x>:SPDEtector<y>:DELTA? (Query Only)	1190
FETCh:EMC:SPOT<x>:SPDEtector<y>:PASS? (Query Only)	1191

FETCH:EVM[:MEASview<y>]:FERRor? (Query only).	1191
FETCH:EVM[:MEASview<y>]:PEAK? (Query only).	1192
FETCH:EVM[:MEASview<y>]:PINDex? (Query only).	1192
FETCH:EVM[:MEASview<y>]:RMS? (Query only).	1193
FETCH:EVM[:MEASview<y>]:TRACe? (Query only).	1194
FETCH:FDVTime[:MEASview<y>]:FERRor? (Query only).	1194
FETCH:FDVTime[:MEASview<y>]:TRACe? (Query only).	1195
FETCH:{FM PM}:FERRor? (Query Only).	1195
FETCH:FM:PHALf? (Query Only).	1196
FETCH:FM:PNEGative? (Query Only).	1196
FETCH:FM:PPOSitive? (Query Only).	1197
FETCH:FM:PTPeak? (Query Only).	1197
FETCH:FM:RESult? (Query Only).	1198
FETCH:FM:RMS? (Query Only).	1198
FETCH:{FSETtling PSETtling}:FTTime? (Query Only).	1199
FETCH:{FSETtling PSETtling}:MASK[:PASS]? (Query Only).	1199
FETCH:{FSETtling PSETtling}:SETTled:FREQuency? (Query Only).	1200
FETCH:{FSETtling PSETtling}:SETTled[:PASS]? (Query Only).	1200
FETCH:{FSETtling PSETtling}:SETTled:TIME? (Query Only).	1200
FETCH:{FSETtling PSETtling}:SLMSd[:PASS]? (Query Only).	1201
FETCH:{FSETtling PSETtling}:START:TIME? (Query Only).	1201
FETCH:{FSETtling PSETtling}:TIME? (Query Only).	1202
FETCH:{FSETtling PSETtling}:TRACe<x>:X? (Query Only).	1202
FETCH:{FSETtling PSETtling}:TRACe<x>:XY? (Query Only).	1203
FETCH:{FSETtling PSETtling}:TRACe<x>[:Y]? (Query Only).	1204
FETCH:{FSETtling PSETtling}:TRIGger:TIME? (Query Only).	1204
FETCH:{FSETtling PSETtling}:VALue? (Query Only).	1205
FETCH:FSETtling:ERRor? (Query Only).	1205
FETCH:FVTime[:MEASview<y>]? (Query Only).	1206
FETCH:FVTime[:MEASview<y>]:MAXimum? (Query Only).	1206
FETCH:FVTime[:MEASview<y>]:MAXLocation? (Query Only).	1207
FETCH:FVTime[:MEASview<y>]:MINimum? (Query Only).	1207
FETCH:FVTime[:MEASview<y>]:MINLocation? (Query Only).	1208
FETCH:FVTime[:MEASview<y>]:RESult? (Query Only).	1208
FETCH:IQVTime[:MEASview<y>]:I? (Query Only).	1209
FETCH:IQVTime[:MEASview<y>]:MAXimum (Query Only).	1210
FETCH:IQVTime[:MEASview<y>]:MAXLocation (Query Only).	1210
FETCH:IQVTime[:MEASview<y>]:MINimum (Query Only).	1211
FETCH:IQVTime[:MEASview<y>]:MINLocation (Query Only).	1211
FETCH:IQVTime[:MEASview<y>]:Q (Query Only).	1212
FETCH:IQVTime[:MEASview<y>]:RESult (Query Only).	1212
FETCH:LTE:ACLR:MHITs:COUNT? (Query Only).	1213
FETCH:LTE:ACLR:MHITs<x>:BANDwidth? (Query Only).	1213
FETCH:LTE:ACLR:MHITs<x>:CHANnel:NAME? (Query Only).	1214
FETCH:LTE:ACLR:MHITs<x>:FREQuency:OFFSet? (Query Only).	1214
FETCH:LTE:ACLR:MHITs<x>:INTeg:LOWEr:ABSolute? (Query Only).	1215
FETCH:LTE:ACLR:MHITs<x>:INTeg:LOWEr:RELAtive? (Query Only).	1215

FETCH:LTE:ACLR:MHITs<x>:INTeg:UPPEr:ABSolute? (Query Only)	1215
FETCH:LTE:ACLR:MHITs<x>:INTeg:UPPEr:RELative? (Query Only)	1216
FETCH:LTE:ACLR:REFerence:POWEr? (Query Only)	1216
FETCH:LTE:ACLR:RESUlts:STATus? (Query Only)	1217
FETCH:LTE:ACLR:SPECTrum:X? (Query Only)	1217
FETCH:LTE:ACLR:SPECTrum:XY? (Query Only)	1218
FETCH:LTE:ACLR:SPECTrum:Y? (Query Only)	1218
FETCH:LTE:CHSPectrum:OBW? (Query Only)	1219
FETCH:LTE:CHSPectrum:POWEr:CHANnel? (Query Only)	1219
FETCH:LTE:CHSPectrum:SPECTrum? (Query Only)	1219
FETCH:LTE:CONSte:CELL:ID? (Query Only)	1220
FETCH:LTE:CONSte:FREQuency:ERRor? (Query Only)	1220
FETCH:LTE:CONSte:GROUp:ID? (Query Only)	1221
FETCH:LTE:CONSte:SECTor:ID? (Query Only)	1221
FETCH:LTE:PVTime:OFFSlot:POWEr? (Query Only)	1221
FETCH:LTE:PVTime:RESUlts:STATus	1222
FETCH:LTE:PVTime:TRACe:X? (Query Only)	1222
FETCH:LTE:PVTime:TRACe:XY? (Query Only)	1223
FETCH:LTE:PVTime:TRACe:Y? (Query Only)	1223
FETCH:MCPower:ADJacent:CHANnels? (Query Only)	1224
FETCH:MCPower:CHANnel:POWEr? (Query Only)	1224
FETCH:MCPower:MAIN:CHANnels? (Query Only)	1225
FETCH:MCPower:SPECTrum? (Query Only)	1225
FETCH:MERRor[:MEASview<y>]:FERRor? (Query only)	1226
FETCH:MERRor[:MEASview<y>]:PEAK? (Query only)	1227
FETCH:MERRor[:MEASview<y>]:PINDeX? (Query only)	1227
FETCH:MERRor[:MEASview<y>]:RMS? (Query only)	1228
FETCH:MERRor[:MEASview<y>]:TRACe? (Query only)	1228
FETCH:NOISe:GAIN:TRACe<x>:RESUlt? (Query Only)	1229
FETCH:NOISe:TABLE:VALue? (Query Only)	1229
FETCH:NR:ACP:TAGGpower ? (Query Only)	1230
FETCH:NR:ACP:NO:OF:NR:OFFsets? (Query Only)	1230
FETCH:NR:ACP:ADJChannel<x>:INTBw? (Query Only)	1231
FETCH:NR:ACP:ADJChannel<x>:UABS? (Query Only)	1231
FETCH:NR:ACP:ADJChannel<x>:UREL ? (Query Only)	1231
FETCH:NR:ACP:ADJChannel<x>:LABS? (Query Only)	1232
FETCH:NR:ACP:ADJChannel<x>:LREL ? (Query Only)	1232
FETCH:NR:ACP:ADJChannel<x>:FREQoffset ? (Query Only)	1233
FETCH:NR:CHP:CARRier<x>:ABSPower? (Query Only)	1233
FETCH:NR:CHP:CARRier<x>:RELPower? (Query Only)	1233
FETCH:NR:CHP:TAGGpower? (Query Only)	1234
FETCH:NR:EVM:ATSYmbol (Query Only)	1234
FETCH:NR:EVM:PEAK (Query Only)	1235
FETCH:NR:EVM:RMS (Query Only)	1235
FETCH:NR:LINK:DIREction? (Query Only)	1235
FETCH:NR:MODAcc:CARRier<x>:CELL:ID? (Query Only)	1236
FETCH:NR:MODAcc:CARRier<x>:OFFSet? (Query Only)	1236

FETCH:NR:MODAcc:CARRier<x>:CREM? (Query Only)	1237
FETCH:NR:MODAcc:CARRier<x>:CPEM? (Query Only)	1237
FETCH:NR:MODAcc:CARRier<x>:CPESLI? (Query Only)	1237
FETCH:NR:MODAcc:CARRier<x>:CPESYI? (Query Only)	1238
FETCH:NR:MODAcc:CARRier<x>:CPESCI? (Query Only)	1238
FETCH:NR:MODAcc:CARRier<x>:CCFME? (Query Only)	1239
FETCH:NR:MODAcc:CARRier<x>:CCIOOM? (Query Only)	1239
FETCH:NR:MODAcc:CARRier<x>:CCIGIM? (Query Only)	1239
FETCH:NR:MODAcc:CARRier<x>:CCIQEM? (Query Only)	1240
FETCH:NR:MODAcc:CARRier<x>:IBEM? (Query Only)	1240
FETCH:NR:MODAcc:CARRier<x>:DATA:PEAK (Query Only)	1241
FETCH:NR:MODAcc:CARRier<x>:DATA:RMS (Query Only)	1241
FETCH:NR:MODAcc:CARRier<x>:DMRS:PEAK (Query Only)	1242
FETCH:NR:MODAcc:CARRier<x>:DMRS:RMS (Query Only)	1242
FETCH:NR:MODAcc:CARRier<x>:PREM (Query Only)	1242
FETCH:NR:MODAcc:CARRier<x>:PTRS: RMS (Query Only)	1243
FETCH:NR:MODAcc:CARRier<x>:PTRS:PEAK (Query Only)	1243
FETCH:NR:OBW:ABSPower (Query Only)	1244
FETCH:NR:OBW:OCCUpiedbw (Query Only)	1244
FETCH:NR:OBW:STARTfreq (Query Only)	1244
FETCH:NR:OBW:STOPfreq (Query Only)	1245
FETCH:NR:PVT:ABS:OFFpower:AFTR (Query Only)	1245
FETCH:NR:PVT:ABS:OFFpower:BFR (Query Only)	1246
FETCH:NR:PVT:ABS:ONpower (Query Only)	1246
FETCH:NR:PVT:BURStwidth (Query Only)	1246
FETCH:NR:PVT:MEASurement:STATus (Query Only)	1247
FETCH:NR:SEM:TAGGpower? (Query Only)	1247
FETCH:NR:SEM:OFFSet<x>:STARTfreq? (Query Only)	1247
FETCH:NR:SEM:OFFSet<x>:STOPfreq? (Query Only)	1248
FETCH:NR:SEM:OFFSet<x>:PEAK:ABS? (Query Only)	1248
FETCH:NR:SEM:OFFSet<x>:PEAK:REL? (Query Only)	1249
FETCH:NR:SEM:OFFSet<x>:PEAK:FREQ? (Query Only)	1249
FETCH:NR:SEM:OFFSet<x>:MARGin? (Query Only)	1249
FETCH:NR:SEM:OFFSet<x>:MARGin:ABS? (Query Only)	1250
FETCH:NR:SEM:OFFSet<x>:MARGin:REL? (Query Only)	1250
FETCH:NR:SEM:OFFSet<x>:MARGin:FREQ? (Query Only)	1251
FETCH:NR:SEM:OFFSet<x>:INTEg:ABS? (Query Only)	1251
FETCH:NR:SEM:OFFSet<x>:INTEg:REL? (Query Only)	1251
FETCH:NR:SEM:OFFSet<x>:RBW? (Query Only)	1252
FETCH:NR:SEM:OFFSet<x>:ABSLimit:START? (Query Only)	1252
FETCH:NR:SEM:OFFSet<x>:ABSLimit:STOP? (Query Only)	1253
FETCH:NR:SEM:OFFSet<x>:RELLimit:START? (Query Only)	1253
FETCH:NR:SEM:OFFSet<x>:RELLimit:STOP? (Query Only)	1254
FETCH:NR:SUBblock<x>:NUMCcs? (Query Only)	1254
FETCH:OBWidth:BOBW:FREQuency:ERRor (Query Only)	1254
FETCH:OBWidth:BOBW:RESUltS:STATus (Query Only)	1255
FETCH:OBWidth:BOBW:XDBB:POWer (Query Only)	1255

FETCH:OBWidth:BOBW:XDBBandwidth? (Query Only)	1256
FETCH:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth? (Query Only)	1256
FETCH:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency? (Query Only)	1257
FETCH:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency? (Query Only)	1257
FETCH:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth? (Query Only)	1258
FETCH:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency? (Query Only)	1259
FETCH:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency? (Query Only)	1259
FETCH:OBWidth:FREQuency:ERRor? (Query Only)	1260
FETCH:OBWidth:OBWidth:BANDwidth? (Query Only)	1260
FETCH:OBWidth:OBWidth:LEFT:FREQuency? (Query Only)	1261
FETCH:OBWidth:OBWidth:LEFT:LEVel? (Query Only)	1261
FETCH:OBWidth:OBWidth:POWer? (Query Only)	1262
FETCH:OBWidth:OBWidth:RIGHT:FREQuency? (Query Only)	1262
FETCH:OBWidth:OBWidth:RIGHT:LEVel? (Query Only)	1263
FETCH:OBWidth:SPECtrum? (Query Only)	1263
FETCH:OBWidth:XDBBandwidth:BANDwidth? (Query Only)	1264
FETCH:OBWidth:XDBBandwidth:LEFT:FREQuency? (Query Only)	1264
FETCH:OBWidth:XDBBandwidth:LEFT:LEVel? (Query Only)	1265
FETCH:OBWidth:XDBBandwidth:POWer? (Query Only)	1265
FETCH:OBWidth:XDBBandwidth:RIGHT:FREQuency? (Query Only)	1266
FETCH:OBWidth:XDBBandwidth:RIGHT:LEVel? (Query Only)	1266
FETCH:OFDM:APOWer? (Query Only)	1267
FETCH:OFDM:APOWer:PEAK? (Query Only)	1267
FETCH:OFDM:CONSte:MAGNitude? (Query Only)	1268
FETCH:OFDM:CONSte:PHASe? (Query Only)	1268
FETCH:OFDM:CONSte:TYPE? (Query Only)	1269
FETCH:OFDM:CONSte:VALue? (Query Only)	1270
FETCH:OFDM:CPE? (Query Only)	1270
FETCH:OFDM:CRESpone:MAGNitude? (Query Only)	1271
FETCH:OFDM:CRESpone:PHASe? (Query Only)	1271
FETCH:OFDM:EVM:PEAK:DECibel:ALL? (Query Only)	1272
FETCH:OFDM:EVM:PEAK:DECibel:DATA? (Query Only)	1272
FETCH:OFDM:EVM:PEAK:DECibel:PILots? (Query Only)	1273
FETCH:OFDM:EVM:PEAK:PERCent:ALL? (Query Only)	1273
FETCH:OFDM:EVM:PEAK:PERCent:DATA? (Query Only)	1274
FETCH:OFDM:EVM:PEAK:PERCent:PILots? (Query Only)	1274
FETCH:OFDM:EVM:PEAK:SCARrier:ALL? (Query Only)	1275
FETCH:OFDM:EVM:PEAK:SCARrier:DATA? (Query Only)	1275
FETCH:OFDM:EVM:PEAK:SCARrier:PILots? (Query Only)	1276
FETCH:OFDM:EVM:PEAK:SYMBol:ALL? (Query Only)	1276
FETCH:OFDM:EVM:PEAK:SYMBol:DATA? (Query Only)	1276
FETCH:OFDM:EVM:PEAK:SYMBol:PILots? (Query Only)	1277
FETCH:OFDM:EVM:RMS:DECibel:ALL? (Query Only)	1277
FETCH:OFDM:EVM:RMS:DECibel:DATA? (Query Only)	1278
FETCH:OFDM:EVM:RMS:DECibel:PILots? (Query Only)	1278
FETCH:OFDM:EVM:RMS:PERCent:ALL? (Query Only)	1279
FETCH:OFDM:EVM:RMS:PERCent:DATA? (Query Only)	1279

FETCH:OFDM:EVM:RMS:PERCent:PILots? (Query Only)	1280
FETCH:OFDM:EVM:TRACe<x>? (Query Only)	1280
FETCH:OFDM:FERRor? (Query Only)	1281
FETCH:OFDM:FLATness:PASS? (Query Only)	1281
FETCH:OFDM:FLATness:RESult? (Query Only)	1282
FETCH:OFDM:FLATness:TRACe<x>? (Query Only)	1282
FETCH:OFDM:GAIN:IMBalance? (Query Only)	1283
FETCH:OFDM:IQ:ORIGin:OFFSet? (Query Only)	1283
FETCH:OFDM:MERRor:TRACe<x>? (Query Only)	1284
FETCH:OFDM:PACKet:DIRection? (Query Only)	1284
FETCH:OFDM:PERRor:TRACe<x>? (Query Only)	1285
FETCH:OFDM:POWEr:TRACe<x>? (Query Only)	1286
FETCH:OFDM:QUADrature:OFFSet? (Query Only)	1286
FETCH:OFDM:SCARriers? (Query Only)	1287
FETCH:OFDM:SCARriers:SPACing? (Query Only)	1287
FETCH:OFDM:STABle:VALUe? (Query Only)	1288
FETCH:OFDM:SYMBol:CERRor? (Query Only)	1288
FETCH:OFDM:SYMBol:COUNt? (Query Only)	1289
FETCH:P25:CONSte:FERRor? (Query Only)	1289
FETCH:P25:CONSte:TRACe? (Query Only)	1289
FETCH:P25:EDIagram:FDEVIation? (Query Only)	1290
FETCH:P25:EDIagram:FERRor? (Query Only)	1290
FETCH:P25:EDIagram:I? (Query Only)	1291
FETCH:P25:EDIagram:Q? (Query Only)	1291
FETCH:P25:PVTime:BURSt:WIDTh? (Query Only)	1292
FETCH:P25:PVTime:FALL:TIME:STARt? (Query Only)	1292
FETCH:P25:PVTime:FALL:TIME:STOP? (Query Only)	1293
FETCH:P25:PVTime:RISE:TIME? (Query Only)	1293
FETCH:P25:PVTime:RISE:TIME:STARt? (Query Only)	1294
FETCH:P25:PVTime:RISE:TIME:STOP? (Query Only)	1294
FETCH:P25:PVTime:RTIME? (Query Only)	1295
FETCH:P25:PVTime:TRACe[Y]? (Query Only)	1295
FETCH:P25:SUMMary:LIMIt: SRA (Query Only)	1296
FETCH:P25:SUMMary:MODUlation:MEASurement:FIDelity (Query Only)	1296
FETCH:P25:SUMMary:MODUlation:MEASurement:FIDelity:STATus (Query Only)	1297
FETCH:P25:SUMMary:MODUlation:MEASurement: FREQuency:DEVlation:POSPeak	1297
FETCH:P25:SUMMary:MODUlation:MEASurement: FREQuency:DEVlation:POSPeak:STA	1298
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency: ACCUracY (Query Only)	1298
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency: ACCUracY (Query Only)	1299
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency: ACCUracY:STATus (Query Only)	1299
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency: DEVlation:NEGPeak:STATus (Query Only)	1300
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency: DEVlation:NEGPeak (Query Only)	1300
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency: DEVlation:POSPeak:STATus (Query Only)	1301
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency: DEVlation:POSPeak (Query Only)	1301
FETCH:P25:SUMMary:MODUlation:MEASurement:FREQuency:ERRor (Query Only)	1302
FETCH:P25:SUMMary:MODUlation:MEASurement:SRA? (Query Only)	1302
FETCH:P25:SUMMary:MODUlation:MEASurement:SRA:STATus (Query Only)	1303

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF? (Query Only)	1303
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF:STATUS? (Query	1303
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON? (Query Only)	1304
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON:STATUS? (Query Only)	1304
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS? (Query Only)	1305
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS:STATUS (Query Only)	1305
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM? (Query Only)	1306
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS? (Query Only)	1306
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT? (Query Only)	1306
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT:STATUS? (Query Only)	1307
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI (Query Only)	1307
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:LOW (Query	1308
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN (Query	1308
FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR: MIN:STATUS	1309
FETCH:P25:SUMMARY:POWER:MEASUREMENT:RF (Query Only)	1309
FETCH:P25:SUMMARY:POWER:MEASUREMENT:RF:STATUS (Query Only)	1309
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ONE:ACQ:COUNT (Query Only)	1310
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ONE:ACQ:COUNT (Query Only)	1310
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ZERO:STATUS (Query Only)	1311
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ONE:STATUS (Query Only)	1311
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ZERO:ACQ:COUNT (Query Only)	1312
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ZERO:S(Query Only)	1312
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ONE:ACQ:COUNT?(Query Only)	1313
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ONE:?(Query Only)	1313
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TERROR:ZERO?	1314
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TOBSync? (Query Only)	1314
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT: TOBSync:ACQ:COUNT (Query Only)	1315
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER? (Query Only)	1315
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER:BI:STAT(Query Only)	1315
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER: STATUS (Query Only)	1316
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER:BI (Query Only)	1317
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ACQ:COUNT(Query Only)	1317
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ACQ:COUNT:BI(Query Only)	1317
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER:BI:STATUS (Query Only)	1318
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER: STATUS (Query Only)	1319
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER?(Query Only)	1319
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER:BI?(Query Only)	1320
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER (Query Only)	1320
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER:BI (Query Only)	1320
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER:BI:STATUS(Query Only)	1321
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER:BI?(Query Only)	1321
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME: POWER:STATUS (Query Only)	1322
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER?(Query Only)	1322

FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:THRUput: DELAY (Query Only).	1323
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:THRUput: DELAY:ACQ:COUNT (Query Only).	1323
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:THRUput: DELAY:ACQ:COUNT?(Query Only).	1323
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:THRUput: DELAY:STATUS (Query Only).	1324
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:THRUput: DELAY? (Query Only).	1324
FETCh:PERRor[:MEASview<y>]:FERRor? (Query only).	1325
FETCh:PERRor[:MEASview<y>]:PEAK? (Query only).	1325
FETCh:PERRor[:MEASview<y>]:PINDeX? (Query only).	1326
FETCh:PERRor[:MEASview<y>]:RMS? (Query only).	1326
FETCh:PERRor[:MEASview<y>]:TRACe? (Query only).	1327
FETCh:PHVTime[:MEASview<y>]? (Query Only).	1328
FETCh:PHVTime[:MEASview<y>]:MAXimum? (Query Only).	1328
FETCh:PHVTime[:MEASview<y>]:MAXLocation? (Query Only).	1329
FETCh:PHVTime[:MEASview<y>]:MINimum? (Query Only).	1329
FETCh:PHVTime[:MEASview<y>]:MINLocation? (Query Only).	1330
FETCh:PHVTime[:MEASview<y>]:RESult? (Query Only).	1330
FETCh:PM:PNEGative? (Query Only).	1331
FETCh:PM:PPOSitive? (Query Only).	1331
FETCh:PM:PTPeak? (Query Only).	1332
FETCh:PM:RESult? (Query Only).	1332
FETCh:PM:RMS? (Query Only).	1333
FETCh:PNOise:ALL? (Query Only).	1333
FETCh:PNOise:CARRier:FERRor? (Query Only).	1334
FETCh:PNOise:CARRier:POWer? (Query Only).	1334
FETCh:PNOise:JITTer? (Query Only).	1335
FETCh:PNOise:RESidual:FM? (Query Only).	1335
FETCh:PNOise:RMS:PNOise? (Query Only).	1336
FETCh:PNOise:SPECTrum<x>:X? (Query Only).	1336
FETCh:PNOise:SPECTrum<x>:XY? (Query Only).	1337
FETCh:PNOise:SPECTrum<x>[:Y]? (Query Only).	1337
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]: OUTLier:HIGHer? (Query Only).	1338
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]: OUTLier:LOWer? (Query Only).	1338
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULSe:COUNt? (Query Only).	1339
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULSe:TOTal? (Query Only).	1339
FETCh:PULSe:CUMulative:STATistics[:MEASview<y>].	1340
FETCh:PULSe:CUMulative:STATistics[:MEASview<y>] (Query Only).	1342
FETCh:PULSe:OGRAM[:MEASview<y>]:MAX:FRAME:COUNt (Query Only).	1343
FETCh:PULSe:OGRAM[:MEASview<y>]:RBW (Query Only).	1344
FETCh:PULSe[:RESult[:MEASview<y>]:ADVanced (Query Only).	1344
FETCh:PULSe[:RESult[:MEASview<y>]:ADVanced:RANGe (Query only).	1346
FETCh:PULSe[:RESult[:MEASview<y>]:ATX? (Query Only).	1347
FETCh:PULSe[:RESult[:MEASview<y>]:AVERage? (Query Only).	1348
FETCh:PULSe[:RESult[:MEASview<y>]:DRODb? (Query Only).	1349
FETCh:PULSe[:RESult[:MEASview<y>]:DROOp? (Query Only).	1349
FETCh:PULSe[:RESult[:MEASview<y>]:DUTPct? (Query Only).	1350
FETCh:PULSe[:RESult[:MEASview<y>]:DUTRatio? (Query Only).	1350
FETCh:PULSe[:RESult[:MEASview<y>]:FABS? (Query Only).	1351

FETCH:PULSe[:RESult][:MEASview<y>]:FALL? (Query Only)	1352
FETCH:PULSe[:RESult][:MEASview<y>]:FDELta? (Query Only)	1352
FETCH:PULSe[:RESult][:MEASview<y>]:FRDeviation? (Query Only)	1353
FETCH:PULSe[:RESult][:MEASview<y>]:IRAMplitude? (Query Only)	1353
FETCH:PULSe[:RESult][:MEASview<y>]:IRTime? (Query Only)	1354
FETCH:PULSe[:RESult][:MEASview<y>]:MFReqerror? (Query Only)	1354
FETCH:PULSe[:RESult][:MEASview<y>]:MPHerror? (Query Only)	1355
FETCH:PULSe[:RESult][:MEASview<y>]:OVEDb? (Query Only)	1355
FETCH:PULSe[:RESult][:MEASview<y>]:OVERshoot? (Query Only)	1356
FETCH:PULSe[:RESult][:MEASview<y>]:PHDeviation? (Query Only)	1357
FETCH:PULSe[:RESult][:MEASview<y>]:PPFD? (Query Only)	1357
FETCH:PULSe[:RESult][:MEASview<y>]:PPFRequency? (Query Only)	1358
FETCH:PULSe[:RESult][:MEASview<y>]:PPOWer? (Query Only)	1358
FETCH:PULSe[:RESult][:MEASview<y>]:PPPD? (Query Only)	1359
FETCH:PULSe[:RESult][:MEASview<y>]:PPPHase? (Query Only)	1360
FETCH:PULSe[:RESult][:MEASview<y>]:RINterval? (Query Only)	1360
FETCH:PULSe[:RESult][:MEASview<y>]:RIPDb? (Query Only)	1361
FETCH:PULSe[:RESult][:MEASview<y>]:RIPple? (Query Only)	1361
FETCH:PULSe[:RESult][:MEASview<y>]:RISE? (Query Only)	1362
FETCH:PULSe[:RESult][:MEASview<y>]:RMSFrequerror? (Query Only)	1362
FETCH:PULSe[:RESult][:MEASview<y>]:RMSPherror? (Query Only)	1363
FETCH:PULSe[:RESult][:MEASview<y>]:RRATe? (Query Only)	1364
FETCH:PULSe[:RESult][:MEASview<y>]:TIME? (Query Only)	1364
FETCH:PULSe[:RESult][:MEASview<y>]:WIDTh? (Query Only)	1365
FETCH:PULSe:STATistics[:MEASview<y>]:ADVanced (Query Only)	1365
FETCH:PULSe:STATistics[:MEASview<y>]:ATX (Query Only)	1367
FETCH:PULSe:STATistics[:MEASview<y>]:AVERage (Query Only)	1367
FETCH:PULSe:STATistics[:MEASview<y>]:DRODb (Query Only)	1368
FETCH:PULSe:STATistics[:MEASview<y>]:DROop (Query Only)	1369
FETCH:PULSe:STATistics[:MEASview<y>]:DUTPct (Query Only)	1369
FETCH:PULSe:STATistics[:MEASview<y>]:DUTRatio (Query Only)	1370
FETCH:PULSe:STATistics[:MEASview<y>]:FABS (Query Only)	1371
FETCH:PULSe:STATistics[:MEASview<y>]:FALL (Query Only)	1371
FETCH:PULSe:STATistics[:MEASview<y>]:FDELta (Query Only)	1372
FETCH:PULSe:STATistics[:MEASview<y>]:FRDeviation (Query Only)	1372
FETCH:PULSe:STATistics[:MEASview<y>]:IRAMplitude (Query Only)	1373
FETCH:PULSe:STATistics[:MEASview<y>]:IRTime (Query Only)	1373
FETCH:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMber (Query Only)	1374
FETCH:PULSe:STATistics[:MEASview<y>]:MFReqerror (Query Only)	1375
FETCH:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMber (Query Only)	1375
FETCH:PULSe:STATistics[:MEASview<y>]:MPHerror (Query Only)	1376
FETCH:PULSe:STATistics[:MEASview<y>]:OVEDb (Query Only)	1376
FETCH:PULSe:STATistics[:MEASview<y>]:OVERshoot (Query Only)	1377
FETCH:PULSe:STATistics[:MEASview<y>]:PHDeviation (Query Only)	1378
FETCH:PULSe:STATistics[:MEASview<y>]:PPFD (Query Only)	1378
FETCH:PULSe:STATistics[:MEASview<y>]:PPFRequency (Query Only)	1379
FETCH:PULSe:STATistics[:MEASview<y>]:PPOWer (Query Only)	1379

FETCH:PULSe:STATistics[:MEASview<y>]:PPPD (Query Only)	1380
FETCH:PULSe:STATistics[:MEASview<y>]:PPPHase (Query Only)	1381
FETCH:PULSe:STATistics[:MEASview<y>]:RINterval (Query Only)	1381
FETCH:PULSe:STATistics[:MEASview<y>]:RIPDb (Query Only)	1382
FETCH:PULSe:STATistics[:MEASview<y>]:RIPple (Query Only)	1382
FETCH:PULSe:STATistics[:MEASview<y>]:RISe (Query Only)	1383
FETCH:PULSe:STATistics[:MEASview<y>]:RMSFreqerror (Query Only)	1384
FETCH:PULSe:STATistics[:MEASview<y>]:RMSPherror (Query Only)	1384
FETCH:PULSe:STATistics[:MEASview<y>]:RRATe (Query Only)	1385
FETCH:PULSe:STATistics[:MEASview<y>]:WIDTh (Query Only)	1386
FETCH:PULSe:STATistics[:MEASview<y>]:X? (Query Only)	1386
FETCH:PULSe:STATistics[:MEASview<y>]:XY? (Query Only)	1387
FETCH:PULSe:STATistics[:MEASview<y>][:Y]? (Query Only)	1388
FETCH:PULSe:TRACe[:MEASview<y>]:X	1388
FETCH:PULSe:TRACe[:MEASview<y>]:XY	1389
FETCH:PULSe:TRACe[:MEASview<y>]:Y	1390
FETCH:RFIN:IQ? (Query Only)	1390
FETCH:RFIN:IQ:HEADer? (Query Only)	1391
FETCH:RFIN:IQ:SCALE? (Query Only)	1392
FETCH:RFIN:IQ:VHEader? (Query Only)	1393
FETCH:RFIN:RECORD:IDS? (Query Only)	1393
FETCH:SEM:MHITS:COUNt? (Query Only)	1394
FETCH:SEM:MHITS<x>:AMPLitude:ABSolute? (Query Only)	1394
FETCH:SEM:MHITS<x>:AMPLitude:RELative? (Query Only)	1395
FETCH:SEM:MHITS<x>:FREQUency? (Query Only)	1395
FETCH:SEM:MHITS<x>:INTeg:ABSolute? (Query Only)	1396
FETCH:SEM:MHITS<x>:INTeg:RELative? (Query Only)	1396
FETCH:SEM:MHITS<x>:MARGin:ABSolute? (Query Only)	1397
FETCH:SEM:MHITS<x>:MARGin:RELative? (Query Only)	1397
FETCH:SEM:MHITS<x>:OFFSet? (Query Only)	1398
FETCH:SEM:PASS? (Query Only)	1398
FETCH:SEM:REF:POWer? (Query Only)	1399
FETCH:SEM:SPECTrum:X? (Query Only)	1399
FETCH:SEM:SPECTrum:XY? (Query Only)	1400
FETCH:SEM:SPECTrum[:Y]? (Query Only)	1400
FETCH:SGRam[:MEASview<y>] (Query Only)	1401
FETCH:SIGNALvu:ACQuisition:COUPLing? (Query Only)	1401
FETCH:SIGNALvu:ACQuisition:MAX:RT:BW? (Query Only)	1402
FETCH:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:INJEction:HIGHSide:MAXFreq? (Query only) . .	1402
FETCH:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:INJEction:HIGHSide:MINFreq? (Query only) .	1403
FETCH:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:INJEction:LOWSide:MAXFreq? (Query only) .	1404
FETCH:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:INJEction:LOWSide:MINFreq? (Query only) . .	1404
FETCH:SIGNALvu:ACQuisition:TERMination? (Query Only)	1405
FETCH:SIGNALvu:ACQuisition:MATHchannels	1405
FETCH:SPECTrum[:MEASview<y>]:TRACe<x>? (Query Only)	1406
FETCH:SPURious:CARRier:POWer? (Query Only)	1406
FETCH:SPURious:COUNt? (Query Only)	1407

FETCH:SPURious:PASS? (Query Only)	1407
FETCH:SPURious:SPECTrum:X? (Query Only)	1408
FETCH:SPURious:SPECTrum:XY? (Query Only)	1408
FETCH:SPURious:SPECTrum[:Y]? (Query Only)	1409
FETCH:SPURious:SPUR<x>:AMPLitude:ABSolute? (Query Only)	1409
FETCH:SPURious:SPUR<x>:AMPLitude:RELative? (Query Only)	1410
FETCH:SPURious:SPUR<x>:FREQuency:ABSolute? (Query Only)	1410
FETCH:SPURious:SPUR<x>:FREQuency:RELative? (Query Only)	1411
FETCH:SPURious:SPUR<x>:LIMit:ABSolute? (Query Only)	1411
FETCH:SPURious:SPUR<x>:LIMit:RELative? (Query Only)	1412
FETCH:SPURious:SPUR<x>:LIMit:VIOlation? (Query Only)	1412
FETCH:SPURious:SPUR<x>:RANGe? (Query Only)	1413
FETCH:SQUality[:MEASview<y>]:FREQuency:DEViation? (Query only)	1413
FETCH:SQUality[:MEASview<y>]:FREQuency:DEViation:TABLE? (Query only)	1414
FETCH:SQUality[:MEASview<y>]:FREQuency:ERRor? (Query only)	1415
FETCH:SQUality[:MEASview<y>]:GAIN:IMBalance? (Query only)	1415
FETCH:SQUality[:MEASview<y>]:ORIGin:OFFSet? (Query only)	1416
FETCH:SQUality[:MEASview<y>]:PEAK:EVM? (Query only)	1416
FETCH:SQUality[:MEASview<y>]:PEAK:EVM:DB? (Query only)	1417
FETCH:SQUality[:MEASview<y>]:PEAK:EVM:DB:OFFSet? (Query only)	1418
FETCH:SQUality[:MEASview<y>]:PEAK:EVM:LOCation? (Query only)	1418
FETCH:SQUality[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet? (Query only)	1419
FETCH:SQUality[:MEASview<y>]:PEAK:EVM:OFFSet? (Query only)	1419
FETCH:SQUality[:MEASview<y>]:PEAK:FERRor? (Query only)	1420
FETCH:SQUality[:MEASview<y>]:PEAK:MERRor:DB? (Query only)	1420
FETCH:SQUality[:MEASview<y>]:PEAK:MERRor:LOCation? (Query only)	1421
FETCH:SQUality[:MEASview<y>]:PEAK:MERRor? (Query only)	1422
FETCH:SQUality[:MEASview<y>]:PEAK:PERRor:LOCation? (Query only)	1422
FETCH:SQUality[:MEASview<y>]:PEAK:PERRor? (Query only)	1423
FETCH:SQUality[:MEASview<y>]:QUADrature:ERRor? (Query only)	1423
FETCH:SQUality[:MEASview<y>]:RHO? (Query only)	1424
FETCH:SQUality[:MEASview<y>]:RMS:EVM? (Query only)	1424
FETCH:SQUality[:MEASview<y>]:RMS:EVM:DB? (Query only)	1425
FETCH:SQUality[:MEASview<y>]:RMS:EVM:DB:OFFSet? (Query only)	1426
FETCH:SQUality[:MEASview<y>]:RMS:EVM:OFFSet? (Query only)	1426
FETCH:SQUality[:MEASview<y>]:RMS:FERRor? (Query only)	1427
FETCH:SQUality[:MEASview<y>]:RMS:MERRor:DB? (Query only)	1427
FETCH:SQUality[:MEASview<y>]:RMS:MERRor? (Query only)	1428
FETCH:SQUality[:MEASview<y>]:RMS:MERRor:DB? (Query only)	1428
FETCH:SQUality[:MEASview<y>]:RMS:PERRor? (Query only)	1429
FETCH:SQUality[:MEASview<y>]:SYMBol:LENGth? (Query only)	1429
FETCH:SQUality[:MEASview<y>]:SYMBol:RATE? (Query only)	1430
FETCH:SQUality[:MEASview<y>]:SYMBol:RATE:ERRor? (Query only)	1431
FETCH:TDIagram[:MEASview<y>]:FERRor? (Query only)	1431
FETCH:TDIagram[:MEASview<y>]:TRACe? (Query only)	1432
FETCH:TOverview[:MEASview<y>] (Query Only)	1432
FETCH:TXGain:AVERage? (Query Only)	1433

FETCH:TXGain:MAX? (Query Only)	1433
FETCH:TXGain:MAXLocation? (Query Only)	1434
FETCH:TXGain:MIN? (Query Only)	1434
FETCH:TXGain:MINLocation? (Query Only)	1434
FETCH:TXGain:TRACe<x>? (Query Only)	1435
FETCH:WLAN:AD:CONStE:DATA:EVM? (Query Only)	1435
FETCH:WLAN:AD:CONStE:DATA:EVM:PEAK? (Query Only)	1436
FETCH:WLAN:AD:CONStE:DATA:EVM:PEAK:SYMBol? (Query Only)	1436
FETCH:WLAN:AD:CONStE:FERRor? (Query Only)	1437
FETCH:WLAN:AD:CONStE:IQDC:OFFSet? (Query Only)	1437
FETCH:WLAN:AD:EVM:TRACe? (Query Only)	1438
FETCH:WLAN:AD:SUMMary:AVERage:BURSt:COUNt (Query Only)	1438
FETCH:WLAN:AD:SUMMary:AVERage:BURSt:TOTAL:COUNt (Query Only)	1439
FETCH:WLAN:AD:SUMMary:ESNR (Query Only)	1439
FETCH:WLAN:AD:SUMMary:EVM:DATA:AVERage (Query Only)	1439
FETCH:WLAN:AD:SUMMary:EVM:DATA:AVERage:STATus (Query Only)	1440
FETCH:WLAN:AD:SUMMary:EVM:DATA:MAX (Query Only)	1440
FETCH:WLAN:AD:SUMMary:EVM:PACKet:CEF:EVM (Query Only)	1441
FETCH:WLAN:AD:SUMMary:EVM:PACKet:CEF:PEAK (Query Only)	1441
FETCH:WLAN:AD:SUMMary:EVM:PACKet:CEF:SYMBol (Query Only)	1442
FETCH:WLAN:AD:SUMMary:EVM:PACKet:DATA:EVM (Query Only)	1442
FETCH:WLAN:AD:SUMMary:EVM:PACKet:DATA:PEAK (Query Only)	1443
FETCH:WLAN:AD:SUMMary:EVM:PACKet:DATA:STATus (Query Only)	1443
FETCH:WLAN:AD:SUMMary:EVM:PACKet:DATA:SYMBol (Query Only)	1444
FETCH:WLAN:AD:SUMMary:EVM:PACKet:GUARd:EVM (Query Only)	1444
FETCH:WLAN:AD:SUMMary:EVM:PACKet:GUARd:PEAK (Query Only)	1445
FETCH:WLAN:AD:SUMMary:EVM:PACKet:GUARd:SYMBol (Query Only)	1445
FETCH:WLAN:AD:SUMMary:EVM:PACKet:HEADer:EVM (Query Only)	1446
FETCH:WLAN:AD:SUMMary:EVM:PACKet:HEADer:PEAK (Query Only)	1446
FETCH:WLAN:AD:SUMMary:EVM:PACKet:HEADer:SYMBol (Query Only)	1447
FETCH:WLAN:AD:SUMMary:EVM:PACKet:STF:EVM (Query Only)	1447
FETCH:WLAN:AD:SUMMary:EVM:PACKet:STF:PEAK (Query Only)	1448
FETCH:WLAN:AD:SUMMary:EVM:PACKet:STF:SYMBol (Query Only)	1448
FETCH:WLAN:AD:SUMMary:FERRor:AVERage (Query Only)	1448
FETCH:WLAN:AD:SUMMary:FERRor:AVERage:STATus (Query Only)	1449
FETCH:WLAN:AD:SUMMary:FERRor:HERTz (Query Only)	1449
FETCH:WLAN:AD:SUMMary:FERRor:MAX (Query Only)	1450
FETCH:WLAN:AD:SUMMary:FERRor:PPM (Query Only)	1450
FETCH:WLAN:AD:SUMMary:FERRor:STATus (Query Only)	1451
FETCH:WLAN:AD:SUMMary:IQ:GAIN:IMBALance (Query Only)	1451
FETCH:WLAN:AD:SUMMary:IQ:ORIGin:OFFSet (Query Only)	1452
FETCH:WLAN:AD:SUMMary:IQ:QUADrature:ERRor (Query Only)	1452
FETCH:WLAN:AD:SUMMary:PACKet:AGGRegation (Query Only)	1453
FETCH:WLAN:AD:SUMMary:PACKet:BTR (Query Only)	1453
FETCH:WLAN:AD:SUMMary:PACKet:HCS (Query Only)	1454
FETCH:WLAN:AD:SUMMary:PACKet:LENGth (Query Only)	1454
FETCH:WLAN:AD:SUMMary:PACKet:MCS (Query Only)	1455

FETCH:WLAN:AD:SUMMARY:PACKET:PPDU (Query Only)	1455
FETCH:WLAN:AD:SUMMARY:PACKET:RSSI (Query Only)	1455
FETCH:WLAN:AD:SUMMARY:PACKET:SCRAMBLER:INITIALIZATION (Query Only)	1456
FETCH:WLAN:AD:SUMMARY:PACKET:TAROUND (Query Only)	1456
FETCH:WLAN:AD:SUMMARY:PACKET:TLEN (Query Only)	1457
FETCH:WLAN:AD:SUMMARY:PACKET:TYPE (Query Only)	1457
FETCH:WLAN:AD:SUMMARY:RCPI (Query Only)	1458
FETCH:WLAN:AD:SUMMARY:RF:POWER (Query Only)	1458
FETCH:WLAN:AY:CONST:DATA:EVM:PEAK? (Query Only)	1459
FETCH:WLAN:AY:CONST:DATA:EVM:PEAK:SYMBOL? (Query Only)	1459
FETCH:WLAN:AY:CONST:DATA:EVM? (Query Only)	1459
FETCH:WLAN:AY:CONST:FERROR? (Query Only)	1460
FETCH:WLAN:AY:CONST:FREQUENCY:ERROR? (Query Only)	1460
FETCH:WLAN:AY:CONST:IQDC:OFFSET? (Query Only)	1461
FETCH:WLAN:AY:EVM:TRACE? (Query Only)	1461
FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:COUNT? (Query Only)	1462
FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:TOTAL:COUNT? (Query Only)	1462
FETCH:WLAN:AY:SUMMARY:ESNR? (Query Only)	1462
FETCH:WLAN:AY:SUMMARY:EVM:DATA:AVERAGE? (Query Only)	1463
FETCH:WLAN:AY:SUMMARY:EVM:DATA:AVERAGE:STATUS? (Query Only)	1463
FETCH:WLAN:AY:SUMMARY:EVM:DATA:MAX? (Query Only)	1464
FETCH:WLAN:AY:SUMMARY:EVM:DATA:SIGMA? (Query Only)	1464
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:DATA:EVM? (Query Only)	1464
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:DATA:PEAK? (Query Only)	1465
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:DATA:STATUS? (Query Only)	1465
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:DATA:SYMBOL? (Query Only)	1466
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:CEF:EVM? (Query Only)	1466
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:CEF:PEAK? (Query Only)	1467
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:CEF:SYMBOL? (Query Only)	1467
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:STF:EVM? (Query Only)	1468
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:STF:PEAK? (Query Only)	1468
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:STF:SYMBOL? (Query Only)	1469
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:GUARD:EVM? (Query Only)	1469
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:GUARD:PEAK? (Query Only)	1469
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:GUARD:SYMBOL? (Query Only)	1470
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:HEADER:EVM? (Query Only)	1470
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:HEADER:PEAK? (Query Only)	1471
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:HEADER:SYMBOL? (Query Only)	1471
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE1Edmg: A1Header:EVM? (Query	1472
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE1Edmg: CEF1:EVM? (Query Only)	1472
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE1Edmg: GUARD1:EVM? (Query	1473
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE1Edmg :HEADER1:EVM? (Query	1473
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE1Edmg:STF1:EVM? (Query Only)	1473
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg: A2Header:EVM? (Query	1474
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg:CEF2:EVM? (Query Only)	1474
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg: GUARD2:EVM? (Query	1475
FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg: HEADER2:EVM? (Query	1475

FETCH:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg: STF2:EVM? (Query Only).....	1476
FETCH:WLAN:AY:SUMMARY:FERROR:AVERAGE? (Query Only).....	1476
FETCH:WLAN:AY:SUMMARY:FERROR:AVERAGE:STATUS? (Query Only).....	1477
FETCH:WLAN:AY:SUMMARY:FERROR:HERTZ? (Query Only).....	1477
FETCH:WLAN:AY:SUMMARY:FERROR:MAX? (Query Only).....	1477
FETCH:WLAN:AY:SUMMARY:FERROR:PPM? (Query Only).....	1478
FETCH:WLAN:AY:SUMMARY:FERROR:STATUS? (Query Only).....	1478
FETCH:WLAN:AY:SUMMARY:IQ:GAIN:IMBALANCE? (Query Only).....	1479
FETCH:WLAN:AY:SUMMARY:IQ:ORIGIN:OFFSET? (Query Only).....	1479
FETCH:WLAN:AY:SUMMARY:IQ:QUADRATURE:ERROR? (Query Only).....	1479
FETCH:WLAN:AY:SUMMARY:PACKET:AGGREGATION? (Query Only).....	1480
FETCH:WLAN:AY:SUMMARY:PACKET:BEAMFORMED? (Query Only).....	1480
FETCH:WLAN:AY:SUMMARY:PACKET:BWBITMAP? (Query Only).....	1481
FETCH:WLAN:AY:SUMMARY:PACKET:COMPBW? (Query Only).....	1481
FETCH:WLAN:AY:SUMMARY:PACKET:CRC? (Query Only).....	1481
FETCH:WLAN:AY:SUMMARY:PACKET:EDMGmcs? (Query Only).....	1482
FETCH:WLAN:AY:SUMMARY:PACKET:LDPCcwlen? (Query Only).....	1482
FETCH:WLAN:AY:SUMMARY:PACKET:PRIMARYchannel? (Query Only).....	1482
FETCH:WLAN:AY:SUMMARY:PACKET:PSDULEN? (Query Only).....	1483
FETCH:WLAN:AY:SUMMARY:PACKET:RSSI? (Query Only).....	1483
FETCH:WLAN:AY:SUMMARY:PACKET:SCRAMBLER:INITIALIZATION? (Query Only).....	1484
FETCH:WLAN:AY:SUMMARY:PACKET:SPATIALstreams? (Query Only).....	1484
FETCH:WLAN:AY:SUMMARY:PACKET:STBCapplied? (Query Only).....	1484
FETCH:WLAN:AY:SUMMARY:PACKET:TRNLen ? (Query Only).....	1485
FETCH:WLAN:AY:SUMMARY:RCPI? (Query Only).....	1485
FETCH:WLAN:AY:SUMMARY:RF:POWER? (Query Only).....	1486
FETCH:WLAN:AY:SUMMARY:SIG:QUALITY? (Query Only).....	1486
FETCH:WLAN:CONSTE:MAGNITUDE? (Query Only).....	1486
FETCH:WLAN:CONSTE:PHASE? (Query Only).....	1487
FETCH:WLAN:CONSTE:TYPE? (Query Only).....	1487
FETCH:WLAN:CONSTE:VALUE? (Query Only).....	1488
FETCH:WLAN:CRESPONSE:MAGNITUDE? (Query Only).....	1489
FETCH:WLAN:CRESPONSE:PHASE? (Query Only).....	1489
FETCH:WLAN:EVM:TRACE<x>? (Query Only).....	1490
FETCH:WLAN:FLATNESS:PASS? (Query Only).....	1490
FETCH:WLAN:FLATNESS:RESULT? (Query Only).....	1491
FETCH:WLAN:FLATNESS:TRACE<x>? (Query Only).....	1491
FETCH:WLAN:MERROR:TRACE<x>? (Query Only).....	1492
FETCH:WLAN:PERROR:TRACE<x>? (Query Only).....	1493
FETCH:WLAN:PVTime:BURST:POWER? (Query Only).....	1493
FETCH:WLAN:PVTime:BURST:WIDTH? (Query Only).....	1494
FETCH:WLAN:PVTime:FALL:TIME? (Query Only).....	1494
FETCH:WLAN:PVTime:FALL:TIME:START? (Query Only).....	1494
FETCH:WLAN:PVTime:FALL:TIME:STOP? (Query Only).....	1495
FETCH:WLAN:PVTime:FTIME? (Query Only).....	1495
FETCH:WLAN:PVTime:RISE:TIME? (Query Only).....	1496
FETCH:WLAN:PVTime:RISE:TIME:START? (Query Only).....	1496

FETCH:WLAN:PVTime:RISE:TIME:STOP? (Query Only)	1497
FETCH:WLAN:PVTime:RTIME? (Query Only)	1497
FETCH:WLAN:PVTime:TRACe:X? (Query Only)	1497
FETCH:WLAN:PVTime:TRACe:XY? (Query Only)	1498
FETCH:WLAN:PVTime:TRACe[Y]? (Query Only)	1498
FETCH:WLAN:STABle:VALUe? (Query Only)	1499
FETCH:WLAN:SUMMary:BURSt:INDEx? (Query Only)	1499
FETCH:WLAN:SUMMary:BURSt:POWer? (Query Only)	1500
FETCH:WLAN:SUMMary:BURSt:POWer:CFACTOR? (Query Only)	1500
FETCH:WLAN:SUMMary:CERRor? (Query Only)	1501
FETCH:WLAN:SUMMary:CPE? (Query Only)	1501
FETCH:WLAN:SUMMary:EVM:PEAK:ALL? (Query Only)	1502
FETCH:WLAN:SUMMary:EVM:PEAK:CHIP:ALL? (Query Only)	1502
FETCH:WLAN:SUMMary:EVM:PEAK:CHIP:ONEKchips? (Query Only)	1502
FETCH:WLAN:SUMMary:EVM:PEAK:DATA? (Query Only)	1503
FETCH:WLAN:SUMMary:EVM:PEAK:ONEKchips? (Query Only)	1503
FETCH:WLAN:SUMMary:EVM:PEAK:PILots? (Query Only)	1504
FETCH:WLAN:SUMMary:EVM:PEAK:SCARrier:ALL? (Query Only)	1504
FETCH:WLAN:SUMMary:EVM:PEAK:SCARrier:DATA? (Query Only)	1504
FETCH:WLAN:SUMMary:EVM:PEAK:SCARrier:PILots? (Query Only)	1505
FETCH:WLAN:SUMMary:EVM:PEAK:SYMBol:ALL? (Query Only)	1505
FETCH:WLAN:SUMMary:EVM:PEAK:SYMBol:DATA? (Query Only)	1506
FETCH:WLAN:SUMMary:EVM:PEAK:SYMBol:PILots? (Query Only)	1506
FETCH:WLAN:SUMMary:EVM:RMS:ALL? (Query Only)	1506
FETCH:WLAN:SUMMary:EVM:RMS:AVERAge? (Query Only)	1507
FETCH:WLAN:SUMMary:EVM:RMS:DATA? (Query Only)	1507
FETCH:WLAN:SUMMary:EVM:RMS:MAXimum? (Query Only)	1508
FETCH:WLAN:SUMMary:EVM:RMS:ONEKchips? (Query Only)	1508
FETCH:WLAN:SUMMary:EVM:RMS:PILots? (Query Only)	1508
FETCH:WLAN:SUMMary:FERRor? (Query Only)	1509
FETCH:WLAN:SUMMary:HEADer? (Query Only)	1509
FETCH:WLAN:SUMMary:HTSig? (Query Only)	1510
FETCH:WLAN:SUMMary:IQOFFset? (Query Only)	1510
FETCH:WLAN:SUMMary:LSIG? (Query Only)	1510
FETCH:WLAN:SUMMary:PACKet? (Query Only)	1511
FETCH:WLAN:SUMMary:PACKet:DMODulation? (Query Only)	1511
FETCH:WLAN:SUMMary:PACKet:FORMat? (Query Only)	1512
FETCH:WLAN:SUMMary:PACKet:GUARd? (Query Only)	1512
FETCH:WLAN:SUMMary:SIG? (Query Only)	1512
FETCH:WLAN:SUMMary:VHTSig:A? (Query Only)	1513
FETCH:WLAN:SUMMary:VHTSig:B? (Query Only)	1513
*IDN? (Query Only)	1514
INITiate:CONTinuous	1514
INITiate[:IMMediate] (No Query Form)	1515
INITiate:RESume (No Query Form)	1515
Input commands	1516

INPut:CORRection:EXTErnal:EDIT<x>:INTERpolation.	1516
INPut:CORRection:EXTErnal:EDIT<x>:LABEL.	1517
INPut:CORRection:EXTErnal:EDIT<x>:NEW.	1517
INPut:CORRection:EXTErnal:EDIT<x>:STATE.	1518
INPut:CORRection:EXTErnal:GAIN[:MAGNitude].	1519
INPut:CORRection:EXTErnal:GAIN:STATE.	1519
INPut:CORRection:EXTErnal:TYPE.	1520
INPut:{MLEVel RLEVel}.	1520
INPut[:RF]:ATTenuation.	1520
INPut[:RF]:ATTenuation:AUTO.	1521
INPut[:RF]:ATTenuation:MONitor:STATE.	1521
INPut[:RF]:GAIN:STATE.	1522
INPut[:RF]:PRESelector:STATE.	1522
INPut:TYPE.	1523
Memory commands.	1523
MMEMory:{AM FM PM}:LOAD:TRACe (No Query Form).	1523
MMEMory:{AM FM PM}:SHOW:TRACe<x>.	1524
MMEMory:{AM FM PM}:STORE:TRACe (No Query Form).	1524
MMEMory:AUDio:LOAD:FILTER (No Query Form).	1525
MMEMory:AVTime[:MEASview<y>]:LOAD:TRACe<x> (No Query Form).	1525
MMEMory:AVTime[:MEASview<y>]:SHOW:TRACe<x>.	1526
MMEMory:AVTime[:MEASview<y>]:STORE:PLOT.	1526
MMEMory:AVTime[:MEASview<y>]:STORE:PLOT:DONE.	1527
MMEMory:AVTime[:MEASview<y>]:STORE:TRACe<x> (No Query Form).	1527
MMEMory:CALibration:LOAD:CORRection:EXTErnal:EDIT<x> (No Query Form).	1528
MMEMory:CALibration:STORE:CORRection:EXTErnal:EDIT<x> (No Query Form).	1528
MMEMory:CCDF:LOAD:TRACe<x> (No Query Form).	1528
MMEMory:CCDF:SHOW:TRACe<x>.	1529
MMEMory:CCDF:STORE:TRACe<x> (No Query Form).	1529
MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTER:MEASurement:UOTHer (No query form).	1530
MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTER:MEASurement: USER<y> (No query form).	1530
MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTER:REFerence:UOTHer (No query form).	1531
MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTER:REFerence:USER<y> (No query form).	1531
MMEMory:DDEMod[:SOURce<x>]:LOAD:SYMBOL:MAP (No query form).	1532
MMEMory:DPX:LOAD:TRACe<x> (No Query Form).	1532
MMEMory:DPX:SHOW:TRACe<x>.	1533
MMEMory:DPX:STORE:TRACe<x>.	1533
MMEMory:DPX:TDM:FREQuency:TXBer:LOAD:PATtern (No Query Form).	1533
MMEMory:EMC:ACCEssory<x>:LOAD:TABLE (No Query Form).	1534
MMEMory:EMC:ACCEssory<x>:STORE:TABLE (No Query Form).	1534
MMEMory:EMC:AMBlent:TRACe:FILE (No Query Form).	1535
MMEMory:EMC:AMBlent:TRACe:SHOW (No Query Form).	1535
MMEMory:EMC:AMBlent:TRACe:STORE (No Query Form).	1536
MMEMory:EMC:MATH:TRACe:FILE (No Query Form).	1536
MMEMory:EMC:MATH:TRACe:SHOW.	1537
MMEMory:EMC:MATH:TRACe:STORE (No Query Form).	1537
MMEMory:EMC:RANGe:LOAD:TABLE (No Query Form).	1538

MMEMory:EMC:RANGe:STORe:TABLE (No Query Form)	1538
MMEMory:EMC:RECAll:TRACe<x>:FILE (No Query Form)	1539
MMEMory:EMC:RECAll:TRACe<x>:SHOW (No Query Form)	1539
MMEMory:EMC:REPOrt:GENERate:FINAl (No Query Form)	1540
MMEMory:EMC:REPOrt:HISTory:DELeTe:ALL (No Query Form)	1540
MMEMory:EMC:REPOrt:SAVE:RUN (No Query Form)	1541
MMEMory:EMC:SCAN:TRACe<x>:STORe (No Query Form)	1541
MMEMory:EMC:SPOT:TRACe<x>:STORe (No Query Form)	1541
[MMEMory:{FSETtling PSETtling}:LOAD:TRACe<x>	1542
[MMEMory:{FSETtling PSETtling}:SHOW:TRACe<x>	1542
[MMEMory:{FSETtling PSETtling}:STORe:TRACe<x>	1543
MMEMory:FVTime[:MEASview<y>]:LOAD:TRACe (No Query Form)	1543
MMEMory:FVTIME[:MEASview<y>]:SHOW:TRACe<x>	1544
MMEMory:FVTime[:MEASview<y>]:STORe:TRACe (No Query Form)	1544
MMEMory:IQVTime[:MEASVIEW<y>]:LOAD:TRACe:I (No Query Form)	1545
MMEMory:IQVTime[:MEASVIEW<y>]:LOAD:TRACe:Q (No Query Form)	1545
MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe:I	1546
MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe<x>:Q	1546
MMEMory:IQVTime[:MEASVIEW<y>]:STORe:TRACe:I (No Query Form)	1547
MMEMory:IQVTime[:MEASVIEW<y>]:STORe:TRACe:Q (No Query Form)	1547
MMEMory:LOAD:IQ (No Query Form)	1548
MMEMory:LOAD:STATe (No Query Form)	1548
MMEMory:LOAD:TRACe (No Query Form)	1548
MMEMory:LTE:ACLR:LOAD:TABLE (No Query Form)	1550
MMEMory:LTE:ACLR:STORe:TABLE (No Query Form)	1551
MMEMory:MAPit:LOAD (No Query Form)	1551
MMEMory:MAPit:STORe (No Query Form)	1552
MMEMory:MAPit:STORe:ALL (No Query Form)	1552
MMEMory:NOISe:GAIN:LOAD:TRACe (No Query Form)	1552
MMEMory:NOISe:GAIN:SHOW:TRACe	1553
MMEMory:NOISe:GAIN:STORe:TRACe (No Query Form)	1553
MMEMory:Noise:LOAD:ENRCALibration (No Query Form)	1554
MMEMory:Noise:LOAD:FREQTABLE (No Query Form)	1554
MMEMory:Noise:STORe:ENRCALibration (No Query Form)	1555
MMEMory:Noise:STORe:FREQTABLE (No Query Form)	1555
MMEMory:OFDM:CONSte:LOAD:TRACe (No Query Form)	1555
MMEMory:OFDM:CONSte:SHOW:TRACe	1556
MMEMory:OFDM:CONSte:STORe:TRACe (No Query Form)	1556
MMEMory:PHVTime[:MEASVIEW<y>]:LOAD:TRACe (No Query Form)	1557
MMEMory:PHVTime[:MEASview<y>]:SHOW:TRACe	1557
MMEMory:PHVTime[:MEASVIEW<y>]:STORe:TRACe (No Query Form)	1558
MMEMory:PNOise:LOAD:TRACe<x> (No Query Form)	1558
MMEMory:PNOise:SHOW:TRACe<x>	1558
MMEMory:PNOise:STORe:TRACe<x> (No Query Form)	1559
MMEMory:SEM:LOAD:TABLE (No Query Form)	1559
MMEMory:SEM:STORe:TABLE (No Query Form)	1560
MMEMory:SGRam[:MEASview<y>]:LOAD:TRACe (No Query Form)	1560

MMEMory:SGRam[:MEASview<y>]:SHOW:TRACe	1561
MMEMory:SGRam[:MEASview<y>]:STORE:TRACe (No Query Form)	1561
MMEMory:SGRam[:MEASview<y>]:STORE:PLOT	1562
MMEMory:SGRam[:MEASview<y>]:STORE:PLOT:DONe (Query only)	1562
MMEMory:SPECTrum[:MEASview<y>]:LOAD:TRACe (No Query Form)	1563
MMEMory:SPECTrum[:MEASview<y>]:SHOW:TRACe<x>	1563
MMEMory:SPECTrum[:MEASview<y>]:STORE:PLOT (No Query Form)	1564
MMEMory:SPECTrum[:MEASview<y>]:STORE:PLOT:DONe (Query Only)	1564
MMEMory:SPECTrum[:MEASview<y>]:STORE:TRACe (No Query Form)	1565
MMEMory:SPURious:LOAD:TABLE (No Query Form)	1565
MMEMory:SPURious:RECALL:TRACe (No Query Form)	1566
MMEMory:SPURious:SHOW:TRACe (No Query Form)	1566
MMEMory:SPURious:STORE:TABLE (No Query Form)	1567
MMEMory:SPURious:STORE:TRACe (No Query Form)	1567
MMEMory:STORE:IQ (No Query Form)	1568
MMEMory:STORE:IQ:CSV (No Query Form)	1568
MMEMory:STORE:IQ:MAT (No Query Form)	1568
MMEMory:STORE:IQ:SELEct:DATA	1569
MMEMory:STORE:IQ:SELEct:FRAMES	1569
MMEMory:STORE:IQ:SELEct:LENGth	1570
MMEMory:STORE:MState (No Query Form)	1570
MMEMory:STORE:RESults (No Query Form)	1570
MMEMory:STORE:SCReen (No Query Form)	1571
MMEMory:STORE:STAtE (No Query Form)	1571
MMEMory:STORE:TRACe (No Query Form)	1572
MMEMory:TOVerview[:MEASview<y>]:LOAD:TRACe1 (No Query Form)	1572
MMEMory:TOVerview[:MEASview<y>]:SHOW:TRACe1	1573
MMEMory:TOVerview[:MEASview<y>]:STORE:TRACe1 (No Query Form)	1573
MMEMory:TXGain:LOAD:TRACe<x> (No Query Form)	1574
MMEMory:TXGain:SHOW:TRACe<x>	1574
MMEMory:TXGain:STORE:TRACe<x> (No Query Form)	1575
MMEMory:WLAN:AD:SUMMary:LIMIt:TABLE:LOAD (No Query Form)	1575
MMEMory:WLAN:AD:SUMMary:LIMIt:TABLE:SAVE (No Query Form)	1575
MMEMory:WLAN:AY:SUMMary:LIMIt:TABLE:LOAD (No Query Form)	1576
MMEMory:WLAN:AY:SUMMary:LIMIt:TABLE:SAVE (No Query Form)	1576
MMEMory:WLAN:CRESPonse:LOAD:TRACe<x> (No Query Form)	1577
MMEMory:WLAN:CRESPonse:SHOW:TRACe<x>	1577
MMEMory:WLAN:CRESPonse:STORE:TRACe<x> (No Query Form)	1578
TEST	1578
*OPC	1579
*OPT? (Query Only)	1579
Output commands	1581
OUTPut:ETHeRnet:ADDReSS	1581
OUTPut:ETHeRnet:ENABle	1581
OUTPut:ETHeRnet:PORT	1582
OUTPut:IF:{BANDwidth BWIDTH}	1582
OUTPut:IF[:STATe]	1583

OUTPut:IQ:SOURce.	1583
OUTPut:IQ[:STATe].	1584
OUTPut:NOISe[:STATe].	1584
OUTPut:TGen:BRIDge:MODE.	1584
OUTPut:TGen:ENABle.	1585
OUTPut:TGen:FREQuency.	1585
OUTPut:TGen:INSTalled? (Query Only).	1586
OUTPut:TGen:LEVel.	1586
OUTPut:USERapi:ENABle.	1586
OUTPut:ZS:{BANDwidth BWIDth}.	1587
OUTPut:ZS:{BANDwidth BWIDth}:AUTO.	1587
OUTPut:ZS:{BANDwidth BWIDth}:STATe.	1588
OUTPut:ZS:DELay? (Query Only).	1588
OUTPut:ZS:FILTer:STATe.	1589
OUTPut:ZS[:STATe].	1589
OUTPut:ZS:VOLTage.	1589
OUTPut:ZS:VOLTage:AUTO.	1590
Read commands.	1590
READ:ACPower? (Query Only).	1590
READ:ACPower:CHANnel:POWer? (Query Only).	1591
READ:ACPower:SPECTrum? (Query Only).	1591
READ:{AM FM PM}? (Query Only).	1592
READ:AM:AMINdex? (Query Only).	1593
READ:AM:AMNegative? (Query Only).	1593
READ:AM:AMPositive? (Query Only).	1593
READ:AM:RESult? (Query Only).	1594
READ:AUDio:FERRor? (Query Only).	1594
READ:AUDio:FREQuency? (Query Only).	1595
READ:AUDio:HARMonic:COUNt? (Query Only).	1595
READ:AUDio:HARMonic<x>:AMPLitude? (Query Only).	1596
READ:AUDio:HARMonic<x>:FREQuency? (Query Only).	1596
READ:AUDio:HNOise? (Query Only).	1597
READ:AUDio:HNREFerence? (Query Only).	1598
READ:AUDio:HPTPeak? (Query Only).	1598
READ:AUDio:MODDist? (Query Only).	1599
READ:AUDio:NHARmonic:COUNt? (Query Only).	1599
READ:AUDio:NHARmonic<x>:AMPLitude? (Query Only).	1600
READ:AUDio:NHARmonic<x>:FREQuency? (Query Only).	1600
READ:AUDio:PNEGative? (Query Only).	1601
READ:AUDio:POWer? (Query Only).	1601
READ:AUDio:PPOSitive? (Query Only).	1602
READ:AUDio:RMS? (Query Only).	1602
READ:AUDio:SINad? (Query Only).	1603
READ:AUDio:SNOise? (Query Only).	1603
READ:AUDio:SPECTrum:TRACe<x>? (Query Only).	1604
READ:AUDio:THDist? (Query Only).	1604
READ:AUDio:THDist:DB? (Query Only).	1605

READ:AUDio:TNHDist? (Query Only)	1605
READ:AUDio:TNHDist:DB? (Query Only)	1606
READ:AVTime[:MEASview<y>]:AVERage? (Query Only)	1606
READ:AVTime[:MEASview<y>]:{FIRSt SECond THIRd FOURth}? (Query Only)	1607
READ:AVTime[:MEASview<y>]:MAXimum? (Query Only)	1608
READ:AVTime[:MEASview<y>]:MAXLocation? (Query Only)	1608
READ:AVTime[:MEASview<y>]:MINimum? (Query Only)	1609
READ:AVTime[:MEASview<y>]:MINLocation? (Query Only)	1609
READ:AVTime[:MEASview<y>]:RESult? (Query Only)	1610
READ:AVTime[:MEASview<y>]:AVERage:{FIRSt SECond THIRd FOURth}?	1611
READ:AVTime[:MEASview<y>]:MAXimum:{FIRSt SECond THIRd FOURth}?	1611
READ:AVTime[:MEASview<y>]:MAXLocation:{FIRSt SECond THIRd FOURth}?	1612
READ:AVTime[:MEASview<y>]:MINimum:{FIRSt SECond THIRd FOURth}?	1613
READ:AVTime[:MEASview<y>]:MINLocation:{FIRSt SECond THIRd FOURth}?	1613
READ:AVTime[:MEASview<y>]:RESult:{FIRSt SECond THIRd FOURth}?	1614
READ:BIBEmissions:FTX? (Query Only)	1615
READ:BIBEmissions:POWer? (Query Only)	1615
READ:BIBEmissions:RESUltS:STATus? (Query Only)	1616
READ:BLUEtooth:CONStE:FERRor? (Query Only)	1616
READ:BLUEtooth:CONStE:TRACe? (Query Only)	1617
READ:BLUEtooth:EDlagram:FDEVIation? (Query Only)	1617
READ:BLUEtooth:EDlagram:FERRor? (Query Only)	1618
READ:BLUEtooth:EDlagram:HORiz:SCALe? (Query Only)	1618
READ:BLUEtooth:EDlagram:I? (Query Only)	1619
READ:BLUEtooth:EDlagram:Q? (Query Only)	1619
READ:BLUEtooth:FDVTime:TRACe? (Query Only)	1620
READ:BLUEtooth:FREQUency:ERRor? (Query Only)	1620
READ:BLUEtooth:FREQUency:ERRor:TYPE	1621
READ:BLUEtooth:FREQUency:OFFSet:DRIFt:F1FZero? (Query Only)	1621
READ:BLUEtooth:FREQUency:OFFSet:DRIFt:FNFN5? (Query Only)	1622
READ:BLUEtooth:FREQUency:OFFSet:DRIFt:FNFN5:INTERval? (Query Only)	1622
READ:BLUEtooth:FREQUency:OFFSet:DRIFt:FNFZERO? (Query Only)	1623
READ:BLUEtooth:FREQUency:OFFSet:DRIFt:FNFZERO:INTERval? (Query Only)	1623
READ:BLUEtooth:FREQUency:OFFSet:MAX? (Query Only)	1624
READ:BLUEtooth:FREQUency:OFFSet:MAX:INTERval? (Query Only)	1624
READ:BLUEtooth:FREQUency:OFFSet:PREAmble? (Query Only)	1625
READ:BLUEtooth:MODULation:CHARacteristics:AVERage:F? (Query Only)	1625
READ:BLUEtooth:MODULation:CHARacteristics:AVERage:F2F1ratio? (Query Only)	1626
READ:BLUEtooth:MODULation:CHARacteristics:AVERage:FONE? (Query Only)	1626
READ:BLUEtooth:MODULation:CHARacteristics:AVERage:FTWO? (Query Only)	1627
READ:BLUEtooth:SUMMary:FREQUency:OFFSet:DRIFt:COUNT? (Query Only)	1627
READ:BLUEtooth:SUMMary:FREQUency:OFFSet:DRIFt:F1FZero? (Query Only)	1628
READ:BLUEtooth:SUMMary:FREQUency:OFFSet:DRIFt:F1FZero:STATus? (Query Only)	1628
READ:BLUEtooth:SUMMary:FREQUency:OFFSet:DRIFt:FNFN5? (Query Only)	1629
READ:BLUEtooth:SUMMary:FREQUency:OFFSet:DRIFt:FNFN5:STATus? (Query Only)	1629
READ:BLUEtooth:SUMMary:FREQUency:OFFSet:DRIFt:FNFZero? (Query Only)	1630
READ:BLUEtooth:SUMMary:FREQUency:OFFSet:DRIFt:FNFZero: STATus? (Query Only)	1630

READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded: CODING:SCHEME (Query Only)	1631
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded: F0FThree (Query Only)	1631
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded: F0FThree:STATUS (Query Only)	1632
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded: F1FFour (Query Only)	1632
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded: F1FFour:STATUS (Query Only)	1633
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded: FNFN3 (Query Only)	1633
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded: FNFN3:STATUS (Query Only)	1634
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:MAX? (Query Only)	1634
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:MAX:STATUS? (Query Only)	1635
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:PREAmble? (Query Only)	1635
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:PREAmble:STATUS? (Query Only)	1636
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT? (Query Only)	1636
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:DELTA:FONE:MAX:PERCENTAGE:COUNT? (Query Only)	1637
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:DELTA:FTWO:MAX:PERCENTAGE? (Query Only)	1637
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:DELTA:FTWO:MAX:PERCENTAGE:COUNT? (Query Only)	1638
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:DELTA:FTWO:MAX:PERCENTAGE:STATUS? (Query Only)	1638
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:F2F1ratio? (Query Only)	1639
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:F2F1ratio:STATUS? (Query Only)	1639
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:F? (Query Only)	1640
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:FONE? (Query Only)	1640
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:FONE:STATUS? (Query Only)	1641
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:FTWO? (Query Only)	1641
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:INDEX (Query Only)	1642
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:AVERAGE? (Query Only)	1642
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:AVERAGE:STATUS? (Query Only)	1643
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:COUNT? (Query Only)	1643
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:EDR:COUNT? (Query Only)	1644
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:EDR:DPSK? (Query Only)	1644
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:EDR:GFSK? (Query Only)	1645
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:PEAK? (Query Only)	1645
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:PEAK:STATUS? (Query Only)	1646
READ:BLUEtooth:SUMMARY:PACKET:BDR:CRC? (Query Only)	1646
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:ARQN? (Query Only)	1647
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:FLOW? (Query Only)	1647
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:HEC? (Query Only)	1648
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:LT:ADDRESS? (Query Only)	1648
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:SN (Query Only)	1649
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:SEQN? (Query Only)	1649
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:TYPE? (Query Only)	1650
READ:BLUEtooth:SUMMARY:PACKET:BDR:PAYLOAD:LENGTH? (Query Only)	1650
READ:BLUEtooth:SUMMARY:PACKET:BDR:PREAmble? (Query Only)	1651
READ:BLUEtooth:SUMMARY:PACKET:BDR:SYNC:WORD? (Query Only)	1651
READ:BLUEtooth:SUMMARY:PACKET:BDR:TYPE? (Query Only)	1651
READ:BLUEtooth:SUMMARY:PACKET:BLE:ACCESS:ADDRESS? (Query Only)	1652

READ:BLUEtooth:SUMMARY:PACKET:BLE:CRC? (Query Only)	1652
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER: CHANNEL:SELECT (Query Only)	1653
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:LENGTH? (Query Only)	1653
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:LLID (Query Only)	1654
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:MD (Query Only)	1654
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:NESN (Query Only)	1655
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:RX:ADDRESS? (Query Only)	1655
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:TX:ADDRESS? (Query Only)	1656
READ:BLUEtooth:SUMMARY:PACKET:BLE:PDU:HEADER:TYPE? (Query Only)	1656
READ:BLUEtooth:SUMMARY:PACKET:BLE:PREAMBLE? (Query Only)	1657
READ:BLUEtooth:SUMMARY:PACKET:BLE:TYPE? (Query Only)	1657
READ:CCDF? (Query Only)	1658
READ:CCDF:{FIRST SECOND THIRD}:X? (Query Only)	1659
READ:CCDF:{FIRST SECOND THIRD}:XY? (Query Only)	1659
READ:CCDF:{FIRST SECOND THIRD}:Y? (Query Only)	1660
READ:CONSt[:MEASview<y>]:FERRor? (Query only)	1661
READ:CONSt[:MEASview<y>]:RESults? (Query only)	1661
READ:CONSt[:MEASview<y>]:TRACe? (Query only)	1662
READ:DDEMod[:MEASview<y>]:STABle? (Query only)	1663
READ:DIQVtime[:MEASview<y>]:FERRor? (Query only)	1664
READ:DIQVtime[:MEASview<y>]:I? (Query only)	1664
READ:DIQVtime[:MEASview<y>]:Q? (Query only)	1665
READ:DPX:DDENsity? (Query Only)	1665
READ:DPX:DGRam:LINE:COUNt? (Query Only)	1666
READ:DPX:DGRam:TIME[:SCALE]:OFFSet? (Query Only)	1666
READ:DPX:RESults:TRACe<x>? (Query Only)	1667
READ:DPX:TRACe:AVERAge? (Query Only)	1667
READ:DPX:TRACe:BITMap? (Query Only)	1668
READ:DPX:TRACe:MATH? (Query Only)	1668
READ:DPX:TRACe:MAXimum? (Query Only)	1669
READ:DPX:TRACe:MINimum? (Query Only)	1670
READ:EDlagram[:MEASview<y>]:FDEViation? (Query only)	1670
READ:EDlagram[:MEASview<y>]:FERRor? (Query only)	1671
READ:EDlagram[:MEASview<y>]:I? (Query only)	1671
READ:EDlagram[:MEASview<y>]:Q? (Query only)	1672
READ:EMC:COUNt? (Query Only)	1673
READ:EMC:EMISsion:RESults:STATus? (Query Only)	1673
READ:EMC:SPOT<x>:AMBlent:AMPLitude? (Query Only)	1673
READ:EMC:SPOT<x>:AMBlent:DELTA? (Query Only)	1674
READ:EMC:SPOT<x>:AMBlent:PASS? (Query Only)	1674
READ:EMC:SPOT<x>:FREQuency? (Query Only)	1675
READ:EMC:SPOT<x>:PASS? (Query Only)	1675
READ:EMC:SPOT<x>:RANGe? (Query Only)	1676
READ:EMC:SPOT<x>:RECALL:AMPLitude? (Query Only)	1676
READ:EMC:SPOT<x>:RECALL:DELTA? (Query Only)	1677
READ:EMC:SPOT<x>:RECALL:PASS? (Query Only)	1677
READ:EMC:SPOT<x>:SCAN<y>:AMPLitude? (Query Only)	1678

READ:EMC:SPOT<x>:SCAN<y>:DELTA? (Query Only)	1679
READ:EMC:SPOT<x>:SCAN<y>:PASS? (Query Only)	1679
READ:EMC:SPOT<x>:SPOT<y>:AMPLITUDE? (Query Only)	1680
READ:EMC:SPOT<x>:SPOT<y>:DELTA? (Query Only)	1680
READ:EMC:SPOT<x>:SPOT<y>:PASS? (Query Only)	1681
READ:EVM[:MEASview<y>]:FERRor? (Query only)	1681
READ:EVM[:MEASview<y>]:PEAK? (Query only)	1682
READ:EVM[:MEASview<y>]:PINDEx? (Query only)	1682
READ:EVM[:MEASview<y>]:RMS? (Query only)	1683
READ:EVM[:MEASview<y>]:TRACe? (Query only)	1684
READ:FDVTime[:MEASview<y>]:FERRor? (Query only)	1684
READ:FDVTime[:MEASview<y>]:TRACe? (Query only)	1685
READ:{FM PM}:FERRor? (Query only)	1685
READ:FM:PHALf? (Query Only)	1686
READ:FM:PNEGative? (Query Only)	1686
READ:FM:PPOSitive? (Query Only)	1687
READ:FM:PTPeak? (Query Only)	1687
READ:FM:RESult? (Query Only)	1688
READ:FM:RMS? (Query Only)	1688
READ:{FSETtling PSETtling}:FTTime? (Query Only)	1689
READ:{FSETtling PSETtling}:MASK[:PASS]? (Query Only)	1689
READ:{FSETtling PSETtling}:SETTled:FREQuency? (Query Only)	1690
READ:{FSETtling PSETtling}:SETTled[:PASS]? (Query Only)	1690
READ:{FSETtling PSETtling}:SETTled:TIME? (Query Only)	1691
READ:{FSETtling PSETtling}:SLMSd[:PASS]? (Query Only)	1691
READ:{FSETtling PSETtling}:STARt:TIME? (Query Only)	1691
READ:{FSETtling PSETtling}:TIME? (Query Only)	1692
READ:{FSETtling PSETtling}:TRACe<x>:X? (Query Only)	1692
READ:{FSETtling PSETtling}:TRACe<x>:XY? (Query Only)	1693
READ:{FSETtling PSETtling}:TRACe<x>[:Y]? (Query Only)	1694
READ:{FSETtling PSETtling}:TRIGger:TIME? (Query Only)	1694
READ:{FSETtling PSETtling}:VALue? (Query Only)	1695
READ:FSETtling:ERRor? (Query Only)	1695
READ:FVTime[:MEASview<y>]? (Query Only)	1696
READ:FVTime[:MEASview<y>]:MAXimum? (Query Only)	1696
READ:FVTime[:MEASview<y>]:MAXLocation? (Query Only)	1697
READ:FVTime[:MEASview<y>]:MINimum? (Query Only)	1697
READ:FVTime[:MEASview<y>]:MINLocation? (Query Only)	1698
READ:FVTime[:MEASview<y>]:RESult? (Query Only)	1698
READ:IQVTime[:MEASview<y>]:I? (Query Only)	1699
READ:IQVTime[:MEASview<y>]:MAXimum? (Query Only)	1700
READ:IQVTime[:MEASview<y>]:MAXLocation? (Query Only)	1700
READ:IQVTime[:MEASview<y>]:MINimum? (Query Only)	1701
READ:IQVTime[:MEASview<y>]:MINLocation? (Query Only)	1701
READ:IQVTime[:MEASview<y>]:Q? (Query Only)	1702
READ:IQVTime[:MEASview<y>]:RESult? (Query Only)	1702
READ:LTE:ACLR:MHITs:COUNT? (Query Only)	1703

READ:LTE:ACLR:MHITs<x>:BANDwidth? (Query Only)	1703
READ:LTE:ACLR:MHITs<x>:CHANnel:NAME? (Query Only)	1704
READ:LTE:ACLR:MHITs<x>:FREQuency:OFFSet? (Query Only)	1704
READ:LTE:ACLR:MHITs<x>:INTeg:LOWEr:ABSolute? (Query Only)	1704
READ:LTE:ACLR:MHITs<x>:INTeg:LOWEr:RELative? (Query Only)	1705
READ:LTE:ACLR:MHITs<x>:INTeg:UPPEr:ABSolute? (Query Only)	1705
READ:LTE:ACLR:REFerence:POWer? (Query Only)	1706
READ:LTE:ACLR:RESUlts:STATus? (Query Only)	1706
READ:LTE:ACLR:SPECtrum:X? (Query Only)	1707
READ:LTE:ACLR:SPECtrum:XY? (Query Only)	1707
READ:LTE:ACLR:SPECtrum:Y? (Query Only)	1708
READ:LTE:CHSPectrum:OBW? (Query Only)	1708
READ:LTE:CHSPectrum:POWer:CHANnel? (Query Only)	1709
READ:LTE:CHSPectrum:SPECtrum? (Query Only)	1709
READ:LTE:CONSte:CELL:ID? (Query Only)	1709
READ:LTE:CONSte:FREQuency:ERRor? (Query Only)	1710
READ:LTE:CONSte:GROUp:ID? (Query Only)	1710
READ:LTE:CONSte:SECTor:ID? (Query Only)	1711
READ:LTE:PVTime:OFFSlot:POWer? (Query Only)	1711
READ:LTE:PVTime:RESUlts:STATus	1711
READ:LTE:PVTime:TRACe:X? (Query Only)	1712
READ:LTE:PVTime:TRACe:XY? (Query Only)	1712
READ:LTE:PVTime:TRACe:Y? (Query Only)	1713
READ:MCPower:ADJacent:CHANnels? (Query Only)	1713
READ:MCPower:CHANnel:POWer? (Query Only)	1714
READ:MCPower:MAIN:CHANnels? (Query Only)	1714
READ:MCPower:SPECtrum? (Query Only)	1715
READ:MERRor[:MEASview<y>]:FERRor? (Query only)	1716
READ:MERRor[:MEASview<y>]:PEAK? (Query only)	1716
READ:MERRor[:MEASview<y>]:PINdex? (Query only)	1717
READ:MERRor[:MEASview<y>]:RMS? (Query only)	1718
READ:MERRor[:MEASview<y>]:TRACe? (Query only)	1718
READ:NOISe:TABLE:VALue? (Query Only)	1719
READ:OBWidth:BOBW:XDBBbandwidth? (Query Only)	1719
READ:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth? (Query Only)	1720
READ:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency? (Query Only)	1720
READ:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency? (Query Only)	1721
READ:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth? (Query Only)	1722
READ:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency? (Query Only)	1722
READ:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency? (Query Only)	1723
READ:OBWidth:FREQuency:ERRor? (Query Only)	1723
READ:OBWidth:OBWidth:BANDwidth? (Query Only)	1724
READ:OBWidth:OBWidth:LEFT:FREQuency? (Query Only)	1724
READ:OBWidth:OBWidth:LEFT:LEVel? (Query Only)	1725
READ:OBWidth:OBWidth:POWer? (Query Only)	1725
READ:OBWidth:OBWidth:RIGHT:FREQuency? (Query Only)	1726
READ:OBWidth:OBWidth:RIGHT:LEVel? (Query Only)	1726

READ:OBWidth:SPECTrum? (Query Only)	1727
READ:OBWidth:XDBBandwidth:BANDwidth? (Query Only)	1727
READ:OBWidth:XDBBandwidth:LEFT:FREQuency? (Query Only)	1728
READ:OBWidth:XDBBandwidth:LEFT:LEVel? (Query Only)	1728
READ:OBWidth:XDBBandwidth:POWer? (Query Only)	1729
READ:OBWidth:XDBBandwidth:RIGHT:FREQuency? (Query Only)	1729
READ:OBWidth:XDBBandwidth:RIGHT:LEVel? (Query Only)	1730
READ:OFDM:APOWer? (Query Only)	1730
READ:OFDM:APOWer:PEAK? (Query Only)	1731
READ:OFDM:CONSte:MAGNitude? (Query Only)	1731
READ:OFDM:CONSte:PHASe? (Query Only)	1732
READ:OFDM:CONSte:TYPE? (Query Only)	1732
READ:OFDM:CONSte:VALue? (Query Only)	1733
READ:OFDM:CPE? (Query Only)	1734
READ:OFDM:CRESPonse:MAGNitude? (Query Only)	1734
READ:OFDM:CRESPonse:PHASe? (Query Only)	1735
READ:OFDM:EVM:PEAK:DECibel:ALL? (Query Only)	1736
READ:OFDM:EVM:PEAK:DECibel:DATA? (Query Only)	1736
READ:OFDM:EVM:PEAK:DECibel:PILOts? (Query Only)	1736
READ:OFDM:EVM:PEAK:PERCent:ALL? (Query Only)	1737
READ:OFDM:EVM:PEAK:PERCent:DATA? (Query Only)	1737
READ:OFDM:EVM:PEAK:PERCent:PILOts? (Query Only)	1738
READ:OFDM:EVM:PEAK:SCARrier:ALL? (Query Only)	1738
READ:OFDM:EVM:PEAK:SCARrier:DATA? (Query Only)	1739
READ:OFDM:EVM:PEAK:SCARrier:PILOts? (Query Only)	1739
READ:OFDM:EVM:PEAK:SYMBol:ALL? (Query Only)	1740
READ:OFDM:EVM:PEAK:SYMBol:DATA? (Query Only)	1740
READ:OFDM:EVM:PEAK:SYMBol:PILOts? (Query Only)	1740
READ:OFDM:EVM:RMS:DECibel:ALL? (Query Only)	1741
READ:OFDM:EVM:RMS:DECibel:DATA? (Query Only)	1741
READ:OFDM:EVM:RMS:DECibel:PILOts? (Query Only)	1742
READ:OFDM:EVM:RMS:PERCent:ALL? (Query Only)	1742
READ:OFDM:EVM:RMS:PERCent:DATA? (Query Only)	1743
READ:OFDM:EVM:RMS:PERCent:PILOts? (Query Only)	1743
READ:OFDM:EVM:TRACe<x>? (Query Only)	1744
READ:OFDM:FERRor? (Query Only)	1744
READ:OFDM:FLATness:PASS? (Query Only)	1745
READ:OFDM:FLATness:RESult? (Query Only)	1745
READ:OFDM:FLATness:TRACe<x>? (Query Only)	1746
READ:OFDM:GAIN:IMBalance? (Query Only)	1746
READ:OFDM:IQ:ORIGin:OFFSet? (Query Only)	1747
READ:OFDM:MERRor:TRACe<x>? (Query Only)	1747
READ:OFDM:PACKet:DIRection? (Query Only)	1748
READ:OFDM:PERRor:TRACe<x>? (Query Only)	1748
READ:OFDM:POWer:TRACe<x>? (Query Only)	1749
READ:OFDM:QUADrature:OFFSet? (Query Only)	1750
READ:OFDM:SCARriers? (Query Only)	1750

READ:OFDM:SCARriers:SPACing? (Query Only)	1751
READ:OFDM:STABle:VALUe? (Query Only)	1751
READ:OFDM:SYMBol:CERRor? (Query Only)	1752
READ:OFDM:SYMBol:COUNt? (Query Only)	1752
READ:P25:CONStE:FERRor? (Query Only)	1753
READ:P25:EDIagram:FDEVIation? (Query Only)	1753
READ:P25:EDIagram:FERRor? (Query Only)	1754
READ:P25:PVTime:BURSt:POWEr? (Query Only)	1754
READ:P25:PVTime:FALL:TIME? (Query Only)	1754
READ:P25:PVTime:FTIME? (Query Only)	1755
READ:P25:PVTime:TRACe:X? (Query Only)	1755
READ:P25:PVTime:TRACe:XY? (Query Only)	1756
READ:P25:SUMMary:LIMIt:SRA (Query Only)	1756
READ:P25:SUMMary:MODUlation:MEASurement:FIDelity? (Query Only)	1757
READ:P25:SUMMary:MODUlation:MEASurement:FIDelity:STATus (Query Only)	1757
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency: ACCUracY (No Query Form)	1758
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency: ACCUracY? (Query Only)	1758
READ:P25:SUMMary:MODUlation:MEASurement: FREQUency: ACCUracY:STATus (Query Only)	1759
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency: DEVlation:NEGPeak	1759
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency: DEVlation:NEGPeak:STATus	1760
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency: DEVlation:POSPeak	1760
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency: DEVlation:POSPeak:STATus	1761
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency:ERRor	1761
READ:P25:SUMMary:MODUlation:MEASurement:FREQUency:ERRor (Query Only)	1761
READ:P25:SUMMary:MODUlation:MEASurement:SRA	1762
READ:P25:SUMMary:MODUlation:MEASurement:SRA:STATus (Query Only)	1762
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXOFF (Query Only)	1763
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXOFF:STATus? (Query Only)	1763
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXOFF? (Query Only)	1764
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXON (Query Only)	1764
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXON:STATus (Query Only)	1764
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXON? (Query Only)	1765
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXSs (Query Only)	1765
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXSs:STATus (Query Only)	1766
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MAXSs? (Query Only)	1766
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MINImum (Query Only)	1767
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MINImum:STATus? (Query Only)	1767
READ:P25:SUMMary:POWEr:MEASurement:HCPM:MINImum? (Query Only)	1767
READ:P25:SUMMary:POWEr:MEASurement:HCPM:OFFSlot (Query Only)	1768
READ:P25:SUMMary:POWEr:MEASurement:HCPM:OFFSlot:STATus? (Query Only)	1768
READ:P25:SUMMary:POWEr:MEASurement:HCPM:PEAK:ACPR:HI (Query Only)	1769
READ:P25:SUMMary:POWEr:MEASurement:HCPM:PEAK:ACPR:LOW (Query Only)	1769
READ:P25:SUMMary:POWEr:MEASurement:HCPM:PEAK:ACPR:MIN (Query Only)	1770
READ:P25:SUMMary:POWEr:MEASurement:HCPM:PEAK:ACPR: MIN:STATus(Query Only)	1770
READ:P25:SUMMary:POWEr:MEASurement:RF:STATus (Query Only)	1770
READ:P25:SUMMary:POWEr:MEASurement:RF (Query Only)	1771
READ:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME: ALIGNment:TERRor:ONE (Query Only)	1771

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ONE:ACQ:COUNT? (Query Only)	1772
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ONE:STATUS (Query Only).	1772
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ONE?(Query Only).	1773
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ZERO (Query Only).	1773
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ZERO:ACQ:COUNT? (Query Only).	1773
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ZERO:STATUS (Query Only)	1774
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TERROR:ZERO? (Query Only).	1774
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TOBSync (Query Only).	1775
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ACQ:COUNT (Query Only).	1775
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TOBSync? (Query Only).	1776
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ACQ:COUNT (Query Only).	1776
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ACQ:COUNT:BI (Query Only).	1776
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME: ALIGNMENT:TOBSync:ACQ:COUNT (Query Only)	1777
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER:BI:STATUS (Query Only). . . .	1777
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ACQ:COUNT:BI?(Query Only).	1778
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER:STATUS (Query Only).	1778
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:ENCODER? (Query Only).	1779
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER (Query Only).	1779
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1: ATTACK:TIME:POWER:BI (Query Only).	1779
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER:BI:STATUS (Query Only).	1780
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER:BI? (Query Only).	1780
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER:STATUS (Query Only).	1781
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK: TIME:POWER? (Query Only).	1781
READ:P25:SUMMARY:TRIGGER:MEASUREMENT: PHASE1:THRUput:DELAy (Query Only).	1781
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput: DELAy:ACQ:COUNT (Query Only).	1782
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1: THRUput:DELAy:ACQ:COUNT? (Query Only).	1782
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1: THRUput:DELAy:STATUS (Query Only).	1783
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput:DELAy? (Query Only).	1783
READ:PERRor[:MEASview<y>]:FERRor? (Query only).	1784
READ:PERRor[:MEASview<y>]:PEAK? (Query only).	1784
READ:PERRor[:MEASview<y>]:PINDEx? (Query only).	1785
READ:PERRor[:MEASview<y>]:RMS (Query only).	1785
READ:PERRor[:MEASview<y>]:TRACe? (Query only).	1786
READ:PHVTime[:MEASview<y>]? (Query Only).	1787
READ:PHVTime[:MEASview<y>]:MAXimum? (Query Only).	1787
READ:PHVTime[:MEASview<y>]:MAXLocation? (Query Only).	1788
READ:PHVTime[:MEASview<y>]:MINimum? (Query Only).	1788
READ:PHVTime[:MEASview<y>]:MINLocation? (Query Only).	1789
READ:PHVTime[:MEASview<y>]:RESult? (Query Only).	1789
READ:PM:PNEGative? (Query Only).	1790
READ:PM:PPOSitive? (Query Only).	1790
READ:PM:PTPeak? (Query Only).	1791
READ:PM:RESult? (Query Only).	1791
READ:PM:RMS? (Query Only).	1792
READ:PNOise:ALL? (Query Only).	1792
READ:PNOise:CARRier:FERRor? (Query Only).	1793

READ:PNOise:CARRier:POWER? (Query Only)	1793
READ:PNOise:JITTer? (Query Only)	1794
READ:PNOise:RESidual:FM? (Query Only)	1794
READ:PNOise:RMS:PNOise? (Query Only)	1795
READ:PNOise:SPECTrum<x>:X? (Query Only)	1795
READ:PNOise:SPECTrum<x>[:Y]? (Query Only)	1796
READ:PNOise:SPECTrum<x>:XY? (Query Only)	1796
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:HIGHer? (Query Only)	1797
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:LOWer? (Query Only)	1797
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULSe:COUNt? (Query Only)	1798
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULSe:TOTal? (Query Only)	1799
READ:PULSe:CUMulative:STATistics[:MEASview<y>] (Query Only)	1799
READ:PULSe:OGRAM[:MEASview<y>]:MAX:FRAME:COUNt (Query Only)	1801
READ:PULSe:OGRAM[:MEASview<y>]:RBW (Query Only)	1801
READ:PULSe[:RESult][:MEASview<y>]:ADVanced (Query Only)	1802
READ:PULSe[:RESult][:MEASview<y>]:ADVanced:RANGe (Query only)	1803
READ:PULSe:STATistics[:MEASview<y>]:ADVanced (Query Only)	1805
READ:PULSe[:RESult][:MEASview<y>]:ATX (Query Only)	1807
READ:PULSe[:RESult][:MEASview<y>]:AVERage (Query Only)	1807
READ:PULSe[:RESult][:MEASview<y>]:DRODb (Query Only)	1808
READ:PULSe[:RESult][:MEASview<y>]:DROOp (Query Only)	1808
READ:PULSe[:RESult][:MEASview<y>]:DUTPct (Query Only)	1809
READ:PULSe[:RESult][:MEASview<y>]:DUTRatio (Query Only)	1809
READ:PULSe[:RESult][:MEASview<y>]:FABS (Query Only)	1810
READ:PULSe[:RESult][:MEASview<y>]:FALL (Query Only)	1811
READ:PULSe[:RESult][:MEASview<y>]:FDELta (Query Only)	1811
READ:PULSe[:RESult][:MEASview<y>]:FRDeviation (Query Only)	1812
READ:PULSe[:RESult][:MEASview<y>]:IRAMplitude (Query Only)	1812
READ:PULSe[:RESult][:MEASview<y>]:IRTime (Query Only)	1813
READ:PULSe[:RESult][:MEASview<y>]:MFRreqerror (Query Only)	1813
READ:PULSe[:RESult][:MEASview<y>]:MPHerror (Query Only)	1814
READ:PULSe[:RESult][:MEASview<y>]:OVERDb (Query Only)	1814
READ:PULSe[:RESult][:MEASview<y>]:OVERshoot (Query Only)	1815
READ:PULSe[:RESult][:MEASview<y>]:PHDeviation (Query Only)	1816
READ:PULSe[:RESult][:MEASview<y>]:PPFD (Query Only)	1816
READ:PULSe[:RESult][:MEASview<y>]:PPFRequency (Query Only)	1817
READ:PULSe[:RESult][:MEASview<y>]:PPOWER (Query Only)	1817
READ:PULSe[:RESult][:MEASview<y>]:PPPD (Query Only)	1818
READ:PULSe[:RESult][:MEASview<y>]:PPPHase (Query Only)	1819
READ:PULSe[:RESult][:MEASview<y>]:RINTerval (Query Only)	1819
READ:PULSe[:RESult][:MEASview<y>]:RIPDb (Query Only)	1820
READ:PULSe[:RESult][:MEASview<y>]:RISE (Query Only)	1820
READ:PULSe[:RESult][:MEASview<y>]:RIPple (Query Only)	1821
READ:PULSe[:RESult][:MEASview<y>]:RMSFreqerror (Query Only)	1822
READ:PULSe[:RESult][:MEASview<y>]:RMSPherror (Query Only)	1822
READ:PULSe[:RESult][:MEASview<y>]:RRATe (Query Only)	1823
READ:PULSe[:RESult][:MEASview<y>]:TIME (Query Only)	1823

READ:PULSe[:RESult][:MEASview<y>]:WIDTh (Query Only)	1824
READ:PULSe:STATistics[:MEASview<y>] (Query Only)	1824
READ:PULSe:STATistics[:MEASview<y>]:ADVanced (Query Only)	1825
READ:PULSe[:RESult]:ADVanced (Query Only)	1827
READ:PULSe:STATistics[:MEASview<y>]:AVERage (Query Only)	1828
READ:PULSe:STATistics[:MEASview<y>]:DRODb (Query Only)	1829
READ:PULSe:STATistics[:MEASview<y>]:DROOp (Query Only)	1830
READ:PULSe:STATistics[:MEASview<y>]:DUTPct (Query Only)	1830
READ:PULSe:STATistics[:MEASview<y>]:DUTRatio (Query Only)	1831
READ:PULSe:STATistics[:MEASview<y>]:FABS (Query Only)	1832
READ:PULSe:STATistics[:MEASview<y>]:FALL (Query Only)	1832
READ:PULSe:STATistics[:MEASview<y>]:FDELta (Query Only)	1833
READ:PULSe:STATistics[:MEASview<y>]:FRDeviation (Query Only)	1833
READ:PULSe:STATistics[:MEASview<y>]:IRAMplitude (Query Only)	1834
READ:PULSe:STATistics[:MEASview<y>]:IRTime (Query Only)	1835
READ:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMber (Query Only)	1835
READ:PULSe:STATistics[:MEASview<y>]:MFRReqerror (Query Only)	1836
READ:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMber? (Query Only)	1836
READ:PULSe:STATistics[:MEASview<y>]:MPHError (Query Only)	1837
READ:PULSe:STATistics[:MEASview<y>]:OVEDb (Query Only)	1838
READ:PULSe:STATistics[:MEASview<y>]:OVERshoot (Query Only)	1838
READ:PULSe:STATistics[:MEASview<y>]:PHDeviation (Query Only)	1839
READ:PULSe:STATistics[:MEASview<y>]:PPFD (Query Only)	1840
READ:PULSe:STATistics[:MEASview<y>]:PPFRequency (Query Only)	1840
READ:PULSe:STATistics[:MEASview<y>]:PPOWer (Query Only)	1841
READ:PULSe:STATistics[:MEASview<y>]:PPPD (Query Only)	1841
READ:PULSe:STATistics[:MEASview<y>]:PPPHase (Query Only)	1842
READ:PULSe:STATistics[:MEASview<y>]:RINTerval (Query Only)	1843
READ:PULSe:STATistics[:MEASview<y>]:RIPDb (Query Only)	1843
READ:PULSe:STATistics[:MEASview<y>]:RIPple (Query Only)	1844
READ:PULSe:STATistics[:MEASview<y>]:RISE (Query Only)	1845
READ:PULSe:STATistics[:MEASview<y>]:RMSFreqerror (Query Only)	1845
READ:PULSe:STATistics[:MEASview<y>]:RMSPherror (Query Only)	1846
READ:PULSe:STATistics[:MEASview<y>]:RRATe (Query Only)	1847
READ:PULSe:STATistics[:MEASview<y>]:WIDTh (Query Only)	1847
READ:PULSe:STATistics[:MEASview<y>]:X (Query Only)	1848
READ:PULSe:STATistics[:MEASview<y>]:XY (Query Only)	1849
READ:PULSe:TRACe[:MEASview<y>]:Y	1849
READ:PULSe:TRACe[:MEASview<y>]:X	1850
READ:PULSe:TRACe[:MEASview<y>]:XY	1851
READ:SEM:MHITs:COUNT? (Query Only)	1851
READ:SEM:MHITs<x>:AMPLitude:ABSolute? (Query Only)	1852
READ:SEM:MHITs<x>:AMPLitude:RELative? (Query Only)	1852
READ:SEM:MHITs<x>:FREQuency? (Query Only)	1853
READ:SEM:MHITs<x>:INTeg:ABSolute? (Query Only)	1853
READ:SEM:MHITs<x>:INTeg:RELative? (Query Only)	1854
READ:SEM:MHITs<x>:MARGin:ABSolute? (Query Only)	1854

READ:SEM:MHITs<x>:MARGIn:RELative? (Query Only)	1855
READ:SEM:MHITs<x>:OFFSet? (Query Only)	1855
READ:SEM:PASS? (Query Only)	1856
READ:SEM:REF:POWer? (Query Only)	1856
READ:SEM:SPECtrum:X? (Query Only)	1857
READ:SEM:SPECtrum:XY? (Query Only)	1857
READ:SEM:SPECtrum[:Y]? (Query Only)	1858
READ:SGRam[:MEASview<y>] (Query Only)	1858
READ:SPECtrum[:MEASview<y>]:TRACe<x>? (Query Only)	1859
READ:SPURious:CARRier:POWer? (Query Only)	1860
READ:SPURious:COUNT? (Query Only)	1860
READ:SPURious:PASS? (Query Only)	1860
READ:SPURious:SPECtrum:X? (Query Only)	1861
READ:SPURious:SPECtrum:XY? (Query Only)	1861
READ:SPURious:SPECtrum[:Y]? (Query Only)	1862
READ:SPURious:SPUR<x>:AMPLitude:ABSolute? (Query Only)	1863
READ:SPURious:SPUR<x>:AMPLitude:RELative? (Query Only)	1863
READ:SPURious:SPUR<x>:FREQuency:ABSolute? (Query Only)	1864
READ:SPURious:SPUR<x>:FREQuency:RELative? (Query Only)	1864
READ:SPURious:SPUR<x>:LIMit:ABSolute? (Query Only)	1865
READ:SPURious:SPUR<x>:LIMit:RELative? (Query Only)	1865
READ:SPURious:SPUR<x>:LIMit:VIOLation? (Query Only)	1866
READ:SPURious:SPUR<x>:RANGe? (Query Only)	1866
READ:SQUality[:MEASview<y>]:FREQuency:DEViation? (Query only)	1867
READ:SQUality[:MEASview<y>]:FREQuency:DEViation:TABLE? (Query only)	1867
READ:SQUality[:MEASview<y>]:FREQuency:ERRor? (Query only)	1868
READ:SQUality[:MEASview<y>]:GAIN:IMBalance? (Query only)	1869
READ:SQUality[:MEASview<y>]:ORIGin:OFFSet? (Query only)	1869
READ:SQUality[:MEASview<y>]:PEAK:EVM? (Query only)	1870
READ:SQUality[:MEASview<y>]:PEAK:EVM:DB? (Query only)	1870
READ:SQUality[:MEASview<y>]:PEAK:EVM:DB:OFFSet? (Query only)	1871
READ:SQUality[:MEASview<y>]:PEAK:EVM:LOCation? (Query only)	1871
READ:SQUality[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet? (Query only)	1872
READ:SQUality[:MEASview<y>]:PEAK:EVM:OFFSet? (Query only)	1873
READ:SQUality[:MEASview<y>]:PEAK:FERRor? (Query only)	1873
READ:SQUality[:MEASview<y>]:PEAK:MERRor? (Query only)	1874
READ:SQUality[:MEASview<y>]:PEAK:MERRor:DB? (Query only)	1874
READ:SQUality[:MEASview<y>]:PEAK:MERRor:LOCation? (Query only)	1875
READ:SQUality[:MEASview<y>]:PEAK:PERRor? (Query only)	1875
READ:SQUality[:MEASview<y>]:PEAK:PERRor:LOCation? (Query only)	1876
READ:SQUality[:MEASview<y>]:QUADrature:ERRor? (Query only)	1877
READ:SQUality[:MEASview<y>]:RHO? (Query only)	1877
READ:SQUality[:MEASview<y>]:RMS:EVM? (Query only)	1878
READ:SQUality[:MEASview<y>]:RMS:EVM:DB? (Query only)	1878
READ:SQUality[:MEASview<y>]:RMS:EVM:DB:OFFSet? (Query only)	1879
READ:SQUality[:MEASview<y>]:RMS:EVM:OFFSet? (Query only)	1879
READ:SQUality[:MEASview<y>]:RMS:FERRor? (Query only)	1880

READ:SQUality[:MEASview<y>]:RMS:MER:DB? (Query only)	1880
READ:SQUality[:MEASview<y>]:RMS:MERRor? (Query only)	1881
READ:SQUality[:MEASview<y>]:RMS:MERRor:DB? (Query only)	1882
READ:SQUality[:MEASview<y>]:RMS:PERRor? (Query only)	1882
READ:SQUality[:MEASview<y>]:SYMBol:LENGth? (Query only)	1883
READ:SQUality[:MEASview<y>]:SYMBol:RATE? (Query only)	1883
READ:SQUality[:MEASview<y>]:SYMBol:RATE:ERRor? (Query only)	1884
READ:TDIagram[:MEASview<y>]:FERRor? (Query only)	1884
READ:TDIagram[:MEASview<y>]:TRACe? (Query only)	1885
READ:TOVerview[:MEASview<y>] (Query Only)	1886
READ:WLAN:AD:CONSte:DATA:EVM? (Query Only)	1886
READ:WLAN:AD:CONSte:DATA:EVM:PEAK? (Query Only)	1887
READ:WLAN:AD:CONSte:DATA:EVM:PEAK:SYMBol? (Query Only)	1887
READ:WLAN:AD:CONSte:FERRor? (Query Only)	1888
READ:WLAN:AD:CONSte:IQDC:OFFSet? (Query Only)	1888
READ:WLAN:AD:EVM:TRACe? (Query Only)	1888
READ:WLAN:AD:SUMMary:AVERage:BURSt:COUNT (Query Only)	1889
READ:WLAN:AD:SUMMary:AVERage:BURSt:TOTAL:COUNT (Query Only)	1889
READ:WLAN:AD:SUMMary:ESNR (Query Only)	1890
READ:WLAN:AD:SUMMary:EVM:DATA:AVERage (Query Only)	1890
READ:WLAN:AD:SUMMary:EVM:DATA:AVERage:STATus (Query Only)	1891
READ:WLAN:AD:SUMMary:EVM:DATA:MAX (Query Only)	1891
READ:WLAN:AD:SUMMary:EVM:PACKet:CEF:EVM (Query Only)	1892
READ:WLAN:AD:SUMMary:EVM:PACKet:CEF:PEAK (Query Only)	1892
READ:WLAN:AD:SUMMary:EVM:PACKet:CEF:SYMBol (Query Only)	1893
READ:WLAN:AD:SUMMary:EVM:PACKet:DATA:EVM (Query Only)	1893
READ:WLAN:AD:SUMMary:EVM:PACKet:DATA:PEAK (Query Only)	1894
READ:WLAN:AD:SUMMary:EVM:PACKet:DATA:STATus (Query Only)	1894
READ:WLAN:AD:SUMMary:EVM:PACKet:DATA:SYMBol (Query Only)	1895
READ:WLAN:AD:SUMMary:EVM:PACKet:GUARd:EVM (Query Only)	1895
READ:WLAN:AD:SUMMary:EVM:PACKet:GUARd:PEAK (Query Only)	1896
READ:WLAN:AD:SUMMary:EVM:PACKet:GUARd:SYMBol (Query Only)	1896
READ:WLAN:AD:SUMMary:EVM:PACKet:HEADer:EVM (Query Only)	1896
READ:WLAN:AD:SUMMary:EVM:PACKet:HEADer:PEAK (Query Only)	1897
READ:WLAN:AD:SUMMary:EVM:PACKet:HEADer:SYMBol (Query Only)	1897
READ:WLAN:AD:SUMMary:EVM:PACKet:STF:EVM (Query Only)	1898
READ:WLAN:AD:SUMMary:EVM:PACKet:STF:PEAK (Query Only)	1898
READ:WLAN:AD:SUMMary:EVM:PACKet:STF:SYMBol (Query Only)	1899
READ:WLAN:AD:SUMMary:FERRor:AVERage (Query Only)	1899
READ:WLAN:AD:SUMMary:FERRor:AVERage:STATus (Query Only)	1900
READ:WLAN:AD:SUMMary:FERRor:HERTZ (Query Only)	1900
READ:WLAN:AD:SUMMary:FERRor:MAX (Query Only)	1901
READ:WLAN:AD:SUMMary:FERRor:PPM (Query Only)	1901
READ:WLAN:AD:SUMMary:FERRor:STATus (Query Only)	1902
READ:WLAN:AD:SUMMary:IQ:GAIN:IMBALance (Query Only)	1902
READ:WLAN:AD:SUMMary:IQ:ORIGin:OFFSet (Query Only)	1903
READ:WLAN:AD:SUMMary:IQ:QUADrature:ERRor (Query Only)	1903

READ:WLAN:AD:SUMMARY:PACKET:AGGREGATION (Query Only)	1904
READ:WLAN:AD:SUMMARY:PACKET:BTR (Query Only)	1904
READ:WLAN:AD:SUMMARY:PACKET:HCS (Query Only)	1904
READ:WLAN:AD:SUMMARY:PACKET:LENGTH (Query Only)	1905
READ:WLAN:AD:SUMMARY:PACKET:MCS (Query Only)	1905
READ:WLAN:AD:SUMMARY:PACKET:PPDU (Query Only)	1906
READ:WLAN:AD:SUMMARY:PACKET:RSSI (Query Only)	1906
READ:WLAN:AD:SUMMARY:PACKET:SCRAMBLER:INITIALIZATION (Query Only)	1907
READ:WLAN:AD:SUMMARY:PACKET:TAROUND (Query Only)	1907
READ:WLAN:AD:SUMMARY:PACKET:TLEN (Query Only)	1908
READ:WLAN:AD:SUMMARY:PACKET:TYPE (Query Only)	1908
READ:WLAN:AD:SUMMARY:RCPI (Query Only)	1908
READ:WLAN:AD:SUMMARY:RF:POWER (Query Only)	1909
READ:WLAN:AY:CONST:DATA:EVM? (Query Only)	1909
READ:WLAN:AY:CONST:DATA:EVM:PEAK? (Query Only)	1910
READ:WLAN:AY:CONST:DATA:EVM:PEAK:SYMBOL? (Query Only)	1910
READ:WLAN:AY:CONST:FERROR? (Query Only)	1911
READ:WLAN:AY:CONST:FREQUENCY:ERROR? (Query Only)	1911
READ:WLAN:AY:CONST:IQDC:OFFSET? (Query Only)	1911
READ:WLAN:AY:EVM:TRACE? (Query Only)	1912
READ:WLAN:AY:SUMMARY:AVERAGE:BURST:COUNT? (Query Only)	1912
READ:WLAN:AY:SUMMARY:AVERAGE:BURST:TOTAL:COUNT? (Query Only)	1913
READ:WLAN:AY:SUMMARY:ESNR? (Query Only)	1913
READ:WLAN:AY:SUMMARY:EVM:DATA:AVERAGE? (Query Only)	1913
READ:WLAN:AY:SUMMARY:EVM:DATA:AVERAGE:STATUS? (Query Only)	1914
READ:WLAN:AY:SUMMARY:EVM:DATA:MAX? (Query Only)	1914
READ:WLAN:AY:SUMMARY:EVM:DATA:SIGMA? (Query Only)	1915
READ:WLAN:AY:SUMMARY:EVM:PACKET:DATA:EVM? (Query Only)	1915
READ:WLAN:AY:SUMMARY:EVM:PACKET:DATA:PEAK? (Query Only)	1916
READ:WLAN:AY:SUMMARY:EVM:PACKET:DATA:STATUS? (Query Only)	1916
READ:WLAN:AY:SUMMARY:EVM:PACKET:DATA:SYMBOL? (Query Only)	1916
READ:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:CEF:EVM? (Query Only)	1917
READ:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:CEF:PEAK? (Query Only)	1917
READ:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:CEF:SYMBOL? (Query Only)	1918
READ:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:STF:EVM? (Query Only)	1918
READ:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:STF:PEAK? (Query Only)	1919
READ:WLAN:AY:SUMMARY:EVM:PACKET:EDMG:STF:SYMBOL? (Query Only)	1919
READ:WLAN:AY:SUMMARY:EVM:PACKET:GUARD:EVM? (Query Only)	1920
READ:WLAN:AY:SUMMARY:EVM:PACKET:GUARD:PEAK? (Query Only)	1920
READ:WLAN:AY:SUMMARY:EVM:PACKET:GUARD:SYMBOL? (Query Only)	1921
READ:WLAN:AY:SUMMARY:EVM:PACKET:HEADER:EVM? (Query Only)	1921
READ:WLAN:AY:SUMMARY:EVM:PACKET:HEADER:PEAK? (Query Only)	1921
READ:WLAN:AY:SUMMARY:EVM:PACKET:HEADER:SYMBOL? (Query Only)	1922
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE1EDMG:A1HEADER:EVM? (Query Only)	1922
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE1EDMG:CEF1:EVM? (Query Only)	1923
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE1EDMG:GUARD1:EVM? (Query Only)	1923
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE1EDMG:HEADER1:EVM? (Query Only)	1924

READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE1Edmg:STF1:EVM? (Query Only)	1924
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg:A2Header:EVM? (Query Only)	1925
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg:CEF2:EVM? (Query Only)	1925
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg:GUARd2:EVM? (Query Only)	1925
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg:HEADer2:EVM? (Query Only)	1926
READ:WLAN:AY:SUMMARY:EVM:PACKET:PRE2Edmg:STF2:EVM? (Query Only)	1926
READ:WLAN:AY:SUMMARY:FERRor:AVERage? (Query Only)	1927
READ:WLAN:AY:SUMMARY:FERRor:AVERage:STATus? (Query Only)	1927
READ:WLAN:AY:SUMMARY:FERRor:HERTZ? (Query Only)	1928
READ:WLAN:AY:SUMMARY:FERRor:MAX? (Query Only)	1928
READ:WLAN:AY:SUMMARY:FERRor:PPM? (Query Only)	1928
READ:WLAN:AY:SUMMARY:FERRor:STATus? (Query Only)	1929
READ:WLAN:AY:SUMMARY:IQ:GAIN:IMBALance? (Query Only)	1929
READ:WLAN:AY:SUMMARY:IQ:ORIGin:OFFSet? (Query Only)	1930
READ:WLAN:AY:SUMMARY:IQ:QUADrature:ERRor? (Query Only)	1930
READ:WLAN:AY:SUMMARY:PACKet:BEAMformed? (Query Only)	1930
READ:WLAN:AY:SUMMARY:PACKet:BWBItmap? (Query Only)	1931
READ:WLAN:AY:SUMMARY:PACKet:COMPbw? (Query Only)	1931
READ:WLAN:AY:SUMMARY:PACKet:CRC? (Query Only)	1932
READ:WLAN:AY:SUMMARY:PACKet:EDMGmcs? (Query Only)	1932
READ:WLAN:AY:SUMMARY:PACKet:LDPCcwlen? (Query Only)	1932
READ:WLAN:AY:SUMMARY:PACKet:PRIMarychannel? (Query Only)	1933
READ:WLAN:AY:SUMMARY:PACKet:PSDUlen? (Query Only)	1933
READ:WLAN:AY:SUMMARY:PACKet:RSSI? (Query Only)	1934
READ:WLAN:AY:SUMMARY:PACKet:SCRAMbler:INITIALIZation? (Query Only)	1934
READ:WLAN:AY:SUMMARY:PACKet:SPATialstreams? (Query Only)	1934
READ:WLAN:AY:SUMMARY:PACKet:STBCapplied? (Query Only)	1935
READ:WLAN:AY:SUMMARY:PACKet:TRNLen? (Query Only)	1935
READ:WLAN:AY:SUMMARY:RCPI? (Query Only)	1935
READ:WLAN:AY:SUMMARY:RF:POWER? (Query Only)	1936
READ:WLAN:AY:SUMMARY:SIG:QUALity? (Query Only)	1936
READ:WLAN:CONSte:MAGNitude? (Query Only)	1937
READ:WLAN:CONSte:PHASe? (Query Only)	1937
READ:WLAN:CONSte:TYPE? (Query Only)	1938
READ:WLAN:CONSte:VALue? (Query Only)	1938
READ:WLAN:CRESponse:MAGNitude? (Query Only)	1939
READ:WLAN:CRESponse:PHASe? (Query Only)	1939
READ:WLAN:EVM:TRACe<x>? (Query Only)	1940
READ:WLAN:FLATness:PASS? (Query Only)	1941
READ:WLAN:FLATness:RESult? (Query Only)	1941
READ:WLAN:FLATness:TRACe<x>? (Query Only)	1942
READ:WLAN:MERRor:TRACe<x>? (Query Only)	1942
READ:WLAN:PERRor:TRACe<x>? (Query Only)	1943
READ:WLAN:PVTime:BURSt:POWER? (Query Only)	1943
READ:WLAN:PVTime:BURSt:WIDTh? (Query Only)	1944
READ:WLAN:PVTime:FALL:TIME? (Query Only)	1944
READ:WLAN:PVTime:FALL:TIME:STARt? (Query Only)	1945

READ:WLAN:PVTime:FALL:TIME:STOP? (Query Only)	1945
READ:WLAN:PVTime:FTIME? (Query Only)	1945
READ:WLAN:PVTime:RISE:TIME? (Query Only)	1946
READ:WLAN:PVTime:RISE:TIME:STARt? (Query Only)	1946
READ:WLAN:PVTime:RISE:TIME:STOP? (Query Only)	1947
READ:WLAN:PVTime:RTIME? (Query Only)	1947
READ:WLAN:PVTime:TRACe:X? (Query Only)	1947
READ:WLAN:PVTime:TRACe:XY? (Query Only)	1948
READ:WLAN:PVTime:TRACe[:Y]? (Query Only)	1949
READ:WLAN:STABLE:VALUe? (Query Only)	1949
READ:WLAN:SUMMary:BURSt:INDex? (Query Only)	1950
READ:WLAN:SUMMary:BURSt:POWer? (Query Only)	1950
READ:WLAN:SUMMary:BURSt:POWer:CFACTOR? (Query Only)	1950
READ:WLAN:SUMMary:CERRor? (Query Only)	1951
READ:WLAN:SUMMary:CPE? (Query Only)	1951
READ:WLAN:SUMMary:EVM:PEAK:ALL? (Query Only)	1952
READ:WLAN:SUMMary:EVM:PEAK:CHIP:ALL? (Query Only)	1952
READ:WLAN:SUMMary:EVM:PEAK:CHIP:ONEKchips? (Query Only)	1952
READ:WLAN:SUMMary:EVM:PEAK:DATA? (Query Only)	1953
READ:WLAN:SUMMary:EVM:PEAK:ONEKchips? (Query Only)	1953
READ:WLAN:SUMMary:EVM:PEAK:PILOts? (Query Only)	1954
READ:WLAN:SUMMary:EVM:PEAK:SCARrier:ALL? (Query Only)	1954
READ:WLAN:SUMMary:EVM:PEAK:SCARrier:DATA? (Query Only)	1955
READ:WLAN:SUMMary:EVM:PEAK:SCARrier:PILOts? (Query Only)	1955
READ:WLAN:SUMMary:EVM:PEAK:SYMBol:ALL? (Query Only)	1955
READ:WLAN:SUMMary:EVM:PEAK:SYMBol:DATA? (Query Only)	1956
READ:WLAN:SUMMary:EVM:PEAK:SYMBol:PILOts? (Query Only)	1956
READ:WLAN:SUMMary:EVM:RMS:ALL? (Query Only)	1957
READ:WLAN:SUMMary:EVM:RMS:AVERage? (Query Only)	1957
READ:WLAN:SUMMary:EVM:RMS:DATA? (Query Only)	1957
READ:WLAN:SUMMary:EVM:RMS:MAXimum? (Query Only)	1958
READ:WLAN:SUMMary:EVM:RMS:ONEKchips? (Query Only)	1958
READ:WLAN:SUMMary:EVM:RMS:PILOts? (Query Only)	1959
READ:WLAN:SUMMary:FERRor? (Query Only)	1959
READ:WLAN:SUMMary:HEADer? (Query Only)	1960
READ:WLAN:SUMMary:HTSig? (Query Only)	1960
READ:WLAN:SUMMary:IQOffset? (Query Only)	1960
READ:WLAN:SUMMary:LSIG? (Query Only)	1961
READ:WLAN:SUMMary:PACKet? (Query Only)	1961
READ:WLAN:SUMMary:PACKet:DMODulation? (Query Only)	1961
READ:WLAN:SUMMary:PACKet:FORMat? (Query Only)	1962
READ:WLAN:SUMMary:PACKet:GUARd? (Query Only)	1962
READ:WLAN:SUMMary:SIG? (Query Only)	1963
READ:WLAN:SUMMary:VHTSig:A? (Query Only)	1963
READ:WLAN:SUMMary:VHTSig:B? (Query Only)	1964
Sense commands	1964

[SENSe]:ACPower:AVERage.	1964
[SENSe]:ACPower:AVERage:COUNT.	1965
[SENSe]:ACPower:{BANDwidth BWIDth}[:RESolution].	1965
[SENSe]:ACPower:{BANDwidth BWIDth}[:RESolution]:ACTual? (Query Only).	1965
[SENSe]:ACPower:{BANDwidth BWIDth}[:RESolution]:AUTO.	1966
[SENSe]:ACPower:{BANDwidth BWIDth}:VIDeo.	1966
[SENSe]:ACPower:{BANDwidth BWIDth}:VIDeo:STATe.	1967
[SENSe]:ACPower:CHANnel:{BANDwidth BWIDth}.	1967
[SENSe]:ACPower:CHANnel:FILTer.	1968
[SENSe]:ACPower:CHANnel:PAIRs.	1968
[SENSe]:ACPower:CHANnel:SPACing.	1969
[SENSe]:ACPower:CHIPRate.	1969
[SENSe]:ACPower:CLEar:RESults (No Query Form).	1969
[SENSe]:ACPower:FREQuency.	1970
[SENSe]:ACPower:FREQuency:STEP.	1970
[SENSe]:ACPower:FREQuency:STEP:AUTO.	1971
[SENSe]:ACPower:NFLoor:STATe.	1971
[SENSe]:ACPower:POINts:COUNT.	1972
[SENSe]:ACPower:RRCRolloff.	1972
[SENSe]:ACPower:SYMBRate.	1973
[SENSe]:ACQuisition:{BANDwidth BWIDth}.	1973
[SENSe]:ACQuisition:FFRame:ACTual? (Query Only).	1974
[SENSe]:ACQuisition:FFRame:LIMit.	1974
[SENSe]:ACQuisition:FFRame:STATe.	1974
[SENSe]:ACQuisition:FSAVe:ENABle.	1975
[SENSe]:ACQuisition:FSAVe:FILEs:MAXimum.	1975
[SENSe]:ACQuisition:FSAVe:FORMat.	1976
[SENSe]:ACQuisition:FSAVe:LOCation.	1976
[SENSe]:ACQuisition:FSAVe:NAME:BASE.	1977
[SENSe]:ACQuisition:MEMory:AVAILable:SAMPles? (Query Only).	1977
[SENSe]:ACQuisition:MEMory:CAPacity[:TIME]? (Query Only).	1977
[SENSe]:ACQuisition:MEMory:USED[:PERCent]? (Query Only).	1978
[SENSe]:ACQuisition:MODE.	1978
[SENSe]:ACQuisition:OPTimization.	1979
[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth BWIDth}:AUTO.	1980
[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth BWIDth} <value>.	1980
[SENSe]:ACQuisition:RECORD:FILE:LENGth.	1981
[SENSe]:ACQuisition:RECORD:FILE:LENGth:ENABle.	1981
[SENSe]:ACQuisition:RECORD:FILE:LENGth:UNITs.	1982
[SENSe]:ACQuisition:RECORD:FILE:LOCation.	1982
[SENSe]:ACQuisition:RECORD:FILE:MAXimum.	1983
[SENSe]:ACQuisition:RECORD:FILE:NAME:BASE.	1983
SENSe:ACQuisition:RECORD:FILE:NAME:INDEX.	1983
SENSe:ACQuisition:RECORD:FILE:NAME:SUFFix.	1984
[SENSe]:ACQuisition:RECORD:FILE:SIZE? (Query Only).	1984
[SENSe]:ACQuisition:RECORD:FILE:STRucture.	1985
[SENSe]:ACQuisition:RECORD:FILE:WBWidth:DFORMat.	1985

[SENSe]:ACQuisition:RECORD:RESuLts? (Query Only)	1986
[SENSe]:ACQuisition:RECORD:START (No Query Form)	1987
[SENSe]:ACQuisition:RECORD:STOP (No Query Form)	1987
[SENSe]:ACQuisition:RECORD:TYPE	1987
[SENSe]:ACQuisition:SAMPles	1988
[SENSe]:ACQuisition:SEConds	1988
[SENSe]:{AM FM PM}:{BANDwidth BWIDth}:MEASurement	1989
[SENSe]:{AM FM PM}:CLEAr:RESuLts (No Query Form)	1989
[SENSe]:{AM FM PM}:{MTPoints MAXTracepoints}	1990
[SENSe]:AM:DETECT:AMPLitude	1990
[SENSe]:ANALysis:ADVanced:DITHer	1991
[SENSe]:ANALysis:ADVanced:DITHer:HWARe:STATus? (Query Only)	1991
[SENSe]:ANALysis:BANDwidth:FILTer:MODE {set and query}	1992
[SENSe]:ANALysis:LENGth [:SOURce<z>]	1992
[SENSe]:ANALysis:LENGth[:SOURce<z>]:ACTual? (Query only)	1993
[SENSe]:ANALysis:LENGth[:SOURce<z>]:AUTO	1993
[SENSe]:ANALysis:REFerence[:SOURce<z>]	1994
[SENSe]:ANALysis:START[:SOURce<z>]	1994
[SENSe]:ANALysis:START[:SOURce<z>]:AUTO	1995
[SENSe]:ANSpectrum:START:AUTO:METHod	1995
[SENSe]:AUDio:AVERAge:COUNt	1996
[SENSe]:AUDio:AVERAge:ENABle	1996
[SENSe]:AUDio:BANDwidth BWIDth	1997
[SENSe]:AUDio:BANDwidth BWIDth:RESolution	1997
[SENSe]:AUDio:BANDwidth BWIDth:RESolution:AUTO	1997
[SENSe]:AUDio:BANDwidth BWIDth:RESolution:SHAPE	1998
[SENSe]:AUDio:CARRier:OFFSet	1998
[SENSe]:AUDio:CARRier:OFFSet:AUTO	1999
[SENSe]:AUDio:DEMod:MUTE	1999
[SENSe]:AUDio:DEMod[:STATe]	2000
[SENSe]:AUDio:DEMod:STReam:ACTivate	2000
[SENSe]:AUDio:DEMod:STReam[:FILE] (No Query Form)	2001
[SENSe]:AUDio:DEMod:TYPE	2001
[SENSe]:AUDio:DEMod:VOLume	2002
[SENSe]:AUDio:FILTer:DEEMphasis	2002
[SENSe]:AUDio:FILTer:DEEMphasis:ENABle	2003
[SENSe]:AUDio:FILTer:DEEMphasis:USER	2003
[SENSe]:AUDio:FILTer:HPF	2003
[SENSe]:AUDio:FILTer:HPF:ENABle	2004
[SENSe]:AUDio:FILTer:HPF:USER	2004
[SENSe]:AUDio:FILTer:LPF	2005
[SENSe]:AUDio:FILTer:LPF:ENABle	2005
[SENSe]:AUDio:FILTer:LPF:USER	2006
[SENSe]:AUDio:FILTer:MODE:PREDeFined	2006
[SENSe]:AUDio:FILTer:SOURce? (Query Only)	2007
[SENSe]:AUDio:FILTer:STANdard	2007
[SENSe]:AUDio:FILTer:STANdard:ENABle	2008

[SENSe]:AUDio:FREQuency.	2008
[SENSe]:AUDio:FREQuency:AUTO.	2008
[SENSe]:AUDio:HNOise:ENABLE.	2009
[SENSe]:AUDio:HNOise:REFeRence (No Query Form).	2009
[SENSe]:AUDio:SIGnal:TYPE.	2010
[SENSe]:AUDio:SPECtrum:CLEar:RESults (No Query Form).	2010
[SENSe]:AUDio:SPECtrum:POINts:COUNT.	2011
[SENSe]:AUDio:UNITs.	2011
[SENSe]:AVTime[:MEASview<y>]:SELEcted:SOURce.	2012
[SENSe]:AVTime[:MEASview<y>]:SPAN:LINK.	2013
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth BWIDth}.	2013
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth BWIDth}:ACTual? (Query Only).	2014
[SENSe]:AVTime[:MEASview<y>]:CLEar:RESults (No Query Form).	2014
[SENSe]:AVTime[:MEASview<y>]:MAXTracepoints.	2015
[SENSe]:AVTime[:MEASview<y>]:METHod.	2015
[SENSe]:AVTime[:MEASview<y>]:SPAN.	2016
[SENSe]:BLUEtooth:ANALysis:LENGth.	2016
[SENSe]:BLUEtooth:ANALysis:LENGth:ACTual? (Query Only).	2017
[SENSe]:BLUEtooth:ANALysis:LENGth:AUTO.	2017
[SENSe]:BLUEtooth:ANALysis:MEAS[:BANDwidth BWIDth].	2018
[SENSe]:BLUEtooth:ANALysis:MEAS:SOURce.	2018
[SENSe]:BLUEtooth:ANALysis:OFFSet.	2019
[SENSe]:BLUEtooth:ANALysis:OFFSet:AUTO.	2019
[SENSe]:BLUEtooth:ANALysis:TIME:UNITs (No Query Form).	2019
[SENSe]:BLUEtooth[:BANDwidth]:BWIDth:MODE.	2020
[SENSe]:BLUEtooth[:BANDwidth]:BWIDth:TINTerval.	2020
[SENSe]:BLUEtooth[:BANDwidth]:BWIDth:TINTerval:AUTO.	2021
[SENSe]:BLUEtooth:CONStellation:PREFs:GRATicule:SHOW.	2021
[SENSe]:BLUEtooth:CONStellation:PREFs:MARKERS:SHOW.	2022
[SENSe]:BLUEtooth:CONStellation:PREFs:RADIx.	2022
[SENSe]:BLUEtooth:CONStellation:TRACE<x>:CONTent.	2023
[SENSe]:BLUEtooth:CONStellation:TRACE<x>:FREEze.	2023
[SENSe]:BLUEtooth:CONStellation:TRACE<x>:POINtsPerSymbol.	2023
[SENSe]:BLUEtooth:CONStellation:TRACE<x>:SHOW.	2024
[SENSe]:BLUEtooth:DELta:AVERage:FONE.	2024
[SENSe]:BLUEtooth:DELta:AVERage:FTWO.	2025
[SENSe]:BLUEtooth:FDVTime:TRACE:OCTet? (Query Only).	2025
[SENSe]:BLUEtooth:FDVTime:TRACE:OCTet:TOTAL:COUNT? (Query Only).	2026
[SENSe]:BLUEtooth:FDVTime:TRACE:VIEW:MODE.	2026
[SENSe]:BLUEtooth:FILTer:ALPHa.	2027
[SENSe]:BLUEtooth:FILTer:MEASurement.	2027
[SENSe]:BLUEtooth:FILTer:REFeRence.	2027
[SENSe]:BLUEtooth:FREQuency:DEViation.	2028
[SENSe]:BLUEtooth:FREQuency:DEViation:AUTO.	2029
[SENSe]:BLUEtooth:FREQuency:ERRor.	2029
[SENSe]:BLUEtooth:FREQuency:ERRor:AUTO.	2029
[SENSe]:BLUEtooth:INBEmissions:POWER:LIMIt<x>.	2030

[SENSe]:BLUEtooth:POWer:CLASs.	2030
[SENSe]:BLUEtooth:STANdard.	2031
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:DELTA:FONE:AVERage:MAX.	2031
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:DELTA:FONE:AVERage:MIN.	2032
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:DELTA:FTWO:PERcent.	2032
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:DELTA:FTWO:RESult.	2033
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:DRIFt:FNFZero.	2033
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:FREQuency:OFFSet.	2033
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:FREQuency: OFFSet:PREAmBDR.	2034
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: ONE:AVERage:MAX.	2034
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: ONE:AVERage:MIN.	2035
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: ONE:PEAK:MAX.	2035
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: ONE:PEAK:MIN.	2036
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: THREe:AVERage:MAX.	2036
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: THREe:AVERage:MIN.	2037
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: THREe:PEAK:MAX.	2037
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: THREe:PEAK:MIN.	2037
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: TWO:AVERage:MAX.	2038
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: TWO:AVERage:MIN.	2038
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: TWO:PEAK:MAX.	2039
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs: TWO:PEAK:MIN.	2039
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FONE:AVERage:MIN.	2040
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FTWO:PERcent.	2040
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FTWO:RESult.	2041
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:DRIFt:FNFZero.	2041
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet.	2041
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency: OFFSet:PREAmble.	2042
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:AVERage:MAX.	2042
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:AVERage:MIN.	2043
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:PEAK:MAX.	2043
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FONE:AVERage:MAX.	2043
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:PEAK:MIN.	2044
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFt:F1FZero.	2044
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFt:FNFN5.	2045
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFt:LECoded:F0FThree.	2045
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFt:LECoded:F1FFour.	2046
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFt:LECoded:FNFN3.	2046
[SENSe]:BLUEtooth:SYMBol:POINts.	2047
[SENSe]:BLUEtooth:TEST:PATtern.	2047
[SENSe]:BLUEtooth:TEST:PATtern:AUTO:DETEct.	2048
[SENSe]:BLUEtooth:TIME:ZERO:REFERENCE.	2048
[SENSe]:BLUEtooth:TRACe:TYPE.	2049
[SENSe]:CONSt[:MEASview<y>]:SELEcted:SOURce.	2049
[SENSe]:CCDF:{BANDwidth BWIDth}.	2050
[SENSe]:CCDF:CLEar (No Query Form).	2050
[SENSe]:CCDF:TIME:TOTal:LENGth.	2050
[SENSe]:CCDF:TIME:TYPE.	2051

[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth.	2051
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:ACTual? (Query only).	2052
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:AUTO.	2053
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth BWIDth}:MODE.	2053
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth BWIDth}:TINTerval.	2054
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth BWIDth}:TINTerval:AUTO.	2055
[SENSe]:DDEMod[:SOURce<x>]:BURSt:DETEct.	2055
[SENSe]:DDEMod[:SOURce<x>]:BURSt:THREshold.	2056
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet.	2056
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet:AUTO.	2057
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:AVAilable? (Query only).	2058
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:CONVergence.	2058
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:ENABle.	2058
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:LENGth.	2059
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:MODE.	2059
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:RESet (No query form).	2060
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TAPS.	2060
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TSRAtio.	2061
[SENSe]:DDEMod[:SOURce<x>]:FILTer:ALPHA.	2061
[SENSe]:DDEMod[:SOURce<x>]:FILTer:MEASurement.	2062
[SENSe]:DDEMod[:SOURce<x>]:FILTer:REFerence.	2063
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation.	2064
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation:AUTO.	2065
[SENSe]:DDEMod[:SOURce<x>]:MAGNitude:NORMalize.	2065
[SENSe]:DDEMod[:SOURce<x>]:MINDEX.	2066
[SENSe]:DDEMod[:SOURce<x>]:MINDEX:AUTO.	2066
[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE.	2067
[SENSe]:DDEMod[:SOURce<x>]:PRESet (No query form).	2068
[SENSe]:DDEMod[:SOURce<x>]:RING:RADIus.	2072
[SENSe]:DDEMod[:SOURce<x>]:RING:ROTation.	2072
[SENSe]:DDEMod[:SOURce<x>]:SRATe.	2073
[SENSe]:DDEMod[:SOURce<x>]:SWAP:IQ.	2073
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:HSSHift.	2073
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:MAP:SOURce? (Query only).	2074
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:MAP[:STATe].	2074
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:PLOT:POSition.	2075
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:POINts.	2076
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:RATE:SEARch.	2076
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD.	2077
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD:SYMBol.	2077
[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs.	2078
[SENSe]:DIQVtime[:MEASview<y>]:SELEcted:SOURce.	2079
[SENSe]:DPX:AUDio:DEMod:GAIN.	2079
[SENSe]:DPX:AUDio:DEMod:RXBWidth.	2080
[SENSe]:DPX:AUDio:DEMod:RXFRrequency? (Query Only).	2080
[SENSe]:DPX:AUDio:DEMod:STATe.	2080
[SENSe]:DPX:AUDio:DEMod:TUNE.	2081

[SENSe]:DPX:AUDio:DEMod:TYPE.	2082
[SENSe]:DPX:{BANDwidth BWIDth}:ACTual? (Query Only).	2082
[SENSe]:DPX:{BANDwidth BWIDth}:RESolution.	2082
[SENSe]:DPX:{BANDwidth BWIDth}[:RESolution]:AUTO.	2083
[SENSe]:DPX:CLEar:RESults (No Query Form).	2083
[SENSe]:DPX:COLor.	2084
[SENSe]:DPX:COLor:MAXimum.	2084
[SENSe]:DPX:COLor:MINimum.	2085
[SENSe]:DPX:DDENsity:MEASurement:SHOW.	2085
[SENSe]:DPX:DGRam:COLor:MAXimum.	2086
[SENSe]:DPX:DGRam:COLor:MINimum.	2086
[SENSe]:DPX:DGRam:POINts:COUNt.	2087
[SENSe]:DPX:DGRam:TIME:CAPacity? (Query Only).	2087
[SENSe]:DPX:DGRam:TIME:RESolution.	2088
[SENSe]:DPX:DGRam:TIME:RESolution:AUTO.	2088
[SENSe]:DPX:DGRam:WATERfall:DIRection.	2088
[SENSe]:DPX:DGRam:WATERfall:ENABLE.	2089
[SENSe]:DPX:DGRam:Y[:SCALE]:AUTO (No Query Form).	2089
[SENSe]:DPX:DGRam:Y[:SCALE]:RESet (No Query Form).	2090
[SENSe]:DPX:DWELL.	2090
[SENSe]:DPX:DWELL:AUTO.	2091
[SENSe]:DPX:FREQuency:CENTer.	2091
[SENSe]:DPX:FREQuency:SPAN.	2092
[SENSe]:DPX:FREQuency:SPAN:{BANDwidth BWIDth}[:RESolution]:RATio.	2092
[SENSe]:DPX:FREQuency:STARt.	2093
[SENSe]:DPX:FREQuency:STEP.	2093
[SENSe]:DPX:FREQuency:STEP:AUTO.	2094
[SENSe]:DPX:FREQuency:STOP.	2094
[SENSe]:DPX:PLOT.	2095
[SENSe]:DPX:POINts:COUNt.	2095
[SENSe]:DPX:TDM:{BANDwidth BWIDth}.	2096
[SENSe]:DPX:TDM:{BANDwidth BWIDth}:ACTual? (Query Only).	2096
[SENSe]:DPX:TDM:FREQuency:CENTer.	2097
[SENSe]:DPX:TDM:FREQuency:TXBer:CLEar:RESults (No Query Form).	2097
[SENSe]:DPX:TDM:FREQuency:TXBer:ENABLE.	2098
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern.	2098
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:INVert.	2099
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:REPeat.	2099
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:REVerse.	2100
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:SOURce? (Query Only).	2100
[SENSe]:DPX:TDM:RBW.	2101
[SENSe]:DPX:TDM:RBW:STATe.	2101
[SENSe]:DPX:TDM:SWEep:TIME.	2101
[SENSe]:DPX:TDM:TMOTion.	2102
[SENSe]:EDIagram[:MEASview<y>]:SELEcted:SOURce.	2102
[SENSe]:DEMOd:EVM[:MEASview<y>]:SELEcted:SOURce.	2103
SENSe:EMC:ACCEssory<x>:ANTEнна:DIStance.	2103

SENSe:EMC:ACCEssory<x>:ASSEt:TAG.	2104
SENSe:EMC:ACCEssory<x>:CALibration:DATE.	2104
SENSe:EMC:ACCEssory<x>:CALibration:DATE:DISAbLe.	2105
SENSe:EMC:ACCEssory<x>:CONStant:LOSS.	2105
SENSe:EMC:ACCEssory<x>:ENABLe.	2106
SENSe:EMC:ACCEssory<x>:FREQuency:INTErpolation.	2106
SENSe:EMC:ACCEssory<x>:LOSS:TABLE:ADD (No Query Form).	2107
SENSe:EMC:ACCEssory<x>:LOSS:TABLE:DELEte:ALL (No Query Form).	2107
SENSe:EMC:ACCEssory<x>:LOSS:TYPE.	2108
SENSe:EMC:ACCEssory<x>:MODEl.	2108
SENSe:EMC:ACCEssory<x>:SERial.	2109
SENSe:EMC:ACCEssory<x>:TYPE.	2109
SENSe:EMC:CLear:RESuLts (No Query Form).	2110
SENSe:EMC:EMISsion:TYPE.	2111
SENSe:EMC[:FREQuency]:OVERlap? (Query Only).	2111
SENSe:EMC:LIST.	2112
SENSe:EMC:MARGIn.	2112
SENSe:EMC:MEASurement:AMBlent:DELTA:THREShold.	2113
SENSe:EMC:MEASurement:AMBlent:DETEctor.	2113
SENSe:EMC:MEASurement:AMBlent:DWELl:TIME.	2114
SENSe:EMC:MEASurement:AMBlent:DWELl:TIME:AUTO.	2114
SENSe:EMC:MEASurement:AMBlent:STARt (No Query Form).	2115
SENSe:EMC:MEASurement:INSPEct:DETEctor<x>.	2115
SENSe:EMC:MEASurement:INSPEct:DETEctor<x>:COMParision:LEVEL.	2116
SENSe:EMC:MEASurement:INSPEct:DETEctor<x>:ENABLe.	2116
SENSe:EMC:MEASurement:INSPEct:DWELl:TIME.	2117
SENSe:EMC:MEASurement:INSPEct:DWELl:TIME:AUTO.	2117
SENSe:EMC:MEASurement:INSPEct:MODE.	2118
SENSe:EMC:MEASurement:INSPEct:MODE:DISCREte: FREQuency<x>:ENABLe.	2118
SENSe:EMC:MEASurement:INSPEct:MODE:DISCREte: FREQuency<x>:FREQuency.	2119
SENSe:EMC:MEASurement:INSPEct:MODE:DISCREte: FREQuency<x>:RBW.	2119
SENSe:EMC:MEASurement:INSPEct:MODE:DISCREte: FREQuency<x>:RBW:AUTO.	2120
SENSe:EMC:MEASurement:INSPEct:MODE:DISCREte:LOAD: EMISsion:RESuLts (No Query Form).	2121
SENSe:EMC:MEASurement:INSPEct:MODE:HARMonic<x>:ENABLe.	2121
SENSe:EMC:MEASurement:INSPEct:MODE:HARMonic<x>: FACTor<y>:ENABLe.	2122
SENSe:EMC:MEASurement:INSPEct:MODE: HARMonic<x>:FACTor<y>:FREQuency.	2122
SENSe:EMC:MEASurement:INSPEct:MODE: HARMonic<x>:FACTor<y>:HARMonic:FACTor.	2123
SENSe:EMC:MEASurement:INSPEct:MODE: HARMonic<x>:FACTor<y>:RBW.	2124
SENSe:EMC:MEASurement:INSPEct:MODE:HARMonic<x>: FACTor<y>:RBW:AUTO.	2124
SENSe:EMC:MEASurement:INSPEct:MODE:HARMonic<x>:FREQuency.	2125
SENSe:EMC:MEASurement:INSPEct:STARt (No Query Form).	2125
SENSe:EMC:MEASurement:SCAN:DETEctor<x>.	2126
SENSe:EMC:MEASurement:SCAN:DETEctor<x>:ENABLe.	2127
SENSe:EMC:MEASurement:SCAN:DETEctor<x>:LIMit.	2127
SENSe:EMC:MEASurement:SCAN:DWELl:TIME.	2128
SENSe:EMC:MEASurement:SCAN:DWELl:TIME:AUTO.	2128
SENSe:EMC:MEASurement:SCAN:STARt (No Query Form).	2129

SENSe:EMC:MEASurement:SPOT:ALL	2130
SENSe:EMC:MEASurement:SPOT:COUNT	2131
SENSe:EMC:MEASurement:SPOT:DETEctor<x>	2131
SENSe:EMC:MEASurement:SPOT:DETEctor<x>:ENABle	2132
SENSe:EMC:MEASurement:SPOT:DETEctor<x>:LIMit	2132
SENSe:EMC:MEASurement:SPOT:DWELl:TIME	2133
SENSe:EMC:MEASurement:SPOT:DWELl:TIME:AUTO	2133
SENSe:EMC:MEASurement:SPOT:STARt (No Query Form)	2134
SENSe:EMC:MEASurement:TYPE	2134
SENSe:EMC:MODE	2135
SENSe:EMC:OPTimization	2135
SENSe:EMC:POINts:COUNT	2136
SENSe:EMC:RANGe<x>:BANDwidth:VIDeo	2137
SENSe:EMC:RANGe<x>:BANDwidth:VIDeo:STATe	2137
SENSe:EMC:RANGe<x>:EXCURsion	2138
SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth	2138
SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO	2139
SENSe:EMC:RANGe<x>:FREQuency:STARt	2139
SENSe:EMC:RANGe<x>:FREQuency:STOP	2140
SENSe:EMC:RANGe<x>:LIMit<y>:EQUAL	2140
SENSe:EMC:RANGe<x>:LIMit<y>:STARt	2141
SENSe:EMC:RANGe<x>:LIMit<y>:STOP	2141
SENSe:EMC:RANGe<x>:STATe	2142
SENSe:EMC:RANGe<x>:THReshold	2142
SENSe:EMC:REGion	2143
SENSe:EMC:REPORt:INCLude:CONTRol:SETTings	2143
SENSe:EMC:REPORt:INCLude:EMISsion:RESULts	2144
SENSe:EMC:REPORt:INCLude:ENVironment:INFORmation	2144
SENSe:EMC:REPORt:INCLude:ENVironment:INFORmation:ADD (No Query Form)	2145
SENSe:EMC:REPORt:INCLude:ENVironment:INFORmation:DELeTe:ALL (No Query Form)	2145
SENSe:EMC:REPORt:INCLude:EUT:INFORmation	2146
SENSe:EMC:REPORt:INCLude:EUT:INFORmation:ADD (No Query Form)	2146
SENSe:EMC:REPORt:INCLude:EUT:INFORmation:DELeTe:ALL (No Query Form)	2147
SENSe:EMC:REPORt:INCLude:GRAPH	2147
SENSe:EMC:REPORt:INCLude:INSPEct:FREQuency:RESULts	2148
SENSe:EMC:REPORt:INCLude:USER:INFORmation	2148
SENSe:EMC:REPORt:INCLude:USER:INFORmation:ADD (No Query Form)	2149
SENSe:EMC:REPORt:INCLude:USER:INFORmation:DELeTe:ALL (No Query Form)	2149
SENSe:EMC:REPORt:MEASurement:HEADing	2150
SENSe:EMC:STANDard	2150
[SENSe]:FDVTime[:MEASview<y>]:SELEcted:SOURce	2151
[SENSe]:{FM PM}:BURSt:THReshold	2151
[SENSe]:{FM PM}:FREQuency:OFFSet	2152
[SENSe]:{FM PM}:FREQuency:OFFSet:MARKer (No Query Form)	2152
[SENSe]:{FM PM}:FREQuency:SEARch:AUTO	2153
[SENSe]:{FSETtling PSETtling}:{BANDwidth BWIDTh}	2153
[SENSe]:{FSETtling PSETtling}:{BANDwidth BWIDTh}:ACTual? (Query Only)	2154

[SENSe]:{FSETtling PSETtling}:FREQuency:CENTer.	2154
[SENSe]:{FSETtling PSETtling}:FREQuency:OFFSet.	2155
[SENSe]:{FSETtling PSETtling}:LENGth.	2155
[SENSe]:{FSETtling PSETtling}:LENGth:ACTual? (Query Only).	2155
[SENSe]:{FSETtling PSETtling}:MASK:LIMit.	2156
[SENSe]:{FSETtling PSETtling}:MASK:STATe.	2157
[SENSe]:{FSETtling PSETtling}:MASK:TIME:REFerence.	2157
[SENSe]:{FSETtling PSETtling}:MASK:TIME:START.	2157
[SENSe]:{FSETtling PSETtling}:MASK:TIME:STOP.	2158
[SENSe]:{FSETtling PSETtling}:MAXTracepoints.	2158
[SENSe]:{FSETtling PSETtling}:SDURation:MINimum.	2159
[SENSe]:{FSETtling PSETtling}:TARGet:REFerence.	2159
[SENSe]:{FSETtling PSETtling}:TOLerance.	2160
[SENSe]:FVTime[:MEASview<y>]:CLEar:RESults (No Query Form).	2160
[SENSe]:FVTime[:MEASview<y>]:FREQuency:CENTer.	2161
[SENSe]:FVTime[:MEASview<y>]:FREQuency:SPAN.	2161
[SENSe]:FVTime[:MEASview<y>]:FREQuency:SPAN:LINK.	2162
[SENSe]:FVTime[:MEASview<y>]:FREQuency:START.	2162
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP.	2163
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP:AUTO.	2163
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STOP.	2164
[SENSe]:FVTime[:MEASview<y>]:MAXTracepoints.	2164
[SENSe]:FVTime[:MEASview<y>]:SELEcted:SOURce.	2165
[SENSe]:IQVTime[:MEASview<y>]:CLEar:RESults (No Query Form).	2165
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer.	2166
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN.	2166
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN:LINK.	2167
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:START.	2167
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP.	2168
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP:AUTO.	2169
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STOP.	2169
[SENSe]:IQVTime[:MEASview<y>]:MAXTracepoints.	2170
[SENSe]:IQVTime[:MEASview<y>]:SELEcted:SOURce.	2170
SENSe:LTE:ACLR:BANDwidth:RESolution.	2171
SENSe:LTE:ACLR:BANDwidth:VIDeo.	2171
SENSe:LTE:ACLR:BANDwidth:VIDeo:STATe.	2172
SENSe:LTE:ACLR:CHANnel:IBANDwidth.	2172
SENSe:LTE:ACLR:CHANnel:WIDTh.	2173
SENSe:LTE:ACLR:CLEar:RESults (No Query Form).	2173
SENSe:LTE:ACLR:FREQuency.	2173
SENSe:LTE:ACLR:MFIltter.	2174
SENSe:LTE:ACLR:MODE:REALtime.	2174
SENSe:LTE:ACLR:NFLoor:ACQuire (No Query Form).	2175
SENSe:LTE:ACLR:NFLoor:CORRected? (Query Only).	2175
SENSe:LTE:ACLR:NFLoor:STATe.	2176
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution.	2176
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:COUNT.	2177

SENSe:LTE:ACLR:OFFSet<X>:BANDwidth:RESolution:FILTer.	2177
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo.	2178
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo:STATe.	2178
SENSe:LTE:ACLR:OFFSet<x>:DETection.	2179
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:BANDwidth.	2179
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:OFFSet.	2180
SENSe:LTE:ACLR:OFFSet<x>:LIMit:ABSolute.	2180
SENSe:LTE:ACLR:OFFSet<x>:LIMit:MASK.	2181
SENSe:LTE:ACLR:OFFSet<x>:LIMit:RELative.	2181
SENSe:LTE:ACLR:OFFSet<x>:LIMit:SIDE.	2182
SENSe:LTE:ACLR:OFFSet<x>:STATe.	2183
SENSe:LTE:ACLR:POINts:COUNT.	2183
SENSe:LTE:ACLR:REFerence:MAGNitude.	2184
SENSe:LTE:ACLR:REFerence:MAGNitude:AUTO.	2184
SENSe:LTE:ACLR:REFerence:MAGNitude:DETection.	2185
SENSe:LTE:ACLR:STEP:AUTO.	2185
SENSe:LTE:ACLR:STEP:MAGNitude.	2186
SENSe:LTE:ANALysis:AVErage:OVER:OFFSlot:STATe.	2186
SENSe]:LTE:ANALysis:EQUALization:STATe.	2187
SENSe:LTE:ANALysis:LENGth.	2187
SENSe:LTE:ANALysis:LENGth:ACTual? (Query Only).	2188
SENSe:LTE:ANALysis:LENGth:AUTO.	2188
[SENSe]:LTE:ANALysis:OFFSet.	2188
SENSe:LTE:ANALysis:OFFSet:AUTO.	2189
SENSe:LTE:ANALysis:TIME:UNIT.	2189
SENSe:LTE:ANTEнна:PORTs:CHOSen.	2190
SENSe:LTE:ANTEнна:PORTs:TOTal.	2190
SENSe:LTE:AUTO:DETect.	2191
SENSe:LTE:CHANnel:(BANDwidth BWIDth).	2191
SENSe:LTE:CHANnel:BANDwidth.	2192
SENSe:LTE:CHSPectrum:AVErage.	2192
SENSe:LTE:CHSPectrum:AVErage:COUNT.	2193
SENSe:LTE:CHSPectrum:BANDwidth:RESolution.	2193
SENSe:LTE:CHSPectrum:BANDwidth:RESolution:AUTO.	2194
SENSe:LTE:CHSPectrum:BANDwidth:VIDeo.	2194
SENSe:LTE:CHSPectrum:BANDwidth:VIDeo:STATe.	2195
SENSe:LTE:CHSPectrum:CHANnel:BANDwidth.	2195
SENSe:LTE:CHSPectrum:CLEar:RESults (No Query Form).	2196
SENSe:LTE:CHSPectrum:DETection.	2196
SENSe:LTE:CHSPectrum:FREQuency.	2197
SENSe:LTE:CHSPectrum:FREQuency:SPAN.	2197
SENSe:LTE:CHSPectrum:FREQuency:STEP.	2198
SENSe:LTE:CHSPectrum:FREQuency:STEP:AUTO.	2198
SENSe:LTE:CHSPectrum:POINts:COUNT.	2199
SENSe:LTE:CYClic:PREFix.	2199
SENSe:LTE:FRAME:STRUcture.	2200
SENSe:LTE:LINK:CONFIguration.	2200

SENSe:LTE:SUBFrame:CONFIguration.	2201
[SENSe]:MCPower:AVERage.	2201
[SENSe]:MCPower:AVERage:COUNT.	2201
[SENSe]:MCPower:{BANDwidth BWIDth}{:RESolution}.	2202
[SENSe]:MCPower:{BANDwidth BWIDth}{:RESolution}:ACTual? (Query Only).	2202
[SENSe]:MCPower:{BANDwidth BWIDth}{:RESolution}:AUTO.	2203
[SENSe]:MCPower:{BANDwidth BWIDth}:VIDeo.	2203
[SENSe]:MCPower:{BANDwidth BWIDth}:VIDeo:STATe.	2204
[SENSe]:MCPower:CHANnel:ADJacent:ADD (No Query Form).	2204
[SENSe]:MCPower:CHANnel:ADJacent:DELeTe (No Query Form).	2205
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>.	2205
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>:ENABle? (Query Only).	2206
[SENSe]:MCPower:CHANnel:FILTer.	2206
[SENSe]:MCPower:CHANnel:MAIN:{BANDwidth BWIDth}.	2207
[SENSe]:MCPower:CHANnel:MAIN:COUNT.	2207
[SENSe]:MCPower:CHANnel:MAIN:INACTive.	2207
[SENSe]:MCPower:CHANnel:MAIN:SPACing.	2208
[SENSe]:MCPower:CHIPrate.	2208
[SENSe]:MCPower:CLear:RESults (No Query Form).	2209
[SENSe]:MCPower:FREQuency.	2209
[SENSe]:MCPower:FREQuency:STEP.	2210
[SENSe]:MCPower:FREQuency:STEP:AUTO.	2210
[SENSe]:MCPower:NFLoor:STATe.	2211
[SENSe]:MCPower:POINts:COUNT.	2211
[SENSe]:MCPower:RCHannels? (Query Only).	2212
[SENSe]:MCPower:RCHannels:MAIN<x> (No Query Form).	2212
[SENSe]:MCPower:RCHannels:TOTal (No Query Form).	2213
[SENSe]:MCPower:RRCRolloff.	2213
[SENSe]:MEASurement:FREQuency[:SOURce<z>].	2213
[SENSe]:MEASurement:FREQuency[:SOURce<z>]:CENTer:LOCK.	2214
[SENSe]:MERRor[:MEASview<y>]:SELEcted:SOURce.	2215
[SENSe]:NOISe:AVERage:COUNT.	2215
[SENSe]:NOISe:BANDwidth.	2216
[SENSe]:NOISe:CONTRol:SETTLing:OFF[:TIME].	2216
[SENSe]:NOISe:CONTRol:SETTLing:ON[:TIME].	2217
[SENSe]:NOISe:CORRection:ENR:CONSTant.	2217
[SENSe]:NOISe:CORRection:ENR:MODE.	2218
[SENSe]:NOISe:CORRection:ENR:TABLE:DATA? (Query Only).	2218
[SENSe]:NOISe:CORRection:ENR:TABLE:ID.	2219
[SENSe]:NOISe:CORRection:ENR:TABLE:NEW (No Query Form).	2219
[SENSe]:NOISe:CORRection:ENR:TABLE:SERial.	2220
[SENSe]:NOISe:CORRection:TCOLd:ADUT:UREFERENCE.	2220
[SENSe]:NOISe:CORRection:TCOLd:ADUT[:VALue].	2221
[SENSe]:NOISe:CORRection:TCOLd:BDUT:UREFERENCE.	2221
[SENSe]:NOISe:CORRection:TCOLd:BDUT[:VALue].	2222
[SENSe]:NOISe:CORRection:TCOLd[:REFERENCE].	2222
[SENSe]:NOISe:FIGure:POINts:COUNT (No Query Form).	2223

[SENSe]:NOISe:FREQuency:CENTer.	2223
[SENSe]:NOISe:FREQuency:MODE.	2224
[SENSe]:NOISe:FREQuency:SPAN.	2225
[SENSe]:NOISe:FREQuency:STARt.	2225
[SENSe]:NOISe:FREQuency:STEPs.	2226
[SENSe]:NOISe:FREQuency:STOP.	2226
[SENSe]:NOISe:FREQuency:TABLE:DATA? (Query Only).	2227
[SENSe]:NOISe:FREQuency:TABLE:NEW (No Query Form).	2227
[SENSe]:OBWidth:AVERAge.	2227
[SENSe]:OBWidth:AVERAge:COUNt.	2228
[SENSe]:OBWidth:{BANDwidth BWIDth}:MEASurement.	2228
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution].	2229
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution]:ACTual? (Query Only).	2229
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution]:AUTO.	2230
[SENSe]:OBWidth:{BANDwidth BWIDth}:VIDeo.	2230
[SENSe]:OBWidth:{BANDwidth BWIDth}:VIDeo:STATe.	2230
[SENSe]:OBWidth:BOBW:XDBM:MEASurement:DIREction.	2231
[SENSe]:OBWidth:BOBW:XDBM:RANGe.	2231
[SENSe]:OBWidth:CLEar:RESults (No Query Form).	2232
[SENSe]:OBWidth:FREQuency:CENTer.	2232
[SENSe]:OBWidth:FREQuency:STEP.	2233
[SENSe]:OBWidth:FREQuency:STEP:AUTO.	2233
[SENSe]:OBWidth:PERCent.	2234
[SENSe]:OBWidth:XDBLevel.	2234
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth].	2235
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth]:SRATe? (Query Only).	2235
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth]:STATe.	2235
[SENSe]:OFDM:CHANnel:ESTimation.	2236
[SENSe]:OFDM:CONSte:DETermination.	2236
[SENSe]:OFDM:CONSte:DETermination:MANual.	2237
[SENSe]:OFDM:GUARd:INTerval.	2237
[SENSe]:OFDM:GUARd:INTerval:USER.	2238
[SENSe]:OFDM:PILot:TRACking:AMPLitude:STATe.	2238
[SENSe]:OFDM:PILot:TRACking:PHASe:STATe.	2239
[SENSe]:OFDM:PILot:TRACking:TIMing:STATe.	2239
[SENSe]:OFDM:RADix (No Query Form).	2239
[SENSe]:OFDM:SCARrier:SPACing.	2240
[SENSe]:OFDM:SCARrier:SPACing:STATe.	2240
[SENSe]:OFDM:SCARriers.	2241
[SENSe]:OFDM:SCARriers:RANGe:STARt.	2241
[SENSe]:OFDM:SCARriers:RANGe:STOP.	2242
[SENSe]:OFDM:SCARriers:SINGLe:INDex.	2242
[SENSe]:OFDM:FFT:LENGth? (Query Only).	2243
[SENSe]:OFDM:STANdard.	2243
[SENSe]:OFDM:SWAP:IQ.	2243
[SENSe]:OFDM:SYMBol:ANALysis:OFFSet.	2244
[SENSe]:OFDM:SYMBols.	2244

[SENSe]:OFDM:SYMBols:MAX.	2245
[SENSe]:OFDM:SYMBols:MAX:STATe.	2245
[SENSe]:OFDM:SYMBols:RANGe:COUNt.	2246
[SENSe]:OFDM:SYMBols:RANGe:STARt.	2246
[SENSe]:OFDM:SYMBols:SINGle:INDex.	2246
[SENSe]:OFDM:UNIT:FREQuency (No Query Form).	2247
[SENSe]:OFDM:UNIT:TIME (No Query Form).	2247
[SENSe]:P25:ANALysis:OFFSet.	2248
[SENSe]:P25:ANALysis:OFFSet:AUTO.	2248
[SENSe]:P25([:BANDwidth]):BWIDth):MODE.	2248
[SENSe]:P25([:BANDwidth]):BWIDth):TINTerval.	2249
[SENSe]:P25([:BANDwidth]):BWIDth):TINTerval:AUTO.	2250
[SENSe]:P25:FILTer:MEASurement.	2250
[SENSe]:P25:FILTer:REFerence.	2251
[SENSe]:P25:FREQuency:ERRor.	2252
[SENSe]:P25:FREQuency:ERRor:AUTO.	2253
[SENSe]:P25:MODUlation:CHANnel:([BANDwidth]):BWIDth)]? (Query Only).	2253
[SENSe]:P25:MODUlation:STANDard.	2253
SENSe:P25:MODUlation:TYPE.	2254
[SENSe]:P25:SRATe.	2255
[SENSe]:P25:SUMMary:CLEAr:RESults (No Query Form).	2255
[SENSe]:P25:SUMMary:LIMIt:FA.	2256
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:AVERage: TERRor:ONE.	2256
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:AVERage: TERRor:ZERO.	2257
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:LOGIc:CHANnel: OFF:SLOT.	2257
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:LOGIc:CHANnel: PEAK:ACPR.	2258
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PEAK: NEGAtive:LO.	2258
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PEAK: NEGAtive:UP.	2259
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PEAK: POSItive:LO.	2259
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PEAK: POSItive:UP.	2260
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation: PHASe[1/2]:F[1/2/3/4]:LO.	2261
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PHASe[1/2]: F[1/2/3/4]:LO.	2261
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PHASe[1/2]: F[1/2/3/4]:UP.	2262
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PHASe[1/2]: F[1/2/3/4]:UP.	2262
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PMAX:OFF.	2263
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PMAX:OFF.	2263
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PMAX:ON.	2264
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PMAX:ON.	2264
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PMAX:SS.	2265
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:PMIN:SS.	2265
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERage:ATTK:ENCODer.	2266
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERage:ATTK:ENCODer:BI.	2266
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERage:ATTK:POWER.	2267
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERage:ATTK:POWER:BI.	2267
[SENSe]:P25:SUMMary:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERage:THRUput:DLAY.	2268
[SENSe]:P25:SUMMary:LIMIt:MF.	2268
[SENSe]:P25:SUMMary:LIMIt:RF:OUTPower.	2269

[SENSe]:P25:SUMMARY:LIMIT:SRA.	2269
[SENSe]:P25:SYMBOLS:POINTS.	2270
[SENSe]:P25:TEST:PATTERN.	2271
[SENSe]:P25:TIME:UNITS.	2271
[SENSe]:P25:TRIGGER:MEASUREMENT.	2272
[SENSe]:P25:TRIGGER:MEASUREMENT:TOBSync.	2272
[SENSe]:P25:TRIGGER:MEASUREMENT:TOBSync:AUTO.	2272
[SENSe]:P25:TRIGGER:MEASUREMENT:TRANSIENT: FREQUENCY:BEHAVIOUR.	2273
[SENSe]:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY: BEHAVIOUR:TIME:OFF.	2274
[SENSe]:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY: BEHAVIOUR:TIME:OFF:AUTO.	2274
[SENSe]:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY: BEHAVIOUR:TIME:ON.	2275
[SENSe]:P25:TRIGGER:MEASUREMENT:TRANSIENT: FREQUENCY:BEHAVIOUR:TIME:ON:AUTO.	2275
[SENSe]:PERROR[:MEASview<y>]:SELEcted:SOURce.	2276
[SENSe]:PHVTime[:MEASview<y>]:CLear:RESults (No Query Form).	2276
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:CENTer.	2276
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:SPAN.	2277
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:SPAN:LINK.	2278
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:START.	2278
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP.	2279
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP:AUTO.	2279
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STOP.	2280
[SENSe]:PHVTime[:MEASview<y>]:MAXTracepoints.	2280
[SENSe]:PHVTime[:MEASview<y>]:SELEcted:SOURce.	2281
[SENSe]:PM:PHASe:OFFSet.	2281
[SENSe]:PM:PHASe:OFFSet:MARKer (No Query Form).	2282
[SENSe]:PM:PHASe:SEARch:AUTO.	2282
[SENSe]:PNOise:AVERAge:COUNt.	2283
[SENSe]:PNOise:AVERAge:ENABLE.	2283
[SENSe]:PNOise:CARRier:FREQUENCY:TRACk.	2283
[SENSe]:PNOise:CARRier:THReshold.	2284
[SENSe]:PNOise:CLear:RESults (No Query Form).	2284
[SENSe]:PNOise:FREQUENCY:INTegration:OFFSet:START.	2285
[SENSe]:PNOise:FREQUENCY:INTegration:OFFSet:STOP.	2285
[SENSe]:PNOise:FREQUENCY:PLOT:OFFSet:START.	2285
[SENSe]:PNOise:FREQUENCY:PLOT:OFFSet:STOP.	2286
[SENSe]:PNOise:OPTimization.	2286
[SENSe]:POWER:UNITS.	2287
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASUREMENT: TIME:ALENgtH.	2288
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASUREMENT: TIME:METHod.	2288
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASUREMENT: TIME:RLENgtH.	2289
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASUREMENT: TIME:RLEVel.	2290
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASUREMENT: TIME:START.	2290
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:CORRection: AMPLitude[:STATE].	2291
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:KOTime.	2291
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASUREMENT: TIME:ALENgtH.	2292
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASUREMENT: TIME: METHod.	2292
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASUREMENT: TIME:RLENgtH.	2293

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:MEASurement: TIME: RLEVel.	2294
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:MEASurement: TIME:START.	2294
[SENSe]:PULSe[:MEASview<y>]:ANALyze: LEVel.	2295
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:FIFTy.	2295
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:HUNDred.	2296
[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE?.	2296
[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE.	2297
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot: MEASurement:TIME:ALENgtH.	2298
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot: MEASurement:TIME: METHod.	2298
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot: MEASurement:TIME:RLENgtH.	2299
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot: MEASurement:TIME: RLEVel.	2300
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot: MEASurement:TIME: START.	2300
[SENSe]:PULSe[:MEASview<y>]:ANALyze:PMLocation.	2301
[SENSe]:PULSe[:MEASview<y>]:ANALyze:POINT:LOCation.	2301
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RFALI.	2302
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RIPple.	2302
[SENSe]:PULSe:CARRier:FREQuency? (Query Only).	2303
[SENSe]:PULSe[:MEASview<y>]:CARRier:OFFSet.	2304
[SENSe]:PULSe[:MEASview<y>]:CARRier:SEARCh.	2304
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:BIN:COUNT.	2305
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:CLEar: RESults (Query Only).	2305
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:MODE.	2306
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:ORDinate (Query Only).	2306
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]: OUTLier:ORDinate.	2307
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]: SETtings:APPLY (No Query Form).	2307
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:XLIMit.	2308
SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]: SELEcted:SOURce.	2308
[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:CLEar: RESults.	2309
[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]: SELEcted:SOURce.	2309
[SENSe]:PULSe[:MEASview<y>]:DETEct:MEASurement.	2310
[SENSe]:PULSe[:MEASview<y>]:DETEct:NUMBer.	2310
[SENSe]:PULSe[:MEASview<y>]:DETEct:NUMBer:THReshold.	2311
[SENSe]:PULSe[:MEASview<y>]:DETEct:TIME[:THReshold].	2312
[SENSe]:PULSe[:MEASview<y>]:FILTer:{BANDwidth BWIDth}.	2312
[SENSe]:PULSe[:MEASview<y>]:FILTer:MEASurement.	2313
[SENSe]:PULSe[:MEASview<y>]:FREFerence:AUTO.	2314
[SENSe]:PULSe[:MEASview<y>]:FREFerence:CSLope.	2314
[SENSe]:PULSe[:MEASview<y>]:FREFerence:CSLope:AUTO.	2315
[SENSe]:PULSe[:MEASview<y>]:FREFerence:OFFSet.	2315
[SENSe]:PULSe[:MEASview<y>]:MODulation:TYPE.	2316
[SENSe]:PULSe[:MEASview<y>]:STATistics:SELEcted:SOURce.	2316
[SENSe]:PULSe:OGRAM[:MEASview<y>]: ANALySis:FVTime:FILTer:SHAPE.	2317
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALySis:FVTime: SPECTrum:ANALySis:REGion.	2318
[SENSe]:PULSe:OGRAM[:MEASview<y>]:SELEcted:SOURce.	2318
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALySis:FVTime: ONTime:LENgtH.	2319
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALySis:FVTime: INDEpendent:START.	2319
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALySis:FVTime: INDEpendent:LENgtH.	2320

[SENSe]:PULSe[:MEASview<y>]:SIGNal:TYPE.	2320
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:ORDinate.	2321
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts.	2322
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts:AUTO.	2322
[SENSe]:PULSe[:MEASview<y>]:STATistics:IN:LINear:SCALE.	2323
[SENSe]:PULSe:TRACe[:MEASview<y>]:SELEcted:SOURce.	2323
[SENSe]:PULSe:RESult[:MEASview<y>]:SELEcted:SOURce.	2324
[SENSe]:REANalyze (No Query Form).	2324
[SENSe]:REANalyze:ACQuisition:SETTings? (Query Only).	2325
[SENSe]:REANalyze:ALL:LOOP (No Query Form).	2325
[SENSe]:REANalyze:CURREnt (No Query Form).	2325
[SENSe]:REANalyze:CURREnt:ACQuisition? (Query Only).	2325
[SENSe]:REANalyze:CURREnt:FRAMe? (Query Only).	2326
[SENSe]:REANalyze:CURREnt (No Query Form).	2326
[SENSe]:REANalyze:CURREnt:TIMestamp? (Query Only).	2326
[SENSe]:REANalyze:DELEte:DATA (No Query Form).	2326
[SENSe]:REANalyze:FIRSt (No Query Form).	2327
[SENSe]:REANalyze:LAST (No Query Form).	2327
[SENSe]:REANalyze:NEXT (No Query Form).	2327
[SENSe]:REANalyze:PAUSE.	2327
[SENSe]:REANalyze:PREVious (No Query Form).	2328
[SENSe]:REANalyze:SELEct:ACQuisition:DATA:TYPE.	2328
[SENSe]:REANalyze:SELEct:ACQuisition:FIRSt? (Query Only).	2328
[SENSe]:REANalyze:SELEct:ACQuisition:FIRSt:TIMestamp? (Query Only).	2329
[SENSe]:REANalyze:SELEct:ACQuisition:LAST? (Query Only).	2329
[SENSe]:REANalyze:SELEct:ACQuisition:LAST:TIMestamp? (Query Only).	2329
[SENSe]:REANalyze:SELEct:ACQuisition:START.	2330
[SENSe]:REANalyze:SELEct:ACQuisition:START:TIMestamp? (Query only).	2330
[SENSe]:REANalyze:SELEct:ACQuisition:STOP.	2330
[SENSe]:REANalyze:SELEct:ACQuisition:STOP:TIMestamp? (Query Only).	2331
[SENSe]:REANalyze:SELEct:ALL (No Query Form).	2331
[SENSe]:REANalyze:SELEct:FRAMe:FIRSt? (Query Only).	2331
[SENSe]:REANalyze:SELEct:FRAMe:FIRSt:TIMestamp? (Query Only).	2332
[SENSe]:REANalyze:SELEct:FRAMe:LAST? (Query Only).	2332
[SENSe]:REANalyze:SELEct:FRAMe:LAST:TIMestamp? (Query Only).	2332
[SENSe]:REANalyze:SELEct:FRAMe:START.	2333
[SENSe]:REANalyze:SELEct:FRAMe:START:TIMestamp? (Query Only).	2333
[SENSe]:REANalyze:SELEct:FRAMe:STOP.	2333
[SENSe]:REANalyze:SELEct:FRAMe:STOP:TIMestamp? (Query Only).	2334
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:ALL (No Query Form).	2334
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:CURREnt: ACQuisition? (Query Only).	2334
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:CURREnt: TIMestamp? (Query Only).	2335
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:FIRSt? (Query Only).	2335
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:FIRSt: TIMestamp? (Query Only).	2336
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:LAST? (Query Only).	2336
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:LAST: TIMestamp? (Query Only).	2336
[SENSe]:REANalyze:SELEct:SPECTra:ACQuisition:START.	2337

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START: TIMestamp? (Query Only).	2337
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP.	2338
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP: TIMestamp? (Query Only).	2338
[SENSe]:REANalyze:SPEEd.	2339
[SENSe]:REANalyze:STOP (No Query Form).	2339
[SENSe]:REANalyze:TIMestamp:DECimal.	2339
SENSe:ROSCillator:EXTernal:TIME.	2339
SENSe:ROSCillator:EXTernal:TIME:STATus? (Query Only).	2340
[SENSe]:ROSCillator:SOURce.	2341
[SENSe]:SEM:{BANDwidth BWIDth}{:RESolution}.	2341
[SENSe]:SEM:{BANDwidth BWIDth}:VIDeo.	2342
[SENSe]:SEM:{BANDwidth BWIDth}:VIDeo:STATe.	2342
[SENSe]:SEM:CHANnel:FILTer.	2342
[SENSe]:SEM:CHANnel:IBANDwidth.	2343
[SENSe]:SEM:CHANnel:WIDTh.	2343
[SENSe]:SEM:CHIPrate.	2344
[SENSe]:SEM:CLEar:RESults (No Query Form).	2344
[SENSe]:SEM:FREQuency.	2345
[SENSe]:SEM:FREQuency:SPAN? (Query Only).	2345
[SENSe]:SEM:MFILTer.	2345
[SENSe]:SEM:MODE:REALtime.	2346
[SENSe]:SEM:MTYPE.	2346
[SENSe]:SEM:OFFSet:DETection.	2347
[SENSe]:SEM:OFFSet<x>:BANDwidth:FILTer? (Query Only).	2347
[SENSe]:SEM:OFFSet<x>:BANDwidth{:RESolution}.	2348
[SENSe]:SEM:OFFSet<x>:BANDwidth:RESolution:COUNT.	2348
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo.	2349
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo:STATe.	2349
[SENSe]:SEM:OFFSet<x>:FREQuency:START.	2350
[SENSe]:SEM:OFFSet<x>:FREQuency:STOP.	2350
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:SAME.	2350
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:START.	2351
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:STOP.	2351
[SENSe]:SEM:OFFSet<x>:LIMIT:MASK.	2352
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:SAME.	2352
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:START.	2353
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:STOP.	2353
[SENSe]:SEM:OFFSet<x>:LIMIT:SIDE.	2353
[SENSe]:SEM:OFFSet<x>:STATe (No Query Form).	2354
[SENSe]:SEM:POINts:COUNT.	2354
[SENSe]:SEM:PRESet (No Query Form).	2355
[SENSe]:SEM:REFerence:AUTO.	2355
[SENSe]:SEM:REFerence:DETection.	2356
[SENSe]:SEM:REFerence{:MAGNitude}.	2356
[SENSe]:SEM:RRCRolloff.	2357
[SENSe]:SEM:STEP:AUTO.	2357
[SENSe]:SEM:STEP{:MAGNitude}.	2358

[SENSe]:SEM:WIDTh:DEFinition.	2358
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth BWIDth} [:RESolution].	2359
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth BWIDth} [:RESolution]:ACTual (Query Only).	2359
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth BWIDth} [:RESolution]:AUTO.	2360
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth BWIDth} [:RESolution]:MODE.	2360
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth BWIDth}:VIDeo.	2361
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth BWIDth}:VIDeo:STATe.	2361
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth BWIDth}:OPTImization.	2362
[SENSe]:SGRam[:MEASview<y>]:COLor.	2363
[SENSe]:SGRam[:MEASview<y>]:COLor:MAXimum.	2364
[SENSe]:SGRam[:MEASview<y>]:COLor:MINimum.	2364
[SENSe]:SGRam[:MEASview<y>]:CLEar:RESults (No Query Form).	2365
[SENSe]:SGRam[:MEASview<y>]:FFT:WINDow.	2365
[SENSe]:SGRam[:MEASview<y>]:FILTer[:SHApe].	2366
[SENSe]:SGRam[:MEASview<y>]:FREQuency:CENTer.	2367
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN.	2367
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN: BANDwidth[:RESolution]:RATio.	2368
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:MAXimum (No Query Form).	2369
[SENSe]:SGRam[:MEASview<y>]:FREQuency:START.	2369
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP.	2370
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP:AUTO.	2370
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STOP.	2371
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:MODE.	2371
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap.	2372
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap: PERCent.	2373
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision.	2373
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:ZOOM.	2374
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:AUTO.	2374
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START.	2375
[SENSe]:SGRam[:MEASview<y>]:SELEcted:SOURce.	2375
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate: MINutes.	2376
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate: SEConds.	2376
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:SPECTrums: PERLine (Query Only).	2377
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START:DIVisions.	2377
[SENSe]:SGRam[:MEASview<y>]:WATerfall:DIRection.	2378
[SENSe]:SGRam[:MEASview<y>]:WATerfall:ENABLE.	2378
[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE]:AUTO (No Query Form).	2379
[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE]:OFFSet.	2379
[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE]:RESet (No Query Form).	2380
[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE].	2380
[SENSe]:SIGNAlpath:PRlority.	2381
[SENSe]:SIGNAlvu:ACQuisition:CONTrol:HORIZontal.	2381
[SENSe]:SIGNAlvu:ACQuisition:CONTrol:SAMPle:RATE.	2382
[SENSe]:SIGNAlvu:ACQuisition:CONTrol:SOURce<x>:STATe.	2382
[SENSe]:SIGNAlvu:ACQuisition:CONTrol:TRIGger:POSition.	2383
[SENSe]:SIGNAlvu:ACQuisition:CONTrol:VERTical.	2383
[SENSe]:SIGNAlvu:ACQuisition:DIGitizer:SAMPle:RATE.	2384

[SENSe]:SIGNALvu:ACQuisition:DIGitizer:SAMPle:RATE:AUTO.	2384
[SENSe]:SIGNALvu:ACQuisition:GLOBal:REFlevel.	2385
[SENSe]:SIGNALvu:ACQuisition:INPuttype:REFlevel.	2385
[SENSe]:SIGNALvu:ACQuisition:IQ:CALibrate (No query form).	2386
[SENSe]:SIGNALvu:ACQuisition:NULL:IQ:OFFSet:CLEAR.	2386
[SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:COUpling.	2386
[SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:DESkew.	2387
[SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:EXTattn.	2387
SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:INSTrument: BWIDth (Query only).	2388
[SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:REFlevel.	2388
[SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:TERMination.	2389
[SENSe]:SIGNALvu:ACQuisition:RESet (No query form).	2389
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CALibrate:IQ.	2389
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel[:RF].	2390
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:I.	2390
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:Q.	2391
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IPLus.	2391
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IMINus.	2392
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QPLus.	2392
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QMINus.	2393
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:INJEctionside.	2393
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:INSTrument:BANDwidth:MAXFreq.	2393
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:INSTrument:BANDwidth:MINFreq.	2394
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:LOFreq.	2394
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNNconverter:STATe.	2395
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:PERSrc:REFlevel.	2395
[SENSe]:SPECtrum[:MEASview<y>]:SELEcted:SOURce.	2396
[SENSe]:SPECtrum[:MEASview<y>]:{BANDwidth BWIDth}[:RESolution].	2396
[SENSe]:SPECtrum[:MEASview<y>]:{BANDwidth BWIDth}[:RESolution]:ACTual? (Query Only).	2397
[SENSe]:SPECtrum[:MEASview<y>]:{BANDwidth BWIDth}[:RESolution]:AUTO.	2397
[SENSe]:SPECtrum[:MEASview<y>]:{BANDwidth BWIDth}[:RESolution]:MODE.	2398
[SENSe]:SPECtrum[:MEASview<y>]:{BANDwidth BWIDth}:VIDeo.	2398
[SENSe]:SPECtrum[:MEASview<y>]:{BANDwidth BWIDth} :VIDeo:STATe.	2399
[SENSe]:SPECtrum[:MEASview<y>]:CLEar:RESults (No Query Form).	2399
[SENSe]:SPECtrum[:MEASview<y>]:FFT:WINDow.	2400
[SENSe]:SPECtrum[:MEASview<y>]:FILTer[:SHAPE].	2400
[SENSe]:SPECtrum[:MEASview<y>]:FREQuency:CENTer.	2401
[SENSe]:SPECtrum[:MEASview<y>]:FREQuency:SPAN.	2402
[SENSe]:SPECtrum[:MEASview<y>]:FREQuency:SPAN: BANDwidth[:RESolution]:RATio.	2402
[SENSe]:SPECtrum[:MEASview<y>]:FREQuency:START.	2403
[SENSe]:SPECtrum[:MEASview<y>]:FREQuency:STEP.	2403
[SENSe]:SPECtrum[:MEASview<y>]:FREQuency:STEP:AUTO.	2404
[SENSe]:SPECtrum[:MEASview<y>]:FREQuency:STOP.	2405
[SENSe]:SPECtrum[:MEASview<y>]:LENGth.	2405
[SENSe]:SPECtrum[:MEASview<y>]:LENGth:ACTual (Query Only).	2406
[SENSe]:SPECtrum[:MEASview<y>]:LENGth:AUTO.	2406
[SENSe]:SPECtrum[:MEASview<y>]:MAX:SPAN (No Query Form).	2407

[SENSe]:SPEctrum[:MEASview<y>]:POINts:COUNT.	2407
[SENSe]:SPEctrum[:MEASview<y>]:STARt.	2408
[SENSe]:SPEctrum[:MEASview<y>]:STARt:AUTO.	2408
[SENSe]:SPEctrum[:MEASview<y>]:TIme:MODe.	2409
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}.	2409
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}:INTEgration.	2410
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}[:RESolution].	2410
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}[:RESolution]:AUTO.	2411
[SENSe]:SPURious:CARRier:DETEction.	2411
[SENSe]:SPURious:CARRier:FREQuency.	2412
[SENSe]:SPURious:CARRier:THReshold.	2412
[SENSe]:SPURious:CLEar:RESults (No Query Form).	2413
[SENSe]:SPURious[:FREQuency]:OVERlap? (Query Only).	2413
[SENSe]:SPURious:LIST.	2413
[SENSe]:SPURious:MODE.	2414
[SENSe]:SPURious:OPTimization.	2414
[SENSe]:SPURious:POINts:COUNT.	2415
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo.	2415
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo:STATe.	2416
[SENSe]:SPURious:RANGe<x>:DETEction.	2416
[SENSe]:SPURious:RANGe<x>:EXCURsion.	2417
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE].	2417
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth.	2418
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO.	2418
[SENSe]:SPURious:RANGe<x>:FREQuency:STARt.	2419
[SENSe]:SPURious:RANGe<x>:FREQuency:STOP.	2419
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STARt.	2420
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STOP.	2420
[SENSe]:SPURious:RANGe<x>:LIMit:MASK.	2421
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STARt.	2422
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STOP.	2422
[SENSe]:SPURious:RANGe<x>:STATe.	2423
[SENSe]:SPURious:RANGe<x>:THReshold.	2423
[SENSe]:SPURious:REFerence.	2424
[SENSe]:SPURious:REFerence:MANual:POWer.	2424
[SENSe]:SQUality[:MEASview<y>]:EVM:ALL[:STATe].	2425
[SENSe]:SQUality[:MEASview<y>]:SELEcted:SOURce.	2425
[SENSe]:STABle[:MEASview<y>]:SELEcted:SOURce.	2426
[SENSe]:SVPC:ACQuisition:CONTRol:TRIGger.	2426
[SENSe]:SVPC:ACQuisition:CONTRol:CHANnel.	2427
[SENSe]:SVPC:ACQuisition:FFRame:ACTual? (Query only).	2427
[SENSe]:SVPC:ACQuisition:FFRame:LIMit.	2427
[SENSe]:SVPC:ACQuisition:FFRame:STATe.	2428
[SENSe]:TDIagram[:MEASview<y>]:SELEcted:SOURce.	2428
SENSe:TOFF:POWer:SPEctral:DENSity.	2429
[SENSe]:TOVerview[:MEASview<y>]:FREQuency:CENTer.	2429
[SENSe]:TOVerview[:MEASview<y>]:MAXTracepoints.	2430

[SENSe]:TOVerview[:MEASview<y>]:TIME:PER:DIVision.	2430
[SENSe]:TOVerview[:MEASview<y>]:SELEcted:SOURce.	2431
[SENSe]:TRACe:SPURious:COUNT:RESet (No Query Form).	2431
[SENSe]:TRACe<x>:SPURious:COUNT.	2432
[SENSe]:TRACe<x>:SPURious:COUNT:ENABLE.	2432
[SENSe]:TRACe<x>:SPURious:ENABLE.	2433
[SENSe]:TRACe<x>:SPURious:FREeze.	2433
[SENSe]:TRACe<x>:SPURious:FUNCTion.	2434
[SENSe]:TRACe<x>:SPURious:SELEct.	2435
SENSe:TXGain:{BANDwidth BWIDth}[:RESolution].	2435
SENSe:TXGain:FREQuency:CENTer.	2435
SENSe:TXGain:FREQuency:POINts.	2436
SENSe:TXGain:FREQuency:SPAN.	2436
SENSe:TXGain:FREQuency:STARt.	2437
SENSe:TXGain:FREQuency:STEP.	2437
SENSe:TXGain:FREQuency:STOP.	2438
[SENSe]:USETtings (No Query Form).	2438
[SENSe]:WLAN:AD:ANALysis:BLOCKwise:CORRection:STATe.	2439
[SENSe]:WLAN:AD:ANALysis:DC:OFFSet:CORRection:STATe.	2439
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:CONVergence.	2440
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:LENGth.	2440
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:MODE.	2441
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:RESet (No Query Form).	2441
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:TAPS.	2442
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:TSRatio.	2442
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:TYPE.	2443
[SENSe]:WLAN:AD:ANALysis:EQUAlizer:TYPE.	2443
[SENSe]:WLAN:AD:ANALysis:HANDle:MULTi:PATH: CHANnel:STATe.	2444
[SENSe]:WLAN:AD:ANALysis:LENGth.	2445
[SENSe]:WLAN:AD:ANALysis:LENGth:ACTual? (Query Only).	2445
[SENSe]:WLAN:AD:ANALysis:LENGth:AUTO.	2446
[SENSe]:WLAN:AD:ANALysis:OFFSet.	2446
[SENSe]:WLAN:AD:ANALysis:OFFSet:AUTO.	2447
[SENSe]:WLAN:AD:ANALysis:SWAP:IQ.	2447
[SENSe]:WLAN:AD:ANALysis:TIME:UNITs.	2448
[SENSe]:WLAN:AD(:BANDwidth :BWIDth):MODE.	2448
[SENSe]:WLAN:AD(:BANDwidth :BWIDth):TINTerval.	2449
[SENSe]:WLAN:AD:EVM:BURSt:COUNT.	2449
[SENSe]:WLAN:AD:EVM:BURSt:COUNT:ENABLE.	2450
[SENSe]:WLAN:AD:EVM:DATA:ANALyze:ALL:SYMBols.	2450
[SENSe]:WLAN:AD:EVM:DATA:LENGth.	2451
[SENSe]:WLAN:AD:EVM:DATA:STARt.	2451
[SENSe]:WLAN:AD:EVM:UNITs.	2451
[SENSe]:WLAN:AD:FILTer:ALPHA.	2452
[SENSe]:WLAN:AD:FILTer:MEASurement.	2452
[SENSe]:WLAN:AD:FREQuency:ERRor.	2453
[SENSe]:WLAN:AD:FREQuency:ERRor:AUTO.	2453

[SENSe]:WLAN:AD:MODULation.	2454
[SENSe]:WLAN:AD:SUMMARY:CLEar:RESults (No Query Form).	2454
[SENSe]:WLAN:AD:SUMMARY:LIMIt:EVM.	2455
[SENSe]:WLAN:AD:SUMMARY:LIMIt:FREQuency:ERRor.	2455
[SENSe]:WLAN:ANALysis:LENGth.	2456
[SENSe]:WLAN:ANALysis:LENGth:ACTual? (Query Only).	2456
[SENSe]:WLAN:ANALysis:LENGth:AUTO.	2457
[SENSe]:WLAN:ANALysis:OFFSet.	2457
[SENSe]:WLAN:AY:ANALysis:BLOCKwise:CORRection:STATe.	2458
[SENSe]:WLAN:AY:ANALysis:EQUALizer:CONVergence.	2458
[SENSe]:WLAN:AY:ANALysis:DC:OFFSet:CORRection:STATe.	2459
[SENSe]:WLAN:AY:ANALysis:EQUALizer:LENGth.	2459
[SENSe]:WLAN:AY:ANALysis:EQUALizer:MODE.	2460
[SENSe]:WLAN:AY:ANALysis:EQUALizer:RESet (No Query Form).	2461
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TAPS.	2461
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TSRatio.	2462
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TYPE.	2462
[SENSe]:WLAN:AY:ANALysis:LENGth.	2463
[SENSe]:WLAN:AY:ANALysis:LENGth:ACTual? (Query Only).	2463
[SENSe]:WLAN:AY:ANALysis:LENGth:AUTO.	2464
[SENSe]:WLAN:AY:ANALysis:OFFSet.	2464
[SENSe]:WLAN:AY:ANALysis:OFFSet:AUTO.	2465
[SENSe]:WLAN:AY:ANALysis:SFO:TRACk:STATe.	2465
[SENSe]:WLAN:AY:ANALysis:SWAP:IQ.	2466
[SENSe]:WLAN:AY:ANALysis:TIME:UNITs.	2467
[SENSe]:WLAN:AY:ANALysis:TRACk:EQ:STATe.	2467
[SENSe]:WLAN:AY(:BANDwidth):BWIDth):MODE.	2468
[SENSe]:WLAN:AY(:BANDwidth):BWIDth):TINTerval.	2468
[SENSe]:WLAN:AY:CHbw.	2469
[SENSe]:WLAN:AY:DUPBand.	2469
[SENSe]:WLAN:AY:EVM:BURSt:COUNT.	2470
[SENSe]:WLAN:AY:EVM:BURSt:COUNT:ENABLE.	2471
[SENSe]:WLAN:AY:EVM:DATA:ANALyze:ALL:SYMBols.	2471
[SENSe]:WLAN:AY:EVM:DATA:LENGth.	2472
[SENSe]:WLAN:AY:EVM:DATA:STARt.	2472
[SENSe]:WLAN:AY:EVM:UNITs.	2473
[SENSe]:WLAN:AY:FILTer:ALPHA.	2473
[SENSe]:WLAN:AY:FILTer:MEASurement.	2474
[SENSe]:WLAN:AY:FREQuency:ERRor.	2474
[SENSe]:WLAN:AY:FREQuency:ERRor:AUTO.	2475
[SENSe]:WLAN:AY:MODULation.	2475
[SENSe]:WLAN:AY:Region.	2476
[SENSe]:WLAN:AY:SUMMARY:CLEar:RESults (No Query Form).	2477
[SENSe]:WLAN:AY:SUMMARY:LIMIt:EVM.	2477
[SENSe]:WLAN:AY:SUMMARY:LIMIt:FREQuency:ERRor.	2478
[SENSe]:WLAN:BURSt.	2478
[SENSe]:WLAN:CHANnel[:BANDwidth]:BWIDth].	2479

[SENSe]:WLAN:EQualizer:TRaining.	2479
[SENSe]:WLAN:FFT:LENGth? (Query Only).	2480
[SENSe]:WLAN:FFT:SRAtE? (Query Only).	2480
[SENSe]:WLAN:FREQuency:ERRor.	2481
[SENSe]:WLAN:FREQuency:ERRor:AUTO.	2481
[SENSe]:WLAN:GUARd:INTerval.	2482
[SENSe]:WLAN:MODulation:DETECT:QAM1024.	2482
[SENSe]:WLAN:MODulation:MANual.	2483
[SENSe]:WLAN:MODulation:SOURce.	2483
[SENSe]:WLAN:PILot:TRACking:AMPLitude:STATe.	2484
[SENSe]:WLAN:PILot:TRACking:PHASe:STATe.	2484
[SENSe]:WLAN:PILot:TRACking:TIMing:STATe.	2485
[SENSe]:WLAN:RADix.	2485
[SENSe]:WLAN:SCARriers.	2485
[SENSe]:WLAN:SCARriers:RANGe:START.	2486
[SENSe]:WLAN:SCARriers:RANGe:STOP.	2486
[SENSe]:WLAN:SCARriers:SINGLE:INDEX.	2487
[SENSe]:WLAN:SCARriers:SPACing.	2487
[SENSe]:WLAN:SCARriers:SPACing:AUTO.	2488
[SENSe]:WLAN:SIGNAL:STANDARD:TYPE.	2488
[SENSe]:WLAN:SubCARRier:DERotation.	2489
[SENSe]:WLAN:SUMMARY:CLEar:RESults (No Query Form).	2489
[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT.	2490
[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT:ENABLE.	2490
[SENSe]:WLAN:SWAP:IQ.	2491
[SENSe]:WLAN:SYMBOLs CHIPs.	2491
[SENSe]:WLAN:SYMBOLs CHIPs:MAX.	2492
[SENSe]:WLAN:SYMBOLs CHIPs:MAX:STATe.	2492
[SENSe]:WLAN:SYMBOLs CHIPs:RANGe:COUNT.	2493
[SENSe]:WLAN:SYMBOLs CHIPs:RANGe:START.	2493
[SENSe]:WLAN:SYMBOLs CHIPs:RANGe:STOP.	2494
[SENSe]:WLAN:SYMBOLs CHIPs:SINGLE:INDEX.	2494
[SENSe]:WLAN:UNIT:FREQuency.	2494
[SENSe]:WLAN:UNIT:TIME.	2495
SOURce:TXGain:POWER.	2495
*SRE.	2496
*STB? (Query Only).	2496
Status commands.	2497
STATus:ACPower:EVENTs? (Query Only).	2497
STATus:{AM FM PM}:EVENTs? (Query Only).	2498
STATus:AUDio:SPECTrum:EVENTs? (Query Only).	2498
STATus:AUDio:SUMMARY:EVENTs? (Query Only).	2499
STATus:AVTime[:MEASview<y>]:EVENTs? (Query Only).	2499
STATus:BIBEmissions:EVENTs? (Query Only).	2500
STATus:BLUEtooth:CONStE:EVENTs? (Query Only).	2501
STATus:BLUEtooth:EDIAGram:EVENTs? (Query Only).	2501
STATus:BLUEtooth:FDVTime:EVENTs? (Query Only).	2502

STATus:BLUEtooth:SUMMARY:EVENTs (Query Only)	2502
STATus:CCDF:EVENTs? (Query Only)	2503
STATus:CONStE[:MEASview<y>]:EVENTs? (Query only)	2504
STATus:DIQVTime[:MEASview<y>]:EVENTs? (Query only)	2504
STATus:DPX:EVENTs? (Query Only)	2505
STATus:EDIagram[:MEASview<y>]:EVENTs? (Query only)	2505
STATus:EMC:EVENTs? (Query Only)	2506
STATus:EVM[:MEASview<y>]:EVENTs? (Query only)	2507
STATus:FDVTime[:MEASview<y>]:EVENTs? (Query only)	2507
STATus:{FSETtling PSETtling}:EVENTs? (Query Only)	2508
STATus:FVTime[:MEASview<y>]:EVENTs? (Query Only)	2509
STATus:IQVTime[:MEASview<y>]:EVENTs? (Query Only)	2509
STATus:LTE:ACLR:EVENTs? (Query Only)	2510
STATus:LTE:CHSPpectrum:EVENTs? (Query Only)	2510
STATus:LTE:CONStE:EVENTs? (Query Only)	2511
STATus:LTE:PVTime:EVENTs? (Query Only)	2511
STATus:MCPower:EVENTs? (Query Only)	2512
STATus:MERRor[:MEASview<y>]:EVENTs? (Query only)	2512
STATus:OBWidth:EVENTs? (Query Only)	2513
STATus:OFDM:CONStE:EVENTs? (Query Only)	2514
STATus:OFDM:EVM:EVENTs? (Query Only)	2514
STATus:OFDM:MERRor:EVENTs? (Query Only)	2515
STATus:OFDM:PERRor:EVENTs? (Query Only)	2515
STATus:OFDM:POWer:EVENTs? (Query Only)	2516
STATus:OFDM:STABle:EVENTs? (Query Only)	2517
STATus:OPERation:CONDition? (Query Only)	2517
STATus:OPERation:ENABle	2518
STATus:OPERation[:EVENT]? (Query Only)	2518
STATus:OPERation:NTRansition	2519
STATus:OPERation:PTRansition	2519
STATus:P25:EDIagram:EVENTs? (Query Only)	2520
STATus:P25:SUMMARY:EVENTs (Query Only)	2520
STATus:PERRor[:MEASview<y>]:EVENTs? (Query only)	2521
STATus:PHVTime[:MEASview<y>]:EVENTs? (Query Only)	2521
STATus:PNOise:EVENTs? (Query Only)	2522
STATus:PRESet (No Query Form)	2523
STATus:PULSe:CUMulative:HISTogram[:MEASview<y>]:EVENTs (Query Only)	2523
STATus:PULSe:CUMulative:STATistics[:MEASview<y>]:EVENTs (Query Only)	2524
STATus:PULSe:OGRAM[:MEASview<y>]:EVENTs (Query Only)	2524
STATus:PULSe:RESult:EVENTs? (Query Only)	2525
STATus:PULSe:STATistics[:MEASview<y>]:EVENTs? (Query Only)	2525
STATus:PULSe:TRACe[:MEASview<y>]:EVENTs	2526
STATus:QUESTionable:CALibration:CONDition? (Query Only)	2527
STATus:QUESTionable:CALibration:ENABle	2527
STATus:QUESTionable:CALibration[:EVENT]? (Query Only)	2528
STATus:QUESTionable:CALibration:NTRansition	2528
STATus:QUESTionable:CALibration:PTRansition	2529

STATus:QUESTionable:CONDition? (Query Only)	2529
STATus:QUESTionable:ENABle	2530
STATus:QUESTionable[:EVENT]? (Query Only)	2530
STATus:QUESTionable:FREQuency:CONDition? (Query Only)	2531
STATus:QUESTionable:FREQuency:ENABle	2531
STATus:QUESTionable:FREQuency[:EVENT]? (Query Only)	2532
STATus:QUESTionable:FREQuency:NTRansition	2532
STATus:QUESTionable:FREQuency:PTRansition	2533
STATus:QUESTionable:NTRansition	2533
STATus:QUESTionable:PTRansition	2534
STATus:SEM:EVENTs? (Query Only)	2534
STATus:SGRAM[:MEASview<y>]:EVENTs (Query Only)	2535
STATus:SPECTrum[:MEASview<y>]:EVENTs? (Query Only)	2535
STATus:SPURious:EVENTs ? (Query Only)	2536
STATus:SQUality[:MEASview<y>]:EVENTs? (Query only)	2536
STATus:TDIagram[:MEASview<y>]:EVENTs? (Query only)	2537
STATus:TXGain:EVENTs? (Query Only)	2538
STATus:WLAN:AD:CONSte:EVENTs? (Query Only)	2538
STATus:WLAN:AD:EVM:EVENTs? (Query Only)	2539
STATus:WLAN:AD:SUMMary:EVENTs (Query Only)	2539
STATus:WLAN:AY:CONSte:EVENTs? (Query Only)	2540
STATus:WLAN:AY:EVM:EVENTs? (Query Only)	2540
STATus:WLAN:AY:SUMMary:EVENTs? (Query Only)	2541
STATus:WLAN:CONSte:EVENTs? (Query Only)	2541
STATus:WLAN:CRESPonse:EVENTs? (Query Only)	2542
STATus:WLAN:EVM:EVENTs? (Query Only)	2543
STATus:WLAN:MERRor:EVENTs? (Query Only)	2543
STATus:WLAN:PERRor:EVENTs? (Query Only)	2544
STATus:WLAN:PVTTime:EVENTs? (Query Only)	2544
STATus:WLAN:STABle:EVENTs? (Query Only)	2545
STATus:WLAN:SUMMary:EVENTs? (Query Only)	2545
System commands	2546
SYSTem:ANTenna:AMPLifier? (Query Only)	2546
SYSTem:ANTenna:CAPabilities:REPort? (Query Only)	2546
SYSTem:ANTenna:CATalog? (Query Only)	2547
SYSTem:ANTenna:CONNect (No Query Form)	2547
SYSTem:ANTenna:DATA? (Query Only)	2547
SYSTem:ANTenna:DECLination? (Query Only)	2548
SYSTem:ANTenna:DECLination:USER	2548
SYSTem:ANTenna:DECLination:USER:STATe	2549
SYSTem:ANTenna:FREQuency:BAND? (Query Only)	2549
SYSTem:ANTenna:MANufacturer? (Query Only)	2550
SYSTem:ANTenna:MODEl? (Query Only)	2550
SYSTem:ANTenna:OPTions? (Query Only)	2551
SYSTem:ANTenna:SELected	2551
SYSTem:ANTenna:SERial? (Query Only)	2552
SYSTem:ANTenna:SETDATA (No Query Form)	2552

SYSTem:BATTery:CCYClE? (Query Only)	2552
SYSTem:BATTery:DATE? (Query Only)	2553
SYSTem:BATTery:RChArge? (Query Only)	2553
SYSTem:BATTery:SErIal? (Query Only)	2554
SYSTem:BATTery:STATus? (Query Only)	2554
SYSTem:BATTery:TEMPerature? (Query Only)	2554
SYSTem:COMMunicate:GPiB[:SELF]:ADDReSS	2555
SYSTem:DATE	2555
SYSTem:ERRor:ALL? (Query Only)	2556
SYSTem:ERRor:CODE:ALL? (Query Only)	2556
SYSTem:ERRor:CODE[:NEXT]? (Query Only)	2557
SYSTem:ERRor:COUNT? (Query Only)	2557
SYSTem:ERRor[:NEXT]? (Query Only)	2558
SYSTem:GNSS:ALTitude (No Query Form)	2558
SYSTem:GNSS:COURse? (Query Only)	2559
SYSTem:GNSS:DATA? (Query Only)	2559
SYSTem:GNSS:HDOP? (Query Only)	2560
SYSTem:GNSS:LATitude? (Query Only)	2560
SYSTem:GNSS:LONGitude? (Query Only)	2560
SYSTem:GNSS:SATellites? (Query Only)	2561
SYSTem:GNSS:SElected	2561
SYSTem:GNSS:SErIal:BAUD	2562
SYSTem:GNSS:SErIal:PORT	2562
SYSTem:GNSS:SPEed? (Query Only)	2562
SYSTem:GNSS:STATus? (Query Only)	2563
SYSTem:GNSS:TIMestamp? (Query Only)	2563
SYSTem:KLOCK	2564
SYSTem:LASTaligned:DATEtime? (Query Only)	2564
SYSTem:LASTaligned:TEMPerature? (Query Only)	2564
SYSTem:LINK:SETTings	2565
SYSTem:LINK:SETTings:SYNC	2565
SYSTem:OPTions? (Query Only)	2565
SYSTem:PRESet (No Query Form)	2566
SYSTem:PRESet:APPLication:ACTion	2566
SYSTem:PRESet:BLUETOOTH:STANdard	2567
SYSTem:PRESet:DPX (No Query Form)	2567
SYSTem:PRESet:DPX:ACTion	2568
SYSTem:PRESet:DPX:SElected	2568
SYSTem:PRESet:LTE:STANdard	2569
SYSTem:PRESet[:MAIN] (No Query Form)	2569
SYSTem:PRESet:MAIN:ACTion	2570
SYSTem:PRESet:MAIN:SElected	2570
SYSTem:PRESet:P25:STANdard (No Query Form)	2570
SYSTem:PRESet:STANdards (No Query Form)	2571
SYSTem:PRESet:STANdards:ACTion	2571
SYSTem:PRESet:USER (No Query Form)	2572
SYSTem:PRESet:USER:ACTion	2572

SYSTem:PRESet:USER:SELEcted.	2573
SYSTem:PRESet:WLAN:AD:STANdard.	2573
SYSTem:PRESet:WLAN:AY:STANdard.	2574
SYSTem:PRESet:WLAN:STANdard.	2575
SYSTem:SVPC:DISconnect (No Query Form).	2575
SYSTem:SVPC:CONNect (No Query Form).	2575
SYSTem:SVPC:CONNect:RSA300 (No Query Form).	2576
SYSTem:SVPC:HSInterface:ENABLE.	2576
SYSTem:SVPC:HSInterface:IP:ADDReSS.	2576
SYSTem:SVPC:HSInterface:PORT:NUMBer.	2577
SYSTem:SVPC:HSInterface:USE:LOCALhost.	2577
SYSTem:SVPC:INSTrument:SERial? (Query Only).	2577
SYSTem:SVPC:INSTrument:VERSion? (Query Only).	2578
SYSTem:SVPC:INSTrument:MODEL? (Query Only).	2578
SYSTem:SVPC:INSTrument:OPTions? (Query Only).	2579
SYSTem:SVPC:SOURce<x>:ADD.	2579
SYSTem:SVPC:SOURce<x>:REMOve.	2580
SYSTem:SVPC:SOURce<x>:REMOve:ALL.	2580
SYSTem:SVPC:SOURce<x>:RENAme.	2581
SYSTem:SVPC:VINStr:CONNect.	2581
SYSTem:SVPC:VINStr:CHANnel2:CONFIg.	2582
SYSTem:TEMPerature? (Query only).	2582
SYSTem:TIME.	2583
SYSTem:VERSion? (Query Only).	2583
Trace Commands.	2584
TRACe:{AM FM PM}:DETEction.	2584
TRACe:{AM FM PM}:FREeze.	2584
TRACe:{AM FM PM}:FUNCTion.	2585
TRACe:DIQVtime[:MEASview<y>]:ENABLE:I.	2585
TRACe:DIQVtime[:MEASview<y>]:ENABLE:Q.	2586
TRACe:DIQVtime[:MEASview<y>]:MODE.	2586
TRACe:DIQVtime[:MEASview<y>]:SELEct:I.	2587
TRACe:DIQVtime[:MEASview<y>]:SELEct:Q.	2587
TRACe:EDlagram[:MEASview<y>]:ENABLE:I.	2588
TRACe:EDlagram[:MEASview<y>]:ENABLE:Q.	2588
TRACe:EDlagram[:MEASview<y>]:SELEct:I.	2589
TRACe:EDlagram[:MEASview<y>]:SELEct:Q.	2589
TRACe:EMC:AMBlent:COUNt.	2590
TRACe:EMC:AMBlent:COUNt:ENABLE.	2590
TRACe:EMC:AMBlent:COUNt:RESEt (No Query Form).	2591
TRACe:EMC:AMBlent:ENABLE.	2591
TRACe:EMC:AMBlent:FREeze.	2592
TRACe:EMC:AMBlent:FUNCTion.	2592
TRACe:EMC:AMBlent:SELEct.	2593
TRACe:EMC:MATH:ENABLE.	2593
TRACe:EMC:MATH:FREeze.	2594
TRACe:EMC:MATH:LEFToperand.	2594

TRACe:EMC:MATH:RIGHtooperand.	2595
TRACe:EMC:MATH:SElect.	2595
TRACe:EVM[:MEASview<y>]:MODE.	2595
TRACe:FDVTime[:MEASview<y>]:MODE.	2596
TRACe:{FSETtling PSETtling}:AVERAge:COUNT.	2597
TRACe:{FSETtling PSETtling}:AVERAge:COUNT:CURRent? (Query Only).	2597
TRACe:{FSETtling PSETtling}:AVERAge:ENABLE.	2597
TRACe:{FSETtling PSETtling}:RESet (No Query Form).	2598
TRACe:{FSETtling PSETtling}:SMOothing:COUNT.	2598
TRACe:{FSETtling PSETtling}:SMOothing:ENABLE.	2599
TRACe<x>:FVTime[:MEASview<y>].	2599
TRACe<x>:FVTime[:MEASview<y>]:AVERAge:COUNT.	2600
TRACe<x>:FVTime[:MEASview<y>]:COUNT.	2600
TRACe<x>:FVTime[:MEASview<y>]:COUNT:ENABLE.	2601
TRACe<x>:FVTime[:MEASview<y>]:COUNT:RESet (No Query Form).	2601
TRACe<x>:FVTime[:MEASview<y>]:FREeze.	2602
TRACe<x>:FVTime[:MEASview<y>]:DETection.	2602
TRACe<x>:FVTime[:MEASview<y>]:FUNctioN.	2603
TRACe<x>:IQVTime[:MEASview<y>]:AVERAge:COUNT.	2603
TRACe<x>:IQVTime[:MEASview<y>]:COUNT.	2604
TRACe<x>:IQVTime[:MEASview<y>]:COUNT:ENABLE.	2604
TRACe<x>:IQVTime[:MEASview<y>]:COUNT:RESet (No Query Form).	2605
TRACe<x>:IQVTime[:MEASview<y>]:DETection.	2605
TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:I.	2606
TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:Q.	2606
TRACe<x>:IQVTime[:MEASview<y>]:FREeze.	2607
TRACe<x>:IQVTime[:MEASview<y>]:FUNctioN.	2607
TRACe<x>:IQVTime[:MEASview<y>]:SElect:I.	2608
TRACe<x>:IQVTime[:MEASview<y>]:SElect:Q.	2608
TRACe:MERRor[:MEASview<y>]:MODE.	2609
TRACe:OBW:MAXHold.	2610
TRACe:OFDM:CONSte.	2610
TRACe:OFDM:CONSte:FREeze.	2610
TRACe:OFDM:FLATness:FREeze.	2611
TRACe:OFDM:FLATness:SHOW.	2611
TRACe:PERRor[:MEASview<y>]:MODE.	2612
TRACe<x>:PHVTime[:MEASview<y>].	2612
TRACe<x>:PHVTime[:MEASview<y>]:AVERAge:COUNT.	2613
TRACe<x>:PHVTime[:MEASview<y>]:COUNT.	2613
TRACe<x>:PHVTime[:MEASview<y>]:COUNT:ENABLE.	2614
TRACe<x>:PHVTime[:MEASview<y>]:COUNT:RESet (No Query Form).	2614
TRACe<x>:PHVTime[:MEASview<y>]:FREeze.	2615
TRACe<x>:PHVTime[:MEASview<y>]:DETection.	2615
TRACe<x>:PHVTime[:MEASview<y>]:FUNctioN.	2616
TRACe:SEM:COUNT.	2617
TRACe:SEM:COUNT:RESet (No Query Form).	2617
TRACe:SEM:FUNCTioN.	2617

TRACe:SGRam[:MEASview<y>]:DETection.	2618
TRACe:SGRam[:MEASview<y>]:FREeze.	2619
TRACe:SGRam[:MEASview<y>]:FUNCTion.	2619
TRACe:SGRam[:MEASview<y>]:FUNCTion:TIME.	2620
TRACe:SGRam[:MEASview<y>]:RESet.	2620
TRACe:SGRam[:MEASview<y>]:SELEct:LINE.	2621
TRACe:SPURious:COUNT.	2621
TRACe:SPURious:COUNT:ENABLe.	2622
TRACe:SPURious:COUNT:RESet (No Query Form).	2622
TRACe:SPURious:FREeze.	2623
TRACe:SPURious:FUNCTion.	2623
TRACe:WLAN:AD:CONStE:TYPE.	2624
TRACe:WLAN:AY:CONStE:TYPE.	2624
TRACe:WLAN:FLATness:FREeze.	2625
TRACe:WLAN:FLATness:SHOW.	2625
TRACe1:TOVerview[:MEASview<y>].	2626
TRACe1:TOVerview[:MEASview<y>]:AVERAge:COUNT.	2626
TRACe1:TOVerview[:MEASview<y>]:COUNT.	2627
TRACe1:TOVerview[:MEASview<y>]:COUNT:ENABLe.	2627
TRACe1:TOVerview[:MEASview<y>]:COUNT:RESet (No Query Form).	2628
TRACe1:TOVerview[:MEASview<y>]:DETection.	2628
TRACe1:TOVerview[:MEASview<y>]:FREeze.	2628
TRACe1:TOVerview[:MEASview<y>]:FUNCTion.	2629
TRACe<x>:{AM FM PM}.	2629
TRACe<x>:AVTime[:MEASview<y>].	2630
TRACe<x>:AVTime[:MEASview<y>]:AVERAge:COUNT.	2630
TRACe<x>:AVTime[:MEASview<y>]:AVERAge:RESet (No Query Form).	2631
TRACe<x>:AVTime[:MEASview<y>]:COUNT.	2631
TRACe<x>:AVTime[:MEASview<y>]:COUNT:ENABLe.	2632
TRACe<x>:AVTime[:MEASview<y>]:COUNT:RESet (No Query Form).	2633
TRACe<x>:AVTime[:MEASview<y>]:DETection.	2633
TRACe<x>:AVTime[:MEASview<y>]:FREeze.	2634
TRACe<x>:AVTime[:MEASview<y>]:FUNCTion.	2634
TRACe<x>:AVTime[:MEASview<y>]:LEFToperand.	2635
TRACe<x>:AVTime[:MEASview<y>]:RIGHTooperand.	2635
TRACe<x>:AVTime[:MEASview<y>]:SELEct.	2636
TRACe<x>:BLUEtooth:CONStE.	2637
TRACe<x>:BLUEtooth:CONStE:FREeze.	2637
TRACe<x>:BLUEtooth:CONStE:MODE.	2638
TRACe<x>:BLUEtooth:CONStE:SELEct.	2638
TRACe<x>:BLUEtooth:EDlagram:ENABLe:I.	2639
TRACe<x>:BLUEtooth:EDlagram:ENABLe:Q.	2639
TRACe<x>:BLUEtooth:EDlagram:SELEct:I.	2639
TRACe<x>:BLUEtooth:EDlagram:SELEct:Q.	2640
TRACe<x>:BLUEtooth:FDVTime:MODE.	2640
TRACe<x>:CCDF:FREeze.	2641
TRACe<x>:CCDF:SELEct.	2641

TRACe<x>:CCDF:SHOW.	2642
TRACe<x>:CCDF:X.	2642
TRACe<x>:CCDF:Y? (Query Only).	2643
TRACe<x>:CONSte[:MEASview<y>].	2643
TRACe<x>:CONSte[:MEASview<y>]:FREeze.	2644
TRACe<x>:CONSte[:MEASview<y>]:MODE.	2645
TRACe<x>:CONSte[:MEASview<y>]:Q:OFFSet.	2645
TRACe<x>:CONSte[:MEASview<y>]:SElect (No query form).	2646
TRACe<x>:DPX.	2647
TRACe<x>:DPX:AVERAge:COUNT.	2647
TRACe<x>:DPX:COLor:CURVe.	2648
TRACe<x>:DPX:COLor:INTensity.	2648
TRACe<x>:DPX:COLor:SCALE:AUtO (No Query Form).	2648
TRACe<x>:DPX:DETEction.	2649
TRACe<x>:DPX:DGRAM:SElect:LINE.	2649
TRACe<x>:DPX:DOT:PERStent.	2650
TRACe<x>:DPX:DOT:PERStent:TYPE.	2650
TRACe<x>:DPX:DOT:PERStent:VARiable.	2651
TRACe<x>:DPX:FREeze.	2651
TRACe<x>:DPX:FUNCTion.	2652
TRACe<x>:DPX:LEFToperand.	2652
TRACe<x>:DPX:RIGHToperand.	2653
TRACe<x>:DPX:SElect.	2653
TRACe<x>:EMC:RECALL:ENABLE.	2654
TRACe<x>:EMC:RECALL:SElect.	2654
TRACe<x>:EMC:SCAN:COUNT.	2655
TRACe<x>:EMC:SCAN:COUNT:RESet (No Query Form).	2655
TRACe<x>:EMC:SCAN:ENABLE.	2656
TRACe<x>:EMC:SCAN:FUNCTion.	2656
TRACe<x>:EMC:SCAN:SElect.	2657
TRACe<x>:EMC:SPOT:ENABLE.	2657
TRACe<x>:EMC:SPOT:SElect.	2658
TRACe<x>:{FSETtling PSETtling}:FREeze.	2658
TRACe<x>:{FSETtling PSETtling}:SElect.	2659
TRACe<x>:{FSETtling PSETtling}:SHOW.	2659
TRACe<x>:FVTime[:MEASview<y>]:DETEction.	2659
TRACe<x>:LTE:ACLR:COUNT.	2660
TRACe<x>:LTE:ACLR:COUNT:RESet (No Query Form).	2661
TRACe<x>:LTE:ACLR:FUNCTion.	2661
TRACe<x>:LTE:CONSte:SYNChronization:SEQUence:STATe? (Query Only).	2662
TRACe<x>:NOISe:FIGure:AVERAge:COUNT.	2662
TRACe<x>:NOISe:FIGure:COUNT:ENABLE.	2663
TRACe<x>:NOISe:FIGure:DETEction.	2663
TRACe<x>:NOISe:FIGure:FREeze.	2664
TRACe<x>:NOISe:FIGure:FUNCTion.	2664
TRACe<x>:NOISe:FIGure:SElect.	2665
TRACe<x>:NOISe:FIGure:SHOW.	2666

TRACe<x>:NOISe:GAIN:AVERage:COUNT.	2666
TRACe<x>:NOISe:GAIN:COUNT:ENABLE.	2667
TRACe<x>:NOISe:GAIN:DETection.	2667
TRACe<x>:NOISe:GAIN:FREeze.	2668
TRACe<x>:NOISe:GAIN:FUNCTion.	2668
TRACe<x>:NOISe:GAIN:SELEct.	2669
TRACe<x>:NOISe:GAIN:SHOW.	2670
TRACe<x>:NOISe:TEMPerature:AVERage:COUNT.	2670
TRACe<x>:NOISe:TEMPerature:COUNT:ENABLE.	2671
TRACe<x>:NOISe:TEMPerature:DETection.	2671
TRACe<x>:NOISe:TEMPerature:FREeze.	2672
TRACe<x>:NOISe:TEMPerature:FUNCTion.	2672
TRACe<x>:NOISe:TEMPerature:SELEct.	2673
TRACe<x>:NOISe:TEMPerature:SHOW.	2674
TRACe<x>:NOISe:YFACtor:AVERage:COUNT.	2674
TRACe<x>:NOISe:YFACtor:COUNT:ENABLE.	2675
TRACe<x>:NOISe:YFACtor:DETection.	2675
TRACe<x>:NOISe:YFACtor:FREeze.	2676
TRACe<x>:NOISe:YFACtor:FUNCTion.	2676
TRACe<x>:NOISe:YFACtor:SELEct.	2677
TRACe<x>:NOISe:YFACtor:SHOW.	2678
TRACe<x>:OFDM:EVM.	2678
TRACe<x>:OFDM:EVM:FREeze.	2679
TRACe<x>:OFDM:EVM:SELEct.	2679
TRACe<x>:OFDM:MERRor.	2680
TRACe<x>:OFDM:MERRor:FREeze.	2680
TRACe<x>:OFDM:MERRor:SELEct.	2680
TRACe<x>:OFDM:PERRor.	2681
TRACe<x>:OFDM:PERRor:FREeze.	2681
TRACe<x>:OFDM:PERRor:SELEct.	2682
TRACe<x>:OFDM:POWer.	2682
TRACe<x>:OFDM:POWer:FREeze.	2683
TRACe<x>:OFDM:POWer:SELEct.	2683
TRACe<x>:P25:CONStellation.	2684
TRACe<x>:P25:CONStellation:FREeze.	2684
TRACe<x>:P25:CONStellation:MODE.	2685
TRACe<x>:P25:CONStellation:SELEct.	2685
TRACe<x>:P25:EDIagram:ENABLE:I.	2686
TRACe<x>:P25:EDIagram:ENABLE:Q.	2687
TRACe<x>:P25:EDIagram:SELEct:I.	2687
TRACe<x>:P25:EDIagram:SELEct:Q.	2688
TRACe<x>:PHVTime[:MEASview<y>]:DETection.	2688
TRACe<x>:PNOise:SELEct.	2689
TRACe<x>:PNOise:SHOW.	2689
TRACe<x>:PNOise:SMOothing:COUNT.	2690
TRACe<x>:PNOise:SMOothing:ENABLE.	2690
TRACe<x>:PNOise:SMOothing:RESet (No Query Form).	2691

TRACe<x>:SPECTrum[:MEASview<y>].	2691
TRACe<x>:SPECTrum[:MEASview<y>]:AVERAge:COUNT.	2692
TRACe<x>:SPECTrum[:MEASview<y>]:AVERAge:RESet (No Query Form).	2692
TRACe<x>:SPECTrum[:MEASview<y>]:COUNT.	2693
TRACe<x>:SPECTrum[:MEASview<y>]:COUNT:ENABle.	2693
TRACe<x>:SPECTrum[:MEASview<y>]:COUNT:RESet (No Query Form).	2694
TRACe<x>:SPECTrum[:MEASview<y>]:DETection.	2694
TRACe<x>:SPECTrum[:MEASview<y>]:FREeze.	2695
TRACe<x>:SPECTrum[:MEASview<y>]:FUNctIon.	2696
TRACe<x>:SPECTrum[:MEASview<y>]:LEFToperand.	2696
TRACe<x>:SPECTrum[:MEASview<y>]:RIGHTooperand.	2697
TRACe<x>:SPECTrum[:MEASview<y>]:SElect.	2697
TRACe<x>:TXGain.	2698
TRACe<x>:TXGain:AVERAge:COUNT.	2698
TRACe<x>:TXGain:AVERAge:RESet (No Query Form).	2699
TRACe<x>:TXGain:COUNT.	2699
TRACe<x>:TXGain:COUNT:ENABle.	2700
TRACe<x>:TXGain:COUNT:RESet (No Query Form).	2700
TRACe<x>:TXGain:FREeze.	2701
TRACe<x>:TXGain:FUNctIon.	2701
TRACe<x>:TXGain:SElect.	2702
TRACe<x>:WLAN:AD:CONSte:RESUlt:CONTeNt:STATe.	2702
TRACe<x>:WLAN:AY:CONSte:RESUlt:CONTeNt:STATe.	2703
TRACe<x>:WLAN:CONSte.	2704
TRACe<x>:WLAN:CONSte:FREeze.	2704
TRACe<x>:WLAN:CRESPonse:SElect.	2705
TRACe<x>:WLAN:EVM:FREeze.	2705
TRACe<x>:WLAN:EVM[:SHOW].	2706
TRACe<x>:WLAN:MERRor:FREeze.	2706
TRACe<x>:WLAN:MERRor[:SHOW].	2707
TRACe<x>:WLAN:PERRor:FREeze.	2707
TRACe<x>:WLAN:PERRor[:SHOW].	2708
Trigger commands.	2709
*TRG (No Query Form).	2709
TRIGger:ADVanced:SWEep:MODE.	2709
TRIGger:DPX:SHOW:FRAMes.	2709
TRIGger:DPX:TDM:SHOW:ALL.	2710
TRIGger:EVENT:EXTeRnal:SLOPe.	2710
TRIGger:EVENT:INPut:LEVel.	2711
TRIGger:EVENT:INPut:SLOPe.	2711
TRIGger:EVENT:INPut:TYPE.	2712
TRIGger:EVENT:SOURce.	2712
TRIGger:MASK:NEW (No Query Form).	2712
TRIGger:MASK:NEW:AUTO (No Query Form).	2713
TRIGger:MASK:OPEN (No Query Form).	2714
TRIGger:MASK:SAVE (No Query Form).	2715
TRIGger:SAVE:COUNT:MAXimum.	2715

TRIGger:SAVE:COUNT[:STATe].	2715
TRIGger:SAVE:DATA:FORMat.	2716
TRIGger:SAVE:DATA[:STATe].	2716
TRIGger:SAVE:PICTure:FORMat.	2717
TRIGger:SAVE:PICTure[:STATe].	2717
TRIGger[:SEquence]:ADVanced:HOLDoff.	2718
TRIGger[:SEquence]:ADVanced:HOLDoff:ENABle.	2718
TRIGger[:SEquence]:ADVanced:SWEep:MODE.	2718
TRIGger[:SEquence]:ADVanced:SWEpt:SEGMENT:ENABle.	2719
TRIGger[:SEquence]:EVENT:A:EDGE:COUPling.	2719
TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:MODE.	2720
TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:TIME.	2720
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEl.	2720
TRIGger[:SEquence]:EVENT:EXTFront:IMPedance.	2721
TRIGger[:SEquence]:EVENT:EXTFront:LEVEl.	2721
TRIGger[:SEquence]:EVENT:EXTFront:SLOPe.	2722
TRIGger[:SEquence]:EVENT:EXTRear:SLOPe.	2722
TRIGger[:SEquence]:EVENT:GATed.	2723
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude.	2723
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude:TOLerance.	2724
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency.	2724
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency:TOLerance.	2725
TRIGger[:SEquence]:EVENT:INPut:DDENsity:THReshold.	2725
TRIGger[:SEquence]:EVENT:INPut:DDENsity:VIOLation.	2726
TRIGger[:SEquence]:EVENT:INPut:FEDGE:LEVEl.	2726
TRIGger[:SEquence]:EVENT:INPut:FEDGE:LEVEl:ACTual? (Query Only).	2727
TRIGger[:SEquence]:EVENT:INPut:FEDGE:SLOPe.	2727
TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:LEVEl.	2727
TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:STATe.	2728
TRIGger[:SEquence]:EVENT:INPut:FMASk:{BANDwidth BWIDth[:RESolution]}.	2728
TRIGger[:SEquence]:EVENT:INPut:FMASk:BANDwidth BWIDth[:RESolution]:ACTual? (Query Only).	2729
TRIGger[:SEquence]:EVENT:INPut:FMASk:BANDwidth BWIDth[:RESolution]:AUTO.	2729
TRIGger[:SEquence]:EVENT:INPut:FMASk:VIOLation.	2730
TRIGger[:SEquence]:EVENT:INPut:LEVEl.	2731
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe.	2731
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe:HIGH:LEVEl.	2731
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe:LOW:LEVEl.	2732
TRIGger[:SEquence]:EVENT:INPut:SLOPe.	2732
TRIGger[:SEquence]:EVENT:INPut:TDBWidth.	2733
TRIGger[:SEquence]:EVENT:INPut:TDBWidth:ACTual? (Query Only).	2733
TRIGger[:SEquence]:EVENT:INPut:TDBWidth:STATe.	2734
TRIGger[:SEquence]:EVENT:INPut:TYPE.	2734
:TRIGger[:SEquence]:EVENT:PPS:SYStrigger.	2735
:TRIGger[:SEquence]:EVENT:PPS:UTCtrigger.	2735
TRIGger[:SEquence]:EVENT:SOURce.	2735
TRIGger[:SEquence]:FORCed.	2736
TRIGger:SEquence:FORCed (No Query Form).	2736

TRIGger[:SEquence]:IMMediate (No Query Form)	2737
TRIGger[:SEquence]:STATus	2737
TRIGger[:SEquence]:STATus	2738
TRIGger[:SEquence]:TIME:DELAy	2738
TRIGger[:SEquence]:TIME:POSition	2738
TRIGger[:Sequence]:TIME:POSition:AUTO	2739
TRIGger[:SEquence]:TIME:QUALified	2739
TRIGger[:SEquence]:TIME:QUALified:TIME<x>	2740
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:ANALog	2740
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:FREQuency	2741
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:MAGNitude	2741
TRIGger[:SEquence]:EVENT:A:EDGE:SETTings	2742
TRIGger[:SEquence]:EVENT:A:EDGE:SLOPe	2742
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce	2742
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:FORMat	2743
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:TYPE	2743
TRIGger[:SEquence]:EVENT:A:TYPE	2743
TRIGger[:SEquence]:MODE	2744
TRIGger:TIME:POSition	2744
TRIGger:TIME:POSition:AUTO	2745
UNIT:POWer	2745
*WAI (No Query Form)	2746
Status and Events	2746
Status and event reporting system	2747
Status Byte	2749
Standard event status block	2751
Operation status block	2751
Questionable Status Block	2752
Queues	2754
Status and event processing sequence	2754
Synchronizing execution	2755
Error messages and codes	2756
Command errors	2757
Execution errors	2758
Device specific errors	2760
Query Errors	2761
Device errors	2761
Status Conditions	2765
Global status	2765
Measurement status	2765
Source status	2767
Appendices	2769

Appendix A: Character charts. 2769

Appendix B: SCPI conformance information. 2770

Appendix C: Creating a DPX Frame Access Plugin. 2771

Glossary. 2774

Preface

The SignalVu-PC Vector Signal Analysis Software enables you to use your PC to analyze RF signal behavior with the same software used on the RSA6100B, RSA5100B, and RSA5100A Series Real-Time Analyzers. The SignalVu-PC software supports the use of the RSA6100B, RSA5100B, and RSA5100A Series commands with some limitations. For example, commands that control functions that are only available on RSA instruments.

When SignalVu-PC software is connected to an RSA306, RSA306B, RSA500A series, RSA600A series, or RSA7100A Spectrum Analyzer, the software supports commands that control the functions of those instruments.

This manual is composed of the following sections:

- *Getting Started* outlines how to use the GPIB interface.
- *Syntax and Commands* defines the syntax used in command descriptions, presents a list of all command subsystems, and presents detailed descriptions of all programming commands.
- *Status and Events* describes how the status and Events Reporting system operates and presents a list of all system errors.
- *Appendices* provides additional information including character charts, GPIB interface specification, and factory initialization settings.

Related documentation

- SignalVu-PC Vector Signal Analysis Software Help

The help contains detailed information about how to operate the application and is found in the SignalVu-PC application. A PDF of the Help is also available at tek.com/manuals.

- *TekVISA Programmer Manual*

(Tektronix part number 077-0140-XX)

This manual is available as a printable PDF file on the Tektronix Web site (tek.com/manuals). The manual describes TekVISA, the Tektronix implementation of the VISA Application Programming Interface (API). TekVISA is industry-compliant software for writing interoperable instrument drivers in a variety of Application Development Environments (ADEs).

Getting Started

You can write computer programs that remotely take measurements and read those measurements for further analysis or storage. To help you get started with programming, this section includes the following subsections.


- Overview of the Manual
Summarizes each major section of this manual.
- Measurement Support
Describes which RSA measurement displays are available with the software.
- Setting Up Remote Communications
Describes how to set up TekVISA, the programming interface, and enable control over the Ethernet.

Overview of the Manual

The information contained in each major section of this manual is described below.


Syntax and Commands

[Syntax and Commands](#) (on page 116) describes the structure and content of the messages your program sends to the analyzer. The following figure shows command parts as described in [Command Syntax](#) (on page 116).

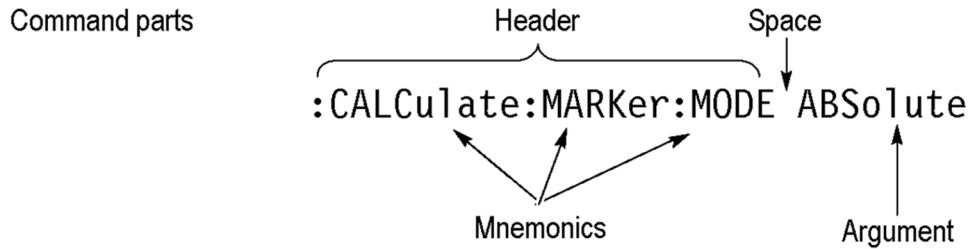

Command parts

[Command Descriptions](#) (on page 384) also describes the effect of each command and provides examples of how you might use it. The [Command Groups](#) (on page 122) subsection provides lists by functional areas. The commands are listed alphabetically in the [Command Descriptions](#) (on page 384) section.

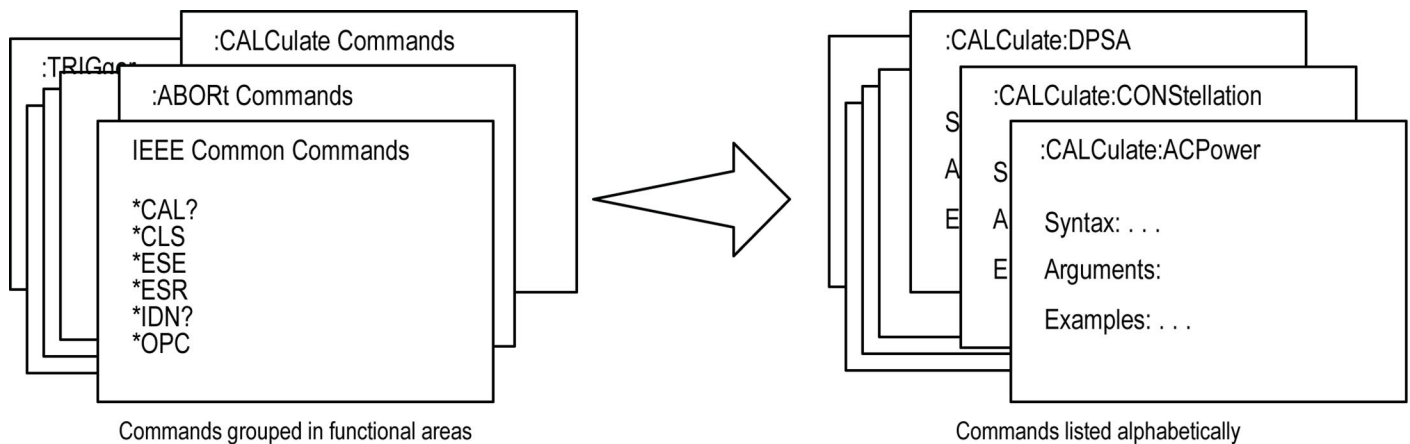


Functional groupings and an alphabetical list of commands

Status and Events

The program may request information from the instrument. The instrument provides information in the form of status and error messages. The following figure illustrates the basic operation of this system. [Status and Events](#) (on page 2746) describes how to get status or event information from the program and details the event and error messages.

Your program requests
status and event reports. ➡

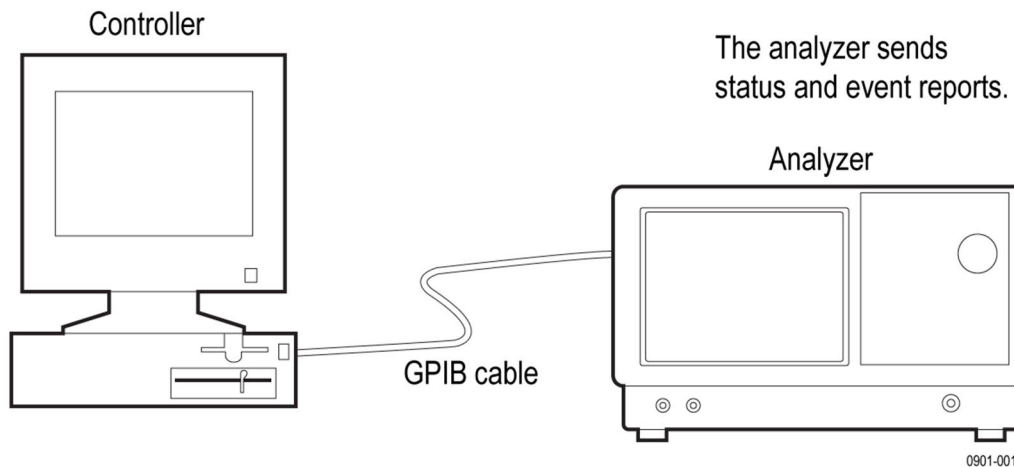

Event-driven program

Setting up remote communications

To use the SignalVu-PC programmatic interface you must install the Tektronix Virtual Instrument Software Architecture (TekVISA) on your PC. TekVISA is a Tektronix VISA solution provided for customers. It is a collection of software and documentation that allows for remote control of instruments regardless of instrument brand and physical connection. It includes a VISA driver, VISA libraries, documentation, USB Device Driver, VXI-11 server, and connection management/debug software.


TekVISA is included as part of the SignalVu-PC application software package and you can select to automatically install it.

Setup for the programming interface

Enable the programming interface and install TekVISA. The programming interface is automatically enabled as part of the SignalVu-PC application software installation. However, in order to control SignalVu-PC using the programmatic interface, you must also install TekVISA, as follows.

The programming interface is automatically enabled as part of the SignalVu-PC application software installation. However, in order to control SignalVu-PC using the programmatic interface, you must also install TekVISA as follows.

1. Install SignalVu-PC.
2. When the installation is almost complete, the following dialog box will appear. Verify that the Install TekVISA box is checked.

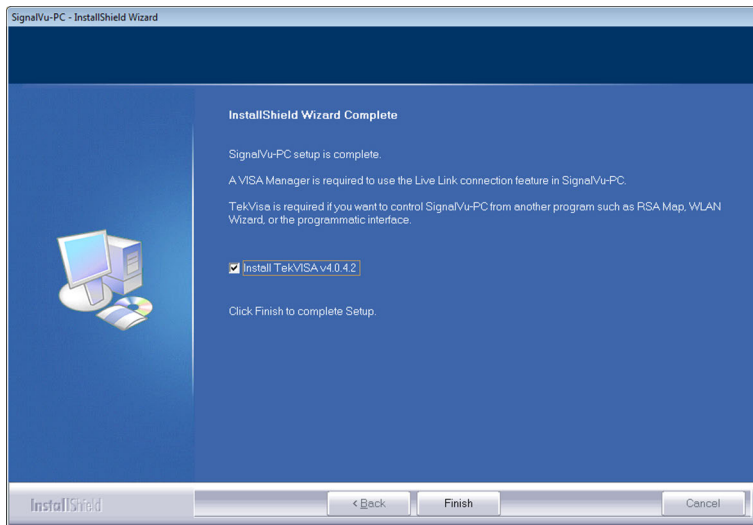


3. Click **Finish**.

Enable control over the Ethernet


Communications with SignalVu-PC over an Ethernet LAN connection is supported with the VXI-11 protocol. The VXI-11 standard specifies an instrument protocol for TCP/IP computer networks, supporting writing and reading data to and from instruments.

The VXI-11 server is automatically installed on the target PC as part of the SignalVu-PC application software installation process. This also creates a shortcut in the Startup folder. Do the following two procedures to establish communication between the instrument and the PC hosting SignalVu-PC.


1. Select the tray icon at the bottom right corner of the Windows Desktop to view hidden icons.
2. Right click the Server Control icon and select Server Properties.

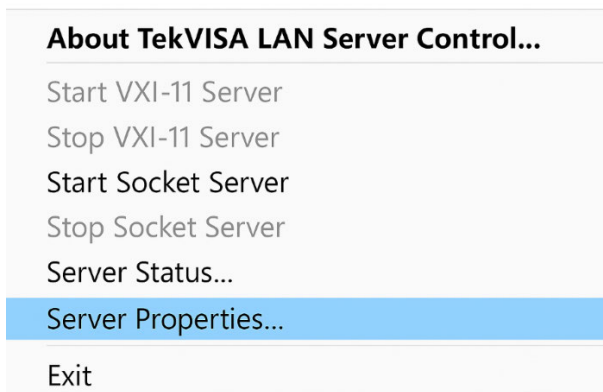


3. When the TekVISA LAN Server Properties window opens, verify the Socket Server port is set to 5005. If it is not, change it to 5005.

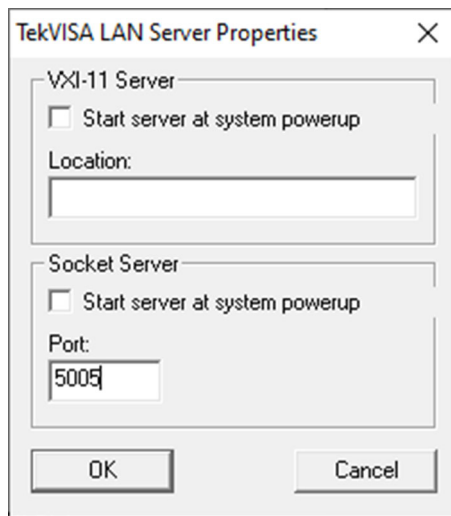


4. Click OK.
5. Right click the Server Control icon again and select Start Socket Server. This will start the socket server to enable communication with the instrument and SignalVu-PC.

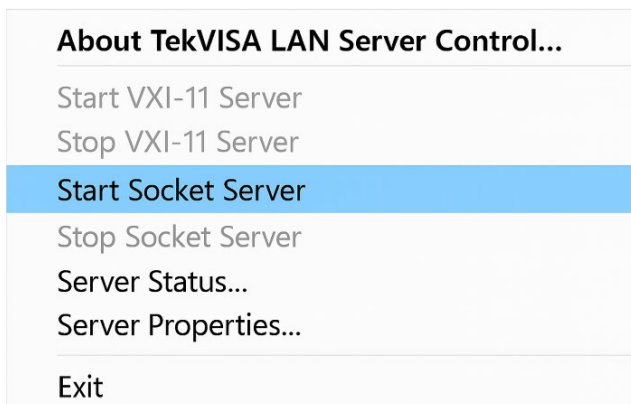

6. On the PC hosting SignalVu-PC, select the tray icon at the bottom right corner of the Windows Desktop to view hidden icons.
7. Click the VISAResourceManager icon and select Instrument Manager from the menu.

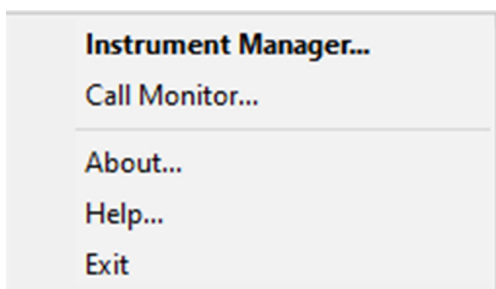

8. Click the Search Criteria button and select the LAN tab.

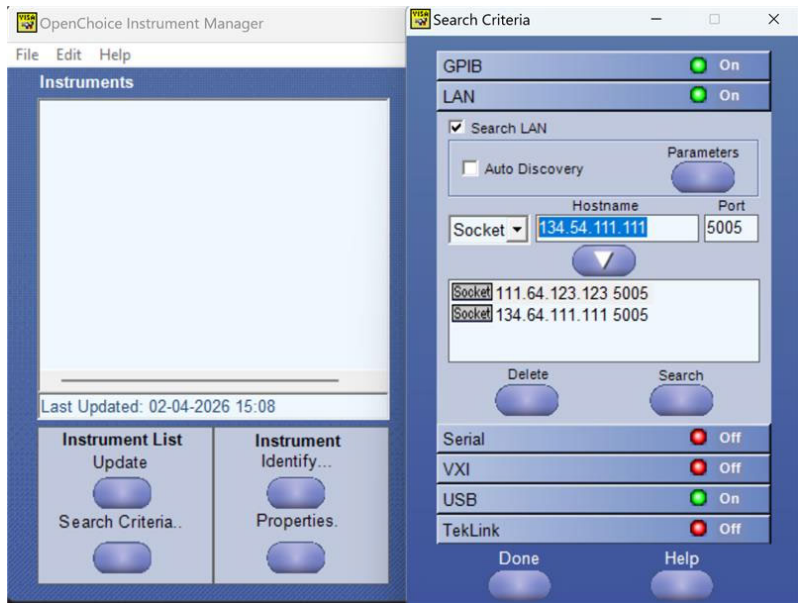

9. Enter the IP address of the instrument in the Hostname field. (Use the address of the instrument for which you started the socket server in the previous steps.)
- 10.Set to Socket and the Port to 5005.
- 11.Click the add icon arrow below it to add the address to the available sockets field and then click the Search button.
- 12.Select the added instrument from the Instruments list and click the Identify button. This will return the *IDN? response for SignalVu-PC.

Measurement support

Each command works in a particular measurement view(s). Views are specified under the Conditions heading in the command description. The following table lists all available measurement displays supported by the SignalVu-PC software, which measurement view it is in, and if it requires an installed option.

NOTE: If you send a command for the measurement view that is not active on screen, an execution error will occur.

NOTE: Some measurement displays require installed options. See the Tektronix Web site product page for a list of available options.

Measurement support

Measurement group	Measurement
General signal viewing	Amplitude vs Time
	DPX® (Spectrum, DPXogram, and Split only)
	Frequency vs Time
	Phase vs Time
	RF I&Q vs Time
	Spectrogram
	Spectrum
	Time overview
Analog Modulation	Amplitude modulation
	Frequency modulation
	Phase modulation
Settling Time (requires Option SVTNL-SVPC or SVTFL-SVPC)	Freq Settling
	Phase Settling
General purpose digital modulation (requires Option SVMNL-SVPC or SVMFL-SVPC)	Constellation
	Demod I&Q versus Time
	EVM vs Time
	Eye Diagram
	Freq Dev vs Time
	Mag Error vs Time
	Phase Error vs Time
	Signal quality
	Symbol table
	Trellis
	User defined filters

Measurement group	Measurement
RF	Channel power and ACPR
	Freq Settling (requires Option SVT).
	MCPR
	Occupied Bandwidth
	Phase Settling (requires Option SVT)
	Signal Strength
	SEM
	Spurious
OFDM (requires Option SVONL-SVPC or SVOFL-SVPC)	OFDM Channel Response
	OFDM Constellation
	OFDM EVM
	OFDM Mag Error
	OFDM Phase Error
	OFDM Power
	OFDM Summary
	OFDM Symbol Table
	OFDM Flatness

Measurement group	Measurement
WLAN (Requires Option SV23NL/SV23FL-SVPC, SV24NL/SV24FL-SVPC, or SV25NL/SV25FL-SVPC)	WLAN Channel Response
	WLAN Constellation
	WLAN EVM
	WLAN Flatness
	WLAN Mag Error
	WLAN Phase Error
	WLAN Power vs Time
	WLAN Summary
	WLAN Symbol Table
	SEM
P25 Analysis (requires Option SV26)(Requires Option SV26NL-SVPC or SV26FL-SVPC)	P25 Eye Diagram
	P25 Freq Dev vs Time
	P25 Power vs Time
	P25 Constellation
	P25 Symbol Table
	P25 Summary
	MCPR
	Time Overveiw

Measurement group	Measurement
Bluetooth® Analysis (Requires Option SV27NL/SV27FL-SVPC or SV31NL/SV31FL-SVPC)	BT 20dB BW
	BT CF Offset and Drift
	BT Constellation
	BT Eye Diagram
	BT Freq Dev vs Time
	BT Inband Emission
	BT Summary
	BT Symbol Table
	Time Overview
LTE Analysis (Requires Option SV28NL-SVPC or SV28FL-SVPC)	LTE ACLR
	LTE Channel Spectrum
	LTE Constellation
	LTE Power vs Time
	SEM
EMC Analysis (Requires option EMCVUNL-SVPC or EMCVUFL-SVPC)	EMC-EMI
	DPX
	Spectrogram
	Spectrum
Tracking generator (Only for the RSA500A series and RSA600A series) (Requires Option 04)	Transmission Gain
Pulsed RF (Requires Option SVPNL-SVPC or SVPFL-SVPC)	Pulse statistics
	Pulse table
	Pulse trace
	Pulse-Ogram
	Cumulative Histogram
	Cumulative Statistics

Measurement group	Measurement
802.11ad Analysis (Available for offline analysis only)	802.11ad Summary
	802.11ad Symbol Table
	802.11ad Constellation
	802.11ad EVM vs Time
Return Loss (Requires Option 04 and Option SV60NL-SVPC or SV60FL-SVPC) (Only for the RSA500A series and RSA600A series)	Cable Loss
	RL/DTF
Audio Analysis (Requires Option SVANL-SVPC or SVAFL-SVPC)	Audio Spectrum
	Audio Summary

Syntax and Commands

Command syntax

This section contains information on the Standard Commands for Programmable Instruments (SCPI) and IEEE 488.2 Common Commands you can use to program your RSA Series analyzer. The information is organized in the following subsections

- Backus-Naur Form Definition
- SCPI Commands and Queries
- IEEE 488.2 Common Commands
- Constructed Mnemonics

Backus-Naur Form Definition

This manual may describe commands and queries using the Backus-Naur Form (BNF) notation. The following table defines the standard BNF symbols.

BNF symbols and meanings


Symbol	Meaning
< >	Defined element
:=	Is defined as
	Exclusive OR
{ }	Group; one element is required
[]	Optional; can be omitted

Symbol	Meaning
...	Previous element(s) may be repeated
()	Comment

SCPI Commands and Queries

SCPI is a standard created by a consortium that provides guidelines for remote programming of instruments. These guidelines provide a consistent programming environment for instrument control and data transfer. This environment uses defined programming messages, instrument responses, and data format across all SCPI instruments, regardless of manufacturer. The analyzer uses a command language based on the SCPI standard.

The SCPI language is based on a hierarchical or tree structure as shown in the following figure that represents a subsystem. The top level of the tree is the root node; it is followed by one or more lower-level nodes.

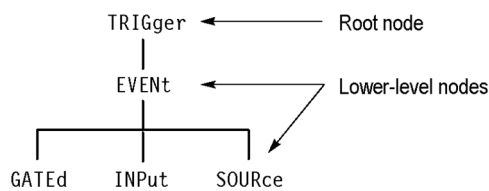

Example of SCPI subsystem hierarchy tree

You can create commands and queries from these subsystem hierarchy trees. Commands specify actions for the instrument to perform. Queries return measurement data and information about parameter settings.

Creating Commands

SCPI commands are created by stringing together the nodes of a subsystem hierarchy and separating each node by a colon.

In the figure above, TRIGger is the root node and EVENT, GATed, INPut, and SOURce are lower-level nodes. To create a SCPI command, start with the root node TRIGger and move down the tree structure adding nodes until you reach the end of a branch. Most commands and some queries have parameters; you must include a value for these parameters. If you specify a parameter value that is out of range, the parameter will be set to a default value. The command descriptions, list the valid values for all parameters.

For example, TRIGgerEVENT:SOURce EXTrear is a valid SCPI command created from the hierarchy tree. (See [Syntax and Commands](#) (on page 107).)

Creating Queries

To create a query, start at the root node of a tree structure, move down to the end of a branch, and add a question mark. TRIGgerEVENT:SOURce? is an example of a valid SCPI query using the hierarchy tree in the figure. (See [Syntax and Commands](#) (on page 107).)

Query Responses

The query causes the analyzer to return information about its status or settings. When a query is sent to the analyzer, only the values are returned. When the returned value is a mnemonic, it is noted in abbreviated format, as shown in the following table.

Query response examples

Query	Response
CALCulate:SPECtrum:MARKer:X?	7.50E+9

Query	Response
SENSe:SPECTrum:FFT:WINDow?	BH4B

A few queries also initiate an operation action before returning information. For example, the *CAL? query runs a calibration.

Parameter Types

Every parameter in the command and query descriptions is of a specified type. The parameters are enclosed in brackets, such as <value>. The parameter type is listed after the parameter and is enclosed in parentheses, for example, (Boolean). Some parameter types are defined specifically for the RSA Series command set and some are defined by ANSI/IEEE 488.2-1987 as shown in the following table.

Parameter types used in syntax descriptions


Parameter type	Description	Example
arbitrary block	A specified length of arbitrary data; defined in ANSI/IEEE 488.2 as "Definite Length Arbitrary Block Response Data"	#512234xxxxx . . . where 5 indicates that the following 5 digits (12234) specify the length of the data in bytes;xxxxx ... indicates the data
Boolean	Boolean numbers or values	ON or 1; OFF or 0
binary	Binary numbers	#B0110
octal	Octal numbers	#Q57, #Q3
hexadecimal	Hexadecimal numbers (0-9, A, B, C, D, E, F); an ANSI/IEEE 488.2-1992-defined parameter type	#HAA, #H1
NR1 numeric	Integers; an ANSI/IEEE 488.2-1992-defined parameter type	0, 1, 15, -1
NR2 numeric	Decimal numbers; an ANSI/IEEE 488.2-1992-defined parameter type; some commands and queries will accept an octal or hexadecimal value even though the parameter type is defined as NR2	1.2, 3.141516, -6.5
NR3	Floating point numbers; an ANSI/IEEE 488.2-1992-defined parameter type.	3.1415E-9, -16.1E5
NRf numeric	Flexible decimal number that may be type NR1, NR2 or NR3; an ANSI/IEEE 488.2-1992-defined parameter type.	See NR1, NR2, and NR3 examples
string	Alphanumeric characters (must be within quotation marks); defined in ANSI/IEEE 488.2 as "String Response Data."	"Testing 1, 2, 3"

Special Characters

The Line Feed (LF) character (ASCII 10), and all characters in the range of ASCII 127-255 are defined as special characters. These characters are used in arbitrary block arguments only; using these characters in other parts of any command yields unpredictable results.

Abbreviating Commands, Queries, and Parameters

You can abbreviate most SCPI commands, queries, and parameters to an accepted short form. This manual shows these short forms as a combination of upper and lower case letters. The upper case letters indicate the accepted short form of a command. As shown in the following figure, you can create a short form by using only the upper case letters. The accepted short form and the long form are equivalent and request the same action of the instrument.

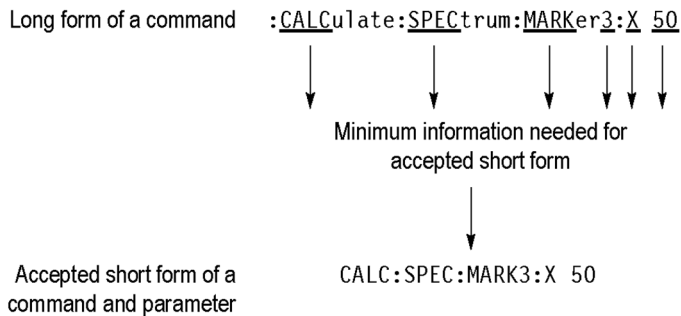


Example of abbreviating a command

NOTE: The numeric suffix of a command or query may be included in either the long form or short form; the analyzer will default to "1" if no suffix is used. In the above figure, the "3" of "MARKer3" indicates that the command is directed to Marker 3.


Chaining Commands and Queries

You can chain several commands or queries together into a single message. To create a chained message, first create a command or query, add a semicolon(;), and then add more commands or queries and semicolons until the message is complete. If the command following a semicolon is a root node, precede it with a colon (:). The following figure illustrates a chained message consisting of several commands and queries. The single chained message should end in a command or query, not a semicolon. Responses to any queries in your message are separated by semicolons.

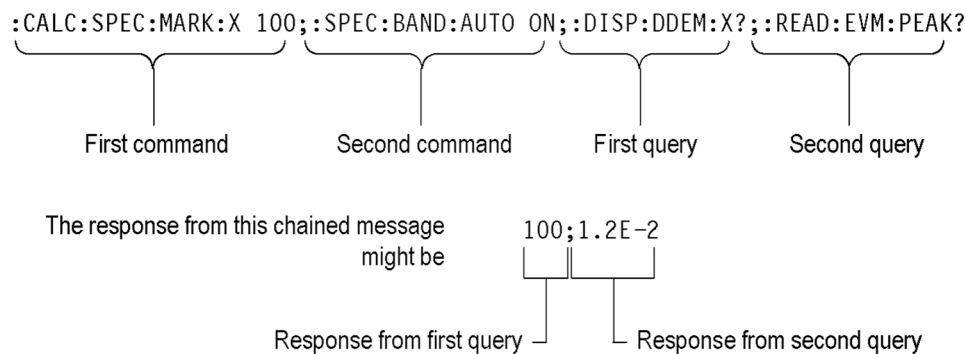

Example of chaining commands and queries

If a command or query has the same root and lower-level nodes as the previous command or query, you can omit these nodes. In the following figure, the second command has the same root node (TRIGgerEVENT) as the first command, so these nodes can be omitted.

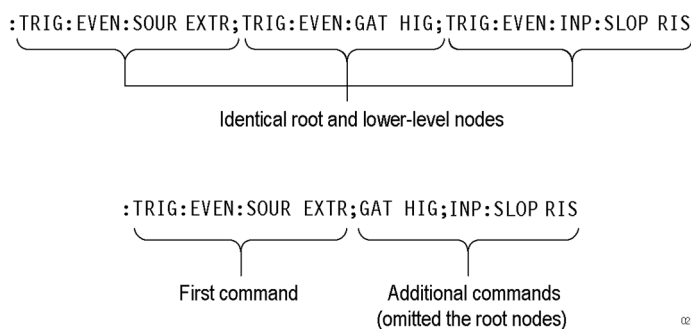

0049-001

Example of omitting root and lower-level nodes in a chained message

Unit and SI Prefix

If the decimal numeric argument refers to amplitude, frequency, or time, you can express it using SI units instead of using the scaled explicit point input value format <NR3>. (SI units are units that conform to the Systeme International d'Unites standard.) For example, you can use the input format 200 mV or 1.0 MHz instead of 200.0E-3 or 1.0E+6, respectively, to specify voltage or frequency.

The following table lists the available units.

Available units

Symbol	Meaning
dB	decibel (relative amplitude)
dBm	decibel (absolute amplitude)
DEG	degree (phase)
Hz	hertz (frequency)
PCT	percent (%)
s	second (time)
V	volt

The available SI prefixes are shown in the following table.

Available SI prefixes

SI prefix	Z	A	F	P	N	U	M	K	MA*	G	T	PE	EX
Corresponding power	10 ⁻²¹	10 ⁻¹⁸	10 ⁻¹⁵	10 ⁻¹²	10 ⁻⁹	10 ⁻⁶	10 ⁻³	10 ⁺³	10 ⁺⁶	10 ⁺⁹	10 ⁺¹²	10 ⁺¹⁵	10 ⁺¹⁸

* When the unit is "Hz", "M" may be used instead of "MA" so that the frequency can be represented by "MHz"

You can omit a unit in a command, but you must include the unit when using a SI prefix. For example, frequency of 15 MHz can be described as follows

15.0E6, 1.5E7Hz, 15000000, 15000000Hz, 15MHz, etc

("15M" is not allowed.)

Note that you can use either lower or upper case units and prefixes. The following examples have the same result, respectively.

170mHz, 170mHz, 170MHz, etc.

250mv, 250mV, 250MV, etc.

General Rules

Here are three general rules for using SCPI commands, queries, and parameters:

- You can use single (' ') or double (" ") quotation marks for quoted strings, but you cannot use both types of quotation marks for the same string.

correct "This string uses quotation marks correctly."

correct 'This string also uses quotation marks correctly.'

incorrect "This string does not use quotation marks correctly."

- You can use upper case, lower case, or a mixture of both cases for all commands, queries, and parameters.

SENSE:SPECTRUM:FFT:LENGTH 1024

is the same as

sense:spectrum:fft:length 1024

and

SENSE:spectrum:FFT:length 1024

NOTE: Literal strings (quoted) are case sensitive, for example, file names.

- No embedded spaces are allowed between or within nodes.

correct SENSE:SPECTRUM:FFT:LENGTH 1024

incorrect SENSE: SPECTRUM: FFT: LEN GTH 1024

IEEE 488.2 Common Commands

ANSI/IEEE Standard 488.2 defines the codes, formats, protocols, and usage of common commands and queries used on the interface between the controller and the instruments. The analyzer complies with this standard.

Command and Query Structure

The syntax for an IEEE 488.2 common command is an asterisk (*) followed by a command and, optionally, a space and parameter value. The syntax for an IEEE 488.2 common query is an asterisk (*) followed by a query and a question mark. All of the common commands and queries are listed in the last part of the **Syntax and Commands** section. The following are examples of common commands:

- *ESE 16
- *CLS

The following are examples of common queries

- *ESR
- *IDN

Constructed Mnemonics

Some header mnemonics specify one of a range of mnemonics. For example, a trace mnemonic can be either TRACe1, TRACe2, TRACe3, or TRACe4. You use these mnemonics in the command just as you do any other mnemonic. For example, there is a TRACe1:SPECTrum:FUNCTION command, and there is also a TRACe2:SPECTrum:FUNCTION command. In the command descriptions, this list of choices is abbreviated as TRACe<x>. The value of <x> is the upper range of valid suffixes. If the numeric suffix is omitted, the analyzer uses the default value of "1".

Constructed mnemonics

Symbol	Meaning
MARKer<x>	A marker specifier where <x> = 0, 1, 2, 3, or 4. Refer to Marker Mnemonics (on page 157)
RANGe<x>	A range specifier where <x> = 1 to 20. Refer to [SENSe]:SPURious Subgroup for details.

Symbol	Meaning
SPUR<x>	A spurious specifier where <x> = 1 to the number of spurious signals. Refer to FETCh :READ:SPURious Subgroup for details, respectively.
TRACe<x>	A trace specifier where <x> = 0, 1, 2, 3, 4, or 5. Refer to TRACe Commands (on page 367) for details.

Command groups

This section lists the analyzer commands in two ways. It first presents them by functional groups. It then lists them alphabetically. The functional group list starts below. The alphabetical list provides more detail on each command. For the complete list of commands, see [Command Descriptions](#) (on page 384).

The analyzers conform to the Standard Commands for Programmable Instruments (SCPI) 1999.0 and IEEE Std 488.2-1987, except where noted.

Items followed by question marks are queries; items without question marks are commands. Some items in this section have a question mark in parentheses (?) in the command header section; this indicates that the item can be both a command and a query.

For the conventions of notation in this manual, refer to [Command Syntax](#) (on page 116) and following pages.

Functional groups

All commands are divided into groups as shown in the following table.

List of command group

Command group	Function
IEEE common	Conforms to the IEEE Std 488.2.
ABORt	Resets the trigger system and stops measurements.
CALCulate	Controls the markers and the search operations.
DISPlay	Controls the display of measurement results and waveforms.
FETCh	Retrieves the measurements from the last acquired data.
INITiate	Controls data acquisition.
INPut	Controls the characteristics of the signal input.
MMEMory	Provides mass storage capabilities for the analyzer.
OUTPut	Controls the characteristics of the signal output.
READ	Obtains the measurement results with acquiring data.
SENSe	Sets up detailed conditions for each measurement.

Command group	Function
STATus	Controls the status and event registers.
SYSTem	Sets or queries system parameters for operation.
TRACe	Controls trace activation and math operations.
UNIT	Specifies fundamental units for measurement.

Programming hints

Here are some basic tips for using commands:

- *Selecting a measurement item*

Use Display commands to select or display the measurement view. [Example] `DISPlay:GENeral:MEASview:NEW SPECTrum` Displays the spectrum view on the screen.

- *Setting measurement parameters*

Use Sense commands to set conditions for the measurement session. [Example] `SENSe:SPECTrum:FREQuency:CENTer 1.5GHz` Sets the center frequency to 1.5 GHz in the spectrum view.

- *Processing waveforms arithmetically*

Use Trace commands for math operation on waveforms. [Example] `TRACe1:SPECTrum:FUNCTion AVERage` Averages the spectrum waveform.

- *Measuring with the markers*

Use Calculate commands to measure some quantity using the markers. [Example] `CALCulate:SPECTrum:MARKer1:MAXimum` Positions the marker at the highest peak signal on the spectrum.

- *Scaling the waveform*

Use Display commands to change the waveform portion on screen. [Example] `DISPlay:IQVTime:Y:SCALE 1.5` Sets the vertical range to 1.5 V in the IQ versus Time graph.

The following sections list the commands by group.

IEEE common commands

The IEEE 488.2 common commands have a "*" prefix.

Status and error commands

Command	Description
*CLS (on page 705)	Clears status.
*ESE (on page 1097)	Sets or queries the bits in the ESER register.
*ESR? (on page 1098)	Returns the contents of the SESR register.
*IDN? (on page 1515)	Returns the instrument identification code.
*OPC (on page 1580)	Synchronizes commands.
*OPT? (on page 1580)	Returns a list of options installed in your analyzer.

Command	Description
*RST	Returns the instrument settings to the factory defaults.
*SRE (on page 2496)	Sets or queries the bits in the SRER register.
*STB? (on page 2496)	Returns the contents of the SBR using the MSS bit.
*WAI (on page 2746)	Prevents the analyzer from executing further commands.

Obsolete commands

The following table lists obsolete commands and their replacements.

Obsolete and replacement commands

Obsolete commands	Replacement commands
[SENSe:]PULSe:ANALyze:MEASurement:TIME:AUTO	SENSe:PULSe:MEASview<y>:ANALyze:FDOMain:MEASurement:TIME:ALENgtH
[SENSe:]PULSe:ANALyze:MEASurement:TIME:STARt	SENSe:PULSe:MEASview<y>:ANALyze:FDOMain:MEASurement:TIME:METHod

Obsolete commands	Replacement commands
[SENSe:]PULSe:ANALyze:MEASurement:TIME:STOP	SENSe:PULSe:MEASview<y>:ANALyze:FDOMain:MEASurement:TIME:RENGth
	SENSe:PULSe:MEASview<y>:ANALyze:FDOMain:MEASurement:TIME:RLEVel
	SENSe:PULSe:MEASview<y>:ANALyze:FDOMain:MEASurement:TIME:STARt
	SENSe:PULSe:MEASview<y>:ANALyze:IRESpOse:MEASurement:TIME:ALENGth
	SENSe:PULSe:MEASview<y>:ANALyze:IRESpOse:MEASurement:TIME:MEHod
	SENSe:PULSe:MEASview<y>:ANALyze:IRESpOse:MEASurement:TIME:RENGth
	SENSe:PULSe:MEASview<y>:ANALyze:IRESpOse:MEASurement:TIME:RLEVel
	SENSe:PULSe:MEASview<y>:ANALyze:IRESpOse:MEASurement:TIME:STARt
	SENSe:PULSe:MEASview<y>:ANALyze:OVERshoot:MEASurement:TIME:ALENGth
	SENSe:PULSe:MEASview<y>:ANALyze:OVERshoot:MEASurement:TIME:MEHod
	SENSe:PULSe:MEASview<y>:ANALyze:OVERshoot:MEASurement:TIME:RENGth
	SENSe:PULSe:MEASview<y>:ANALyze:OVERshoot:MEASurement:TIME:RLEVel
	SENSe:PULSe:MEASview<y>:ANALyze:OVERshoot:MEASurement:TIME:STARt
[SENSe:]PULSe:FREFerence:CHIRpbw(?)	SENSe:PULSe:MEASview<y>:FREFerence:CSLope

NOTE: <y> is the Measurement Index. Range: 1–8 (based on number of sources of connected instrument), where MEASview<y> keyword is optional and by default y is 1

Abort commands

Use the Abort commands to reset the trigger system and to stop measurements.

Abort commands

Command	Description
ABORT (on page 384)	Resets the trigger system and stops measurements.

Calculate commands

Use the Calculate commands to control the markers and the search operations. See the Index for commands not listed in the following table.

Calculate commands

Command	Description
CALCulate:MARKer:ADD (on page 499)	Adds a marker.
CALCulate:SYNC:MARKer<x>:MEASurement (on page 636)	Sets or queries the selected measurement to which the specified marker will be snapped to the peak of the measurement trace.
CALCulate:TXGain subcommand group	Transmission Gain measurements
CALCulate:TXGain:MARKer<x>:DELTA:X? (on page 647)	Returns the delta marker frequency for the specified marker on the trace.
CALCulate:TXGain:MARKer<x>:DELTA:Y? (on page 647)	Returns the delta marker amplitude for the specified marker on the trace.
CALCulate:TXGain:MARKer<x>:MAXimum (on page 647)	Moves the specified marker to the highest peak on the trace.
CALCulate:TXGain:MARKer<x>:PEAK:HIGHer (on page 648)	Moves the specified marker to the next peak higher in amplitude on the trace.
CALCulate:TXGain:MARKer<x>:PEAK:LEFT (on page 648)	Moves the specified marker to the next peak to the left on the trace.
CALCulate:TXGain:MARKer<x>:PEAK:LOWer (on page 649)	Moves the specified marker to the next peak lower in amplitude on the trace.
CALCulate:TXGain:MARKer<x>:PEAK:RIGHT (on page 649)	Moves the specified marker to the next peak to the right on the trace.
CALCulate:TXGain:MARKer<x>:TRACe (on page 650)	Sets or queries the trace on which the specified marker is placed in the Transmission Gain display.
CALCulate:TXGain:MARKer<x>:X (on page 650)	Sets or queries the horizontal position for the specified marker on the trace.
CALCulate:TXGain:MARKer<x>:Y? (on page 651)	Queries the marker amplitude of the specified marker on the trace.
CALCulate:BLUEtooth subcommand group	Bluetooth measurements
CALCulate:BLUEtooth:CONSt:MARKer<x>:DELTA:X[:TIME]? (on page 406)	Queries the delta marker time for the selected marker.
CALCulate:BLUEtooth:CONSt:MARKer<x>:FDEViation? (on page 406)	Queries the frequency deviation for the selected marker.

Command	Description
CALCulate:BLUETOOTH:CONSt:MARKer<x>:MAGNitude? (on page 407)	Queries the magnitude readout of the selected marker.
CALCulate:BLUETOOTH:CONSt:MARKer<x>:MAXimum (on page 408)	Positions the selected marker at the symbol in the center of the analyzed time record.
CALCulate:BLUETOOTH:CONSt:MARKer<x>:PEAK:LEFT (on page 408)	Moves the selected marker in the time domain to the next symbol number to the left, relative to the previous marker position.
CALCulate:BLUETOOTH:CONSt:MARKer<x>:PEAK:RIGHT (on page 409)	Moves the selected marker in the time domain to the next symbol number to the right, relative to the previous marker position.
CALCulate:BLUETOOTH:CONSt:MARKer<x>:PHASe? (on page 409)	Queries the phase readout of the selected marker
CALCulate:BLUETOOTH:CONSt:MARKer<x>:SYMBol? (on page 410)	Queries the symbol readout value for the selected marker.
CALCulate:BLUETOOTH:CONSt:MARKer<x>:Trace (on page 410)	Sets or queries the Trace for the selected marker.
CALCulate:BLUETOOTH:CONSt:MARKer<x>:VALue? (on page 411)	Queries the value readout of the selected marker.
CALCulate:BLUETOOTH:CONSt:MARKer<x>:X (on page 411)	Sets or queries the time position of the selected marker.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:DELTA:X:TIME? (on page 412)	Returns the delta marker time for the selected marker.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:DELTA:Y? (on page 412)	Returns the delta marker time for the selected marker.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:MAXimum (on page 413)	Returns the delta marker amplitude for the selected markers.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:PEAK:HIGHer (on page 413)	Moves the selected marker to the highest peak.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:PEAK:LEFT (on page 414)	Moves the selected marker to the next peak to the left.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:PEAK:LOWer (on page 414)	Moves the selected marker to the next peak lower in amplitude.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:PEAK:RIGHT (on page 415)	Moves the selected marker to the next peak to the right.
CALCulate:BLUETOOTH:EDiagram:MARKer<x>:TRACe (on page 415)	The command places the selected marker on the I or Q trace in the Bluetooth eye diagram display. The query returns the name of the trace where the current marker resides.

Command	Description
CALCulate:BLUEtooth:EDIagram:MARKer<x>:X[:TIME] (on page 416)	Sets or queries the horizontal position (time) of the selected marker.
CALCulate:BLUEtooth:EDIagram:MARKer<x>:Y? (on page 416)	Returns the vertical position of the selected marker.
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:X[:TIME]? (on page 417)	Queries the delta marker time for the selected marker.
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:Y? (on page 417)	Returns the delta marker amplitude for the selected marker .
CALCulate:BLUEtooth:FDVTime:MARKer<x>:MAXimum (on page 418)	Moves the selected marker to the highest peak on the trace.
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:HIGHer (on page 418)	Moves the selected marker to the next peak higher in amplitude.
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LEFT (on page 419)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LOWer (on page 419)	Moves the selected marker to the next peak lower in amplitude.
CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:RIGHT (on page 420)	Moves the selected marker to the next peak to the right on the trace.
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:X[:TIME] (on page 420)	Sets or queries the marker time.
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:Y (on page 421)	Sets or queries the marker amplitude.
CALCulate:BOBW:MARKer<x>:DELTA:X? (on page 421)	Returns the delta marker frequency for the selected marker.
CALCulate:BOBW:MARKer<x>:DELTA:Y? (on page 422)	Returns the delta marker frequency for the selected marker on the Bluetooth 20 dB bandwidth measurement.
CALCulate:BOBW:MARKer<x>:MAXimum (on page 422)	Positions the selected marker at the maximum value of the display.
CALCulate:BOBW:MARKer<x>:PEAK:HIGHer (on page 423)	Moves the selected marker to the next peak higher in amplitude.
CALCulate:BOBW:MARKer<x>:PEAK:LEFT (on page 423)	Moves the selected marker in the time domain to the left, relative to the previous marker position on the trace.
CALCulate:BOBW:MARKer<x>:PEAK:LOWer (on page 424)	Moves the selected marker to the next peak lower in amplitude.
CALCulate:BOBW:MARKer<x>:PEAK:RIGHT (on page 424)	Moves the selected marker in the time domain to the right, relative to the previous marker position on the trace.

Command	Description
CALCulate:BOBW:MARKer<x>[:SET]:CENTer (on page 424)	Sets the center frequency to the value at the marker position.
CALCulate:BOBW:MARKer<x>:X (on page 425)	Sets or queries the time position of the selected marker.
CALCulate:BOBW:MARKer<x>:Y? (on page 425)	Returns the amplitude position of the selected marker.
CALCulate:DPX:MARKer subcommand group	DPX power density readings
CALCulate:DPX:MARKer<x>:POWER:DENSity? (on page 442)	Returns the power density of the specified marker.
CALCulate:DPX:MARKer<x>:POWER:IDensity? (on page 443)	Returns the integrated power density reading between the MR (reference marker) and the selected marker.
CALCulate:DPX:MARKer<x>:POWER:INTEgrated? (on page 443)	Returns the integrated power reading between the MR (reference marker) and the selected marker.
CALCulate:MARKer:MODE (on page 513)	Sets or queries the marker mode.
CALCulate:NOISe subcommand group	Noise and Gain measurements
CALCulate:NOISe:FIGure:MARKer<x>:DELTA:X? (on page 514)	Queries the frequency difference between MR (reference marker) and the selected marker
CALCulate:NOISe:FIGure:MARKer<x>:DELTA:Y? (on page 514)	Queries the power difference value between MR (reference marker) and the selected marker.
CALCulate:NOISe:FIGure:MARKer<x>:MAXimum (on page 515)	Places the selected marker at the maximum value on the peak of the trace.
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer (on page 515)	Places the selected marker at the next highest peak on the trace.
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT (on page 516)	Places the selected marker at the next peak on the trace to the left of the selected marker
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer (on page 516)	Places the selected marker at the next lowest peak on the trace.
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT (on page 517)	Places the selected marker at the next peak on the trace to the right of the selected marker.
CALCulate:NOISe:FIGure:MARKer<x>:TRACe (on page 517)	Sets or queries which trace the specified marker is attached to.
CALCulate:NOISe:FIGure:MARKer<x>:X? (on page 518)	Queries the frequency of the specified marker.
CALCulate:NOISe:FIGure:MARKer<x>:Y? (on page 519)	Queries the vertical position (dB) of the specified marker.

Command	Description
CALCulate:NOISE:GAIN:MARKer<x>:DELta:X? (on page 519)	Query returns the frequency difference between MR (reference marker) and the selected marker.
CALCulate:NOISE:GAIN:MARKer<x>:DELta:Y? (on page 520)	Query returns the power difference value between MR (reference marker) and the selected marker.
CALCulate:NOISE:GAIN:MARKer<x>:MAXimum? (on page 520)	Places the selected marker at the maximum value on the peak of the trace.
CALCulate:NOISE:GAIN:MARKer<x>:PEAK:HIGHer? (on page 521)	Places the selected marker at the next highest peak on the trace.
CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LEFT? (on page 521)	Places the selected marker at the next peak on the trace to the left of the selected marker.
CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LOWer? (on page 522)	Places the selected marker at the next lowest peak on the trace.
CALCulate:NOISE:GAIN:MARKer<x>:PEAK:RIGHT? (on page 522)	Places the specified marker on a specified trace. The query form returns the trace on which the marker resides.
CALCulate:NOISE:GAIN:MARKer<x>:TRACe (on page 523)	Sets or queries which trace the specified marker is attached to.
CALCulate:NOISE:GAIN:MARKer<x>:X? (on page 523)	Queries the horizontal position of the specified marker.
CALCulate:NOISE:GAIN:MARKer<x>:Y? (on page 524)	Queries the vertical position of the specified marker.
CALCulate:NOISE:TEMPerature:MARKer<x>:DELta:X? (on page 524)	Returns the frequency difference between MR (reference marker) and the selected marker.
CALCulate:NOISE:TEMPerature:MARKer<x>:DELta:Y? (on page 525)	Returns the temperature difference between MR (reference marker) and the selected marker.
CALCulate:NOISE:TEMPerature:MARKer<x>:MAXimum? (on page 525)	Places the selected marker at the maximum value on the peak of the trace.
CALCulate:NOISE:TEMPerature:MARKer<x>:PEAK:HIGHer? (on page 526)	Places the selected marker at the highest peak on the trace.
CALCulate:NOISE:TEMPerature:MARKer<x>:PEAK:LEFT? (on page 527)	Places the selected marker at the next peak on the trace to the left of the selected marker.
CALCulate:NOISE:TEMPerature:MARKer<x>:PEAK:LOWer? (on page 527)	Places the selected marker at the next lowest peak on the trace.
CALCulate:NOISE:TEMPerature:MARKer<x>:PEAK:RIGHT? (on page 528)	This command places the specified marker on a specified trace. The query form returns the trace on which the marker resides.
CALCulate:NOISE:TEMPerature:MARKer<x>:TRACe (on page 528)	Sets or queries which trace the specified marker is attached to.

Command	Description
CALCulate:NOISe:TEMPerature:MARKer<x>:X? (on page 529)	Queries the frequency of the specified marker.
CALCulate:NOISe:TEMPerature:MARKer<x>:Y? (on page 529)	Queries the temperature (Kelvin) at the specified marker.
CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:X? (on page 530)	Queries the frequency difference between MR (reference marker) and the selected marker.
CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:Y? (on page 530)	Queries the power difference value between MR (reference marker) and the selected marker.
CALCulate:NOISe:YFACTOR:MARKer<x>:MAXimum (on page 531)	Places the selected marker at the maximum value on the peak of the trace.
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LEFT? (on page 532)	Places the selected marker at the next peak to the left on the trace.
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LOWER? (on page 532)	Places the selected marker at the next lowest peak on the trace.
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:RIGHT? (on page 533)	Places the specified marker on a specified trace. The query form returns the trace on which the marker resides.
CALCulate:NOISe:YFACTOR:MARKer<x>:TRACE (on page 534)	Sets or queries which trace the specified marker is attached to.
CALCulate:NOISe:YFACTOR:MARKer<x>:X? (on page 534)	Queries the frequency of the specified marker.
CALCulate:NOISe:YFACTOR:MARKer<x>:Y? (on page 535)	This command queries the vertical position (dB) of the specified marker.
CALCulate:P25 subcommand group	P25 analysis
CALCulate:P25:CONSt:MARKer<x>:DELTA:X[:TIME]? (on page 551)	Returns the delta marker time for the selected marker.
CALCulate:P25:CONSt:MARKer<x>:FDEVIation? (on page 551)	Queries the frequency deviation of the selected marker.
CALCulate:P25:CONSt:MARKer<x>:MAGNitude? (on page 552)	Queries the frequency deviation (for Freq Dev trace types) or magnitude (for IQ trace types) of the selected marker.
CALCulate:P25:CONSt:MARKer<x>:MAXimum (on page 552)	Moves the selected marker to the highest peak on the trace.
CALCulate:P25:CONSt:MARKer<x>:PEAK:LEFT (on page 552)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:P25:CONSt:MARKer<x>:PEAK:RIGHT (on page 553)	Moves the selected marker to the next peak to the right on the trace.

Command	Description
CALCulate:P25:CONSt:MARKer<x>:PHASe? (on page 553)	Queries the phase of the selected marker.
CALCulate:P25:CONSt:MARKer<x>:SYMBol? (on page 554)	Queries the readout symbol of the selected marker.
CALCulate:P25:CONSt:MARKer<x>:TRAcE (on page 554)	Places the selected marker on the Demodulated I and Q versus Time trace. The query returns the name of the trace on which the marker resides.
CALCulate:P25:CONSt:MARKer<x>:VALue? (on page 555)	Queries the readout value of the specified marker.
CALCulate:P25:CONSt:MARKer<x>:X (on page 555)	Sets or queries the horizontal position of the selected marker.
CALCulate:P25:EDIagram:MARKer<x>:DELTA:X[:TIME]? (Query Only)	Returns the delta marker time for the selected marker.
CALCulate:P25:EDIagram:MARKer<x>:DELTA:Y? (on page 556)	Returns the delta marker time for the selected marker.
CALCulate:P25:EDIagram:MARKer<x>:MAXimum (on page 557)	Moves the selected marker to the highest peak.
CALCulate:P25:EDIagram:MARKer<x>:PEAK:HIGHer (on page 557)	Moves the selected marker to the next highest peak.
CALCulate:P25:EDIagram:MARKer<x>:PEAK:LEFT (on page 558)	Moves the selected marker to the next peak to the left .
CALCulate:P25:EDIagram:MARKer<x>:PEAK:LOWer (on page 559)	Moves the selected marker to the next lowest peak.
CALCulate:P25:EDIagram:MARKer<x>:PEAK:RIGHT (on page 559)	Moves the selected marker to the next peak to the right .
CALCulate:P25:EDIagram:MARKer<x>:TRACe (on page 560)	Sets the selected marker on the I or Q trace, or queries the trace that the specified marker is on.
CALCulate:P25:EDIagram:MARKer<x>:X (on page 561)	Sets or queries the horizontal position of the selected marker.
CALCulate:P25:EDIagram:MARKer<x>:Y (on page 561)	Sets or queries the vertical position of the selected marker.
CALCulate:P25:PVTime:MARKer<x>:DELTA:X[:TIME]? (on page 562)	Returns the delta marker time (seconds) for the selected marker.
CALCulate:P25:PVTime:MARKer<x>:DELTA:Y[:TIME]? (on page 562)	Returns the Delta marker amplitude (dB) for the selected marker.
CALCulate:P25:PVTime:MARKer<x>:Maximum (on page 563)	Moves the selected marker to the highest peak on the trace.

Command	Description
CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer (on page 563)	Moves the selected marker to the next peak higher in amplitude on the trace.
CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT (on page 564)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer (on page 565)	Moves the selected marker to the next peak lower in amplitude on the trace.
CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT (on page 565)	Moves the selected marker to the next peak to the right on the trace.
CALCulate:P25:PVTime:MARKer<x>:X (on page 566)	Sets or queries the horizontal position of the selected marker.
CALCulate:P25:PVTime:MARKer<x>:Y (on page 566)	Sets or queries the vertical position of the selected marker.
CALCulate: Marker subgroup	Marker position and values
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWER:DENSity? (on page 627)	Returns the power density of the specified marker.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWER:IDENSity (on page 628)	Returns the integrated power density reading between the MR (reference marker) and the selected marker.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWER:INTEgrated? (on page 629)	Returns the integrated power reading between the MR (reference marker) and the selected marker.
CALCulate:MARKer:AOff (on page 500)	Turns off all markers.
CALCulate:MARKer:DElete (on page 500)	Deletes the last marker added.
CALCulate:MARKer:DENSity:EXCursion (on page 501)	Sets or queries the minimum excursion of DPX signal density.
CALCulate:MARKer:DENSity:SMOothing (on page 502)	Sets or queries the number of pixels squared for smoothing the density.
CALCulate:MARKer:DENSity:THReshold (on page 502)	Sets or queries the threshold of DPX signal density to detect peaks.
CALCulate:MARKer:DRAG:SEARch:STATe (on page 502)	Enables or disables peak searching when dragging a marker in a plot.
CALCulate:MARKer:MODE (on page 503)	Sets or queries the marker mode.
CALCulate:MARKer:NOISe:MODE (on page 503)	Sets or queries the marker noise mode.
CALCulate:MARKer:PEAK:EXCursion (on page 504)	Sets or queries the minimum excursion level.

Command	Description
CALCulate:MARKer:PEAK:THReshold (on page 504)	Sets or queries the threshold level to detect peaks.
CALCulate:SEARch subgroup	Calculate search commands
CALCulate:SEARch:LIMit:FAIL? (on page 596)	Queries whether the waveform cuts across the limit or not.
CALCulate:SEARch:LIMit:MATCH:BEEP[:STATe] (on page 596)	Sets or queries whether to beep when a match occurs.
CALCulate:SEARch:LIMit:MATCH:SACQuire[:STATe] (on page 596)	Sets or queries whether to stop acquiring data on match.
CALCulate:SEARch:LIMit:MATCH:SDATa[:STATe] (on page 597)	Sets or queries whether to save the acquisition data automatically.
CALCulate:SEARch:LIMit:MATCH:SPICture[:STATe] (on page 597)	Sets or queries whether to save the whole screen automatically.
CALCulate:SEARch:LIMit:MATCH:STRace[:STATe] (on page 598)	Sets or queries whether to save the spectrum trace automatically.
CALCulate:SEARch:LIMit:OPERation (on page 599)	Sets or queries the limit operation in the search function.
CALCulate:SEARch:LIMit:OPERation:FEED (on page 600)	Sets or queries the data flow to be fed in the search operation.
CALCulate:SEARch:LIMit:OPERation:MASK:LOAD (on page 600)	Loads the limit mask from a specified file for the search operation.
CALCulate:SEARch:LIMit:OPERation:MASK:STORE (on page 601)	Stores the limit mask to a specified file for the search operation.
CALCulate[:SEARch]:TEST[:LIMit[:STATe]:MATCH:FILE:LOCation] (on page 385)	Sets or queries the limit value in the search operation.
CALCulate:SEARch:LIMit:REPort:DATA? (on page 602)	Returns the frequency range(s) that satisfy the search condition.
CALCulate:SEARch:LIMit:REPort:POINts? (on page 602)	Returns the number of range(s) that satisfy the search condition.
CALCulate:SEARch:LIMit:STATe (on page 603)	Sets or queries whether to enable or disable the search function.
CALCulate:ACPower subgroup	Channel power and ACPR measurement
CALCulate:ACPower:MARKer<x>:DELta:X? (on page 386)	Returns the delta marker frequency for the selected marker.
CALCulate:ACPower:MARKer<x>:DELta:Y? (on page 387)	Returns the delta marker amplitude for the selected marker.

Command	Description
CALCulate:ACPower:MARKer<x>:MAXimum (on page 387)	Moves the marker to the highest peak on the trace.
CALCulate:ACPower:MARKer<x>:PEAK:LEFT (on page 387)	Moves the marker to the next peak to the left on the trace.
CALCulate:ACPower:MARKer<x>:PEAK:RIGHT (on page 388)	Moves the marker to the next peak to the right on the trace.
CALCulate:ACPower:MARKer<x>:X (on page 388)	Sets or queries the horizontal position of the marker.
CALCulate:ACPower:MARKer<x>:Y? (on page 389)	Queries the marker amplitude of the selected marker.
CALCulate:{AM FM PM} subgroup (Option 21 only)	AM/FM/PM measurement
CALCulate:{AM FM PM}:MARKer<x>:DELta:X? (on page 389)	Returns the delta marker time for the selected marker.
CALCulate:{AM FM PM}:MARKer<x>:DELta:Y? (on page 390)	Returns the delta marker amplitude for the selected marker.
CALCulate:{AM FM PM}:MARKer<x>:MAXimum (on page 390)	Moves the marker to the highest peak on the trace.
CALCulate:{AM FM PM}:MARKer<x>:PEAK:HIGHer (on page 391)	Moves the marker to the next peak higher in amplitude.
CALCulate:{AM FM PM}:MARKer<x>:PEAK:LEFT (on page 391)	Moves the marker to the next peak to the left on the trace.
CALCulate:{AM FM PM}:MARKer<x>:PEAK:LOWer (on page 392)	Moves the marker to the next peak lower in amplitude.
CALCulate:{AM FM PM}:MARKer<x>:PEAK:RIGHT (on page 392)	Moves the marker to the next peak to the right on the trace.
CALCulate:{AM FM PM}:MARKer<x>:X (on page 393)	Sets or queries the horizontal position (time) of the marker.
CALCulate:{AM FM PM}:MARKer<x>:Y? (on page 393)	Queries the marker amplitude of the selected marker.
CALCulate:AUDio subgroup	Audio measurements
CALCulate:AUDio:HARMonic:HNUMber (on page 394)	Sets or queries the number of harmonics.
CALCulate:AUDio:HARMonic:NHNumber (on page 394)	Sets or queries the number of non-harmonics.
CALCulate:AUDio:NHARmonic:EXCursion (on page 394)	Sets or queries the non-harmonic excursion value.

Command	Description
CALCulate:AUDio:NHARmonic:IGNore (on page 395)	Sets or queries the ignore region of the non-harmonics.
CALCulate:AUDio:NHARmonic:THReshold (on page 395)	Sets or queries the non-harmonic threshold value.
CALCulate:AUDio:SPECTrum:MARKer<x>:DELTA:X? (on page 396)	Returns the delta marker frequency for the selected marker on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:DELTA:Y? (on page 396)	Returns the delta marker amplitude for the selected marker on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:MAXimum (on page 397)	Moves the selected marker to the highest peak on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:HIGHER (on page 397)	Moves the selected marker to the next peak higher in amplitude on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LEFT (on page 398)	Moves the selected marker to the next peak to the left on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LOWER (on page 398)	Moves the selected marker to the next peak lower in amplitude on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:RIGHT (on page 399)	Moves the selected marker to the next peak to the right on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:TRACE (on page 399)	Sets or queries the trace on which the specified marker is placed in the spectrum measurement.
CALCulate:AUDio:SPECTrum:MARKer<x>:X (on page 399)	Sets or queries the horizontal position of the selected marker on the spectrum trace.
CALCulate:AUDio:SPECTrum:MARKer<x>:Y? (on page 400)	Queries the marker amplitude of the selected marker on the spectrum trace.
CALCulate:AVTime subgroup	Frequency versus Time measurement
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (on page 400)	Returns the delta marker time for the selected marker.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 401)	Returns the delta marker amplitude for the selected marker.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:MAXimum (on page 402)	Moves the marker to the highest peak on the trace.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHER (on page 402)	Moves the marker to the next peak higher in amplitude.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 403)	Moves the marker to the next peak to the left on the trace.

Command	Description
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 403)	Moves the marker to the next peak lower in amplitude.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 404)	Moves the marker to the next peak to the right on the trace.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:TRACe (on page 404)	Sets or queries the trace on which the marker is placed.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:X (on page 405)	Sets or queries the horizontal position of the marker.
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:Y? (on page 405)	Queries the marker amplitude of the selected marker.
CALCulate:CONSt subgroup (Option 21 only)	Constellation measurement
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (on page 426)	Returns the delta marker time for the selected marker on the Constellation trace.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:FDEViation? (on page 426)	Queries the frequency deviation of the selected marker in the Constellation measurement for an FSK modulated signal.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:MAGNitude? (on page 427)	Queries the magnitude readout of the selected marker in the Constellation measurement.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:MAXimum (on page 428)	Positions the selected marker at the symbol in the center of the time record.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 428)	Moves the selected marker in the time domain to the next lower symbol number, relative to the previous marker position.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 429)	Moves the selected marker in the time domain to the next higher symbol number, relative to the previous marker position.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:PHASe? (on page 430)	Queries the phase readout of the selected marker in the Constellation measurement.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:SYMBol? (on page 430)	Queries the symbol readout of the selected marker in the Constellation measurement.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:VALue? (on page 431)	Queries the value readout of the selected marker in the Constellation measurement.
CALCulate:CONSt[:MEASview<y>]:MARKer<x>:X (on page 432)	Sets or queries the time position of the selected marker on the Constellation trace.
CALCulate:DIQVtime subgroup (Option 21 only)	Demodulated I&Q versus Time measurement
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (on page 432)	Returns the delta marker time for the selected marker.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 433)	Returns the delta marker amplitude for the selected marker.

Command	Description
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:MAXimum (on page 434)	Moves the selected marker to the highest peak on the trace.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 434)	Moves the selected marker to the next peak higher in amplitude.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LEFt (on page 435)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 435)	Moves the selected marker to the next peak lower in amplitude.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 436)	Moves the selected marker to the next peak to the right on the trace.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:TRACe (on page 437)	Places the selected marker on the Demodulated I&Q versus Time trace.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:X[:TIME] (on page 438)	Sets or queries the horizontal position (time) of the selected marker.
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:Y? (on page 437)	Queries the marker amplitude of the selected marker.
CALCulate:DPX subgroup	DPX spectrum measurement
CALCulate:DPX:MARKer<x>:DELta:Y? (on page 440)	Returns the delta marker amplitude for the selected marker.
CALCulate:DPX:MARKer<x>:MAXimum (on page 440)	Moves the marker to the highest peak on the trace.
CALCulate:DPX:MARKer<x>:PEAK:HIGHer (on page 441)	Moves the marker to the next peak higher in amplitude.
CALCulate:DPX:MARKer<x>:PEAK:LEFt (on page 441)	Moves the marker to the next peak to the left on the trace.
CALCulate:DPX:MARKer<x>:PEAK:LOWer (on page 442)	Moves the marker to the next peak lower in amplitude.
CALCulate:DPX:MARKer<x>:PEAK:RIGHt (on page 442)	Moves the marker to the next peak to the right on the trace.
CALCulate:DPX:MARKer<x>[:SET]:CENTer (on page 444)	Sets the center frequency to the marker frequency.
CALCulate:DPX:MARKer<x>:TRACe (on page 444)	Sets or queries the trace to attach the marker to.
CALCulate:DPX:MARKer<x>:X:AMPLitude (on page 445)	Sets or queries the amplitude position of the marker.

Command	Description
CALCulate:DPX:MARKer<x>:X:FREQuency (on page 445)	Sets or queries the frequency position of the marker.
CALCulate:DPX:MARKer<x>:X:PHASe (on page 446)	Sets or queries the phase position of the selected marker.
CALCulate:DPX:MARKer<x>:X:TIME (on page 446)	Sets or queries the time position of the selected marker.
CALCulate:DPX:MARKer<x>:Y? (on page 447)	Queries the marker amplitude of the selected marker.
CALCulate:EDiagram subgroup (Option 21 only)	Eye diagram
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]?	Returns the delta marker time for the selected marker on the eye diagram trace.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 448)	Returns the delta marker amplitude for the selected marker on the eye diagram trace.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:MAXimum (on page 449)	Moves the selected marker to the highest peak on the eye diagram trace.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 449)	Moves the selected marker to the next peak higher in amplitude on the eye diagram trace.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 450)	Moves the selected marker to the next peak to the left on the eye diagram trace.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 450)	Moves the selected marker to the next peak lower in amplitude on the eye diagram trace.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 451)	Moves the selected marker to the next peak to the right on the eye diagram trace.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:TRACe (on page 452)	Places the selected marker on the I or Q trace in the eye diagram display.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:X[:TIME] (on page 452)	Sets or queries the horizontal position (time) of the selected marker in the eye diagram measurement.
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:Y? (on page 453)	Queries the vertical position of the selected marker in the eye diagram measurement.
CALCulate:EVM subgroup (Option 21 only)	EVM versus Time measurement
CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:X? (on page 458)	Returns the delta marker amplitude for the selected marker in the EVM versus Time measurement.
CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 459)	Returns the delta marker amplitude for the selected marker in the EVM versus Time measurement.
CALCulate:EVM[:MEASview<y>]:MARKer<x>:MAXimum (on page 460)	Moves the selected marker to the highest peak on the trace in the EVM versus Time measurement.

Command	Description
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 460)	Moves the selected marker to the next peak higher in amplitude on the EVM versus Time trace.
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 461)	Moves the selected marker to the next peak to the left on the trace in the EVM versus Time measurement.
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 461)	Moves the selected marker to the next peak lower in amplitude on the EVM versus Time trace.
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 462)	Moves the selected marker to the next peak to the right on the trace in the EVM versus Time measurement.
CALCulate:EVM[:MEASview<y>]:MARKer<x>:X (on page 463)	Sets or queries the horizontal position of the selected marker in the EVM versus Time measurement.
CALCulate:EVM[:MEASview<y>]:MARKer<x>:Y? (on page 463)	Queries the marker amplitude of the selected marker in the EVM versus Time measurement.
CALCulate:FDVTime subgroup (Option 21 only)	Frequency deviation versus Time measurement
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (on page 464)	Returns the delta marker time for the selected marker on the Frequency deviation versus Time trace.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 464)	Returns the delta marker amplitude for the selected marker in the Frequency deviation versus Time measurement.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:MAXimum (on page 465)	Moves the selected marker to the highest peak on the trace in the Frequency deviation versus Time measurement.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 466)	Moves the marker to the next peak higher in amplitude.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 466)	Moves the marker to the next peak to the left on the trace.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 467)	Moves the selected marker to the next peak lower in amplitude on the Frequency deviation versus Time trace.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 467)	Moves the selected marker to the next peak to the right on the trace in the Frequency deviation versus Time measurement.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:X[:TIME] (on page 468)	Sets or queries the horizontal position of the selected marker in the Frequency deviation versus Time measurement.
CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:Y? (on page 469)	Queries the marker amplitude of the selected marker in the Frequency deviation versus Time measurement.
CALCulate:{FSETtling PSETtling} subgroup	Frequency and Phase Settling measurements
CALCulate:{FSETtling PSETtling}:MARKer<x>:DELTA:X? (on page 469)	Returns the delta marker time for the selected marker in the Frequency and Phase Settling displays.
CALCulate:{FSETtling PSETtling}:MARKer<x>:DELTA:Y? (on page 470)	Returns the delta marker frequency for the selected marker in the Frequency and Phase Settling displays.

Command	Description
CALCulate:{FSETtling PSETtling}:MARKer<x>:MAXimum (on page 470)	Moves the selected marker to the highest peak on the trace in the Frequency or Phase Settling display.
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:HIGHer (on page 471)	Moves the selected marker to the next peak higher in amplitude on the Frequency or Phase Settling trace.
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:LEFt (on page 471)	Moves the selected marker to the next peak to the left on the trace in the Frequency or Phase Settling display.
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:LOWer (on page 472)	Moves the selected marker to the next peak lower in amplitude on the Frequency or Phase Settling trace.
CALCulate:{FSETtling PSETtling}:MARKer<x>:PEAK:RIGHt (on page 472)	Moves the selected marker to the next peak to the right on the trace in the Frequency or Phase Settling display.
CALCulate:{FSETtling PSETtling}:MARKer<x>:TRACe (on page 473)	Sets or queries the trace on which the specified marker is placed in the spectrum measurement
CALCulate:{FSETtling PSETtling}:MARKer<x>:X (on page 473)	Sets or queries the horizontal position of the selected marker in the Frequency and Phase Settling display.
CALCulate:{FSETtling PSETtling}:MARKer<x>:Y? (on page 474)	Queries the marker amplitude of the selected marker in the Frequency and Phase Settling display.
CALCulate:FVTime subgroup	Frequency versus Time measurement
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (on page 474)	Returns the delta marker time for the selected marker.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 475)	Returns the delta marker frequency for the selected marker.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:MAXimum (on page 475)	Moves the marker to the highest peak on the trace.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 476)	Moves the marker to the next peak higher in amplitude.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFt (on page 476)	Moves the marker to the next peak to the left on the trace.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 477)	Moves the marker to the next peak lower in amplitude.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 477)	Moves the marker to the next peak to the right on the trace.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:X (on page 478)	Sets or queries the horizontal position of the marker.
CALCulate:FVTime[:MEASview<y>]:MARKer<x>:Y? (on page 478)	Queries the marker amplitude of the selected marker.
CALCulate:IQVTime subgroup	RF I&Q versus Time measurement

Command	Description
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELta:X? (on page 480)	Returns the delta marker time for the selected marker.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELta:Y? (on page 481)	Returns the delta marker amplitude for the selected marker.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:MAXimum (on page 481)	Moves the marker to the highest peak on the trace.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 482)	Moves the marker to the next peak higher in amplitude.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFt (on page 482)	Moves the marker to the next peak to the left on the trace.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 483)	Moves the marker to the next peak lower in amplitude.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 484)	Moves the marker to the next peak to the right on the trace.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:TRACe (on page 484)	Sets or queries the trace (I or Q) to place the marker.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:X (on page 485)	Sets or queries the horizontal position of the marker.
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:Y? (on page 485)	Queries the marker amplitude of the selected marker.
CALCulate:MCPower subgroup	MCPR measurement
CALCulate:MCPower:MARKer<x>:DELta:X? (on page 504)	Returns the delta marker frequency for the selected marker.
CALCulate:MCPower:MARKer<x>:DELta:Y? (on page 505)	Returns the delta marker amplitude for the selected marker.
CALCulate:MCPower:MARKer<x>:MAXimum (on page 506)	Moves the marker to the highest peak on the trace.
CALCulate:MCPower:MARKer<x>:PEAK:LEFt (on page 506)	Moves the marker to the next peak to the left on the trace.
CALCulate:MCPower:MARKer<x>:PEAK:RIGHt (on page 506)	Moves the marker to the next peak to the right on the trace.
CALCulate:MCPower:MARKer<x>:X (on page 507)	Sets or queries the horizontal position of the marker.
CALCulate:MCPower:MARKer<x>:Y? (on page 507)	Queries the marker amplitude of the selected marker.
CALCulate:MERRor:Subgroup	Magnitude error versus Time measurement

Command	Description
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:X? (on page 508)	Returns the delta marker amplitude for the selected marker.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:Y? (on page 508)	Returns the delta marker amplitude for the selected marker.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:MAXimum (on page 509)	Moves the marker to the highest peak on the trace.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 510)	Moves the marker to the next peak higher in amplitude.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 510)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 511)	Moves the selected marker to the next peak lower in amplitude.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 511)	Moves the selected marker to the next peak to the right on the trace.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:X (on page 512)	Sets or queries the horizontal position of the marker.
CALCulate:MERRor[:MEASview<y>]:MARKer<x>:Y? (on page 513)	Queries the marker amplitude of the selected marker.
CALCulate:OBWidth subgroup	Occupied Bandwidth measurement
CALCulate:OBWidth:MARKer<x>:DELta:X? (on page 535)	Returns the delta marker frequency for the selected marker.
CALCulate:OBWidth:MARKer<x>:DELta:Y? (on page 536)	Returns the delta marker amplitude for the selected marker.
CALCulate:OBWidth:MARKer<x>:MAXimum (on page 536)	Moves the marker to the highest peak on the trace.
CALCulate:OBWidth:MARKer<x>:PEAK:HIGHer (on page 537)	Moves the marker to the next peak higher in amplitude.
CALCulate:OBWidth:MARKer<x>:PEAK:LEFT (on page 537)	Moves the marker to the next peak to the left on the trace.
CALCulate:OBWidth:MARKer<x>:PEAK:LOWer (on page 537)	Moves the marker to the next peak lower in amplitude.
CALCulate:OBWidth:MARKer<x>:PEAK:RIGHT (on page 538)	Moves the marker to the next peak to the right on the trace.
CALCulate:OBWidth:MARKer<x>[:SET]:CENTer (on page 538)	Sets the center frequency to the value at the marker position.

Command	Description
CALCulate:OBWidth:MARKer<x>:X (on page 539)	Sets or queries the horizontal position of the marker.
CALCulate:OBWidth:MARKer<x>:Y? (on page 539)	Queries the marker amplitude of the selected marker.
CALCulate:OFDM subgroup	Orthogonal frequency division multiplexing measurement
CALCulate:OFDM:CONSt:MARKer<x>:FREQuency (on page 540)	Sets or queries the frequency position of the selected marker.
CALCulate:OFDM:CONSt:MARKer<x>:MAGNitude? (on page 540)	Queries the marker magnitude of the selected marker.
CALCulate:OFDM:CONSt:MARKer<x>:PHASe? (on page 541)	Queries the phase readout of the selected marker.
CALCulate:OFDM:CONSt:MARKer<x>:TIME (on page 541)	Sets or queries the X position of the selected marker.
CALCulate:OFDM:CONSt:MARKer<x>:TYPE? (on page 541)	Queries the data type of the selected marker.
CALCulate:OFDM:CONSt:MARKer<x>:VALue? (on page 542)	Queries the value of the specified marker.
CALCulate:OFDM:CRESpone:MARKer<x>:DELTA:X? (on page 542)	Returns the delta marker frequency for the selected marker.
CALCulate:OFDM:CRESpone:MARKer<x>:DELTA:Y? (on page 543)	Returns the delta marker frequency for the selected marker.
CALCulate:OFDM:CRESpone:MARKer<x>:MAXimum (on page 543)	Moves the selected marker to the highest peak.
CALCulate:OFDM:CRESpone:MARKer<x>:PEAK:HIGHER (on page 544)	Moves the selected marker to the next peak higher in amplitude.
CALCulate:OFDM:CRESpone:MARKer<x>:PEAK:LEFT (on page 544)	Moves the selected marker to the next peak to the left.
CALCulate:OFDM:CRESpone:MARKer<x>:PEAK:LOWER (on page 545)	Moves the selected marker to the next peak lower in amplitude.
CALCulate:OFDM:CRESpone:MARKer<x>:PEAK:RIGHT (on page 545)	Moves the selected marker to the next peak to the right.
CALCulate:OFDM:CRESpone:MARKer<x>:X (on page 545)	Sets or queries the horizontal position of the selected marker.
CALCulate:OFDM:CRESpone:MARKer<x>:Y? (on page 546)	Returns the amplitude of the selected marker.
CALCulate:OFDM:FLATness:MARKer<x>:MAXimum (on page 546)	Positions the specified marker at the maximum point on the trace.

Command	Description
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:HIGHer (on page 547)	Moves the specified marker to the next peak higher in amplitude on the trace.
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LEFT (on page 547)	Moves the specified marker to the next peak to the left on the trace.
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LOWer (on page 548)	Moves the marker to the next peak lower in amplitude on the trace.
CALCulate:OFDM:FLATness:MARKer<x>:PEAK:RIGHT (on page 548)	Moves the marker to the next peak to the right on the trace.
CALCulate:OFDM:FLATness:MARKer<x>:X (on page 548)	Sets or queries the horizontal value at the selected marker position on the points trace.
CALCulate:OFDM:FLATness:MARKer<x>:Y? (on page 549)	Returns the value of the amplitude (vertical position) at the selected marker position.
CALCulate:OFDM:TABLE:MARKer<x>:FREQuency (on page 549)	Sets or queries the frequency position of the selected marker.
CALCulate:OFDM:TABLE:MARKer<x>:TIME (on page 550)	Sets or queries the marker time.
CALCulate:OFDM:TABLE:MARKer<x>:VALue? (on page 550)	Queries the value readout of the selected marker.
CALCulate:PERRor subgroup (Option 21 only)	Phase error versus Time measurement
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:X? (on page 567)	Returns the delta marker amplitude for the selected marker in the Phase error versus Time measurement.
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 568)	Returns the delta marker phase for the selected marker.
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:MAXimum (on page 568)	Moves the marker to the highest peak on the trace.
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 569)	Moves the marker to the next peak higher in amplitude.
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 569)	Moves the marker to the next peak to the left on the trace.
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 570)	Moves the marker to the next peak lower in amplitude.
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 571)	Moves the marker to the next peak to the right on the trace.
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:X (on page 571)	Sets or queries the horizontal position of the marker.

Command	Description
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:Y? (on page 572)	Queries the marker amplitude of the selected marker.
CALCulate:PHVTime subgroup	Phase versus Time measurement
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELta:X? (on page 572)	Returns the delta marker time for the selected marker.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELta:Y? (on page 573)	Returns the delta marker phase for the selected marker.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:MAXimum (on page 573)	Moves the marker to the highest peak on the trace.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 574)	Moves the marker to the next peak higher in amplitude.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LEfT (on page 574)	Moves the marker to the next peak to the left on the trace.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 575)	Moves the marker to the next peak lower in amplitude.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 576)	Moves the marker to the next peak to the right on the trace.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:X (on page 576)	Sets or queries the horizontal position of the marker.
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:Y? (on page 577)	Queries the marker amplitude of the selected marker.
CALCulate:PULSe subgroup	Pulsed RF measurements
CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:X (on page 584)	Sets or queries the frequency in Hz for the X cursor.
CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:Y? (on page 584)	Returns the frequency level in dB for the Y cursor.
CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:X (on page 585)	Sets or queries the histogram indicator X value.
CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:Y? (on page 585)	Queries the histogram indicator Y value.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELta:X? (on page 586)	Returns the delta marker frequency for the specified marker.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELta:Y? (on page 586)	Returns the delta marker amplitude for the specified marker.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:MAXimum (on page 587)	Moves the marker to the highest peak on the trace.

Command	Description
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 587)	Moves the marker to the next peak higher in amplitude.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 588)	Moves the marker to the next peak to the left on the statistics trace.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 589)	Moves the marker to the next peak lower in amplitude.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 589)	Moves the marker to the next peak to the right on the statistics trace.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:X (on page 590)	Sets or queries the horizontal position of the marker.
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:Y? (on page 590)	Queries the marker amplitude of the selected marker.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:X? (on page 591)	Returns the delta marker time for the selected marker.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 591)	Returns the delta marker amplitude for the selected marker.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:MAXimum (on page 592)	Moves the marker to the highest peak on the pulse trace.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 592)	Moves the marker to the next peak higher in amplitude.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 593)	Moves the marker to the next peak to the left on the pulse trace.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 593)	Moves the marker to the next peak lower in amplitude.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 594)	Moves the marker to the next peak to the right on the pulse trace.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:X (on page 594)	Sets or queries the horizontal position of the marker.
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:Y? (on page 595)	Queries the marker amplitude of the selected marker.
CALCulate:SEARch subgroup	Spectrogram measurement
CALCulate:SEARch:LIMit:FAIL? (on page 596)	Queries whether the waveform cuts across the limit in the search operation.
CALCulate:SEARch:LIMit:MATCH:BEEP[:STATE] (on page 596)	Sets or queries whether or not to emit a beep on match during run or replay in the search operation.

Command	Description
CALCulate:SEARCH:LIMit:MATCH:SACQuire[:STATe] (on page 596)	Sets or queries whether or not to stop acquiring data on match during run or replay in the search operation.
CALCulate:SEARCH:LIMit:MATCH:SDATa[:STATe] (on page 597)	Sets or queries whether or not to save automatically (AutoSave) acquisition data on match during run in the search operation.
CALCulate:SEARCH:LIMit:MATCH:SPICture[:STATe] (on page 597)	Sets or queries whether or not to save automatically (AutoSave) the whole screen on match during run in the search operation.
CALCulate:SEARCH:LIMit:MATCH:STRace[:STATe] (on page 598)	Sets or queries whether or not to save automatically (AutoSave) the spectrum trace on match during run in the search operation.
CALCulate:SEARCH:LIMit:OPERation (on page 599)	Sets or queries the search condition parameter.
CALCulate:SEARCH:LIMit:OPERation:FEED (on page 600)	Sets or queries the data flow to be fed in the search operation.
CALCulate:SEARCH:LIMit:OPERation:MASK:LOAD (on page 600)	Loads the specified limit mask file for the search operation.
CALCulate:SEARCH:LIMit:OPERation:MASK:STORE (on page 601)	Saves the limit mask to a specified file.
CALCulate[:SEARCH]:TEST[:LIMit[:STATe]:MATCH:FILE:LOCation (on page 605)	Sets or queries the limit value (in dB) in the search operation.
CALCulate:SEARCH:LIMit:REPort:DATA? (on page 602)	Queries the frequency range(s) that satisfy the search condition.
CALCulate:SEARCH:LIMit:REPort:POINts? (on page 602)	Queries the number of frequency range(s) that satisfy the search condition.
CALCulate:SEARCH:LIMit:STATe (on page 603)	Sets or queries the search function (enabled or disabled).
CALCulate:SEM subgroup	Spectral Emissions Mask measurement
CALCulate:SEM:MARKer<x>:DELta:X? (on page 613)	Returns the delta marker frequency for the selected marker.
CALCulate:SEM:MARKer<x>:DELta:Y? (on page 614)	Returns the delta marker amplitude for the selected marker.
CALCulate:SEM:MARKer<x>:MAXimum (on page 614)	Moves the selected marker to the highest peak.
CALCulate:SEM:MARKer<x>:PEAK:HIGHer (on page 614)	Moves the selected marker to the next peak higher in amplitude.
CALCulate:SEM:MARKer<x>:PEAK:LEFT (on page 615)	Moves the selected marker to the next peak to the left.
CALCulate:SEM:MARKer<x>:PEAK:LOWer (on page 615)	Moves the selected marker to the next peak lower in amplitude.

Command	Description
CALCulate:SEM:MARKer<x>:PEAK:RIGHT (on page 616)	Moves the selected marker to the next peak to the right.
CALCulate:SEM:MARKer<x>[:SET]:CENTer (on page 616)	Moves the specified marker to the center frequency.
CALCulate:SEM:MARKer<x>:X (on page 616)	Sets or queries the horizontal position of the selected marker.
CALCulate:SEM:MARKer<x>:Y? (on page 617)	Queries the marker amplitude of the selected marker.
[CALCulate]:SGRam subgroup	Spectrogram measurements
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELta:X:FREQuency? (on page 617)	Returns the delta marker frequency for the selected marker.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELta:X:TIME? (on page 618)	Returns the delta marker time for the selected marker.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELta:Y? (on page 618)	Returns the delta marker amplitude for the selected marker.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:MAXimum (on page 619)	Moves the marker to the highest peak on the trace.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 619)	Moves the marker to the next peak higher in amplitude.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LEFT (on page 620)	Moves the marker to the next peak to the left on the trace.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 620)	Moves the marker to the next peak lower in amplitude.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 621)	Moves the marker to the next peak to the right on the trace.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>[:SET]:CENTer (on page 622)	Sets the center frequency to the marker frequency.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X:FREQuency (on page 622)	Sets or queries the marker frequency.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X:TIME (on page 623)	Sets or queries the marker time.
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:Y? (on page 623)	Queries the marker amplitude of the selected marker.
CALCulate:SPECTrum subgroup	Spectrogram measurement
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELta:X? (on page 624)	Returns the delta marker frequency for the selected marker.

Command	Description
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELTA:Y? (on page 624)	Returns the delta marker amplitude for the selected marker.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:MAXimum (on page 625)	Moves the marker to the highest peak on the trace.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 625)	Moves the marker to the next peak higher in amplitude.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LEFt (on page 626)	Moves the marker to the next peak to the left on the trace.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 626)	Moves the marker to the next peak lower in amplitude.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 627)	Moves the marker to the next peak to the right on the trace.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>[:SET]:CENTer (on page 629)	Sets the center frequency to the marker frequency.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:TRACe (on page 630)	Sets or queries the trace on which the marker is placed.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:X (on page 630)	Sets or queries the horizontal position of the marker.
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:Y? (on page 631)	Queries the marker amplitude of the selected marker.
CALCulate:SPURious subgroup	Spurious measurement
CALCulate:SPURious:MARKer<x>:DELTA:X? (on page 632)	Returns the delta marker frequency for the selected marker.
CALCulate:SPURious:MARKer<x>:DELTA:Y? (on page 632)	Returns the delta marker amplitude for the selected marker.
CALCulate:SPURious:MARKer<x>:MAXimum (on page 633)	Moves the marker to the highest peak on the trace.
CALCulate:SPURious:MARKer<x>:PEAK:HIGHer (on page 633)	Moves the marker to the next peak higher in amplitude.
CALCulate:SPURious:MARKer<x>:PEAK:LEFt (on page 633)	Moves the marker to the next peak to the left on the trace.
CALCulate:SPURious:MARKer<x>:PEAK:LOWer (on page 634)	Moves the marker to the next peak lower in amplitude.
CALCulate:SPURious:MARKer<x>:PEAK:RIGHt (on page 634)	Moves the marker to the next peak to the right on the trace.

Command	Description
CALCulate:SPURious:MARKer<x>[:SET]:CENTer (on page 634)	Sets the center frequency to the marker frequency.
CALCulate:SPURious:MARKer<x>:X (on page 635)	Sets or queries the horizontal position of the marker.
CALCulate:SPURious:MARKer<x>:Y? (on page 635)	Queries the marker amplitude of the selected marker.
CALCulate:TDiagram subgroup (Option 21 only)	Trellis diagram
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:DELta:X[:TIME]? (on page 636)	Returns the delta marker time for the selected marker.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:DELta:Y? (on page 637)	Returns the delta marker amplitude for the selected marker.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:MAXimum (on page 638)	Moves the marker to the highest peak on the trace.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 638)	Moves the marker to the next peak higher in amplitude on the Trellis diagram trace.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:PEAK:LEFt (on page 639)	Moves the marker to the next peak to the left on the trace.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 639)	Moves the marker to the next peak lower in amplitude.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHt (on page 640)	Moves the marker to the next peak to the right on the trace.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:X[:TIME] (on page 640)	Sets or queries the horizontal position (time) of the marker.
CALCulate:TDiagram[:MEASview<y>]:MARKer<x>:Y? (on page 641)	Queries the vertical position of the selected marker in the Trellis diagram measurement.
CALCulate:TOVerview subgroup	Time overview
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELta:X? (on page 642)	Returns the delta marker time for the selected marker.
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELta:Y? (on page 642)	Returns the delta marker amplitude for the selected marker.
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:MAXimum (on page 643)	Moves the marker to the highest peak on the trace.
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (on page 643)	Moves the marker to the next peak higher in amplitude.
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LEFt (on page 644)	Moves the marker to the next peak to the left on the trace.

Command	Description
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LOWer (on page 644)	Moves the marker to the next peak lower in amplitude.
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (on page 645)	Moves the marker to the next peak to the right on the trace.
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:X (on page 645)	Sets or queries the horizontal position of the marker
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:Y? (on page 646)	Queries the marker amplitude of the selected marker.
CALCulate:WLAN subgroup	Wireless LAN measurement
CALCulate:WLAN:CONSt:MARKer<x>:FREQUency (on page 667)	Sets or queries the frequency value of the marker.
CALCulate:WLAN:CONSt:MARKer<x>:MAGNitude? (on page 668)	Returns the magnitude value at the indicated marker position.
CALCulate:WLAN:CONSt:MARKer<x>:PHASe? (on page 668)	Returns the phase value at the indicated marker position.
CALCulate:WLAN:CONSt:MARKer<x>:TIME (on page 669)	Sets the time offset value at the selected marker position on the points trace.
CALCulate:WLAN:CONSt:MARKer<x>:TYPE? (on page 669)	Returns the data type of the subcarrier for data at the indicated marker position.
CALCulate:WLAN:CONSt:MARKer<x>:VALue? (on page 670)	Queries the value readout at the selected marker position on the points trace.
CALCulate:WLAN:CRESpone:MARKer<x>:DELTA:X? (on page 670)	Queries the delta Subcarrier or frequency value at the selected marker position.
CALCulate:WLAN:CRESpone:MARKer<x>:DELTA:Y? (on page 671)	Queries the vertical delta value for the points trace at the selected marker position.
CALCulate:WLAN:CRESpone:MARKer<x>:MAXimum (on page 671)	Moves the marker to the highest peak on the trace.
CALCulate:WLAN:CRESpone:MARKer<x>:PEAK:HIGHer (on page 672)	Moves the marker to the next peak higher in amplitude.
CALCulate:WLAN:CRESpone:MARKer<x>:PEAK:LEFT (on page 672)	Moves the marker to the next peak on the left on the trace.
CALCulate:WLAN:CRESpone:MARKer<x>:PEAK:LOWer (on page 673)	Moves the marker to the next peak lower in amplitude.
CALCulate:WLAN:CRESpone:MARKer<x>:PEAK:RIGHT (on page 673)	Moves the marker to the next peak to the right on the trace.

Command	Description
CALCulate:WLAN:CRESPonse:MARKer<x>:X (on page 674)	Sets or queries the value of the horizontal position for the selected marker.
CALCulate:WLAN:CRESPonse:MARKer<x>:Y? (on page 674)	Returns the value of the amplitude at the selected marker position.
CALCulate:WLAN:EVM:MARKer<x>:AVERAge:SUBCarrier? (on page 675)	Queries the EVM value at the selected marker position on the average trace.
CALCulate:WLAN:EVM:MARKer<x>:AVERAge:SYMBOL? (on page 675)	Queries the EVM value at the selected marker position on the average trace.
CALCulate:WLAN:EVM:MARKer<x>:DELTA:SUBCarrier? (on page 676)	Queries the delta Subcarrier or frequency value at the selected marker position.
CALCulate:WLAN:EVM:MARKer<x>:DELTA:SYMBOL? (on page 676)	Queries the delta time value in seconds or symbols at the selected marker position.
CALCulate:WLAN:EVM:MARKer<x>:DELTA:Y? (on page 677)	Queries the vertical delta value for the points trace at the selected marker position.
CALCulate:WLAN:EVM:MARKer<x>:FREQuency (on page 677)	Sets or queries the frequency value of the marker.
CALCulate:WLAN:EVM:MARKer<x>:TIME (on page 678)	Sets the vertical marker value of the points trace.
CALCulate:WLAN:EVM:MARKer<x>:VALue? (on page 679)	Queries the EVM value at the selected marker position.
CALCulate:WLAN:FLATness:MARKer<x>:MAXimum (on page 679)	Positions the specified marker at the maximum point on the trace.
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:HIGHer (on page 680)	Moves the specified marker to the next peak higher in amplitude.
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LEFT (on page 680)	Moves the specified marker to the next peak to the left.
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LOWer (on page 681)	Moves the marker to the next peak lower in amplitude.
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:RIGHT (on page 681)	Moves the marker to the next peak to the right.
CALCulate:WLAN:FLATness:MARKer<x>:X (on page 682)	Sets or queries the horizontal position for the selected marker.
CALCulate:WLAN:FLATness:MARKer<x>:Y? (on page 682)	Returns the value of the amplitude (vertical position) at the selected marker position.
CALCulate:WLAN:MERRor:MARKer<x>:AVERAge:SUBCarrier? (on page 683)	Queries the value readout at the selected marker position on the average trace.

Command	Description
CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SYMBol? (on page 683)	Queries the value readout at the selected marker position on the average trace.
CALCulate:WLAN:MERRor:MARKer<x>:DELta:SUBCarrier? (on page 684)	Queries the delta Subcarrier or frequency value at the selected marker position.
CALCulate:WLAN:MERRor:MARKer<x>:DELta:SYMBol? (on page 684)	Queries the delta time value in seconds or symbols at the selected marker position.
CALCulate:WLAN:MERRor:MARKer<x>:DELta:Y? (on page 685)	Queries the vertical delta value for the points trace at the selected marker position.
CALCulate:WLAN:MERRor:MARKer<x>:FREQuency (on page 686)	Sets or queries the frequency value of the marker.
CALCulate:WLAN:MERRor:MARKer<x>:TIME (on page 686)	Sets the time offset value at the selected marker position.
CALCulate:WLAN:MERRor:MARKer<x>:VALue? (on page 687)	Queries the value readout at the selected marker position.
CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SUBCarrier? (on page 688)	Queries the Phase Error value at the selected marker position on the average trace.
CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SYMBol? (on page 688)	Queries the Phase Error value at the selected marker position on the average trace.
CALCulate:WLAN:PERRor:MARKer<x>:DELta:SUBCarrier? (on page 689)	Queries the delta Subcarrier or frequency value at the selected marker position.
CALCulate:WLAN:PERRor:MARKer<x>:DELta:SYMBol? (on page 689)	Queries the delta time value in seconds or symbols at the selected marker position.
CALCulate:WLAN:PERRor:MARKer<x>:DELta:Y? (on page 690)	Queries the vertical delta value for the points trace at the selected marker position.
CALCulate:WLAN:PERRor:MARKer<x>:FREQuency (on page 690)	Sets or queries the frequency value at the selected marker position.
CALCulate:WLAN:PERRor:MARKer<x>:TIME (on page 691)	Sets the time value (offset) at the selected marker position.
CALCulate:WLAN:PERRor:MARKer<x>:VALue? (on page 692)	Queries the Phase Error value at the selected marker position.
CALCulate:WLAN:PVTime:MARKer<x>:DELta:X? (on page 692)	Returns the delta time value at the selected marker position.
CALCulate:WLAN:PVTime:MARKer<x>:DELta:Y? (on page 693)	Queries the vertical delta value for the points trace at the selected marker position.
CALCulate:WLAN:PVTime:MARKer<x>:MAXimum (on page 693)	Positions the specified marker at the maximum point.

Command	Description
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:HIGHer (on page 694)	Moves the specified marker to the next peak higher in amplitude.
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LEFT (on page 694)	Moves the specified marker to the next peak on the left.
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LOWer (on page 695)	Moves the marker to the next peak lower in amplitude.
CALCulate:WLAN:PVTime:MARKer<x>:PEAK:RIGHT (on page 695)	Moves the marker to the next peak to the right.
CALCulate:WLAN:PVTime:MARKer<x>:X (on page 695)	Sets or queries the value of the horizontal position for the selected marker
CALCulate:WLAN:PVTime:MARKer<x>:Y? (on page 696)	Returns the amplitude at the selected marker position.
CALCulate:WLAN:TABLE:MARKer<x>:FREQuency (on page 696)	Assigns or queries the frequency value of the marker.
CALCulate:WLAN:TABLE:MARKer<x>:TIME (on page 697)	Sets or queries the vertical value at the selected marker position.
CALCulate:WLAN:TABLE:MARKer<x>:VALue? (on page 698)	Queries the decoded symbol value at the selected marker position.
CALCulate:LTE subgroup	
CALCulate:LTE:ACLR:MARKer<x>:PEAK:HIGHer (on page 486)	Moves the specified marker to the next peak higher in amplitude on the trace.
CALCulate:LTE:ACLR:MARKer<x>:DELTA:X? (on page 486)	Returns the frequency of the specified delta marker on the trace.
CALCulate:LTE:ACLR:MARKer<x>:DELTA:Y? (on page 487)	Returns the amplitude for the specified delta marker on the trace.
CALCulate:LTE:ACLR:MARKer<x>:MAXimum (on page 487)	Positions the specified marker at the highest peak on the trace.
CALCulate:LTE:ACLR:MARKer<x>:PEAK:LEFT (on page 487)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:LTE:ACLR:MARKer<x>:PEAK:LOWer (on page 488)	Moves the selected marker to the next peak lower in amplitude on the trace.
CALCulate:LTE:ACLR:MARKer<x>:PEAK:RIGHT (on page 488)	Moves the selected marker to the next peak to the right on the trace.
CALCulate:LTE:ACLR:MARKer<x>:SET:CENTer (on page 489)	Moves the specified marker to the center frequency.

Command	Description
CALCulate:LTE:ACLR:MARKer<x>:X (on page 489)	Sets or queries the horizontal position of the selected marker on the trace.
CALCulate:LTE:ACLR:MARKer<x>:Y? (on page 490)	Queries the amplitude of the selected marker on the trace.
CALCulate:LTE:CHSPectrum:MARKer<x>:DELTA:X? (on page 490)	Returns the frequency of the specified delta marker on the trace.
CALCulate:LTE:CHSPectrum:MARKer<x>:DELTA:Y? (on page 490)	Returns the amplitude for the specified delta marker on the trace.
CALCulate:LTE:CHSPectrum:MARKer<x>:MAXimum (on page 491)	Positions the marker at the highest peak on the trace.
CALCulate:LTE:CHSPectrum:MARKer<x>:PEAK:LEFT (on page 491)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:LTE:CHSPectrum:MARKer<x>:PEAK:RIGHT (on page 492)	Moves the selected marker to the next peak to the right on the trace.
CALCulate:LTE:CHSPectrum:MARKer<x>:X (on page 492)	Sets or queries the horizontal position of the selected marker on the trace.
CALCulate:LTE:CHSPectrum:MARKer<x>:Y? (on page 493)	Queries the amplitude of the selected marker on the trace.
CALCulate:LTE:CONSt:MARKer<x>:FREQuency (on page 493)	Sets or returns the subcarrier number of the LTE symbol.
CALCulate:LTE:CONSt:MARKer<x>:MAGNitude? (on page 494)	Queries the marker magnitude of the selected marker.
CALCulate:LTE:CONSt:MARKer<x>:PHASe? (on page 494)	Queries the phase readout of the selected marker.
CALCulate:LTE:CONSt:MARKer<x>:TIME (on page 494)	Sets or queries the X position (Symbol Value) of the selected marker.
CALCulate:LTE:CONSt:MARKer<x>:TYPE? (on page 495)	Queries the data type of the selected marker as PSS or SSS.
CALCulate:LTE:PVTime:MARKer:<x>PEAK:HIGHer (on page 495)	Moves the specified marker to the next peak higher in amplitude on the trace.
CALCulate:LTE:PVTime:MARKer<x>:DELTA:X? (on page 496)	Returns the frequency of the specified delta marker on the trace.
CALCulate:LTE:PVTime:MARKer<x>:DELTA:Y? (on page 496)	Returns the amplitude for the specified delta marker on the trace.
CALCulate:LTE:PVTime:MARKer<x>:MAXimum (on page 497)	Positions the specified marker at the highest peak on the trace.

Command	Description
CALCulate:LTE:PVTime:MARKer<x>:PEAK:LEFT (on page 497)	Moves the selected marker to the next peak to the left on the trace.
CALCulate:LTE:PVTime:MARKer<x>:PEAK:LOWer (on page 498)	Moves the selected marker to the next peak lower in amplitude on the trace.
CALCulate:LTE:PVTime:MARKer<x>:PEAK:RIGHT (on page 498)	Moves the selected marker to the next peak to the right on the trace.
CALCulate:LTE:PVTime:MARKer<x>:X (on page 498)	Sets or queries the horizontal position of the selected marker on the trace.
CALCulate:LTE:PVTime:MARKer<x>:Y? (on page 499)	Queries the amplitude of the selected marker on the trace.
CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:HIGHer? (on page 531)	Places the selected marker at the next highest peak on the trace.
CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:X (on page 577)	Sets or queries the horizontal position of the indicator on the trace.
CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:Y? (on page 578)	Queries the vertical position value of the indicator on the trace.
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:DELTA:X? (on page 578)	Returns the delta marker time for the selected marker.
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:DELTA:Y? (on page 579)	Returns the delta marker amplitude for the selected marker.
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:MAXimum (on page 579)	Moves the selected marker to the highest peak on the trace.
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:X (on page 580)	Sets or queries the horizontal position of the selected marker.
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:Y (on page 580)	Sets or queries the marker amplitude of the selected marker.
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:DELTA:X? (on page 578)	Returns the delta marker time for the selected marker.

Marker mnemonics

Up to five markers can be used. In commands, these are named MARKer<x>, where <x> can be 0, 1, 2, 3, or 4 as shown in the following table.

Marker mnemonics

Mnemonic	Description
MARKer0	Reference marker (MR)

Mnemonic	Description
MARKer1	Marker 1 (M1)
MARKer2	Marker 2 (M2)
MARKer3	Marker 3 (M3)
MARKer4	Marker 4 (M4)

NOTE: If you omit the numeric suffix, the marker control defaults to Marker 1.

Before operating the marker, you have to enable it using the CALCulate basic commands.

If you attempt to use a marker other than above in a CALCulate command, the suffix error (error code -130) will occur.

Calibration commands

Use the CALibration commands to control the external correction. See the Index for commands not listed in the following table.

Not all of these commands apply to SignalVu-PC and connected instruments. See the individual command descriptions for details.

Calibration commands

Command	Description
CALibration:ABORt (on page 698)	Aborts any actions related to the alignments in progress.
CALibration:TXGain:ABORt (on page 704)	Cancels a calibration for the Transmission Gain measurement.
CALibration:TXGain[:ALL] (on page 704)	Performs a calibration using the current settings for the Transmission Gain measurement.
CALibration:TXGain:FINish? (on page 704)	Queries whether or not the calibration is completed for the Transmission Gain measurement.
CALibration:TXGain:STATe? (on page 705)	Queries the calibration state for the Transmission Gain measurement.
CALibration:AUTO (on page 699)	Sets or queries whether or not to run alignments automatically.
INPut:CORRection:EXTeRnal:EDIT<x>:LABel (on page 1518)	Sets or queries the name of the external loss table.
CALibration:CORRection:EXTeRnal:EDIT<x>:NEW (on page 699)	Creates a new external loss table.
INPut:CORRection:EXTeRnal:EDIT<x>:STATe (on page 1519)	Sets or queries whether to enable or disable the external loss table.
INPut:CORRection:EXTeRnal:GAIN[:MAGNitude] (on page 1520)	Sets or queries the external gain value.

Command	Description
CALibration:CORRection:EXternal:PROBe:CONNeCT? (on page 702)	Sets or queries whether to enable or disable the external gain value.
CALibration:CORRection:EXternal:PROBe:CONNeCT? (on page 702)	Queries whether the external probe is connected to the analyzer or not.
CALibration:CORRection:EXternal:PROBe:MAGNitude? (on page 702)	Queries the external probe attenuation.
CALibration:CORRection:EXternal:PROBe:STATe (on page 703)	Determines whether to correct data for the external probe attenuation.
CALibration:CORRection:EXternal:TYPE (on page 703)	Selects data type to use when applying the external loss table.

Display commands

Use the DISPlay commands to control the display of measurement waveforms and results on the screen. See the Index for commands not listed in the following table.

Not all of these commands apply to SignalVu-PC and connected instruments. See the individual command descriptions for details.

Display commands

Command	Description
DISPlay TXGain subgroup	Transmission Gain measurements
DISPlay:TG:MEASview:DELeTe TXGain (on page 1016)	Removes the Transmission Gain display icon from the Selected displays filed of the Selected Displays window.
DISPlay:TG:MEASview<y>:NEW TXGain (on page 1017)	Opens a new Transmission Gain measurement display window.
DISPlay:TG:MEASview<y>:SELeCt TXGain (on page 1017)	Selects the Transmission Gain display icon in the Select Display window and queries if the display is selected or not.
DISPlay:TXGain:MARKer:SHOW:STATe (on page 1023)	Displays or hides the marker readout, but not the marker itself, on the graph area.
DISPlay:TXGain[:SCALE]:AUTO (on page 1024)	Automatically rescales the horizontal and vertical scale.
DISPlay:TXGain:WINDow:TRACe:GRATICule:GRID:STATe (on page 1024)	Displays or hides the graticule grid in the display. Queries whether the graticule grid is hidden or showing.
DISPlay:TXGain:WINDow:TRACe:POINts:SHOW:STATe (on page 1024)	Sets to mark each measurement point on the trace.
DISPlay:TXGain:X[:SCALE]:LOG:STATe (on page 1025)	Sets or queries the display to show the frequency axis in a logarithmic scale.
DISPlay:TXGain:X[:SCALE]:START (on page 1026)	Sets the Zoom Start frequency.

Command	Description
DISPlay:TXGain:X[:SCALE]:AUTO (on page 1025)	Resets the scale of the horizontal axis to contain the complete trace.
DISPlay:TXGain:X[:SCALE]:STOP (on page 1026)	Sets the Zoom Stop frequency.
DISPlay:TXGain:Y[:SCALE]:BOTTom (on page 1028)	Sets or queries the bottom of the vertical position of the display.
DISPlay:TXGain:Y[:SCALE]:PDIVision (on page 1028)	Sets or queries the vertical scale (per division) of the graph.
DISPlay:TXGain:Y[:SCALE]:POSition (on page 1029)	Sets or queries the vertical position of the trace.
DISPlay:TXGain:Y[:SCALE]:TOP (on page 1029)	Sets or queries the top of the vertical scale.
DISPlay:TXGain:Y[:SCALE]:AUTO (on page 1027)	Automatically scales the plot vertically.
DISPlay:TXGain:Y[:SCALE] (on page 1027)	Sets or queries the vertical scale value in dB.
DISPlay Noise subgroup	Noise Figure and Gain measurements
DISPlay:WINDow:ACTive:MEASurement? (on page 1030)	Queries the active measurement views.
DISPlay Bluetooth subgroup	Bluetooth measurements
DISPlay:BIBEmissions:MARKer<x>:SHOW:STATe (on page 735)	Sets or queries to show or hide the readout for the selected marker.
DISPlay:BIBEmissions:PLEVel:SHOW:STATe (on page 735)	Sets or queries to show or hide the power levels
DISPlay:BIBEmissions:RESet:SCALE (on page 736)	Resets the horizontal and vertical scale to the default values.
DISPlay:BIBEmissions:WINDow:TRACe:GRATICule:GRID:STATe (on page 736)	Sets or queries the graticule hidden or showing state.
DISPlay:BIBEmissions:X[:SCALE] (on page 737)	Sets or queries the horizontal range of the graph.
DISPlay:BIBEmissions:X[:SCALE]:AUTO (on page 737)	Rescales the horizontal axis automatically to fit the waveform to the screen in the Bluetooth InBand Emission view.
DISPlay:BIBEmissions:X[:SCALE]:OFFSet (on page 738)	Sets or queries the center frequency.
DISPlay:BIBEmissions:Y[:SCALE] (on page 738)	Sets or queries the vertical range of the graph.
DISPlay:BIBEmissions:Y[:SCALE]:AUTO (on page 739)	Rescales the vertical axis automatically to fit the waveform to the screen in the Bluetooth InBand Emission view.
DISPlay:BIBEmissions:Y[:SCALE]:OFFSet (on page 739)	Sets or queries the vertical offset.

Command	Description
DISPlay:BLUEtooth:CONSte:TRACe:GRATICule:GRID:STATe (on page 740)	Sets or queries the display state of graticule grid.
DISPlay:BLUEtooth:CONSte:WINDow:TRACe:GRATICule:GRID:STATe (on page 740)	Sets or queries whether to show or hide the graticule grid on the screen in the display.
DISPlay:BLUEtooth:EDIagram:WINDow:TRACe:GRATICule:GRID:STATe (on page 741)	Sets or queries graticule grid hidden or showing state in the Bluetooth eye diagram display.
DISPlay:BLUEtooth:EDIagram:Y[:SCALE] (on page 741)	Sets or queries the vertical range.
DISPlay:BLUEtooth:EDIagram:Y[:SCALE]:AUTO (on page 742)	Sets the vertical scale automatically to fit the waveform in the Bluetooth eye diagram.
DISPlay:BLUEtooth:EDIagram:Y[:SCALE]:OFFSet (on page 742)	Sets or queries the vertical offset (center point of the vertical axis).
DISPlay:BLUEtooth:FDVTime:WINDow:TRACe:GRATICule:GRID:STATe (on page 742)	Sets or queries graticule grid hidden or showing state in the Freq Dev vs Time display.
DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:AUTO (on page 743)	Rescales the vertical scale automatically to fit the waveform to the screen.
DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:OFFSet (on page 743)	Sets or queries the vertical offset (center point of the vertical axis).
DISPlay:BLUEtooth:MEASview<y>:DELeTe (on page 744)	Deletes the specified Bluetooth analysis view.
DISPlay:BLUEtooth:MEASview<y>:NEW (on page 744)	Displays a new measurement view for Bluetooth measurements.
DISPlay:BLUEtooth:MEASview<y>:SELeCt (on page 745)	Selects a measurement view on the screen in the Bluetooth measurements. The query command returns the currently selected view.
DISPlay:BOBW:SELeCted:BANDwidth (on page 746)	Sets or queries the bandwidth to measure in the Bluetooth 20 dB BW view.
DISPlay:DPX:WINDow:TRACe:GRATICule:GRID:STATe (on page 763)	Determines whether to show or hide the graticule grid on the DPX Spectrum display..
DISPlay:NOISe:FIGure[:SCALE]:AUTO (on page 830)	Automatically scales the graph.
DISPlay:NOISe:FIGure:WINDow:TRACe:GRATICule:GRID:STATe (on page 831)	Sets or queries the graticule state to on (showing) or off (hidden).
DISPlay:NOISe:FIGure:WINDow:TRACe:LEGend:STATe (on page 831)	Sets or queries the trace legend state to on (showing) or off (hidden).
DISPlay:NOISe:FIGure:WINDow:TRACe:MEASpoints:STATe (on page 832)	Sets or queries the measurement points state to on (showing) or off (hidden).

Command	Description
DISPlay:NOISe:FIGure:X:AUTO (on page 832)	Automatically sets the horizontal scale of the graph.
DISPlay:NOISe:FIGure:X:OFFSet (on page 833)	Sets or queries the center frequency (offset).
DISPlay:NOISe:FIGure:X:SCALe (on page 833)	Sets or queries the horizontal scale of the display.
DISPlay:NOISe:FIGure:Y:AUTO (on page 834)	Automatically sets the vertical scale of the graph.
DISPlay:NOISe:FIGure:Y:AUTO:STATe (on page 834)	Sets the state of the automatic vertical scale and position of the graph to on or off. The query form of the command returns the current state.
DISPlay:NOISe:FIGure:Y:PDIVision (on page 835)	Sets or queries the distance between graticule lines on the display.
DISPlay:NOISe:FIGure:Y:POSition (on page 835)	Sets or queries the vertical position of the display.
DISPlay:NOISe:FIGure:Y:SCALe (on page 836)	Sets or queries the vertical scale of the display.
DISPlay:NOISe:FIGure:Y:SCALe:LINEar:STATe (on page 836)	Sets or queries whether the linear units are shown (on) or not shown (off) on the display.
DISPlay:NOISe:GAIN[:SCALe]:AUTO (on page 837)	Automatically scales the graph.
DISPlay:NOISe:GAIN:WINDow:TRACe:GRATICule:GRID:STATe (on page 837)	Sets or queries the graticule state to on (showing) or off (hidden).
DISPlay:NOISe:GAIN:WINDow:TRACe:LEGend:STATe (on page 838)	Sets or queries the trace legend state to on (showing) or off (hidden).
DISPlay:NOISe:GAIN:WINDow:TRACe:MEASPoints:STATe (on page 838)	Sets or queries the measurement points state to on (showing) or off (hidden).
DISPlay:NOISe:GAIN:X:AUTO (on page 839)	Automatically sets the horizontal scale of the display.
DISPlay:NOISe:GAIN:X:OFFSet (on page 839)	Sets or queries the center frequency (offset).
DISPlay:NOISe:GAIN:X:SCALe (on page 839)	Sets or queries the horizontal scale of the display.
DISPlay:NOISe:GAIN:Y:AUTO (on page 840)	Automatically sets the vertical scale of the graph.
DISPlay:NOISe:GAIN:Y:AUTO:STATe (on page 840)	Sets or queries the state of the automatic vertical scale and position of the graph to on or off.
DISPlay:NOISe:GAIN:Y:PDIVision (on page 841)	Sets or queries the distance between graticule lines on the display.
DISPlay:NOISe:GAIN:Y:POSition (on page 842)	Sets or queries the vertical position of the display.
DISPlay:NOISe:GAIN:Y:SCALe (on page 842)	Sets or queries the vertical scale of the display.
DISPlay:NOISe:MEASview<y>:DELeTe (on page 843)	Deletes the selected Noise and Gain measurement view.

Command	Description
DISPlay:NOISe:MEASview<y>:NEW (on page 843)	Displays a new Noise and Gain measurement view.
DISPlay:NOISe:MEASview<y>:SELEct (on page 844)	Selects a noise measurement view. The query command returns the currently selected view.
DISPlay:NOISe:POWer:LINear:STATe (on page 845)	Sets or queries whether the linear units are shown (on) or not shown (off) on the Noise Table display.
DISPlay:NOISe:TEMPerature[:SCALe]:AUTO (on page 845)	Automatically scales the graph.
DISPlay:NOISe:TEMPerature:WINDow:TRACe:GRATICule:GRID:STATe (on page 845)	Sets or queries the graticule state to on (showing) or off (hidden).
DISPlay:NOISe:TEMPerature:WINDow:TRACe:LEGend:STATe (on page 846)	Sets or queries the trace legend state to on (showing) or off (hidden).
DISPlay:NOISe:TEMPerature:WINDow:TRACe:MEASPoints:STATe (on page 847)	Sets or queries the measurement points state to on (showing) or off (hidden).
DISPlay:NOISe:TEMPerature:X:AUTO (on page 847)	Automatically sets the horizontal scale of the graph.
DISPlay:NOISe:TEMPerature:X:OFFSet (on page 848)	Sets or queries the center frequency (offset) value.
DISPlay:NOISe:TEMPerature:X[:SCALe] (on page 848)	Sets or queries the horizontal scale of the graph.
DISPlay:NOISe:TEMPerature:X:STARt (on page 849)	Sets or queries the Start Frequency value.
DISPlay:NOISe:TEMPerature:X:STOP (on page 849)	Sets or queries the Stop Frequency value.
DISPlay:NOISe:TEMPerature:Y:AUTO (on page 850)	Automatically sets the vertical scale of the graph.
DISPlay:NOISe:TEMPerature:Y:AUTO:STATe (on page 850)	Sets or queries the state of the automatic vertical scale and position of the graph to on or off.
DISPlay:NOISe:TEMPerature:Y:PDIVision (on page 850)	Sets or queries the distance between graticule lines on the display.
DISPlay:NOISe:TEMPerature:Y:POSition (on page 851)	Sets or queries the vertical position of the graph.
DISPlay:NOISe:TEMPerature:Y:SCALe (on page 852)	Sets or queries the vertical scale of the graph.
DISPlay:NOISe:UNCERTainty:RESult:GAIN? (on page 852)	Queries the gain computed uncertainty value.

Command	Description
DISPlay:NOISe:UNCERTainty:RESult:NFIGure? (on page 852)	Queries the noise figure computed uncertainty value.
DISPlay:NOISe:YFACtor[:SCALe]:AUTO (on page 853)	Automatically scales the Y Factor graph.
DISPlay:NOISe:YFACtor:WINDow:TRACe:GRATicule:GRID:STATe (on page 853)	Sets or queries the graticule state to on (showing) or off (hidden).
DISPlay:NOISe:YFACtor:WINDow:TRACe:LEGend:STATe (on page 854)	Sets or queries the trace legend state to on (showing) or off (hidden).
DISPlay:NOISe:YFACtor:WINDow:TRACe:MEASPoints:STATe (on page 854)	Sets or queries the measurement points state to on (showing) or off (hidden).
DISPlay:NOISe:YFACtor:X:AUTO (on page 855)	Automatically sets the horizontal scale.
DISPlay:NOISe:YFACtor:X:OFFSet (on page 855)	Sets or queries the center frequency (offset).
DISPlay:NOISe:YFACtor:X[:SCALe] (on page 856)	Sets or queries the horizontal scale.
DISPlay:NOISe:YFACtor:X:STARt (on page 856)	Sets or queries the Start Frequency value.
DISPlay:NOISe:YFACtor:X:STOP (on page 857)	Sets or queries the Stop Frequency value.
DISPlay:NOISe:YFACtor:Y:AUTO (on page 857)	Automatically sets the vertical scale of the graph.
DISPlay:NOISe:YFACtor:Y:AUTO:STATe (on page 858)	Sets or queries the automatic vertical scale and position of the graph setting to on or off.
DISPlay:NOISe:YFACtor:Y:PDIVision (on page 858)	Sets or queries the distance between graticule lines on the display in dB.
DISPlay:NOISe:YFACtor:Y:POSition (on page 859)	Sets or queries the vertical position.
DISPlay:NOISe:YFACtor:Y:SCALe (on page 859)	Sets or queries the vertical scale.
DISPlay:P25:CONSt:WINDow:TRACe:GRATicule:GRID:STATe (on page 894)	Sets or queries to show or hide the graticule grid on the screen.
DISPlay:P25:EDiagram:WINDow:TRACe:GRATicule:GRID:STATe (on page 894)	Sets or queries to show or hide the graticule grid on the screen.
DISPlay:P25:EDiagram:Y[:SCALe] (on page 895)	Sets or queries the vertical scale.
DISPlay:P25:EDiagram:Y[:SCALe]:AUTO (on page 896)	Sets the vertical scale automatically to fit the waveform to the screen.
DISPlay:P25:EDiagram:Y[:SCALe]:OFFSet (on page 896)	Sets or queries the vertical offset (center point of the vertical axis).
DISPlay:P25:MEASview:DELeTe (on page 896)	Deletes the specified P25 measurement display.

Command	Description
DISPlay:P25:MEASview:NEW (on page 897)	Displays a new P25 measurement view.
DISPlay:P25:MEASview:SElect (on page 898)	Selects a P25 measurement display. The query form returns the currently selected display.
DISPlay:P25:PVTime:BURSt:X[:SCALe] (on page 898)	Sets or queries the value of the scale (width) value, in seconds, when using horizontal Full Burst view.
DISPlay:P25:PVTime:BURSt:X[:SCALe]:AUTO (on page 899)	Automatically sets the starting time (position) and scale (width) values for the best display in the horizontal Full Burst view.
DISPlay:P25:PVTime:BURSt:X[:SCALe]:OFFSet (on page 899)	Sets or queries the starting time (position) value, in seconds, when using the horizontal Full Burst view.
DISPlay:P25:PVTime:BURSt:X[:SCALe]:RESet (on page 900)	Resets the starting time (position) and scale (width) values for the horizontal Full Burst view.
DISPlay:P25:PVTime:FALL:X[:SCALe] (on page 900)	Sets or queries the scale (width) value, in seconds, when using the horizontal Falling Edge view.
DISPlay:P25:PVTime:FALL:X[:SCALe]:AUTO (on page 901)	Automatically sets the starting time (position) and scale (width) values for the best display in the horizontal Falling Edge view.
DISPlay:P25:PVTime:FALL:X[:SCALe]:OFFSet (on page 901)	Sets or queries the value for the starting time (offset) of the graph, in seconds, when using the horizontal Falling Edge view.
DISPlay:P25:PVTime:FALL:X[:SCALe]:RESet (on page 902)	Resets the starting time (position) and scale (width) values for the horizontal Falling Edge view.
DISPlay:P25:PVTime:MARKer:SHOW:STATe (on page 902)	Shows or hides the marker readout.
DISPlay:P25:PVTime:RISE:X[:SCALe] (on page 903)	Sets or queries the scale (width) value, in seconds, for the P25 Power vs. Time display when using the horizontal Rising Edge view.
DISPlay:P25:PVTime:RISE:X[:SCALe]:AUTO (on page 903)	Sets the scale (width) value, in seconds, to automatic.
DISPlay:P25:PVTime:RISE:X[:SCALe]:OFFSet (on page 904)	Sets or queries the starting time value (offset), in seconds, for the P25 Power vs. Time display when using the horizontal Rising Edge view.
DISPlay:P25:PVTime:RISE:X[:SCALe]:RESet (on page 904)	Resets the starting time (position) and scale (width) values for the horizontal Rising Edge view.
DISPlay:P25:PVTime:WINDow:SElect:PLOT (on page 905)	Sets or queries which view to use: Full Burst, Rising Edge, or Falling Edge.
DISPlay:P25:PVTime:WINDow:TRACe:GRATicule:GRID:STATe (on page 905)	Sets or queries the graticule state to on (showing) or off (hidden).
DISPlay:P25:PVTime:Y[:SCALe] (on page 906)	Sets or queries the vertical scale value.

Command	Description
DISPlay:P25:PVTime:Y[:SCALE]:AUTO (on page 906)	Automatically selects the vertical scale and position values.
DISPlay:P25:PVTime:Y[:SCALE]:OFFSet (on page 907)	Sets or queries the value of the vertical offset (top edge of the vertical axis).
DISPlay:P25:PVTime:Y[:SCALE]:PDIVision (on page 907)	Sets or queries the value of the vertical scale for the P25 Power vs. Time display.
DISPlay:P25:RADix (on page 908)	Set or queries the symbol radix for the P25 Symbol Table display.
DISPlay:TOVerview[:MEASview<y>]:WINDow:NAVigator:STATe (on page 1017)	Sets or queries whether the navigator view of the Time Overview display is on or off.
DISPlay:TOVerview[:MEASview<y>]:WINDow:TIME:MODE (on page 1018)	Sets or queries the type of time analysis to be performed.
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:LEGend:STATe (on page 1019)	Sets or queries the trace legend state to on (showing) or off (hidden).
DISPlay basic command subgroup	General window control
DISPlay:WINDow:COLor:SCHeme (on page 1032)	Sets or queries the color scheme for traces and background.
DISPlay:WINDow:OPTimized:MEASurement? (on page 1033)	Queries the measurement views that are optimized.
DISPlay:ACPower subgroup	Channel power and ACPR measurement
DISPlay:ACPower:MARKer:SHOW:STATe (on page 706)	Determines whether to show the readout for the selected marker.
DISPlay:ACPower:PLEvel:SHOW:STATe (on page 707)	Determines whether to show the power levels.
DISPlay:ACPower:RESet:SCALE (on page 707)	Resets the horizontal and vertical scale to the default values.
DISPlay:ACPower:WINDow:TRACe:GRATicule:GRID:STATe (on page 707)	Determines whether to show the graticule grid on screen.
DISPlay:ACPower:X[:SCALE] (on page 708)	Sets or queries the horizontal range.
DISPlay:ACPower:X[:SCALE]:AUTO (on page 708)	Rescales the horizontal axis automatically.
DISPlay:ACPower:X[:SCALE]:OFFSet (on page 709)	Sets or queries the minimum horizontal value (left edge).
DISPlay:ACPower:Y[:SCALE] (on page 709)	Sets or queries the vertical range.
DISPlay:ACPower:Y[:SCALE]:AUTO (on page 710)	Rescales the vertical axis automatically.
DISPlay:ACPower:Y[:SCALE]:OFFSet (on page 710)	Sets or queries the vertical offset.

Command	Description
DISPlay:ADEMod subgroup (Option 21 only)	General purpose analog demodulation measurements
DISPlay:ADEMod:MEASview:DELeTe (on page 711)	Deletes the measurement view.
DISPlay:ADEMod:MEASview:NEW (on page 711)	Displays a new measurement view.
DISPlay:ADEMod:MEASview:SELeCt (on page 712)	Sets or queries the measurement view.
DISPlay:{AM FM PM} subgroup (Option 21 only)	AM/FM/PM measurement
DISPlay:{AM FM PM}:MARKer:SHOW:STATe (on page 712)	Determines whether to show the readout for the selected marker.
DISPlay:{AM FM PM}:WINDow:TRACe:GRATicule:GRID:STATe (on page 713)	Determines whether to show the graticule grid on screen.
DISPlay:{AM FM PM}:X:RSCale (on page 713)	Rescales the horizontal axis automatically.
DISPlay:{AM FM PM}:X[:SCALe]:AUTO (on page 714)	Sets the horizontal scale automatically.
DISPlay:{AM FM PM}:X[:SCALe]:FULL (on page 714)	Sets or queries the horizontal scale.
DISPlay:{AM FM PM}:X[:SCALe]:OFFSet (on page 714)	Sets or queries the minimum horizontal value (left edge).
DISPlay:{AM FM PM}:Y:RSCale (on page 715)	Rescales the vertical axis automatically.
DISPlay:{AM FM PM}:Y[:SCALe] (on page 715)	Sets or queries the vertical scale.
DISPlay:{AM FM PM}:Y[:SCALe]:OFFSet (on page 716)	Sets or queries the vertical offset.
DISPlay:AUDio subgroup	Audio measurements
DISPlay:AUDio:MEASview<y>:DELeTe (on page 717)	Deletes the specified audio analysis view.
DISPlay:AUDio:MEASview<y>:NEW (on page 717)	Displays a new audio analysis view.
DISPlay:AUDio:MEASview<y>:SELeCt (on page 718)	Selects an audio analysis view on the screen.
DISPlay:AUDio:SPECtrum:FREQuency[:SCALe]:STARt (on page 719)	Sets or queries the start frequency (left edge) of the audio spectrum graph.
DISPlay:AUDio:SPECtrum:FREQuency[:SCALe]:STOP (on page 719)	Sets or queries the stop frequency (right edge) of the audio spectrum graph.
DISPlay:AUDio:SPECtrum:FREQuency:AUTO (on page 718)	Rescales the horizontal axis automatically to fit the waveform to the screen in the audio spectrum view.

Command	Description
DISPlay:AUDio:SPECtrum:MARKer:SHOW:STATe (on page 720)	Determines whether to show or hide the readouts for the selected marker in the audio spectrum view.
DISPlay:AUDio:SPECtrum:RESet:SCALE (on page 720)	Resets the horizontal and vertical scales in the audio spectrum view.
DISPlay:AUDio:SPECtrum:SCALE:LOG:STATe (on page 720)	Determines whether or not to set the horizontal axis logarithmic in the audio spectrum view.
DISPlay:AUDio:SPECtrum:SHOW:NHARmonic:THReshold (on page 721)	Sets or queries the appearance of the non-harmonic threshold in the audio spectrum view.
DISPlay:AUDio:SPECtrum:TABLE:SHOW:STATe (on page 721)	Determines whether to show or hide the results table in the audio spectrum view.
DISPlay:AUDio:SPECtrum:WINDow:TRACe:GRATicule:GRID:STATe (on page 722)	Determines whether to show or hide the graticule grid on the screen.
DISPlay:AUDio:SPECtrum:Y:[SCALE] (on page 722)	Sets or queries the vertical scale in the audio spectrum view.
DISPlay:AUDio:SPECtrum:Y:[SCALE]:AUTO (on page 723)	Rescales the vertical axis automatically in the audio spectrum view.
DISPlay:AUDio:SPECtrum:Y:[SCALE]:OFFSet (on page 723)	Sets or queries the vertical position (offset) in the audio spectrum view.
DISPlay:AVTime subgroup	Amplitude versus Time measurement
DISPlay:AVTime[:MEASview<y>]:LEGend:STATe (on page 723)	Shows or hides the trace legend in the amplitude versus time view.
DISPlay:AVTime[:MEASview<y>]:MARKer:SHOW:STATe (on page 726)	Determines whether to show the readout for the selected marker.
DISPlay:AVTime[:MEASview<y>]:RESet (on page 727)	Resets the horizontal and vertical scale to the default values.
DISPlay:AVTime[:MEASview<y>]:TRIGger:LEVel:STATe (on page 727)	Determines whether to show the power trigger level line on screen.
DISPlay:AVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe (on page 728)	Determines whether to show the graticule grid on screen.
DISPlay:AVTime[:MEASview<y>]:X:RSCale (on page 728)	Rescales the horizontal axis automatically.
DISPlay:AVTime[:MEASview<y>]:X:[SCALE]:AUTO (on page 729)	Sets the horizontal scale automatically.
DISPlay:AVTime[:MEASview<y>]:X:[SCALE]:AUTO:STATe (on page 729)	Determines whether to set the horizontal scale automatically or manually.

Command	Description
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:FULL (on page 730)	Sets or queries the horizontal scale.
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:MAXimum? (on page 730)	Queries the upper limit of the horizontal scale setting range.
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:MINimum? (on page 731)	Queries the lower limit of the horizontal scale setting range.
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet (on page 731)	Sets or queries the minimum horizontal value (left edge).
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum?	Queries the upper limit of the horizontal offset setting range.
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MINimum? (on page 733)	Queries the lower limit of the horizontal offset setting range.
DISPlay:AVTime[:MEASview<y>]:Y:RSCale (on page 733)	Rescales the vertical axis automatically.
DISPlay:AVTime[:MEASview<y>]:Y[:SCALe]:FULL (on page 734)	Sets or queries the vertical scale.
DISPlay:AVTime[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 734)	Sets or queries the vertical offset.
DISPlay:CONSte subgroup (Option 21 only)	Constellation measurement
DISPlay:CONSte[:MEASview<x>]:MPHase (on page 747)	Sets or queries the multiplication constant of the phase multiplication constellation display for a CPM signal. This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to CPM.
DISPlay:CONSte[:MEASview<x>]:WINDow:TRACe:GRATICule:GRID:STATe (on page 748)	Determines whether to show or hide the graticule grid on the screen.
DISPlay:DDEMod subgroup (Option 21 only)	General purpose digital modulation measurements
DISPlay:DDEMod[:MEASview<y>]:DELeTe (on page 749)	Deletes the measurement view in the general purpose digital modulation measurements.
DISPlay:DDEMod[:MEASview<y>][:SOURce<x>]:NEW (on page 750)	Displays a new measurement view.
DISPlay:DDEMod[:MEASview<y>]:SELeCt (on page 750)	Selects a measurement view in the general purpose digital modulation measurements on the screen.
DISPlay:DDEMod[:SOURce<x>]:RADix (on page 751)	Sets or queries the base of symbols of the measurement source.
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe] (on page 751)	Sets or queries the horizontal scale.

Command	Description
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO (on page 752)	Sets the horizontal scale automatically.
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO:STATe (on page 752)	Determines whether to set the horizontal scale automatically or manually.
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:MAXimum? (on page 753)	Queries the upper limit of the horizontal scale setting range.
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:MINimum? (on page 753)	Queries the lower limit of the horizontal scale setting range.
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:OFFSet (on page 754)	Sets or queries the minimum horizontal value (left edge).
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:OFFSet:MAXimum? (on page 755)	Queries the upper limit of the horizontal offset setting range.
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:OFFSet:MINimum? (on page 755)	Queries the lower limit of the horizontal offset setting range.
DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:RESet (on page 755)	Presets the horizontal scale to the default value.
DISPlay:DIAGram subgroup (Option 21 only)	Eye/Trellis diagram
DISPlay:DIAGram:X[:SCALe] (on page 756)	Sets or queries the horizontal range.
DISPlay:DIAGram:X[:SCALe]:RESet (on page 756)	Presets the horizontal scale to the default value.
DISPlay:DIQVtime subgroup (Option 21 only)	Demodulated I&Q versus Time measurement
DISPlay:DIQVtime[:MEASview<y>]:WINDow:TRACe:GRATICule:GRID:STATe	Sets or queries whether to show the graticule grid on the screen.
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe] (on page 757)	Sets or queries the vertical scale.
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe]:AUTO (on page 758)	Sets the vertical scale automatically.
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 758)	Sets or queries the vertical offset (center point of the vertical axis).
DISPlay:DPX subgroup	DPXogram measurement
DISPlay:DPX:DGRam:TIME[:SCALe]:OFFSet:DIVision (on page 759)	Sets or queries the DPXogram vertical time offset in divisions.
DISPlay:DPX:DGRam:TIME[:SCALe]:PDIVision (on page 759)	Sets or queries the DPXogram vertical time scale per division.
DISPlay:DPX:DGRam:TIME[:SCALe]:RESet (on page 760)	Presets the time scale to the default value for the DPXogram measurement.

Command	Description
DISPlay:DPX:DGRam:TSTamp:STATe (on page 760)	Determines whether to display the time stamp readout in the DPXogram display.
DISPlay:DPX:DGRam:Y[:SCALe]:AUTO (on page 761)	Rescales the height axis automatically to fit the waveform to the screen in the DPXogram display.
DISPlay:DPX:DGRam:Y[:SCALe]:RESet (on page 761)	Resets the height scale of the DPXogram display.
DISPlay:DPX:LEGend:STATe (on page 762)	Determines whether to show or hide the trace legend on the display.
DISPlay:DPX:PHASe:Y[:SCALe]:AXIS (on page 762)	Sets or queries the vertical axis representation.
DISPlay:DPX:PHASe:Y[:SCALe]:AXIS:OFFSet (on page 763)	Sets or queries the vertical offset in the DPX Phase view.
DISPlay:DPX:Y[:SCALe]:OFFSet (on page 764)	Sets or queries the vertical offset.
DISPlay:DPX:Y[:SCALe]:PDIVision (on page 764)	Sets or queries the vertical scale (per division).
DISPlay:DPX:WINDow:TRACe:GRATicule:GRID:STATe (on page 763)	Shows or hides the graticule grid on the screen
DISPlay:EDiagram subgroup (Option 21 only)	Eye diagram
DISPlay:EDiagram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe (on page 765)	Determines whether to show or hide the graticule grid on the screen in the eye diagram.
DISPlay:EDiagram[:MEASview<y>]:Y[:SCALe] (on page 765)	Sets or queries the vertical range of the eye diagram.
DISPlay:EDiagram[:MEASview<y>]:Y[:SCALe]:AUTO (on page 766)	Sets the vertical scale automatically to fit the waveform to the screen in the eye diagram.
DISPlay:EDiagram[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 766)	Sets or queries the vertical offset (center point of the vertical axis) of the eye diagram.
DISPlay:EVM subgroup (Option 21 only)	EVM versus Time measurement
DISPlay:EVM[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe (on page 775)	Sets or queries the graticule grid view state for the EVM view.
DISPlay:EVM[:MEASview<y>]:Y[:SCALe] (on page 776)	Sets or queries the vertical range of the EVM versus Time graph.
DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:AUTO (on page 777)	Sets the vertical scale automatically to fit the waveform to the screen in the EVM versus Time display.
DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 777)	Sets or queries the minimum vertical value (bottom edge) of the EVM versus Time graph.
DISPlay:FDVTime subgroup (Option 21 only)	Frequency deviation versus Time measurement

Command	Description
DISPlay:FDVTime[:MEASview<y>]:WINDow:TRACe:GRATICule:GRID:STATe (on page 778)	Sets or queries the graticule grid view state for the FDV view.
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALE] (on page 778)	Sets or queries the vertical range of the Frequency deviation versus Time graph.
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALE]:AUTO (on page 779)	Sets the vertical scale automatically to fit the waveform to the screen in the Frequency deviation versus Time display.
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALE]:OFFSet (on page 780)	Sets or queries the minimum vertical value (bottom edge) of the Frequency deviation versus Time graph.
DISPlay:{FSETtling PSETtling} subgroup	Frequency and Phase Settling measurements
DISPlay:{FSETtling PSETtling}:MARKer:SHOW:STATe (on page 780)	Determines whether to show or hide the readout for the selected marker in the Frequency or Phase Settling views.
DISPlay:{FSETtling PSETtling}:TIME:DECimal (on page 781)	Sets or queries the number of values to the right of the decimal point.
DISPlay:{FSETtling PSETtling}:WINDow:TRACe:GRATICule:GRID:STATe (on page 781)	Determines whether to show or hide the graticule grid on the screen.
DISPlay:{FSETtling PSETtling}:X[:SCALE] (on page 782)	Sets or queries the horizontal scale (full-scale time) of the Settling Time graph.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:AUTO (on page 782)	Sets the horizontal scale automatically to fit the waveform to the screen in the Frequency and Phase Settling views.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:AUTO:STATe (on page 783)	Determines whether to set the horizontal scale automatically or manually.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:MAXimum? (on page 783)	Queries the upper limit of the horizontal scale setting range.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:MINimum? (on page 784)	Queries the lower limit of the horizontal scale setting range.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:OFFSet:MINimum? (on page 785)	Queries the lower limit of the horizontal offset setting range.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:OFFSet (on page 784)	Sets or queries the minimum horizontal value (left edge) of the Frequency versus Time graph.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:OFFSet:MAXimum? (on page 785)	Queries the upper limit of the horizontal offset setting range.
DISPlay:{FSETtling PSETtling}:X[:SCALE]:OFFSet:MINimum? (on page 785)	Queries the lower limit of the horizontal offset setting range.
DISPlay:{FSETtling PSETtling}:Y[:SCALE] (on page 786)	Sets or queries the vertical range of the Frequency versus Time graph.

Command	Description
DISPlay:{FSETtling PSETtling}:Y[:SCALe]:AUTO (on page 786)	Sets the vertical scale automatically to fit the waveform to the screen in the Frequency and Phase Settling views.
DISPlay:{FSETtling PSETtling}:Y[:SCALe]:OFFSet (on page 787)	Sets or queries the vertical offset (the value at the center of the vertical axis) in the Frequency and Phase Settling graphs.
DISPlay:{FSETtling PSETtling}:Y[:SCALe]:PDIVision (on page 787)	Sets or queries the vertical scale (per division) of the Frequency and Phase Settling graphs.
DISPlay:FVTime subgroup	Frequency versus Time measurement
DISPlay:FVTime[:MEASview<y>]:WINDow:TRACe:GRATICule:GRID:STATe (on page 788)	Sets or queries whether to show the graticule grid on the Frequency versus Time view.
DISPlay:FVTime[:MEASview<y>]:X[:SCALe] (on page 788)	Sets or queries the horizontal scale.
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:AUTO (on page 789)	Sets the horizontal scale automatically.
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe (on page 790)	Determines whether to set the horizontal scale automatically or manually.
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:MAXimum? (on page 790)	Queries the upper limit of the horizontal scale setting range.
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:MINimum? (on page 791)	Queries the lower limit of the horizontal scale setting range.
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:OFFSet (on page 791)	Sets or queries the minimum horizontal value (left edge).
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum? (on page 792)	Queries the upper limit of the horizontal offset setting range.
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MINimum? (on page 793)	Queries the lower limit of the horizontal offset setting range.
DISPlay:FVTime[:MEASview<y>]:Y[:SCALe] (on page 793)	Sets or queries the vertical scale.
DISPlay:FVTime[:MEASview<y>]:Y[:SCALe]:AUTO (on page 794)	Sets the vertical scale automatically.
DISPlay:FVTime[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 794)	Sets or queries the vertical offset.
DISPlay:GENeral subgroup	General signal viewing
DISPlay:GENeral:MEASview<y>:DELete (on page 795)	Deletes the measurement view.
DISPlay:GENeral:MEASview<y>[:SOURce<x>]:NEW (on page 796)	Displays a new measurement view.

Command	Description
DISPlay:GENeral:MEASview<y>:SElect (on page 796)	Sets or queries the measurement view.
DISPlay:GPRF subgroup	General purpose RF measurements
DISPlay:GPRF:MEASview:DELeTe (on page 797)	Deletes the measurement view.
DISPlay:GPRF:MEASview[:SOURce<x>]:NEW (on page 798)	Displays a new measurement view.
DISPlay:GPRF:MEASview:SElect (on page 799)	Sets or queries the measurement view.
DISPlay:IQVTime subgroup	RF I&Q versus Time measurement
DISPlay:IQVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe (on page 800)	Sets or queries whether to show the graticule grid on the screen.
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE] (on page 800)	Sets or queries the horizontal scale.
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO (on page 801)	Sets the horizontal scale automatically.
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe (on page 802)	Determines whether to set the horizontal scale automatically or manually.
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:MAXimum? (on page 802)	Queries the upper limit of the horizontal scale setting range.
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:MINimum? (on page 803)	Queries the lower limit of the horizontal scale setting range.
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet (on page 803)	Sets or queries the minimum horizontal value (left edge).
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MAXimum? (on page 804)	Queries the upper limit of the horizontal offset setting range.
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum? (on page 805)	Queries the lower limit of the horizontal offset setting range.
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE] (on page 805)	Sets or queries the vertical scale.
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:AUTO (on page 806)	Sets the vertical scale automatically.
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:OFFSet (on page 806)	Sets or queries the vertical offset.
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:RESCale (on page 807)	Rescales the vertical scale.
DISPlay:MCPower subgroup	MCPR measurement

Command	Description
DISPlay:MCPower:MARKer:SHOW:STATe (on page 824)	Determines whether to show the readout for the selected marker.
DISPlay:MCPower:PLEVel:SHOW:STATe (on page 824)	Determines whether to show the power levels.
DISPlay:MCPower:RESet:SCALe (on page 824)	Resets the horizontal and vertical scale to the default values.
DISPlay:MCPower:WINDow:TRACe:GRATICule:GRID:STATe (on page 825)	Determines whether to show the graticule grid on screen.
DISPlay:MCPower:X[:SCALe] (on page 825)	Sets or queries the horizontal range.
DISPlay:MCPower:X[:SCALe]:AUTO (on page 826)	Rescales the horizontal axis automatically.
DISPlay:MCPower:X[:SCALe]:OFFSet (on page 826)	Sets or queries the minimum horizontal value (left edge).
DISPlay:MCPower:Y[:SCALe] (on page 827)	Sets or queries the vertical range.
DISPlay:MCPower:Y[:SCALe]:AUTO (on page 827)	Rescales the vertical axis automatically.
DISPlay:MCPower:Y[:SCALe]:OFFSet (on page 828)	Sets or queries the vertical offset.
DISPlay:MERRor subgroup (Option 21 only)	Magnitude error versus Time measurement
DISPlay:MERRor[:MEASview<y>]:WINDow:TRACe:GRATICule:GRID:STATe (on page 828)	Sets or queries the graticule grid view state for the Magnitude error versus Time view.
DISPlay:MERRor[:MEASview<y>]:Y[:SCALe] (on page 829)	Sets or queries the vertical range of the Magnitude error versus Time graph.
DISPlay:MERRor[:MEASview<y>]:Y[:SCALe]:AUTO (on page 829)	Sets the vertical scale automatically to fit the waveform to the screen in the Magnitude error versus Time display.
DISPlay:MERRor[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 830)	Sets or queries the minimum vertical value (bottom edge) of the Magnitude error versus Time graph.
DISPlay:OBWidth subgroup	Occupied Bandwidth measurement
DISPlay:OBWidth:MARKer:SHOW:STATe (on page 860)	Determines whether to show the readout for the selected marker.
DISPlay:OBWidth:RESet:SCALe (on page 860)	Resets the horizontal and vertical scale to the default values.
DISPlay:OBWidth:SELeCted:BANDwidth (on page 861)	Sets or queries the bandwidth (OBW or x dB BW) to measure.
DISPlay:OBWidth:WINDow:TRACe:GRATICule:GRID:STATe (on page 861)	Determines whether to show the graticule grid on screen.
DISPlay:OBWidth:X[:SCALe] (on page 861)	Sets or queries the horizontal range.

Command	Description
DISPlay:OBWidth:X[:SCALe]:AUTO (on page 862)	Rescales the horizontal axis automatically.
DISPlay:OBWidth:X[:SCALe]:OFFSet (on page 862)	Sets or queries the minimum horizontal value (left edge).
DISPlay:OBWidth:Y[:SCALe] (on page 863)	Sets or queries the vertical range
DISPlay:OBWidth:Y[:SCALe]:AUTO (on page 863)	Rescales the vertical axis automatically.
DISPlay:OBWidth:Y[:SCALe]:OFFSet (on page 864)	Sets or queries the vertical offset.
DISPlay:OFDM subgroup	OFDM measurements
DISPlay:OFDM:CONSt[:SCALe] (on page 864)	Sets or queries the horizontal offset.
DISPlay:OFDM:CONSt:X:OFFSet (on page 865)	Sets or queries the vertical offset.
DISPlay:OFDM:CONSt:Y:OFFSet (on page 865)	Sets or queries the scale.
DISPlay:OFDM:CRESpnse:FREQuency:AUTO (on page 865)	Rescales the horizontal axis automatically.
DISPlay:OFDM:CRESpnse:FREQuency:OFFSet (on page 866)	Sets or queries the frequency offset.
DISPlay:OFDM:CRESpnse:MAGNitude:AUTO (on page 867)	Sets or queries the horizontal range.
DISPlay:OFDM:CRESpnse:MAGNitude:OFFSet (on page 867)	Rescales the magnitude automatically.
DISPlay:OFDM:CRESpnse:MAGNitude:PDIVision (on page 867)	Sets or queries the magnitude offset.
DISPlay:OFDM:CRESpnse:PHASe:AUTO (on page 868)	Sets or queries the scale (per division) of the magnitude.
DISPlay:OFDM:CRESpnse:PHASe:OFFSet (on page 868)	Rescales the vertical axis automatically.
DISPlay:OFDM:CRESpnse:PHASe[:SCALe] (on page 869)	Sets or queries the phase offset.
DISPlay:OFDM:CRESpnse:WINDow:SElect:PLOT (on page 869)	Sets the vertical scale automatically.
DISPlay:OFDM:CRESpnse:WINDow:TRACe:GRATicule:GRID:STATe (on page 869)	Sets or queries the plot
DISPlay:OFDM:EVM:FREQuency[:SCALe] (on page 871)	Determines whether to show or hide the graticule.

Command	Description
DISPlay:OFDM:EVM:FREQuency:AUTO (on page 870)	Sets or queries the horizontal range.
DISPlay:OFDM:EVM:FREQuency:OFFSet (on page 870)	Rescales the frequency automatically to fit the waveform to the screen.
DISPlay:OFDM:EVM:MARKer:SHOW:STATe (on page 871)	Sets or queries the frequency offset.
DISPlay:OFDM:EVM:TIME[:SCALE] (on page 872)	Determines whether to show or hide the readout.
DISPlay:OFDM:EVM:TIME:AUTO (on page 871)	Rescales the time automatically to fit the waveform to the screen..
DISPlay:OFDM:EVM:TIME:OFFSet (on page 872)	Sets or queries the time offset.
DISPlay:OFDM:EVM:WINDow:SELEct:PLOT (on page 873)	Sets or queries the plot.
DISPlay:OFDM:EVM:WINDow:TRACe:GRATicule:GRID:STATe (on page 873)	Determines whether to show or hide the graticule.
DISPlay:OFDM:EVM:Y[:SCALE] (on page 874)	Sets or queries the vertical range.
DISPlay:OFDM:EVM:Y:AUTO (on page 873)	Rescales the vertical scale automatically.
DISPlay:OFDM:EVM:Y:OFFSet (on page 874)	Sets or queries the vertical offset.
DISPlay:OFDM:FLATness:AUTO (on page 875)	Automatically rescales the horizontal and vertical axes for the best display.
DISPlay:OFDM:FLATness:X:AUTO (on page 875)	Rescales the horizontal axis automatically in the OFDM Spectral Flatness display.
DISPlay:OFDM:FLATness:X:OFFSet (on page 875)	Sets or queries the value of the offset of the horizontal axis.
DISPlay:OFDM:FLATness:X[:SCALE] (on page 876)	Sets or queries the value of the horizontal scale.
DISPlay:OFDM:FLATness:Y:AUTO (on page 876)	Rescales the vertical axis scale and position values automatically.
DISPlay:OFDM:FLATness:Y:OFFSet (on page 877)	Sets or queries the value of the offset from the center (vertical position).
DISPlay:OFDM:FLATness:Y[:SCALE] (on page 877)	Sets or queries the vertical scale value.
DISPlay:OFDM:MEASview:DELEte (on page 878)	Deletes the specified OFDM measurement view.
DISPlay:OFDM:MEASview:NEW (on page 878)	Creates a new OFDM measurement view.
DISPlay:OFDM:MEASview:SELEct (on page 879)	Sets or queries the OFDM measurement view.
DISPlay:OFDM:MERRor:FREQuency[:SCALE] (on page 880)	Sets or queries the horizontal range.

Command	Description
DISPlay:OFDM:MERRor:FREQuency[:SCALe]:AUTO (on page 880)	Rescales the frequency automatically to fit the waveform to the screen.
DISPlay:OFDM:MERRor:FREQuency[:SCALe]:OFFSet (on page 880)	Sets or queries the frequency offset.
DISPlay:OFDM:MERRor:MARKer:SHOW:STATe (on page 881)	Determines whether to show or hide the readout for the selected marker.
DISPlay:OFDM:MERRor:TIME[:SCALe] (on page 881)	Sets or queries the time scale.
DISPlay:OFDM:MERRor:TIME[:SCALe]:AUTO (on page 882)	Rescales the time automatically to fit the waveform to the screen.
DISPlay:OFDM:MERRor:TIME[:SCALe]:OFFSet (on page 882)	Sets or queries the time offset.
DISPlay:OFDM:MERRor:WINDow:SElect:PLOT (on page 882)	Sets or queries the plot.
DISPlay:OFDM:MERRor:WINDow:TRACe:GRATICule:GRID:STATe (on page 883)	Determines whether to show or hide the graticule.
DISPlay:OFDM:MERRor:Y[:SCALe] (on page 884)	Sets or queries the vertical range.
DISPlay:OFDM:MERRor:Y:AUTO (on page 883)	Rescales the vertical scale automatically to fit the waveform.
DISPlay:OFDM:MERRor:Y:OFFSet (on page 884)	Sets or queries the vertical offset.
DISPlay:OFDM:PERRor:FREQuency[:SCALe] (on page 884)	Sets or queries the horizontal range.
DISPlay:OFDM:PERRor:FREQuency[:SCALe]:AUTO (on page 885)	Rescales the frequency automatically to fit the waveform to the screen.
DISPlay:OFDM:PERRor:FREQuency[:SCALe]:OFFSet (on page 885)	Sets or queries the frequency offset.
DISPlay:OFDM:PERRor:MARKer:SHOW:STATe (on page 886)	Determines whether to show or hide the readout for the selected marker.
DISPlay:OFDM:PERRor:TIME[:SCALe] (on page 886)	Sets or queries the time scale.
DISPlay:OFDM:PERRor:TIME[:SCALe]:AUTO (on page 886)	Rescales the time automatically to fit the waveform to the screen.
DISPlay:OFDM:PERRor:TIME[:SCALe]:OFFSet (on page 887)	Sets or queries the time offset.
DISPlay:OFDM:PERRor:WINDow:SElect:PLOT (on page 887)	Sets or queries the plot.

Command	Description
DISPlay:OFDM:PERRor:WINDow:TRACe:GRATicule:GRID:STATe (on page 888)	Determines whether to show or hide the graticule.
DISPlay:OFDM:PERRor:Y[:SCALE] (on page 889)	Sets or queries the vertical range.
DISPlay:OFDM:PERRor:Y:AUTO (on page 888)	Rescales the vertical scale automatically to fit the waveform.
DISPlay:OFDM:PERRor:Y:OFFSet (on page 888)	Sets or queries the vertical offset.
DISPlay:OFDM:POWEr:FREQuency[:AUTO] (on page 889)	Rescales the frequency automatically to fit the waveform to the screen.
DISPlay:OFDM:POWEr:FREQuency[:OFFSet] (on page 890)	Sets or queries the frequency offset.
DISPlay:OFDM:POWEr:FREQuency[:SCALE] (on page 890)	Sets or queries the horizontal range.
DISPlay:OFDM:POWEr:MARKer:SHOW:STATe (on page 890)	Determines whether to show or hide the readout for the selected marker.
DISPlay:OFDM:POWEr:TIME[:AUTO] (on page 891)	Rescales the time automatically to fit the waveform to the screen.
DISPlay:OFDM:POWEr:TIME:OFFSet (on page 891)	Sets or queries the time offset.
DISPlay:OFDM:POWEr:TIME[:SCALE] (on page 892)	Sets or queries the time scale.
DISPlay:OFDM:POWEr:WINDow:SELEct:PLOT (on page 892)	Sets or queries the plot.
DISPlay:OFDM:POWEr:WINDow:TRACe:GRATicule:GRID:STATe (on page 892)	Determines whether to show or hide the graticule.
DISPlay:OFDM:POWEr:Y:AUTO (on page 893)	Rescales the vertical scale automatically to fit the waveform.
DISPlay:OFDM:POWEr:Y:OFFSet (on page 893)	Sets or queries the vertical offset.
DISPlay:OFDM:POWEr:Y[:SCALE] (on page 894)	Sets or queries the vertical range.
DISPlay:PERRor subgroup (Option 21 only)	Phase error versus Time measurement
DISPlay:PERRor[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe (on page 908)	Sets or queries the graticule grid view state for the Phase error versus Time view.
DISPlay:PERRor[:MEASview<y>]:Y[:SCALE] (on page 909)	Sets or queries the vertical scale.
DISPlay:PERRor[:MEASview<y>]Y[:SCALE]:AUTO (on page 910)	Sets the vertical scale automatically.

Command	Description
DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 910)	Sets or queries the minimum vertical value (bottom edge).
DISPlay:PHVTime subgroup	Phase versus Time measurement
DISPlay:PHVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe (on page 911)	Sets or queries whether to show the graticule grid on the screen.
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe] (on page 911)	Sets or queries the horizontal scale.
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:AUTO (on page 912)	Sets the horizontal scale automatically.
DISPlay:PHVTime[:MEASview?]:Y[:SCALe]:AXIS:ENABle:REFeRence (on page 912)	Sets or queries the state of Y Reference checkbox.
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe (on page 913)	Determines whether to set the horizontal scale automatically or manually.
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:MAXimum? (on page 913)	Queries the upper limit of the horizontal scale setting range.
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:MINimum? (on page 914)	Queries the lower limit of the horizontal scale setting range.
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:OFFSet (on page 915)	Sets or queries the minimum horizontal value (left edge).
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum? (on page 915)	Queries the upper limit of the horizontal offset setting range.
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MINimum? (on page 916)	Queries the lower limit of the horizontal offset setting range.
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe] (on page 916)	Sets or queries the vertical scale.
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:AUTO (on page 917)	Sets the vertical scale automatically.
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:AXIS (on page 917)	Sets or queries the vertical axis representation.
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:AXIS:REFeRence (on page 918)	Sets or queries the reference time for phase.
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 918)	Sets or queries the vertical offset.
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALe]:RESCale (on page 919)	Rescales the vertical scale.
DISPlay:PNOise subgroup (Option 11 only)	Phase noise measurements

Command	Description
DISPlay:PNOise:LEGend:STATe (on page 919)	Sets or queries showing the trace legend on the display.
DISPlay:PNOise:MARKer:SHOW:STATe (on page 920)	Determines whether to show the readout for the selected marker.
DISPlay:PNOise:RESet:SCALe (on page 920)	Resets the horizontal and vertical scale to the default values.
DISPlay:PNOise:WINDow:TRACe:GRATICule:GRID:STATe (on page 920)	Sets or queries whether to show the graticule grid on the screen.
DISPlay:PNOise:X[:SCALe]:AUTO (on page 921)	Rescales the horizontal axis automatically.
DISPlay:PNOise:X[:SCALe]:START (on page 921)	Sets or queries the start frequency of the graph.
DISPlay:PNOise:X[:SCALe]:STOP (on page 922)	Sets or queries the stop frequency of the graph.
DISPlay:PNOise:Y[:SCALe] (on page 922)	Sets or queries the stop frequency of the graph.
DISPlay:PNOise:Y[:SCALe]:AUTO (on page 922)	Rescales the vertical axis automatically.
DISPlay:PNOise:Y[:SCALe]:OFFSet (on page 923)	Sets or queries the vertical offset.
DISPlay:PNOise:Y[:SCALe]:PDIVision (on page 923)	Sets or queries the vertical scale (per division).
DISPlay:PULSe subgroup	Pulsed RF measurements
DISPlay:PULSe:MEASview<y>:DELeTe (on page 947)	Deletes the measurement view.
DISPlay:PULSe:MEASview<y>[:SOURce<x>]:NEW (on page 947)	Displays a new measurement view.
DISPlay:PULSe:MEASview<y>:SELeCt (on page 948)	Selects the specifies Measurement view.
DISPlay:PULSe:RESult[:MEASview<y>]:ATX (on page 958)	Sets or queries whether to show the average transmitted power result.
DISPlay:PULSe:RESult[:MEASview<y>]:AVERAge (on page 959)	Sets or queries whether to show the average on power result.
DISPlay:PULSe:RESult[:MEASview<y>]:AVERAge (on page 959)	Sets or queries whether to show the average on power result.
DISPlay:PULSe:RESult[:MEASview<y>]:DRODb (on page 959)	Sets or queries whether to show the droop in the results table.
DISPlay:PULSe:RESult[:MEASview<y>]:DROOp (on page 960)	Sets or queries showing the droop measurement result in the pulse table

Command	Description
DISPlay:PULSe:RESult[:MEASview<y>]:DUTPct (on page 960)	Sets or queries whether to show the duty factor (%) result.
DISPlay:PULSe:RESult[:MEASview<y>]:DUTRatio (on page 961)	Sets or queries whether to show the duty factor (ratio) result.
DISPlay:PULSe:RESult[:MEASview<y>]:FALL (on page 962)	Sets or queries whether to show the fall time in the results table.
DISPlay:PULSe:RESult[:MEASview<y>]:FDELta (on page 962)	Sets or queries whether to show the delta frequency result.
DISPlay:PULSe:RESult[:MEASview<y>]:FRDeviation (on page 963)	Sets or queries whether to show the frequency deviation result.
DISPlay:PULSe:RESult[:MEASview<y>]:IRAmplitude (on page 963)	Sets or queries showing the Impulse Response Amplitude measurement result in the pulse table.
DISPlay:PULSe:RESult[:MEASview<y>]:IRTime (on page 964)	Sets or queries showing the Impulse Response Time measurement result in the pulse table.
DISPlay:PULSe:RESult[:MEASview<y>]:MFRerror (on page 964)	Sets or queries whether to show the maximum frequency error result.
DISPlay:PULSe:RESult[:MEASview<y>]:MPHerror (on page 965)	Sets or queries whether to show the maximum phase error result.
DISPlay:PULSe:RESult[:MEASview<y>]:OVEDb (on page 965)	Sets or queries whether to show the Overshoot measurement result in dB in the pulse table.
DISPlay:PULSe:RESult[:MEASview<y>]:OVERshoot (on page 966)	Sets or queries whether to show the Overshoot measurement result in the pulse table.
DISPlay:PULSe:RESult[:MEASview<y>]:PHDeviation (on page 966)	Sets or queries whether to show the phase deviation result.
DISPlay:PULSe:RESult[:MEASview<y>]:PPFRequency (on page 968)	Sets or queries whether to show the pulse-pulse frequency result.
DISPlay:PULSe:RESult[:MEASview<y>]:PPOWER (on page 968)	Sets or queries whether to show the peak power in the results table.
DISPlay:PULSe:RESult[:MEASview<y>]:PPPHase (on page 969)	Sets or queries whether to show the pulse-pulse carrier phase result.
DISPlay:PULSe:RESult[:MEASview<y>]:RINTerval (on page 969)	Sets or queries whether to show the repetition interval result.
DISPlay:PULSe:RESult[:MEASview<y>]:RIPDb (on page 970)	Sets or queries showing the ripple measurement result in dB in the pulse table.
DISPlay:PULSe:RESult[:MEASview<y>]:RIPPLE (on page 970)	Sets or queries showing the ripple measurement result in dB in the pulse table.

Command	Description
DISPlay:PULSe:RESult[:MEASview<y>]:RISE (on page 971)	Sets or queries whether to show the rise time in the results table.
DISPlay:PULSe:RESult[:MEASview<y>]:RMSFreqerror (on page 971)	Sets or queries whether to show the RMS frequency error result.
DISPlay:PULSe:RESult[:MEASview<y>]:RMSPhererror (on page 972)	Sets or queries whether to show the RMS phase error result.
DISPlay:PULSe:RESult[:MEASview<y>]:RRATe (on page 972)	Sets or queries whether to show the repetition rate result.
DISPlay:PULSe:RESult[:MEASview<y>]:TIME (on page 973)	Sets or queries whether to show the time in the results table.
DISPlay:PULSe:RESult[:MEASview<y>]:WIDTh (on page 973)	Sets or queries whether to show the pulse width in the results table.
DISPlay:PULSe:SElect[:MEASview<y>]:NUMBer (on page 974)	Sets or queries the pulse to measure.
DISPlay:PULSe:SElect[:MEASview<y>]:RESult (on page 974)	Sets or queries which result is shown in the trace and statistics views.
DISPlay:PULSe:STATistics[:MEASview<y>]:MARKer<x>:SHOW:STATe (on page 977)	Sets or queries whether to show the marker readout in the graph.
DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT (on page 978)	Sets or queries how to show the statistics graph.
DISPlay:PULSe:STATistics[:MEASview<y>]:WINDow:TRACe:GRATICule:GRID:STATe (on page 978)	Sets or queries whether to show the graticule grid in the statistics view.
DISPlay:PULSe:STATistics[:MEASview<y>]:X:RSCale (on page 979)	Rescales the horizontal axis of the statistics graph.
DISPlay:PULSe:STATistics[:MEASview<y>]:X[:SCALE]:NUMBer (on page 979)	Sets or queries the horizontal scale (the number of pulses per division).
DISPlay:PULSe:STATistics[:MEASview<y>]:X[:SCALE]:OFFSet (on page 980)	Sets or queries the minimum horizontal value in the statistics view.
DISPlay:PULSe:STATistics[:MEASview<y>]:Y:RSCale (on page 981)	Rescales the vertical axis of the statistics graph.
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:FULL (on page 981)	Sets or queries the vertical full-scale in the statistics view.
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:OFFSet (on page 982)	Sets or queries the vertical offset in the statistics view.

Command	Description
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALe]:STOP? (on page 983)	Queries the minimum vertical value in the statistics view.
DISPlay:PULSe:TRACe[:MEASview<y>]:MARKer<x>:SHOW:STATe (on page 984)	Sets or queries whether to show the marker readout in the trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:POINT:SHOW (on page 984)	Sets or queries whether to show the measurement points and lines.
DISPlay:PULSe:TRACe[:MEASview<y>]:WINDOW:TRACe:GRATICule:GRID:STATe (on page 985)	Sets or queries whether to show the graticule grid in the trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:X:RSCale (on page 985)	Rescales the horizontal axis of the pulse trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe] (on page 986)	Sets or queries the horizontal full scale in the pulse trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:FULL (on page 986)	Sets or queries the full-scale reference for the horizontal rescale.
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:OFFSet (on page 987)	Sets or queries the minimum horizontal value in the pulse trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:PDIVision (on page 987)	Sets or queries the horizontal full scale in the pulse trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:Y:RSCale (on page 988)	Rescales the vertical axis of the pulse trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALe]:FULL (on page 988)	Sets or queries the vertical full scale in the pulse trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 989)	Sets or queries the vertical offset in the pulse trace view.
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALe]:STOP? (on page 989)	Queries the minimum vertical value in the pulse trace view.
DISPlay:SEM subgroup	Spectral Emissions Mask measurements
DISPlay:SEM:MARKer:SHOW:STATe (on page 990)	Determines whether to show or hide the readout for the selected marker.
DISPlay:SEM:RESet:SCALe (on page 990)	Resets the scale.
DISPlay:SEM:SHOW:LIMit (on page 991)	Sets or queries the appearance of the limits.
DISPlay:SEM:WINDOW:TRACe:GRATICule:GRID:STATe (on page 991)	Determines whether to show or hide the graticule.
DISPlay:SEM:X[:SCALe]:AUTO (on page 992)	Rescales the horizontal scale automatically to fit the waveform.
DISPlay:SEM:X[:SCALe]:START (on page 992)	Sets or queries the start frequency.

Command	Description
DISPlay:SEM:X[:SCALE]:STOP (on page 992)	Sets or queries the stop frequency.
DISPlay:SEM:Y[:SCALE] (on page 993)	Sets or queries the vertical range.
DISPlay:SEM:Y[:SCALE]:AUTO (on page 993)	Rescales the vertical scale automatically to fit the waveform.
DISPlay:SEM:Y[:SCALE]:OFFSet (on page 994)	Sets or queries the vertical offset.
DISPlay:SGRam subgroup	Spectrogram measurement
DISPlay:SGRam[:MEASview<y>]:FREQuency:AUTO (on page 994)	Rescales the horizontal (frequency) axis automatically.
DISPlay:SGRam[:MEASview<y>]:FREQuency:OFFSet (on page 994)	Sets or queries the horizontal (frequency) offset.
DISPlay:SGRam[:MEASview<y>]:FREQuency:SCALE (on page 995)	Sets or queries the horizontal (frequency) range.
DISPlay:SGRAM[:MEASview<y>]:MARKer:SHOW:STATE (on page 996)	Sets or queries the marker readout.
DISPlay:SGRAM[:MEASview<y>]:SELEcted:TIMestamp (on page 996)	Sets or queries the time stamp readout.
DISPlay:SGRam[:MEASview<y>]:TIME:AUTO (on page 997)	Rescales the vertical axis automatically.
DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet (on page 997)	Sets or queries the vertical axis (time) offset (bottom line number).
DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet:DIVisions (on page 998)	Sets or queries the Vertical offset or Position in divisions.
DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap:PERCent (on page 999)	Sets or queries the Overlap in percent.
DISPlay:SGRam[:MEASview<y>]:TIME[:SCALE] (on page 999)	Sets or queries the vertical scale (the amount of time in each line).
DISPlay:SGRam[:MEASview<y>]:TIME:SCALE:PER:DIVision (on page 1000)	Sets or queries the vertical Time/division value.
DISPlay:SGRam[:MEASview<y>]:TIME:SPECTrums:PERLine? (on page 1001)	Queries the Spectrums/Line value.
DISPlay:SIGClass subgroup	Signal classification measurement
DISPlay:SIGClass:REGion:ADD (on page 1001)	Adds a frequency region for signal classification in the spectrum or DPX measurement.
DISPlay:SIGClass:REGion? (on page 1001)	Queries the number of frequency regions for the signal classification present in the Spectrum or DPX measurements.

Command	Description
DISPlay:SPECTrum subgroup	Spurious measurement
DISPlay:SPURious:MARKer:SHOW:STATE (on page 1009)	Sets or queries whether to show the readout for the selected marker.
DISPlay:SPURious:RESet:SCALE (on page 1009)	Resets the horizontal and vertical scale to the default values.
DISPlay:SPURious:SCALE:LOG:STATE (on page 1010)	Sets or queries whether to set the horizontal axis logarithmic.
DISPlay:SPURious:SElect:NUMBer (on page 1010)	Sets or queries the spurious number.
DISPlay:SPURious:SHOW:LIMit (on page 1010)	Sets or queries how to display the limits.
DISPlay:SPURious:WINDow:TRACe:GRATICule:GRID:STATE (on page 1011)	Determines whether to show the graticule grid on screen.
DISPlay:SPURious:X[:SCALE]:AUTO (on page 1011)	Rescales the horizontal axis automatically.
DISPlay:SPURious:X[:SCALE]:START (on page 1012)	Sets or queries the minimum horizontal value of the spectrum graph.
DISPlay:SPURious:X[:SCALE]:STOP (on page 1012)	Sets or queries the maximum horizontal value of the spectrum graph.
DISPlay:SPURious:Y[:SCALE] (on page 1013)	Sets or queries the vertical range of the spectrum graph.
DISPlay:SPURious:Y[:SCALE]:AUTO (on page 1013)	Rescales the vertical axis automatically.
DISPlay:SPURious:Y[:SCALE]:OFFSet (on page 1014)	Sets or queries the vertical offset of the spectrum graph.
DISPlay:TDIagram subgroup (Option 21 only)	Trellis diagram
DISPlay:TDIagram[:MEASview<y>]:WINDow:TRACe:GRATICule:GRID:STATE (on page 1014)	Sets or queries whether to show or hide the graticule grid on the screen in the Trellis diagram.
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE] (on page 1015)	Sets or queries the vertical scale of the Trellis diagram.
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:AUTO (on page 1015)	Sets the vertical scale automatically.
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:OFFSet (on page 1016)	Sets or queries the vertical offset (center point of the vertical axis).
DISPlay:TOVerview subgroup	Time overview
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:GRATICule:GRID:STATE (on page 1019)	Sets or queries whether to show the graticule grid in the time overview.

Command	Description
DISPlay:TOVerview[:MEASview<y>]:X[:SCALe] (on page 1020)	Sets or queries the horizontal scale.
DISPlay:TOVerview[:MEASview<y>]:X[:SCALe]:AUTO (on page 1020)	Sets the horizontal scale and offset automatically.
DISPlay:TOVerview[:MEASview<y>]:X[:SCALe]:OFFSet (on page 1021)	Sets or queries the minimum horizontal value (left edge).
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALe] (on page 1021)	Sets or queries the vertical scale.
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALe]:AUTO (on page 1022)	Sets the vertical scale and offset automatically.
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALe]:OFFSet (on page 1022)	Sets or queries the vertical offset.
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALe]:RESCale (on page 1023)	Rescales the vertical scale.
DISPlay:WINDow subgroup	Window display
DISPlay:WINDow:ACQuisition:BANDwidth:SHOW:StAte (on page 1029)	Sets or queries the state of Show Acq Bandwidth checkbox.
DISPlay:WINDow:ACTive:MEASurement? (on page 1030)	Queries the active measurement views
DISPlay:WINDow:APPLY:SOURce:COLOr (on page 1032)	Sets or queries the state of Apply Source Color to Trace checkbox.
DISPlay:WINDow:COLor:SCHEME (on page 1032)	Sets or queries the color scheme for displaying traces and background on the screen.
DISPlay:WINDow:OPTimized:MEASurement? (on page 1033)	Queries the measurement views that are optimized.
DISPlay:WLAN subgroup	Wireless LAN measurements
DISPlay:WLAN:CONSte[:SCALe] (on page 1052)	Sets the magnification value (zoom factor).
DISPlay:WLAN:CONSte:X:OFFSet (on page 1052)	Sets or queries the value of the offset of the horizontal axis.
DISPlay:WLAN:CONSte:Y:OFFSet (on page 1053)	Sets or queries the value of the offset of the vertical axis.
DISPlay:WLAN:CRESpone:AUTO (on page 1053)	Automatically rescales the horizontal and vertical values.
DISPlay:WLAN:CRESpone:FREQuency:AUTO (on page 1054)	Automatically rescales the horizontal subcarrier (frequency) start and stop values.
DISPlay:WLAN:CRESpone:FREQuency:START (on page 1054)	Specifies or queries the horizontal start value.

Command	Description
DISPlay:WLAN:CRESpone:FREQuency:STOP (on page 1055)	Specifies or queries the horizontal stop value.
DISPlay:WLAN:CRESpone:MAGNitude:AUTO (on page 1055)	Rescales the vertical magnitude offset (position) and scale values.
DISPlay:WLAN:CRESpone:MAGNitude:OFFSet (on page 1056)	Sets or queries the vertical offset.
DISPlay:WLAN:CRESpone:MAGNitude[:SCALE] (on page 1056)	Sets or queries the value of the vertical scale.
DISPlay:WLAN:CRESpone:MARKer:SHOW:STATe (on page 1056)	Shows or hides the marker readout.
DISPlay:WLAN:CRESpone:PHASe:AUTO (on page 1057)	Rescales the vertical phase value automatically to fit the waveform to the screen.
DISPlay:WLAN:CRESpone:PHASe:OFFSet (on page 1057)	Sets or queries the vertical offset.
DISPlay:WLAN:CRESpone:PHASe[:SCALE] (on page 1058)	Sets or queries the phase value.
DISPlay:WLAN:CRESpone:WINDow:SElect:PLOT (on page 1058)	Specifies or queries which graphs are displayed.
DISPlay:WLAN:CRESpone:WINDow:TRACe:GRATICule:GRID:STATe (on page 1059)	Sets or queries whether to show the graticule grid.
DISPlay:WLAN:EVM:FREQuency:AUTO (on page 1059)	Automatically rescales the horizontal subcarrier (frequency) start and stop values.
DISPlay:WLAN:EVM:FREQuency:RESet (on page 1060)	Automatically resets the horizontal subcarrier (frequency) start and stop values.
DISPlay:WLAN:EVM:FREQuency:START (on page 1060)	Specifies or queries the horizontal start value.
DISPlay:WLAN:EVM:FREQuency:STOP (on page 1061)	Specifies or queries the horizontal stop value.
DISPlay:WLAN:EVM:MARKer:SHOW:STATe (on page 1061)	Shows or hides the Marker readout.
DISPlay:WLAN:EVM[:SCALE]:AUTO (on page 1061)	Automatically adjusts all vertical and horizontal values.
DISPlay:WLAN:EVM:TIME:AUTO (on page 1062)	Sets the horizontal start and stop values to fit the waveform.
DISPlay:WLAN:EVM:TIME:AUTO:STATe (on page 1062)	Automatically sets the horizontal symbol scale value.

Command	Description
DISPlay:WLAN:EVM:TIME:RESet (on page 1063)	Resets the horizontal symbol start and stop values.
DISPlay:WLAN:EVM:TIME:START (on page 1063)	Sets or queries the horizontal symbol start value.
DISPlay:WLAN:EVM:TIME:STOP (on page 1064)	Sets or queries the horizontal symbol stop value
DISPlay:WLAN:EVM:WINDow:SElect:PLOT (on page 1064)	Specifies or queries which graphs are displayed in the WLAN EVM display.
DISPlay:WLAN:EVM:WINDow:TRACe:GRATICule:GRID:STATE (on page 1065)	Shows or hides the graticule grid on the screen.
DISPlay:WLAN:EVM:Y:AUTO (on page 1065)	Automatically sets the vertical scale and position values.
DISPlay:WLAN:EVM:Y:OFFSet (on page 1065)	Sets or queries the value of the offset from the center.
DISPlay:WLAN:EVM:Y:RESet (on page 1066)	Resets the vertical scale and position (offset) values.
DISPlay:WLAN:EVM:Y[:SCALE] (on page 1066)	Sets or queries the vertical scale value.
DISPlay:WLAN:FLATness:AUTO (on page 1067)	Automatically rescales the horizontal and vertical axes.
DISPlay:WLAN:FLATness:X:AUTO (on page 1067)	Automatically rescales the horizontal axis.
DISPlay:WLAN:FLATness:X:OFFSet (on page 1068)	Sets or queries the value of the offset of the horizontal axis from the center.
DISPlay:WLAN:FLATness:X[:SCALE] (on page 1068)	Sets or queries the horizontal scale value.
DISPlay:WLAN:FLATness:Y:AUTO (on page 1069)	Automatically rescales the vertical axis scale and position values.
DISPlay:WLAN:FLATness:Y:OFFSet (on page 1069)	Sets or queries the value of the offset from the center.
DISPlay:WLAN:FLATness:Y[:SCALE] (on page 1070)	Sets or queries the vertical scale value.
DISPlay:WLAN:MEASview:DELeTe (on page 1070)	Deletes the selected measurement view.
DISPlay:WLAN:MEASview:NEW (on page 1071)	Displays a new measurement view.
DISPlay:WLAN:MEASview:SElect (on page 1072)	Selects a WLAN measurement view.
DISPlay:WLAN:MERRor:FREQuency:AUTO (on page 1073)	Automatically rescales the horizontal subcarrier (frequency) start and stop values.
DISPlay:WLAN:MERRor:FREQuency:RESet (on page 1073)	Automatically resets the horizontal subcarrier (frequency) start and stop values.
DISPlay:WLAN:MERRor:FREQuency:START (on page 1073)	Specifies or queries the horizontal start value.

Command	Description
DISPlay:WLAN:MERRor:FREQuency:STOP (on page 1074)	Specifies or queries the horizontal stop value.
DISPlay:WLAN:MERRor:MARKer:SHOW:STATe (on page 1074)	Shows or hides the marker readout.
DISPlay:WLAN:MERRor[:SCALe]:AUTO (on page 1075)	Automatically adjusts all vertical and horizontal values.
DISPlay:WLAN:MERRor:TIME:AUTO (on page 1075)	Sets the horizontal start and stop values.
DISPlay:WLAN:MERRor:TIME:AUTO:STATe (on page 1076)	Automatically sets the horizontal symbol scale value.
DISPlay:WLAN:MERRor:TIME:RESet (on page 1076)	Resets the horizontal symbol start and stop values.
DISPlay:WLAN:MERRor:TIME:START (on page 1077)	Sets or queries the horizontal symbol start value.
DISPlay:WLAN:MERRor:TIME:STOP (on page 1077)	Sets or queries the horizontal symbol stop value.
DISPlay:WLAN:MERRor:WINDow:SElect:PLOT (on page 1077)	Specifies or queries which graphs are displayed.
DISPlay:WLAN:MERRor:WINDow:TRACe:GRATICule:GRID:STATe (on page 1078)	Shows or hides the graticule grid on the display.
DISPlay:WLAN:MERRor:Y:AUTO (on page 1078)	Automatically sets the vertical scale and position values.
DISPlay:WLAN:MERRor:Y:OFFSet (on page 1079)	Sets or queries the offset from the center (vertical position).
DISPlay:WLAN:MERRor:Y:RESet (on page 1079)	Resets the vertical scale and position (offset).
DISPlay:WLAN:MERRor:Y[:SCALe] (on page 1080)	Sets or queries the vertical scale value.
DISPlay:WLAN:PERRor:FREQuency:AUTO (on page 1080)	Automatically rescales the horizontal subcarrier (frequency) start and stop values.
DISPlay:WLAN:PERRor:FREQuency:RESet (on page 1081)	Automatically resets the horizontal subcarrier (frequency) start and stop values.
DISPlay:WLAN:PERRor:FREQuency:START (on page 1081)	Specifies or queries the horizontal start value.
DISPlay:WLAN:PERRor:FREQuency:STOP (on page 1082)	Specifies or queries the horizontal stop value.
DISPlay:WLAN:PERRor:MARKer:SHOW:STATe (on page 1082)	Show or hides the Marker readout.

Command	Description
DISPlay:WLAN:PERRor[:SCALe]:AUTO (on page 1083)	Automatically adjusts all vertical and horizontal settings.
DISPlay:WLAN:PERRor:TIME:AUTO (on page 1083)	Automatically sets the horizontal symbol start and stop values.
DISPlay:WLAN:PERRor:TIME:AUTO:STATe (on page 1083)	Automatically sets the horizontal symbol scale value.
DISPlay:WLAN:PERRor:TIME:RESet (on page 1084)	Resets the horizontal symbol start and stop values.
DISPlay:WLAN:PERRor:TIME:STARt (on page 1084)	Sets or queries the horizontal symbol start value.
DISPlay:WLAN:PERRor:TIME:STOP (on page 1085)	Sets or queries the horizontal symbol stop value.
DISPlay:WLAN:PERRor:WINDow:SElect:PLOT (on page 1085)	Specifies or queries which displays are displayed.
DISPlay:WLAN:PERRor:WINDow:TRACe:GRATicule GRID:STATe (on page 1086)	Shows or hides the graticule grid on the screen.
DISPlay:WLAN:PERRor:Y:AUTO (on page 1086)	Automatically selects the vertical scale and position values.
DISPlay:WLAN:PERRor:Y:OFFSet (on page 1087)	Sets or queries the value of the offset from the center (vertical position).
DISPlay:WLAN:PERRor:Y:RESet (on page 1087)	Resets the vertical scale and position (offset) values.
DISPlay:WLAN:PERRor:Y[:SCALe] (on page 1088)	Sets or queries the vertical scale value.
DISPlay:WLAN:PVTime:BURSt:X[:SCALe] (on page 1088)	Sets or queries the value of the scale (width).
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:AUTO (on page 1088)	Automatically sets the starting time (position) and scale (width) values
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:OFFSet (on page 1089)	Sets or queries the starting time (position) value.
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:RESet (on page 1089)	Resets the starting time (position) and scale (width) values.
DISPlay:WLAN:PVTime:FALL:X[:SCALe] (on page 1090)	Sets or queries the scale (width) value.
DISPlay:WLAN:PVTime:FALL:X[:SCALe]:AUTO (on page 1090)	Automatically sets the starting time (position) and scale (width) values.
DISPlay:WLAN:PVTime:FALL:X[:SCALe]:OFFSet (on page 1091)	Sets or queries the value for the starting time (offset).

Command	Description
DISPlay:WLAN:PVTime:FALL:X[:SCALe]:RESet (on page 1091)	Resets the starting time (position) and scale (width) values.
DISPlay:WLAN:PVTime:MARKer:SHOW:STATe (on page 1092)	Shows or hides the marker readout.
DISPlay:WLAN:PVTime:RISE:X[:SCALe] (on page 1092)	Sets or queries the scale (width) value.
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:AUTO (on page 1092)	Automatically sets the starting time (position) and scale (width) values.
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:OFFSet (on page 1093)	Sets or queries the starting time value (offset).
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:RESet (on page 1093)	Resets the starting time (position) and scale (width) values.
DISPlay:WLAN:PVTime:WINDow:SElect:PLOT (on page 1094)	Specifies or queries which view to use.
DISPlay:WLAN:PVTime:WINDow:TRACe:GRATicule:GRID:STATe (on page 1094)	Shows or hides the graticule grid on the screen.
DISPlay:WLAN:PVTime:Y[:SCALe] (on page 1095)	Sets or queries the vertical scale value.
DISPlay:WLAN:PVTime:Y[:SCALe]:AUTO (on page 1095)	Automatically selects the vertical scale and position values.
DISPlay:WLAN:PVTime:Y[:SCALe]:OFFSet (on page 1096)	Sets or queries the value of the vertical offset.
DISPlay:WLAN:PVTime:Y[:SCALe]:PDIVision (on page 1096)	Sets or queries the value of the vertical scale.
DISPlay:WLAN:PVTime:Y[:SCALe]:RESet (on page 1096)	Resets the vertical scale and position (offset) values.
DISPlay:WLAN:SUMMary:EVMUnits (on page 1097)	Sets or queries the EVM Units setting.
DISPlay:LTE subgroup	
DISPlay:LTE:ACLR:MARKer:SHOW:STATe (on page 807)	Determines whether to show or hide the readout for the selected marker.
DISPlay:LTE:ACLR:RESet:SCALe (on page 808)	Resets the horizontal and vertical scale to default values.
DISPlay:LTE:ACLR:SHOW:LIMit (on page 808)	Sets or queries the appearance of the limits.
DISPlay:LTE:ACLR:WINDow:TRACe:GRATicule:GRID:STATe (on page 809)	Determines whether to show or hide the graticules.

Command	Description
DISPlay:LTE:ACLR:WINDow:TRACe:POWer:LEVEl:STATe (on page 809)	Determines whether to show or hide the power readout.
DISPlay:LTE:ACLR:X:SCALe (on page 810)	Sets or queries the horizontal range.
DISPLay:LTE:ACLR:X:SCALe:AUTO (on page 810)	Rescales the horizontal axis automatically to fit the waveform to the screen.
DISPlay:LTE:ACLR:X:SCALe:OFFSet (on page 810)	Sets or queries the center frequency of the trace.
DISPlay:LTE:ACLR:Y:SCALe:AUTO (on page 811)	Rescales the vertical scale automatically to fit the waveform on the screen.
DISPlay:LTE:ACLR:Y:SCALe:OFFSet (on page 811)	Sets or queries the vertical offset of the trace.
DISPlay:LTE:ACLR:Y:SCALe (on page 812)	Sets or queries the vertical range of the graph.
DISPlay:LTE:CHSPepectrum:MARKer:SHOW:STATe (on page 812)	Determines whether to show or hide the readout for the selected marker.
DISPlay:LTE:CHSPepectrum:RESet:SCALe (on page 813)	Resets the horizontal and vertical scale to default values.
DISPlay:LTE:CHSPepectrum:WINDow:TRACe:GRATICule:GRID:STATe (on page 813)	Determines whether to show or hide the graticule.
DISPlay:LTE:CHSPepectrum:X:SCALe (on page 814)	Sets or queries the horizontal range.
DISPLay:LTE:CHSPepectrum:X:SCALe:AUTO (on page 814)	Rescales the horizontal axis automatically to fit the waveform to the screen.
DISPlay:LTE:CHSPepectrum:X:SCALe:OFFSet (on page 815)	Sets or queries the center frequency of the trace.
DISPlay:LTE:CHSPepectrum:Y:SCALe (on page 815)	Sets or queries the vertical range of the graph.
DISPlay:LTE:CHSPepectrum:Y:SCALe:AUTO (on page 815)	Rescales the vertical scale automatically to fit the waveform on the screen.
DISPlay:LTE:CHSPepectrum:Y:SCALe:OFFSet (on page 816)	Sets or queries the vertical offset of the trace.
DISPlay:LTE:CONSt:SCALe (on page 816)	Sets or queries the scale (zoom).
DISPlay:LTE:CONSt:X:OFFSet (on page 817)	Sets or queries the horizontal offset.
DISPlay:LTE:CONSt:Y:OFFSet (on page 817)	Sets or queries the vertical offset.
DISPlay:LTE:MEASview:DELeTe (on page 818)	Deletes the selected LTE measurement display in the application.
DISPlay:LTE:MEASview:NEw (on page 818)	Opens a new LTE measurement display.

Command	Description
DISPlay:LTE:MEASview:SElect (on page 819)	Selects an LTE measurement display in the application. The query returns the currently selected display.
DISPlay:LTE:PVTime:MARKer:SHOW:STATe (on page 819)	Shows or hides the marker readout.
DISPlay:LTE:PVTime:WINDow:TRACe:GRATicule:GRID:STATe (on page 820)	Determines whether to show or hide the graticule.
DISPlay:LTE:PVTime:X:SCALE (on page 820)	Sets or queries the vertical range.
DISPlay:LTE:PVTime:X:SCALE:AUTO (on page 821)	Rescales the horizontal axis automatically to fit the waveform to the screen.
DISPlay:LTE:PVTime:X:SCALE:RESet (on page 821)	Resets the horizontal scale to the default value for the time measurements.
DISPlay:LTE:PVTime:Y:SCALE (on page 821)	Sets or queries the horizontal range.
DISPlay:LTE:PVTime:Y:SCALE:AUTO (on page 822)	Rescales the vertical scale automatically to fit the waveform on the screen.
DISPlay:LTE:PVTime:Y:SCALE:OFFSet (on page 822)	Sets or queries the vertical offset (top edge of the vertical axis) of the trace.
DISPlay:LTE:PVTime:Y:SCALE:PDIVision (on page 823)	Sets or queries the value of the vertical scale in dB/division.
DISPlay:LTE:PVTime:Y:SCALE:RESet (on page 823)	Resets the vertical scale and position (offset) to the default value for the time measurements.

Fetch commands

The FETCh commands retrieve the measurements from the data taken by the latest INITiate command. See the Index for commands not listed in the following table.

To perform a FETCh operation on fresh data, use the READ commands, which acquire a new input signal and fetch the measurement results from that data.

Not all of these commands apply to SignalVu-PC and connected instruments. See the individual command descriptions for details.

Fetch commands

Command	Description
FETCh TXGain command subgroup	Transmission Gain measurements
FETCh:TXGain:AVERage? (on page 1434)	Returns the mean value of the trace.
FETCh:TXGain:MAX? (on page 1434)	Returns the maximum trace value.
FETCh:TXGain:MAXLocation? (on page 1435)	Returns the frequency of the maximum trace value.

Command	Description
FETCh:TXGain:MIN? (on page 1435)	Returns the minimum trace value.
FETCh:TXGain:MINLocation? (on page 1435)	Returns the frequency of the minimum trace value.
FETCh:TXGain:TRACe<x>? (on page 1436)	Returns the trace data of the selected trace.
FETCh basic command subgroup	General fetch control
FETCh:RFIN:IQ? (on page 1391)	Returns time-domain IQ data for a specific acquisition data record.
FETCh: BLUetooth subgroup	Bluetooth measurements
FETCh:BIBEmissions:FTX? (on page 1123)	Returns the band number corresponding to the transmitted FTX detected in the display.
FETCh:BIBEmissions:POWer? (on page 1123)	Returns all channel power results.
FETCh:BIBEmissions:RESUlts:STATus? (on page 1124)	Returns the Pass/Fail result status.
FETCh:BLUetooth:CONSt:FErRor? (on page 1124)	Returns the frequency error.
FETCh:BLUetooth:CONSt:TRACe? (on page 1125)	Queries the trace data.
FETCh:BLUetooth:EDIagram:FDEVIation? (on page 1125)	Returns the frequency deviation versus time trace data with the X values.
FETCh:BLUetooth:EDIagram:FErRor? (on page 1126)	Returns the frequency error.
FETCh:BLUetooth:EDIagram:HORiz:SCALe? (on page 1126)	Returns the value of the horizontal scale.
FETCh:BLUetooth:EDIagram:I? (on page 1127)	Returns the I versus time trace.
FETCh:BLUetooth:EDIagram:Q? (on page 1127)	Returns the Q versus time trace.
FETCh:BLUetooth:FDVTime:TRACe? (on page 1128)	Returns the trace data.
FETCh:BLUetooth:FREQuency:ERROr? (on page 1128)	Returns the frequency error from the Bluetooth Constellation diagram.
FETCh:BLUetooth:FREQuency:ERROr:TYPE? (on page 1129)	Returns the frequency error type in the Bluetooth Constellation display.
FETCh:BLUetooth:FREQuency:OFFSet:DRIFT:F1FZero? (on page 1129)	Returns the drift in frequency offset ($f_1 - f_0$ —the frequency offset calculated in the first interval in the payload — the frequency offset calculated in the preamble) in the Bluetooth Frequency Deviation vs. Time display.

Command	Description
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFN5? (on page 1130)	Returns the maximum drift of the frequency offset in payload intervals spaced 50 μ s away in the Bluetooth Frequency Deviation vs. Time display.
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFN5:INTERval? (on page 1130)	Returns the interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred.
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFZERO? (on page 1131)	Returns the maximum drift of the frequency offset of the intervals in the payload from the preamble packet in the Bluetooth Frequency Deviation vs. Time display.
FETCh:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFZERO:INTERval? (on page 1131)	Returns the interval (n) at which the maximum drift f_n-f_0 occurred in the Bluetooth Frequency Deviation vs. Time display.
FETCh:BLUEtooth:FREQuency:OFFSet:MAX? (on page 1132)	Returns the maximum frequency offset in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.
FETCh:BLUEtooth:FREQuency:OFFSet:MAX:INTERval? (on page 1132)	Returns the maximum frequency offset interval in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.
FETCh:BLUEtooth:FREQuency:OFFSet:PREAmble? (on page 1133)	Returns the offset calculated in the preamble region in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:F? (on page 1133)	Returns the average frequency value when the selected test pattern is Other in the Bluetooth Frequency Deviation vs. Time display.
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:F2F1ratio? (on page 1134)	Returns the average ratio value for the high and low frequency deviation in the Bluetooth Frequency deviation versus Time display.
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:FONE? (on page 1134)	Returns the average frequency deviation for the low deviation pattern in the Bluetooth Frequency deviation versus Time display.
FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:FTWO? (on page 1135)	Returns the average frequency deviation for the high deviation pattern in the Bluetooth Frequency Deviation versus. Time display.
FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:COUNT? (on page 1135)	Returns the number of packets analyzed to obtain average drift results.
FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:F1FZero? (on page 1135)	Returns the drift f_1-f_0 .
FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:F1FZero:STATus? (on page 1136)	Returns the Pass/Fail drift f_1-f_0 result status in the packet.
FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:FNFN5? (on page 1136)	Returns the maximum drift of the f_n-f_{n-5} value.
FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:FNFN5:STATus? (on page 1137)	Returns the Pass/Fail status of the maximum f_n-f_{n-5} drift in the packet.
FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:FNFZero? (on page 1137)	Returns the maximum drift f_n-f_0 .

Command	Description
FETCh:BLUEtooth:SUMMARY:FREQUENCY:OFFSet:DRIFT:FNFZero:STATus? (on page 1138)	Returns the Pass/Fail result status of the f_n - f_0 maximum drift in the packet.
FETCh:BLUEtooth:SUMMARY:FREQUENCY:OFFSet:MAX? (on page 1142)	Returns the maximum frequency offset present in the packet.
FETCh:BLUEtooth:SUMMARY:FREQUENCY:OFFSet:MAX:STATus? (on page 1143)	Returns the Pass or Fail result status of the frequency offset maximum in the packet.
FETCh:BLUEtooth:SUMMARY:FREQUENCY:OFFSet:PREAmble? (on page 1143)	Returns the frequency offset value in the preamble region.
FETCh:BLUEtooth:SUMMARY:FREQUENCY:OFFSet:PREAmble:STATus? (on page 1144)	Returns the Pass or Fail result status of the frequency offset in the preamble region.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:DELTA:F:MAX:PERcentage:COUNt? (on page 1144)	Returns the number of packets analyzed out of 10 packets for ΔF average.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:DELTA:FONE:MAX:PERcentage:COUNt? (on page 1145)	Returns the number of packets analyzed out of 10 packets for the ΔF_{1avg} .
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:DELTA:FTWO:MAX:PERcentage? (on page 1146)	Returns the percentage of the ΔF_{2Max} values that are above the specified limit.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:DELTA:FTWO:MAX:PERcentage:COUNt? (on page 1145)	Returns the number of packets analyzed out of 10 packets for the $\Delta F_{2Max\%}$.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:DELTA:FTWO:MAX:PERcentage:STATus? (on page 1146)	Returns the Pass/Fail result status of the $\Delta F_{2Max\%}$ field.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:F? (on page 1147)	Returns the ΔF_{avg} value.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:F2F1ratio? (on page 1147)	Returns the ratio of the ΔF_{2avg} to ΔF_{1avg} .
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:F2F1ratio:STATus? (on page 1148)	Returns the Pass/Fail results status of the $\Delta F_{2avg}/\Delta F_{1avg}$ field.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:FONE? (on page 1148)	Returns the ΔF_{1avg} value.
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:FONE:STATus? (on page 1149)	Returns the Pass/Fail results status of the ΔF_{1avg} .

Command	Description
FETCh:BLUEtooth:SUMMARY:MODulation:CHARacteristics:AVERage:FTWO? (on page 1149)	Returns the ΔF_{2avg} value.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:AVERage? (on page 1150)	Returns the average output power.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:AVERage:STATus? (on page 1151)	Returns the Pass/Fail results status of the average output power.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:COUNt? (on page 1151)	Returns the number of packets analyzed out of 10 packets for the calculation of the output power.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:EDR:COUNt? (on page 1152)	Returns the number of packets analyzed out of 10 packets for calculation of the output power for EDR.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:EDR:DPSK? (on page 1152)	Returns the power in the DPSK portion of the EDR burst.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:EDR:GFSK? (on page 1153)	Returns the power in the GFSK portion of the EDR burst.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:PEAK? (on page 1153)	Returns the peak output power.
FETCh:BLUEtooth:SUMMARY:OUTPut:POWER:PEAK:STATus? (on page 1154)	Returns the Pass/Fail results status of the peak output power.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:CRC? (on page 1154)	Returns the Basic Rate value of the CRC field.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:ARQN? (on page 1155)	Returns the value of ARQN field.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:FLOW? (on page 1155)	Returns the value of Flow field.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:HEC? (on page 1156)	Returns the value of HEC field.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:LT:ADDRESS? (on page 1156)	Returns the LT address.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:SEQN? (on page 1157)	Returns the value of SEQN field.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:TYPE? (on page 1157)	Returns the value of Type field.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:PAYLoad:LENGth? (on page 1158)	Returns the Basic Rate payload length.
FETCh:BLUEtooth:SUMMARY:PACKet:BDR:PREAmble? (on page 1158)	Returns the preamble of the Basic Rate packet.

Command	Description
FETCh:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD? (on page 1159)	Returns the sync word.
FETCh:BLUEtooth:SUMMary:PACKet:BDR:TYPE? (on page 1159)	Returns the packet type of the Basic Rate signal.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:ACCeSS:ADDReSS? (on page 1160)	Returns the 32-bit Access Address.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:CRC? (on page 1160)	Returns the value of the CRC field.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:LENGth? (on page 1161)	Returns the value of the length field.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:RX:ADDReSS? (on page 1163)	Returns the Rx address.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TX:ADDReSS? (on page 1164)	Returns the Tx address.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TYPE? (on page 1165)	Returns the PDU type.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:PREAmble? (on page 1165)	Returns the preamble of the BLE packet.
FETCh:BLUEtooth:SUMMary:PACKet:BLE:TYPE? (on page 1165)	Returns the packet type.
FETCh:NOISe subgroup	Noise Figure and Gain measurements
FETCh:NOISe:GAIN:TRACe<x>:RESult? (on page 1230)	This query returns the gain value in mdB of the specified trace in the Gain display.
FETCh:NOISe:TABLE:VALue? (on page 1230)	Returns Noise Table data. A total of 7 values per frequency (28 bytes per frequency) is returned.
FETCh:OBWidth subgroup	Bluetooth 20dB BW measurements
FETCh:OBWidth:BOBW:XDBBbandwidth? (on page 1257)	Returns the difference between the higher and lower frequency points corresponding to the value where it is X dB less from the value at the center frequency.
FETCh:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth? (on page 1257)	Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured inwards (coming from the ends to the center frequency).
FETCh:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency? (on page 1258)	Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the inward direction.
FETCh:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency? (on page 1258)	Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the inward direction.

Command	Description
FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth? (on page 1259)	Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured outwards(from the center frequency to the ends).
FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency? (on page 1260)	Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the outward direction.
FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency? (on page 1260)	Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the outward direction.
FETCh:P25 subgroup	P25 measurements
FETCh:P25:CONSt:FErRor? (on page 1290)	Returns the frequency error.
FETCh:P25:CONSt:TRACe? (on page 1290)	Returns the display trace data.
FETCh:P25:EDlagram:FDEVIation? (on page 1291)	Returns the Frequency Deviation versus Time trace data with the X value.
FETCh:P25:EDlagram:FErRor? (on page 1291)	Returns the frequency error.
FETCh:P25:EDlagram:I? (on page 1292)	Returns the I versus time trace data.
FETCh:P25:EDlagram:Q? (on page 1292)	Returns the Q versus time trace data.
FETCh:P25:PVTime:BURSt:WIDTh? (on page 1293)	Returns the value of the measured time width of the burst packet from poweron to powerdown (or the end of waveform, if that occurs before powerdown), in seconds.
FETCh:P25:SUMMary:MODUlation:MEASurement:FREQuency:ACCUracy (on page 1300)	Returns the Operational Frequency Accuracy measurement results.
FETCh:P25:SUMMary:MODUlation:MEASurement:FREQuency:ACCUracy:STATus (on page 1300)	Returns the Operational Frequency Accuracy measurement status.
FETCh:P25:SUMMary:MODUlation:MEASurement:FREQuency:DEVlation:NEGPeak (on page 1301)	Returns the Frequency Deviation, negative peak, measurement results.
FETCh:P25:SUMMary:MODUlation:MEASurement:FREQuency:DEVlation:NEGPeak:STATus (on page 1301)	Returns the Status of Frequency Deviation, negative peak measurement status.
FETCh:P25:SUMMary:MODUlation:MEASurement:FREQuency:DEVlation:POSPeak (on page 1302)	Returns the status of Frequency Deviation, positive peak results.
FETCh:P25:SUMMary:MODUlation:MEASurement:FREQuency:DEVlation:POSPeak:STATus (on page 1302)	Returns the status of Frequency Deviation, positive peak status.
FETCh:P25:SUMMary:MODUlation:MEASurement:FREQuency:ERROr (on page 1303)	Returns the Frequency Error measurement results.
FETCh:P25:SUMMary:MODUlation:MEASurement:SRA? (on page 1303)	Returns the Symbol Rate Accuracy measurement results.

Command	Description
FETCh:P25:SUMMARY:MODulation:MEASurement:SRA:STATus (on page 1304)	Returns the Symbol Rate Accuracy measurement status.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MAXOFF:STATus? (on page 1304)	Returns HCPM Pmax-off measurement status.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MAXON:STATus? (on page 1305)	Returns Status of HCPM Pmax-on measurement status.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MAXSs:STATus (on page 1306)	Returns HCPM Pss-max measurement status.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MINImum:STATus? (on page 1307)	Returns status of HCPM Pss-min measurement status based on the limit.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:OFFSlot:STATus? (on page 1308)	Returns status of HCPM Offslot measurement based on the limit.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:PEAK:ACPR:HI (on page 1308)	Returns P_ACP_HI value.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:PEAK:ACPR:LOW (on page 1309)	Returns P_ACP_LOW value.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:PEAK:ACPR:MIN (on page 1309)	Returns Min Pk ACPR value.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:PEAK:ACPR:MIN:STATus (on page 1310)	Returns status of Min Pk ACPR value based on the limit.
FETCh:P25:SUMMARY:POWER:MEASurement:RF (on page 1310)	Returns RF measurement results.
FETCh:P25:SUMMARY:POWER:MEASurement:RF:STATus (on page 1310)	Returns Status of RF measurement status.
FETCh:P25:SUMMARY:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:ACQ:COUNT? (on page 1311)	Returns the HCPM Time alignment's t_error_1 acquisition count over which the t_error_1 average is computed.
FETCh:P25:SUMMARY:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:STATus (on page 1312)	Returns status of HCPM Time alignment's t_error_1 measurement results based on the limit.
FETCh:P25:SUMMARY:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ZERO:STATus? (on page 1312)	Returns status of HCPM Time alignment's t_error_0 measurement results.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:ENCOder:BI:STATus? (on page 1319)	Returns status of Average Transmitter Power Encoder Attack Time,busy/idle, measurement status.

Command	Description
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:ENCOrder:STATus? (on page 1317), FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:ENCOrder:STATus? (on page 1320)	Returns status of Average Transmitter Encoder Attack Time measurement results based on the limit.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:ENCOrder? (on page 1320)	Returns the Average Transmitter Encoder Attack Time measurement results.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER:BI:STATus (on page 1322)	Returns status of Average Transmitter Power Attack Time, busy/idle, measurement results based on the limit.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER:BI? (on page 1318), FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER:BI? (on page 1321)	Returns the Average Transmitter Power Attack Time, busy/idle, measurement results.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER:STATus (on page 1323)	Returns status of Average Transmitter Power Attack Time measurement results.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER? (on page 1323)	Returns the Average Transmitter Power Attack Time measurement results.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:THRUput:DELAy:ACQ:COUNT? (on page 1324)	Returns the Throughput delay acquisition counts over which the Throughput delay average is computed.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:THRUput:DELAy:STATus (on page 1325)	Returns status of Throughput delay measurement results based on the limit.
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASe1:THRUput:DELAy? (on page 1325)	Returns the Throughput delay measurement results.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MAXOFF? (on page 1304)	Returns the HCPM Pmax-off measurement results.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MAXON? (on page 1305)	Returns the HCPM Pmax-on measurement results.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MAXSS? (on page 1306)	Returns the HCPM Pss-max measurement results.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:MINImum? (on page 1307)	Returns the HCPM Pss-min measurement results.
FETCh:P25:SUMMARY:POWER:MEASurement:HCPM:OFFSlot? (on page 1307)	Returns the HCPM Offslot power results.
FETCh:P25:SUMMARY:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE? (on page 1314)	Returns the HCPM Time alignment's t_error_1 measurement results.

Command	Description
FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:ACQ:COUNT? (on page 1314)	Returns the HCPM Time alignment's t_error_1 acquisition count over which the t_error_1 average is computed.
FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ZERO? (on page 1315)	Returns the HCPM Time alignment's t_error_0 measurement results.
FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ZERO:ACQ:COUNT (on page 1313)	Returns the HCPM Time alignment's t_error_0 acquisition count over which the t_error_0 average is done.
FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TOBSync? (on page 1315)	Returns the HCPM Time alignment's t_obsync measurement results.
FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TOBSync:ACQ:COUNT (on page 1316)	Returns the HCPM Time alignment's t_obsync acquisition counts over which the t_obsync average is computed.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTack:TIME:ACQ:COUNT (on page 1318)	Returns the Average Transmitter Power Attack acquisition count over which the t_obsync average is computed.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTack:TIME:ACQ:COUNT:BI? (on page 1318)	Returns the Average Transmitter Power Attack, busy/idle, acquisition count over which the Busy/Idle Attack time average is computed.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTack:TIME:ENCODer? (on page 1320)	Returns the Average Transmitter Encoder Attack Time measurement results.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTack:TIME:ENCODer:BI? (on page 1321)	Returns the Average Transmitter Encoder Attack Time, busy/idle, measurement results.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER (on page 1321)	Returns the Average Transmitter Power Attack Time measurement results.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER:BI (on page 1322)	Returns the Average Transmitter Power Attack Time, busy or idle, measurement results.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:THRUput:DELAy (on page 1325)	Returns the Throughput delay measurement results.
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:THRUput:DELAy:ACQ:COUNT (on page 1324)	Returns the Throughput delay acquisition counts over which the Throughput delay average is computed.
FETCh:RFIN subgroup	RF acquisition data
FETCh:RFIN:IQ:HEADer? (on page 1392)	Returns the header information for a specific acquisition data record.
FETCh:RFIN:IQ:SCALE? (on page 1393)	Returns the scaling factor contained in the .tiq file header.
FETCh:RFIN:RECOrd:IDS? (on page 1394)	Returns the beginning and end ID numbers of acquisition data.

Command	Description
FETCh:ACPower subgroup	Channel power and ACPR measurement
FETCh:ACPower? (on page 1099)	Returns the ACPR measurement results.
FETCh:ACPower:CHANnel:POWer? (on page 1099)	Returns the average power of the main channel.
FETCh:ACPower:SPECTrum? (on page 1100)	Returns spectrum trace data of the ACPR measurement.
FETCh:FM:PNEGative? (on page 1197)	Returns the negative peak frequency deviation (–Pk).
FETCh:FM:PPOSitive? (on page 1198)	Returns the positive peak frequency deviation (+Pk).
FETCh:FM:PTPeak? (on page 1198)	Returns the peak-peak frequency deviation (Pk-Pk).
FETCh:FM:RESult? (on page 1199)	Returns the FM measurement results.
FETCh:FM:RMS? (on page 1199)	Returns the RMS frequency deviation.
FETCh:PM:PNEGative? (on page 1332)	Returns the negative peak phase deviation (–Pk).
FETCh:PM:PPOSitive? (on page 1332)	Returns the negative peak phase deviation (–Pk).
FETCh:PM:PTPeak? (on page 1333)	Returns the peak-peak phase deviation (Pk-Pk).
FETCh:PM:RESult? (on page 1333)	Returns the PM measurement results.
FETCh:PM:RMS? (on page 1334)	Returns the PM measurement results.
FETCh:AUDio subgroup	Audio measurement
FETCh:AUDio:FERRor? (on page 1103)	Returns the carrier frequency error in the audio measurement.
FETCh:AUDio:FREQuency? (on page 1103)	Returns the audio frequency.
FETCh:AUDio:HARMonic:COUNT? (on page 1104)	Returns the number of harmonics in the audio spectrum measurement.
FETCh:AUDio:HARMonic<x>:AMPLitude? (on page 1104)	Returns the amplitude of the specified harmonic in the audio spectrum measurement.
FETCh:AUDio:HARMonic<x>:FREQuency? (on page 1105)	Returns the frequency of the specified harmonic in the audio spectrum measurement.
FETCh:AUDio:HNOise? (on page 1105)	Returns the difference between the current RMS modulation value and the reference value.
FETCh:AUDio:HNREFerence? (on page 1106)	Returns the Hum and Noise RMS modulation reference value.
FETCh:AUDio:HPTPeak? (on page 1107)	Returns the half peak-to-peak modulation excursion.
FETCh:AUDio:MODDist? (on page 1107)	Returns the modulation distortion for the audio measurement.

Command	Description
FETCh:AUDio:NHARmonic:COUNT? (on page 1108)	Returns the number of non-harmonics in the audio spectrum measurement.
FETCh:AUDio:NHARmonic<x>:AMPLitude? (on page 1108)	Returns the amplitude of the specified non-harmonic in the audio spectrum measurement.
FETCh:AUDio:NHARmonic<x>:FREQuency? (on page 1109)	Returns the frequency of the specified non-harmonic in the audio spectrum measurement.
FETCh:AUDio:PNEGative? (on page 1109)	Returns the minus peak modulation excursion.
FETCh:AUDio:POWer? (on page 1110)	Returns the carrier power or signal power depending the signal type.
FETCh:AUDio:PPOSitive? (on page 1110)	Returns the positive peak modulation excursion.
FETCh:AUDio:RMS? (on page 1111)	Returns the RMS modulation excursion for the audio measurement.
FETCh:AUDio:SINad? (on page 1111)	Returns the signal-to-noise and distortion for the audio measurement.
FETCh:AUDio:SNOise? (on page 1112)	Returns the signal level to noise level with the harmonic distortion and non-harmonic distortion components removed.
FETCh:AUDio:SPECTrum:TRACe<x>? (on page 1112)	Returns the audio spectrum trace data for the audio measurement.
FETCh:AUDio:THDist? (on page 1113)	Returns the percentage of the total harmonic distortion.
FETCh:AUDio:THDist:DB? (on page 1113)	Returns the total harmonic distortion in dB in the audio measurement.
FETCh:AUDio:TNHDist? (on page 1114)	Returns the percentage of the total harmonic distortion in the audio measurement.
FETCh:AUDio:TNHDist:DB? (on page 1114)	Returns the total non-harmonic distortion in dB in the audio measurement.
FETCh:AUDio:TNHDist? (on page 1114)	Returns the percentage of the total non-harmonic distortion in the audio measurement.
FETCh:AVTime subgroup	Amplitude versus Time measurement
FETCh:AVTime[:MEASview<y>]:AVERage? (on page 1115)	Returns the RMS value.
FETCh:AVTime[:MEASview<y>]:{FIRSt SECOnd THIRd FOURth}? (on page 1115)	Returns the trace data.
FETCh:AVTime[:MEASview<y>]:MAXimum? (on page 1120)	Returns the maximum value.
FETCh:AVTime[:MEASview<y>]:MAXLocation? (on page 1120)	Returns the time at the maximum.
FETCh:AVTime[:MEASview<y>]:MINimum? (on page 1121)	Returns the minimum value.

Command	Description
FETCh:AVTime[:MEASview<y>]:MINLocation? (on page 1121)	Returns the time at the minimum.
FETCh:AVTime[:MEASview<y>]:RESult? (on page 1122)	Returns the measurement results.
FETCh:CCDF subgroup	CCDF measurement
FETCh:CCDF? (on page 1166)	Returns the CCDF measurement results.
FETCh:CCDF:{FIRST SECond THIRd}:X? (on page 1167)	Returns the horizontal values of the specified trace.
FETCh:CCDF:{FIRST SECond THIRd}:XY? (on page 1167)	Returns the horizontal and vertical value pairs of the specified trace.
FETCh:CCDF:{FIRST SECond THIRd}:Y? (on page 1168)	Returns the vertical values of the specified trace.
FETCh:CONSte subgroup (Option 21 only)	Constellation measurement
FETCh:CONSte[:MEASview<x>]:FERRor? (on page 1169)	Returns the frequency error in Hz. The frequency error is the difference between the measured carrier frequency of the signal and the user-selected center frequency of the analyzer.
FETCh:CONSte[:MEASview<x>]:RESults? (on page 1169)	Returns the constellation measurement results of EVM RMS, peak and location displayed on the bottom of the screen.
FETCh:CONSte[:MEASview<x>]:TRACe? (on page 1170)	Returns the constellation trace data.
FETCh:DDEMod subgroup (Option 21 only)	General purpose digital modulation measurements
FETCh:DDEMod[:MEASview<y>]:STABle? (on page 1171)	Returns the symbol table data.
FETCh:DDEMod:SYNCh:WORD:LENGth? (on page 1171)	Returns the length of the synch word in the symbol table.
FETCh:DDEMod:SYNCh:WORD:POSition? (on page 1172)	Returns the position of the synch word in the symbol table.
FETCh:DIQVtime subgroup (Option 21 only)	Demodulated I&Q versus Time measurement
FETCh:DIQVtime[:MEASview<y>]:FERRor? (on page 1172)	Returns the frequency error.
FETCh:DIQVtime[:MEASview<y>]:I? (on page 1173)	Returns the I versus Time trace data.
FETCh:DIQVtime[:MEASview<y>]:Q? (on page 1174)	Returns the Q versus Time trace data.
FETCh:DPX subgroup	DPX spectrum measurement

Command	Description
FETCh:DPX:DDENsity? (on page 1174)	Returns the calculated density for the selected region in the DPXogram measurement.
FETCh:DPX:DGRam:LINE:COUNT? (on page 1175)	Returns the number of lines in the DPXogram measurement.
FETCh:DPX:DGRam:TIME[:SCALE]:OFFSet? (on page 1175)	Returns the time scale offset in the DPXogram measurement.
FETCh:DPX:RESults:TRACe<x>? (on page 1176)	Returns waveform data in the DPX spectrum measurement.
FETCh:DPX:TDM:FREQuency:TXBer:BER? (on page 1176)	Returns the Tx BER measurement BER results.
FETCh:DPX:TDM:FREQuency:TXBer:BITS? (on page 1177)	Returns the number of bits counted in the active Tx BER measurement session.
FETCh:DPX:TDM:FREQuency:TXBer:ERRors? (on page 1177)	Returns the number of errors counted in the active Tx BER measurement session.
FETCh:DPX:TDM:FREQuency:TXBer:STATe? (on page 1178)	Returns the state of the Tx BER measurement.
FETCh:DPX:TRACe:AVERage? (on page 1178)	Returns waveform data of the average trace in the DPX spectrum measurement.
FETCh:DPX:TRACe:BITMap? (on page 1179)	Returns trace waveform data of the bitmap trace.
FETCh:DPX:TRACe:MATH? (on page 1179)	Returns waveform data of the math trace.
FETCh:DPX:TRACe:MAXimum? (on page 1180)	Returns waveform data of the maximum trace.
FETCh:DPX:TRACe:MINimum? (on page 1180)	Returns waveform data of the minimum trace.
FETCh:EDlagram subgroup (Option 21 only)	Eye diagram
FETCh:EDlagram[:MEASview<y>]:FDEViation? (on page 1181)	Returns the frequency deviation versus Time trace data with the X values.
FETCh:EDlagram[:MEASview<y>]:FERRor? (on page 1182)	Returns the frequency error in the eye diagram measurement.
FETCh:EDlagram[:MEASview<y>]:I? (on page 1182)	Returns the I versus Time trace data in the eye diagram measurement.
FETCh:EDlagram[:MEASview<y>]:Q? (on page 1183)	Returns the Q versus Time trace data in the eye diagram measurement.
FETCh:EVM subgroup (Option 21 only)	EVM versus Time measurement
FETCh:EVM[:MEASview<y>]:FERRor? (on page 1192)	Returns the frequency error in the EVM versus Time measurement.

Command	Description
FETCh:EVM[:MEASview<y>]:PEAK? (on page 1193)	Returns the peak value in the EVM versus Time measurement.
FETCh:EVM[:MEASview<y>]:PINDeX? (on page 1193)	Returns the time at the EVM peak.
FETCh:EVM[:MEASview<y>]:RMS? (on page 1194)	Returns the RMS (Root-Mean-Square) value in the EVM versus Time measurement.
FETCh:EVM[:MEASview<y>]:TRACe? (on page 1196)	Returns the EVM versus Time trace data.
FETCh:FDVTime subgroup (Option 21 only)	Frequency deviation versus Time measurement
FETCh:FDVTime[:MEASview<y>]:FERRor? (on page 1195)	Returns the frequency error in the Frequency deviation versus Time measurement.
FETCh:FDVTime[:MEASview<y>]:TRACe? (on page 1196)	Returns the Frequency deviation versus Time trace data.
FETCh:{FSETtling PSETtling} subgroup (Option 12 only)	Frequency and Phase Settling measurements
FETCh:FSETtling:ERRor? (on page 1206)	Returns the settled error in Hz in Frequency Settling.
FETCh:{FSETtling PSETtling}:FTTime? (on page 1200)	Returns the settling time from the trigger position in seconds.
FETCh:{FSETtling PSETtling}:MASK[:PASS]? (on page 1200)	Returns whether the input signal passes the mask test.
FETCh:{FSETtling PSETtling}:SETTled:FREQuency? (on page 1201)	Returns the frequency at which the signal is considered settled.
FETCh:{FSETtling PSETtling}:SETTled[:PASS]? (on page 1201)	Returns whether the input signal is settled with the tolerance range.
FETCh:{FSETtling PSETtling}:SETTled:TIME? (on page 1201)	Returns the settled time in seconds.
FETCh:{FSETtling PSETtling}:SLMSd[:PASS]? (on page 1202)	Returns whether the input signal is settled within the specified tolerance and the signal is settled longer than the Minimum Settled Duration.
FETCh:{FSETtling PSETtling}:STARt:TIME? (on page 1202)	Returns the start time for the measurement in seconds.
FETCh:{FSETtling PSETtling}:TIME? (on page 1203)	Returns the settling time in seconds. The settling time is measured from the start time.
FETCh:{FSETtling PSETtling}:TRACe<x>:X? (on page 1203)	Returns the settling time in seconds. The settling time is measured from the start time.
FETCh:{FSETtling PSETtling}:TRACe<x>:XY? (on page 1204)	Returns the time and frequency or phase value pairs of the specified trace.

Command	Description
FETCh:{FSETtling PSETtling}:TRACe<x>[:Y]? (on page 1205)	Returns the frequency or phase values of the specified trace.
FETCh:{FSETtling PSETtling}:TRIGger:TIME? (on page 1205)	Returns the time when the trigger occurred in seconds.
FETCh:{FSETtling PSETtling}:VALue? (on page 1206)	Returns the settled value in Hz for Frequency Settling and in degrees for Phase Settling.
FETCh:FVTime subgroup	Frequency versus Time measurement
FETCh:FVTime[:MEASview<y>]? (on page 1207)	Returns the Frequency versus Time trace data.
FETCh:FVTime[:MEASview<y>]:MAXimum? (on page 1207)	Returns the maximum value.
FETCh:FVTime[:MEASview<y>]:MAXLocation? (on page 1208)	Returns the time at which the frequency drift is maximum.
FETCh:FVTime[:MEASview<y>]:MINimum? (on page 1208)	Returns the minimum value.
FETCh:FVTime[:MEASview<y>]:MINLocation? (on page 1209)	Returns the time at which the frequency drift is minimum.
FETCh:FVTime[:MEASview<y>]:RESult? (on page 1209)	Returns the measurement results.
FETCh:IQVTime subgroup	RF I&Q versus Time measurement
FETCh:IQVTime[:MEASview<y>]:I? (on page 1210)	Returns the I versus Time trace data.
FETCh:IQVTime[:MEASview<y>]:MAXimum? (on page 1211)	Returns the maximum value.
FETCh:IQVTime[:MEASview<y>]:MAXLocation? (on page 1211)	Returns the time at which the I or Q level is maximum.
FETCh:IQVTime[:MEASview<y>]:MINimum? (on page 1212)	Returns the minimum value.
FETCh:IQVTime[:MEASview<y>]:MINLocation? (on page 1212)	Returns the time at which the I or Q level is minimum.
FETCh:IQVTime[:MEASview<y>]:Q? (on page 1213)	Returns the Q versus Time trace data.
FETCh:IQVTime[:MEASview<y>]:RESult? (on page 1213)	Returns the measurement results.
FETCh:MCPower subgroup	MCPR measurement
FETCh:MCPower:ADJacent:CHANnels? (on page 1225)	Returns the power of adjacent channels.

Command	Description
FETCh:MCPower:CHANnel:POWer? (on page 1225)	Returns the reference power.
FETCh:MCPower:MAIN:CHANnels? (on page 1226)	Returns the power of main channels.
FETCh:MCPower:SPECtrum? (on page 1226)	Returns spectrum trace data.
FETCh:MERRor subgroup (Option 21 only)	Magnitude error versus Time measurement
FETCh:MERRor[:MEASview<y>]:FERRor? (on page 1227)	Returns the frequency error in the Magnitude error versus Time measurement.
FETCh:MERRor[:MEASview<y>]:PEAK? (on page 1228)	Returns the peak value in the Magnitude error versus Time measurement.
FETCh:MERRor[:MEASview<y>]:PINdex? (on page 1228)	Returns the time at the Magnitude error peak.
FETCh:MERRor[:MEASview<y>]:RMS? (on page 1229)	Returns the RMS value in the Magnitude error versus Time measurement.
FETCh:MERRor[:MEASview<y>]:TRACe? (on page 1229)	Returns the Magnitude error versus Time trace data.
FETCh:OBWidth subgroup	Occupied Bandwidth measurement
FETCh:OBWidth:BOBW:FREQuency:ERRor (on page 1255)	Returns the frequency error.
FETCh:OBWidth:BOBW:RESUltS:STATus (on page 1256)	Returns the test result as Pass or Fail.
FETCh:OBWidth:BOBW:XDBB:POWer (on page 1256)	Returns the dB BW reference power.
FETCh:OBWidth:FREQuency:ERRor? (on page 1261)	Returns the frequency error.
FETCh:OBWidth:OBWidth:BANDwidth? (on page 1261)	Returns the occupied bandwidth.
FETCh:OBWidth:OBWidth:LEFT:FREQuency? (on page 1262)	Returns the left (lower) frequency of the occupied bandwidth.
FETCh:OBWidth:OBWidth:LEFT:LEVel? (on page 1262)	Returns the level at the left frequency of the occupied bandwidth.
FETCh:OBWidth:OBWidth:POWer? (on page 1263)	Returns the reference power in the Occupied Bandwidth measurement.
FETCh:OBWidth:OBWidth:RIGHT:FREQuency? (on page 1263)	Returns the right (higher) frequency of the occupied bandwidth.

Command	Description
FETCh:OBWidth:OBWidth:RIGHT:LEVel? (on page 1264)	Returns the level at the right frequency of the occupied bandwidth.
FETCh:OBWidth:SPECTrum? (on page 1264)	Returns spectrum trace data of the Occupied Bandwidth measurement.
FETCh:OBWidth:XDBBandwidth:BANDwidth? (on page 1265)	Returns the x dB bandwidth.
FETCh:OBWidth:XDBBandwidth:LEFT:FREQuency? (on page 1265)	Returns the left (lower) frequency of the x dB bandwidth.
FETCh:OBWidth:XDBBandwidth:LEFT:LEVel? (on page 1266)	Returns the level at the left frequency of the x dB bandwidth.
FETCh:OBWidth:XDBBandwidth:POWER? (on page 1266)	Returns the reference power in the x dB bandwidth measurement.
FETCh:OBWidth:XDBBandwidth:RIGHT:FREQuency? (on page 1267)	Returns the right (higher) frequency of the x dB bandwidth.
FETCh:OBWidth:XDBBandwidth:RIGHT:LEVel? (on page 1267)	Returns the level at the right frequency of the x dB bandwidth.
FETCh:OFDM subgroup	Orthogonal Frequency Division Multiplexing measurement
FETCh:OFDM:APOWer? (on page 1268)	Returns the average power.
FETCh:OFDM:APOWer:PEAK? (on page 1268)	Returns the peak-to-average power.
FETCh:OFDM:CONSte:MAGNitude? (on page 1269)	Returns the constellation magnitude data.
FETCh:OFDM:CONSte:PHASe? (on page 1269)	Returns the constellation phase values.
FETCh:OFDM:CONSte:TYPE? (on page 1270)	Returns the constellation context value.
FETCh:OFDM:CONSte:VALue? (on page 1271)	Returns the constellation value.
FETCh:OFDM:CPE? (on page 1271)	Returns the Common Pilot Error magnitude.
FETCh:OFDM:CRESPonse:MAGNitude? (on page 1272)	Returns the channel response magnitude data.
FETCh:OFDM:CRESPonse:PHASe? (on page 1272)	Returns the channel response phase data.
FETCh:OFDM:EVM:PEAK:DECibel:ALL? (on page 1273)	Returns the peak EVM data for all subcarriers.
FETCh:OFDM:EVM:PEAK:DECibel:DATA? (on page 1273)	Returns the peak EVM data for the data subcarriers.

Command	Description
FETCh:OFDM:EVM:PEAK:DECibel:PILots? (on page 1274)	Returns the peak EVM data for the pilot subcarriers.
FETCh:OFDM:EVM:PEAK:PERCent:ALL? (on page 1274)	Returns the peak EVM data for all subcarriers.
FETCh:OFDM:EVM:PEAK:PERCent:DATA? (on page 1275)	Returns the peak EVM data for the data subcarriers.
FETCh:OFDM:EVM:PEAK:PERCent:PILots? (on page 1275)	Returns the peak EVM data for the pilot subcarriers.
FETCh:OFDM:EVM:PEAK:SCARrier:ALL? (on page 1276)	Returns the peak EVM data for all subcarriers.
FETCh:OFDM:EVM:PEAK:SCARrier:DATA? (on page 1276)	Returns the peak EVM data for all data subcarriers.
FETCh:OFDM:EVM:PEAK:SCARrier:PILots? (on page 1277)	Returns the peak EVM data for the pilot subcarriers.
FETCh:OFDM:EVM:PEAK:SYMBol:ALL? (on page 1277)	Returns the peak EVM data for all subcarriers.
FETCh:OFDM:EVM:PEAK:SYMBol:DATA? (on page 1277)	Returns the peak EVM data for the data subcarriers.
FETCh:OFDM:EVM:PEAK:SYMBol:PILots? (on page 1278)	Returns the peak EVM data for the pilot subcarriers.
FETCh:OFDM:EVM:RMS:DECibel:ALL? (on page 1278)	Returns the RMS EVM data for all subcarriers
FETCh:OFDM:EVM:RMS:DECibel:DATA? (on page 1279)	Returns the RMS EVM data for the data subcarriers.
FETCh:OFDM:EVM:RMS:DECibel:PILots? (on page 1279)	Returns the RMS EVM data for the pilot subcarriers.
FETCh:OFDM:EVM:RMS:PERCent:ALL? (on page 1280)	Returns the peak RMS data for all subcarriers
FETCh:OFDM:EVM:RMS:PERCent:DATA? (on page 1280)	Returns the peak RMS data for the data subcarriers.
FETCh:OFDM:EVM:RMS:PERCent:PILots? (on page 1281)	Returns the peak RMS data for the pilot subcarriers.
FETCh:OFDM:EVM:TRACe<x>? (on page 1281)	Returns the EVM trace data.
FETCh:OFDM:FERRor? (on page 1282)	Returns the Frequency error reading.

Command	Description
FETCh:OFDM:FLATness:PASS? (on page 1282)	Verifies the average power levels of the subcarriers remain within the limits defined for a particular standard.
FETCh:OFDM:FLATness:RESult? (on page 1283)	Returns the summary results of each segment.
FETCh:OFDM:FLATness:TRACe<x>? (on page 1283)	Returns the OFDM Spectral Flatness trace data.
FETCh:OFDM:GAIN:IMBalance? (on page 1284)	Returns the gain imbalance.
FETCh:OFDM:IQ:ORIGin:OFFSet? (on page 1284)	Returns the IQ origin offset.
FETCh:OFDM:MERRor:TRACe<x>? (on page 1285)	Returns the magnitude error trace data.
FETCh:OFDM:PACKet:DIRection? (on page 1285)	Returns the direction of the packet.
FETCh:OFDM:PERRor:TRACe<x>? (on page 1286)	Returns the phase error trace data.
FETCh:OFDM:POWER:TRACe<x>? (on page 1287)	Returns the power trace data.
FETCh:OFDM:QUADrature:OFFSet? (on page 1287)	Returns the quadrature offset.
FETCh:OFDM:SCARriers? (on page 1288)	Returns the number of subcarriers.
FETCh:OFDM:SCARriers:SPACing? (on page 1288)	Returns the subcarrier spacing.
FETCh:OFDM:STABle:VALUe? (on page 1289)	Returns the number of bytes in the symbol table.
FETCh:OFDM:SYMBol:CERRor? (on page 1289)	Returns the symbol clock error.
FETCh:OFDM:SYMBol:COUNt? (on page 1290)	Returns the number of symbols.
FETCh:PERRor subgroup (Option 21 only)	Phase error versus Time measurement
FETCh:PERRor[:MEASview<y>]:FERRor? (on page 1326)	Returns the frequency error in the Phase error versus Time measurement.
FETCh:PERRor[:MEASview<y>]:PEAK? (on page 1326)	Returns the peak value in the Phase error versus Time measurement.
FETCh:PERRor[:MEASview<y>]:PINDeX? (on page 1327)	Returns the time at the phase error peak.
FETCh:PERRor[:MEASview<y>]:RMS? (on page 1327)	Returns the RMS (Root-Mean-Square) value in the Phase error versus Time measurement.
FETCh:PERRor[:MEASview<y>]:TRACe? (on page 1328)	Returns the Phase error versus Time trace data.
FETCh:PHVTime subgroup	Phase versus Time measurement

Command	Description
FETCh:PHVTime[:MEASview<y>]? (on page 1329)	Returns the Phase versus Time trace data.
FETCh:PHVTime[:MEASview<y>]:MAXimum? (on page 1329)	Returns the maximum value.
FETCh:PHVTime[:MEASview<y>]:MAXLocation? (on page 1330)	Returns the time at which the phase is maximum.
FETCh:PHVTime[:MEASview<y>]:MINimum? (on page 1330)	Returns the minimum value.
FETCh:PHVTime[:MEASview<y>]:MINLocation? (on page 1331)	Returns the time at which the phase is minimum.
FETCh:PHVTime[:MEASview<y>]:RESult? (on page 1331)	Returns the results.
FETCh:PNOise subgroup (Option 11 only)	Phase noise measurements
FETCh:PNOise:ALL? (on page 1334)	Returns all the measurement results.
FETCh:PNOise:CARRier:FERRor? (on page 1335)	Returns the carrier frequency error.
FETCh:PNOise:CARRier:POWer? (on page 1335)	Returns the carrier power.
FETCh:PNOise:RESidual:FM? (on page 1336)	Returns the residual FM.
FETCh:PNOise:RMS:PNOise? (on page 1337)	Returns the RMS phase noise.
FETCh:PNOise:SPECtrum<x>:X? (on page 1337)	Returns the frequencies of the specified trace.
FETCh:PNOise:SPECtrum<x>:XY? (on page 1338)	Returns the frequency and phase noise pairs of the specified trace.
FETCh:PNOise:SPECtrum<x>[:Y]? (on page 1338)	Returns the phase noise values of the specified trace.
FETCh:PNOise:JITTer? (on page 1336)	Returns the jitter.
FETCh:PULSe subgroup	Pulsed RF measurements
FETCh:PULSe[:RESult][:MEASview<y>]:ATX? (on page 1348)	Returns the average transmitted power in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:AVERage? (on page 1349)	Returns the average on power in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:DRODb? (on page 1350)	Returns the droop in dB in the pulse table.
FETCh:PULSe[:RESult][:MEASview<y>]:DROop? (on page 1350)	Returns the droop in the pulse table

Command	Description
FETCh:PULSe[:RESult][:MEASview<y>]:DUTPct? (on page 1351)	Returns the duty factor (%) in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:DUTRatio? (on page 1351)	Returns the duty factor (ratio) in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:FALL? (on page 1353)	Returns the fall time in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:FDELta? (on page 1353)	Returns the delta frequency in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:FRDeviation? (on page 1354)	Returns the frequency deviation in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:IRAMplitude? (on page 1354)	Returns the pulse impulse response amplitude measurement in the pulse table.
FETCh:PULSe[:RESult][:MEASview<y>]:IRTime? (on page 1355)	Returns the impulse response time in the pulse table.
FETCh:PULSe[:RESult][:MEASview<y>]:MFRqerror? (on page 1355)	Returns the maximum frequency error in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:MPHerror? (on page 1356)	Returns the maximum phase error in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:OVEDb? (on page 1356)	Returns the overshoot in dB in the pulse table.
FETCh:PULSe[:RESult][:MEASview<y>]:OVERshoot? (on page 1357)	Returns the overshoot in the pulse table.
FETCh:PULSe[:RESult][:MEASview<y>]:PHDeviation? (on page 1358)	Returns the phase deviation in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:PPFRequency? (on page 1359)	Returns the pulse-pulse carrier frequency in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:PPOWER? (on page 1359)	Returns the peak power in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:PPPHase? (on page 1361)	Returns the pulse-pulse carrier phase in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:RINterval? (on page 1361)	Returns the repetition interval in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:RIPDb? (on page 1362)	Returns the ripple in dB in the pulse table.
FETCh:PULSe[:RESult][:MEASview<y>]:RIPple? (on page 1362)	Returns the ripple in the pulse table.

Command	Description
FETCh:PULSe[:RESult][:MEASview<y>]:RISE? (on page 1363)	Returns the rise time in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:RMSFreqerror? (on page 1363)	Returns the RMS frequency error in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:RMSPherror? (on page 1364)	Returns the RMS phase error in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:RRATe? (on page 1365)	Returns the repetition rate in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:TIME? (on page 1365)	Returns the time in the results table.
FETCh:PULSe[:RESult][:MEASview<y>]:WIDTH? (on page 1366)	Returns the pulse width in the results table.
FETCh:PULSe:STATistics[:MEASview<y>]:ATX? (on page 1368)	Returns the average transmitted power of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:AVERage? (on page 1368)	Returns the average on power of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:DRODb? (on page 1369)	Returns the droop in dB of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:DROOp? (on page 1370)	Returns the droop of the statistics
FETCh:PULSe:STATistics[:MEASview<y>]:DUTPct? (on page 1370)	Returns the duty factor (%) of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:DUTRatio? (on page 1371)	Returns the duty factor (ratio) of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:FALL? (on page 1372)	Returns the fall time of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:FDELta? (on page 1373)	Returns the delta frequency measurement statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:FRDeviation? (on page 1373)	Returns the frequency deviation of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:IRAMplitude? (on page 1374)	Returns the Pulse Impulse Response amplitude measurement in the pulse statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:IRTime? (on page 1374)	Returns the impulse response time in the pulse statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:MFRReqerror? (on page 1377)	Returns the maximum frequency error of the statistics.

Command	Description
FETCh:PULSe:STATistics[:MEASview<y>]:MPHerror? (on page 1377)	Returns the maximum phase error of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:OVEdB? (on page 1377)	Returns the overshoot measurement result in dB in the pulse statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:OVERshoot? (on page 1378)	Returns the overshoot measurement result in the pulse statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:PHDeviation? (on page 1379)	Returns the phase deviation of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:PPFRequency? (on page 1380)	Returns the pulse-pulse carrier frequency of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:PPOWer? (on page 1380)	Returns the peak power of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:PPPHase? (on page 1382)	Returns the pulse-pulse carrier phase of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:RINterval? (on page 1382)	Returns the repetition interval of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:RIPDb? (on page 1383)	Returns the ripple in dB of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:RIPPlE? (on page 1383)	Returns the ripple of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:RISE? (on page 1384)	Returns the rise time of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:RMSFrequerror? (on page 1385)	Returns the RMS frequency error of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:RMSPherror? (on page 1385)	Returns the RMS phase error of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:RRAtE? (on page 1386)	Returns the repetition rate of the statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:WIDTh? (on page 1387)	Returns the pulse width in the pulse statistics.
FETCh:PULSe:STATistics[:MEASview<y>]:X? (on page 1387)	Returns the horizontal values of the trace data.
FETCh:PULSe:STATistics[:MEASview<y>]:XY? (on page 1388)	Returns the horizontal and vertical values of the trace data.
FETCh:PULSe:STATistics[:MEASview<y>]:Y? (on page 1389)	Returns the vertical values of the trace data.

Command	Description
FETCh:PULSe:TRACe[:MEASview<y>]:X? (on page 1389)	Returns the time values of the pulse trace.
FETCh:PULSe:TRACe[:MEASview<y>]:XY? (on page 1390)	Returns the horizontal (time) and vertical value pairs of the pulse trace.
FETCh:PULSe:TRACe[:MEASview<y>]:Y? (on page 1391)	Returns the vertical values of the pulse trace.
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier: HIGHer? (on page 1339)	Returns the outliers value exceeding the upper limit.
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier: LOWer? (on page 1339)	Returns the outliers value below the lower limit.
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse: COUNT? (on page 1340)	Returns the number of pulses in the bin.
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:TOTal? (on page 1340)	Returns the total number of pulses.
FETCh:PULSe:CUMulative:STATistics[:MEASview<y>] (on page 1341)	Returns the PulseCount, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average and Standard Deviation values for the chosen measurement.
FETCh:PULSe:OGRAM[:MEASview<y>]:MAX:FRAME:COUNt (on page 1344)	Returns the frame count value.
FETCh:PULSe:OGRAM[:MEASview<y>]:RBW (on page 1345)	Returns the resolution bandwidth value only when Frequency vs Time display is opened in the Pulse-Ogram display.
FETCh:PULSe[:RESult][:MEASview<y>]:ADVanced (on page 1345)	Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement.
FETCh:PULSe[:RESult][:MEASview<y>]:ADVanced:RANGe (on page 1347)	Queries the Pulse count, Max, Max Time Stamp, Min, Min Time Stamp, Peak to Peak, Average, and Standard Deviation values for the chosen measurement in the Pulse Table display.
FETCh:PULSe[:RESult][:MEASview<y>]:FABS? (on page 1352)	Returns the computed absolute frequency from the carrier.
FETCh:PULSe[:RESult][:MEASview<y>]:PPFD? (on page 1358)	Returns the computed pulse to pulse frequency difference from the carrier.
FETCh:PULSe[:RESult][:MEASview<y>]:PPPD? (on page 1360)	Returns the computed pulse to pulse phase difference from the carrier.
FETCh:PULSe:STATistics[:MEASview<y>]:ADVanced (on page 1366)	Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement.
FETCh:PULSe:STATistics[:MEASview<y>]:FABS (on page 1372)	Returns the absolute frequency.

Command	Description
FETCh:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMber (on page 1375)	Returns the maximum value at a certain pulse number.
FETCh:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMber? (on page 1376)	Returns the minimum value at a certain pulse number.
FETCh:PULSe:STATistics[:MEASview<y>]:PPFD (on page 1379)	Returns the pulse-pulse frequency difference.
FETCh:PULSe:STATistics[:MEASview<y>]:PPPD (on page 1381)	Returns the pulse-pulse phase difference.
FETCh:[RF]:PRESelector subgroup	Preselector for RSA7100A
FETCh:INPut[:RF]:PRESelector:STATe	Sets or queries the Preselector setting, which uses input filters for image suppression.
FETCh:RFIN subgroup	All measurements
FETCh:RFIN:IQ? (on page 1391)	Returns time-domain IQ data for a specific acquisition data record.
FETCh:RFIN:IQ:HEADer? (on page 1392)	Returns the header information for a specific acquisition data record.
FETCh:RFIN:IQ:SCALe? (on page 1393)	Returns the internal RF linear data scaling factor contained in the .tiq file header
FETCh:RFIN:IQ:VHEader? (on page 1394)	Returns the verbose header information for a specific acquisition data record.
FETCh:RFIN:RECORD:IDS? (on page 1394)	Returns the beginning and end ID numbers of acquisition data.
FETCh:SEM subgroup	Spectral Emissions Mask measurements
FETCh:SEM:MHITs:COUNT? (on page 1395)	Returns the number of rows in the results table
FETCh:SEM:MHITs<x>:AMPLitude:ABSolute? (on page 1395)	Returns the absolute amplitude of the specified mask hit signal.
FETCh:SEM:MHITs<x>:AMPLitude:RELative? (on page 1396)	Returns the relative amplitude of the specified mask hit signal.
FETCh:SEM:MHITs<x>:FREQuency? (on page 1396)	Returns the frequency of the specified mask hit signal.
FETCh:SEM:MHITs<x>:INTeg:ABSolute? (on page 1397)	Returns the absolute integration amplitude of the specified mask hit signal.
FETCh:SEM:MHITs<x>:INTeg:RELative? (on page 1397)	Returns the relative integration amplitude of the specified mask hit signal.
FETCh:SEM:MHITs<x>:MARGin:ABSolute? (on page 1398)	Returns the absolute margin for the specified mask hit signal.

Command	Description
FETCh:SEM:MHITs<x>:MARGin:RELative? (on page 1398)	Returns the relative margin for the specified mask hit signal.
FETCh:SEM:MHITs<x>:OFFSet? (on page 1399)	Returns the offset for the specified mask hit signal.
FETCh:SEM:PASS? (on page 1399)	Returns the pass/fail limit test result.
FETCh:SEM:REF:POWer? (on page 1400)	Returns the reference power level.
FETCh:SEM:SPECTrum:X? (on page 1400)	Returns the frequencies of the spectrum trace.
FETCh:SEM:SPECTrum:XY? (on page 1401)	Returns the frequency and amplitude pairs of the spectrum trace.
FETCh:SEM:SPECTrum[:Y]? (on page 1401)	Returns the amplitude of the spectrum trace.
FETCh:SGRam subgroup	Spectrogram measurement
FETCh:SGRam? (on page 1402)	Returns the spectrogram trace data.
FETCh:SIGNALvu subgroup	Signal measurement
FETCh:SIGNALvu:ACQuisition:COUPling (on page 1402)	Returns the coupling value of the acquisition.
FETCh:SIGNALvu:ACQuisition:MAX:RT:BW (on page 1403)	Returns the maximum real time bandwidth value of the instrument.
FETCh:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:HIGHSide:MAXFreq? (on page 1403)	Returns the maximum range of input center frequency in case of high injection side.
FETCh:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:HIGHSide:MINFreq? (on page 1404)	Returns the minimum range of input center frequency in case of high injection side.
FETCh:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:LOWSide:MAXFreq? (on page 1405)	Returns the maximum range of input center frequency in case of low injection side.
FETCh:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:LOWSide:MINFreq? (on page 1405)	Returns the minimum range of input center frequency in case of low injection side.
FETCh:SIGNALvu:ACQuisition:TERMination? (on page 1406)	Returns the termination value of the acquisition.
FETCh:SPECTrum subgroup	Spectrum measurement
FETCh:SPECTrum:TRACe<x>? (on page 1407)	Returns the trace data in the Spectrum Analyzer measurement.
FETCh:SPURious subgroup	Spurious measurement
FETCh:SPURious:CARRier:POWer? (on page 1407)	Returns the carrier power.

Command	Description
FETCh:SPURious:COUNT? (on page 1408)	Returns the number of spurious signals.
FETCh:SPURious:PASS? (on page 1408)	Returns the pass/fail limit test result.
FETCh:SPURious:SPECTrum:X? (on page 1409)	Returns the frequencies of the spectrum trace.
FETCh:SPURious:SPECTrum:XY? (on page 1409)	Returns the frequency and amplitude pairs of the spectrum trace.
FETCh:SPURious:SPECTrum[:Y]? (on page 1410)	Returns the amplitudes of the spectrum trace.
FETCh:SPURious:SPUR<x>:AMPLitude:ABSolute? (on page 1410)	Returns the absolute amplitude of the specified spurious signal.
FETCh:SPURious:SPUR<x>:AMPLitude:RELative? (on page 1411)	Returns the relative amplitude of the specified spurious signal.
FETCh:SPURious:SPUR<x>:FREQuency:ABSolute? (on page 1411)	Returns the absolute frequency of the specified spurious signal.
FETCh:SPURious:SPUR<x>:FREQuency:RELative? (on page 1412)	Returns the relative frequency of the specified spurious signal.
FETCh:SPURious:SPUR<x>:LIMit:ABSolute? (on page 1412)	Returns the absolute amplitude of the limit for a spurious signal.
FETCh:SPURious:SPUR<x>:LIMit:RELative? (on page 1413)	Returns the relative amplitude of the limit for a spurious signal.
FETCh:SPURious:SPUR<x>:LIMit:VIOLation? (on page 1413)	Returns whether the specified spurious signal exceeds the limit or not.
FETCh:SPURious:SPUR<x>:RANGe? (on page 1414)	Returns the frequency range in which the spurious signal occurred.
FETCh:SQQuality subgroup (Option 21 only)	Signal quality measurement
FETCh:SQQuality[:MEASview<y>]:FREQuency: DEViation? (on page 1414)	Returns the frequency deviation in the signal quality measurement.
FETCh:SQQuality[:MEASview<y>]:FREQuency: DEViation:TABLE? (on page 1415)	Returns the number of columns and the values in the frequency deviation table for a signal quality measurement.
FETCh:SQQuality[:MEASview<y>]:FREQuency: ERRor? (on page 1416)	Returns the frequency error in the signal quality measurement.
FETCh:SQQuality[:MEASview<y>]:GAIN:IMBalance? (on page 1416)	Returns the gain imbalance in the signal quality measurement.
FETCh:SQQuality[:MEASview<y>]:ORIGin:OFFSet? (on page 1417)	Returns the origin offset in the signal quality measurement.
FETCh:SQQuality[:MEASview<y>]:PEAK:EVM? (on page 1417)	Returns the peak EVM (%) in the signal quality measurement.

Command	Description
FETCH:SQuality[:MEASview<y>]:PEAK:EVM:DB? (on page 1418)	Returns the peak EVM (dB)) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:PEAK:EVM:DB:OFFSet? (on page 1419)	Returns the peak offset EVM (dB) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:PEAK:EVM:LOCation? (on page 1419)	Returns the time at which the EVM is peak.
FETCH:SQuality[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet? (on page 1420)	Returns the time at which the offset EVM is peak.
FETCH:SQuality[:MEASview<y>]:PEAK:EVM:OFFSet? (on page 1420)	Returns the peak offset EVM (%) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:PEAK:FERRor? (on page 1421)	Returns the peak FSK error in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:PEAK:MERRor? (on page 1423)	Returns the peak magnitude error (%) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:PEAK:MERRor:DB? (on page 1421)	Returns the peak magnitude error (dB) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:PEAK:MERRor:LOCation? (on page 1422)	Returns the time at which the magnitude error is peak.
FETCH:SQuality[:MEASview<y>]:PEAK:PERRor? (on page 1424)	Returns the peak phase error in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:PEAK:PERRor:LOCation? (on page 1423)	Returns the time at which the phase error is peak.
FETCH:SQuality[:MEASview<y>]:QUADrature:ERRor? (on page 1424)	Returns the quadrature error in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:RHO? (on page 1425)	Returns the p (waveform quality) value in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:RMS:EVM? (on page 1425)	Returns the RMS EVM (%) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:RMS:EVM:DB? (on page 1426)	Returns the RMS EVM (dB) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:RMS:EVM:DB:OFFSet? (on page 1427)	Returns the RMS offset EVM (dB) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:RMS:EVM:OFFSet? (on page 1427)	Returns the RMS offset EVM (%) in the signal quality measurement.
FETCH:SQuality[:MEASview<y>]:RMS:FERRor? (on page 1428)	Returns the RMS FSK error percent in the signal quality measurement.

Command	Description
FETCh:SQuality[:MEASview<y>]:RMS:MER:DB? (on page 1428)	Returns the RMS MER (Modulation Error Ratio) in dB in the signal quality measurement.
FETCh:SQuality[:MEASview<y>]:RMS:MERRor? (on page 1429)	Returns the RMS magnitude error (%) in the signal quality measurement.
FETCh:SQuality[:MEASview<y>]:RMS:MERRor:DB? (on page 1429)	Returns the RMS magnitude error (dB) in the signal quality measurement.
FETCh:SQuality[:MEASview<y>]:RMS:PERRor? (on page 1430)	Returns the RMS phase error in the signal quality measurement.
FETCh:SQuality[:MEASview<y>]:SYMBol:LENGth? (on page 1430)	Returns the number of analyzed symbols.
FETCh:SQuality[:MEASview<y>]:SYMBol:RATE? (on page 1431)	Returns the value of the calculated symbol rate in Hz.
FETCh:SQuality[:MEASview<y>]:SYMBol:RATE:ERRor? (on page 1432)	Returns the value of the symbol rate error in percent (%).
FETCh:TDIagram subgroup (Option 21 only)	Trellis diagram
FETCh:TDIagram[:MEASview<y>]:FERRor? (on page 1432)	Returns the frequency error.
FETCh:TDIagram[:MEASview<y>]:TRACe? (on page 1433)	Returns the Trellis diagram trace data.
FETCh:TOVerview subgroup	Time overview
FETCh:TOVerview:MEASview<y>? (on page 1433)	Returns the trace data.
FETCh:WLAN subgroup	Wireless LAN measurements
FETCh:WLAN:CONSte:MAGNitude? (on page 1487)	Returns the magnitude data for the WLAN Constellation measurement.
FETCh:WLAN:CONSte:PHASe? (on page 1488)	Returns the phase values for the WLAN Constellation measurement.
FETCh:WLAN:CONSte:TYPE? (on page 1488)	Returns the type (context) for the WLAN Constellation measurement.
FETCh:WLAN:CONSte:VALue? (on page 1489)	Returns the value (decoded symbol) for the WLAN Constellation measurement.
FETCh:WLAN:CRESPonse:MAGNitude? (on page 1490)	Returns the magnitude data of the WLAN Channel Response measurement.
FETCh:WLAN:CRESPonse:PHASe? (on page 1490)	Returns the phase data of the WLAN Channel Response measurement.
FETCh:WLAN:EVM:TRACe<x>? (on page 1491)	Returns the trace data for the selected WLAN EVM trace.
FETCh:WLAN:FLATness:PASS? (on page 1491)	Verifies the average power level values of the subcarriers remain within the limits defined for a particular standard.

Command	Description
FETCh:WLAN:FLATness:RESult? (on page 1492)	Returns the summary results of each segment of the WLAN Spectral Flatness display.
FETCh:WLAN:FLATness:TRACe<x>? (on page 1492)	Returns the WLAN Spectral Flatness trace data.
FETCh:WLAN:MERRor:TRACe<x>? (on page 1493)	Returns the trace data for the selected WLAN Magnitude Error trace.
FETCh:WLAN:PERRor:TRACe<x>? (on page 1494)	Returns the trace data for the selected WLAN Phase Error trace.
FETCh:WLAN:PVTime:BURSt:POWer? (on page 1494)	Returns the average power of the burst packet.
FETCh:WLAN:PVTime:BURSt:WIDTh? (on page 1495)	Returns the value of the measured time width of the burst packet from Power-On to Power-Down.
FETCh:WLAN:PVTime:FALL:TIME? (on page 1495)	Returns the width of the falling edge.
FETCh:WLAN:PVTime:FALL:TIME:START? (on page 1495)	Returns the start time of the falling edge.
FETCh:WLAN:PVTime:FALL:TIME:STOP? (on page 1496)	Returns the stop time of the falling edge.
FETCh:WLAN:PVTime:FTIME? (on page 1496)	Returns the width of the falling edge.
FETCh:WLAN:PVTime:RISE:TIME? (on page 1497)	Returns the width of the rising edge.
FETCh:WLAN:PVTime:RISE:TIME:START? (on page 1497)	Returns the start time of the rising edge.
FETCh:WLAN:PVTime:RISE:TIME:STOP? (on page 1498)	Returns the stop time of the rising edge.
FETCh:WLAN:PVTime:RTIME? (on page 1498)	Returns the width of the rising edge.
FETCh:WLAN:PVTime:TRACe:X? (on page 1498)	Returns the horizontal values.
FETCh:WLAN:PVTime:TRACe:XY? (on page 1499)	Returns the horizontal value (time in seconds) and vertical value (power).
FETCh:WLAN:PVTime:TRACe[:Y]? (on page 1499)	Returns the vertical values (power).
FETCh:WLAN:STABLE:VALUe? (on page 1500)	Returns the number of bytes in the symbol table.
FETCh:WLAN:SUMMary:BURSt:INDex? (on page 1500)	Returns the index of the analyzed packet.
FETCh:WLAN:SUMMary:BURSt:POWer? (on page 1501)	Returns the average power of all symbols in the packet.
FETCh:WLAN:SUMMary:BURSt:POWer:CFACTOR? (on page 1501)	Returns the peak-to-average burst power factor.

Command	Description
FETCh:WLAN:SUMMary:CERRor? (on page 1502)	Returns the symbol clock error.
FETCh:WLAN:SUMMary:CPE? (on page 1502)	Returns the RMS magnitude error of the pilots.
FETCh:WLAN:SUMMary:EVM:PEAK:ALL? (on page 1503)	Returns the peak EVM value for all subcarriers or all chips.
FETCh:WLAN:SUMMary:EVM:PEAK:CHIP:ALL? (on page 1503)	Returns the chip at which the reported peak EVM value occurred.
FETCh:WLAN:SUMMary:EVM:PEAK:CHIP:ONEKchips? (on page 1503)	Returns the chip at which the reported peak EVM value over the first 1000 chips occurred.
FETCh:WLAN:SUMMary:EVM:PEAK:DATA? (on page 1503)	Returns the peak EVM value for the data subcarriers.
FETCh:WLAN:SUMMary:EVM:PEAK:ONEKchips? (on page 1504)	Returns the peak EVM value measured over the first 1000 chips.
FETCh:WLAN:SUMMary:EVM:PEAK:PILots? (on page 1505)	Returns the peak EVM value for the pilots in the WLAN measurement.
FETCh:WLAN:SUMMary:EVM:PEAK:SCARrier:ALL? (on page 1505)	Returns the subcarrier on which the ALL peak EVM value occurred.
FETCh:WLAN:SUMMary:EVM:PEAK:SCARrier:DATA? (on page 1505)	Returns the subcarrier on which the DATA peak EVM value occurred.
FETCh:WLAN:SUMMary:EVM:PEAK:SCARrier:PILots? (on page 1506)	Returns the subcarrier on which the PILOT peak EVM value occurred.
FETCh:WLAN:SUMMary:EVM:PEAK:SYMBol:ALL? (on page 1506)	Returns the symbol on which the reported EVM value occurred.
FETCh:WLAN:SUMMary:EVM:PEAK:SYMBol:DATA? (on page 1507)	Returns the symbol on which the DATA peak EVM value occurred.
FETCh:WLAN:SUMMary:EVM:PEAK:SYMBol:PILots? (on page 1507)	Returns the symbol on which the PILOT peak EVM value occurred.
FETCh:WLAN:SUMMary:EVM:RMS:ALL? (on page 1507)	Returns the RMS EVM data for all subcarriers.
FETCh:WLAN:SUMMary:EVM:RMS:AVERAge? (on page 1508)	Returns the average RMS EVM value.
FETCh:WLAN:SUMMary:EVM:RMS:DATA? (on page 1508)	Returns the RMS EVM data for the data subcarriers.
FETCh:WLAN:SUMMary:EVM:RMS:MAXimum? (on page 1509)	Returns the maximum RMS EVM value.

Command	Description
FETCh:WLAN:SUMMARY:EVM:RMS:ONEKchips? (on page 1509)	Returns the RMS EVM data for the 1k chips in the WLAN measurement measured over the first 1000 chips.
FETCh:WLAN:SUMMARY:EVM:RMS:PILOts? (on page 1509)	Returns the RMS EVM data for the pilot subcarriers.
FETCh:WLAN:SUMMARY:FERRor? (on page 1510)	Returns the difference between the measured carrier frequency of the signal and the measurement frequency setting.
FETCh:WLAN:SUMMARY:HEADer? (on page 1510)	Returns the received packet header information.
FETCh:WLAN:SUMMARY:HTSig? (on page 1511)	Returns the decimal values of the received packet HT-SIGNAL
FETCh:WLAN:SUMMARY:IQOFset? (on page 1511)	Returns the average magnitude of the DC subcarrier level relative to total signal power.
FETCh:WLAN:SUMMARY:LSIG? (on page 1511)	Returns the decimal values of the received packet (legacy) SIGNAL symbols fields.
FETCh:WLAN:SUMMARY:PACKet? (on page 1512)	Returns the type and number of symbols in the Preamble and Data portions of the packet.
FETCh:WLAN:SUMMARY:PACKet:DMODulation? (on page 1512)	Returns the modulation used in the Data symbols.
FETCh:WLAN:SUMMARY:PACKet:FORMat? (on page 1513)	Returns the packet format setting.
FETCh:WLAN:SUMMARY:PACKet:GUARd? (on page 1513)	Returns the packet guard interval used by the DATA symbols.
FETCh:WLAN:SUMMARY:SIG? (on page 1513)	Returns the decimal values of the received packet SIGNAL symbols fields.
FETCh:WLAN:SUMMARY:VHTSig:A? (on page 1514)	Returns the decimal values of the received packet VHT-SIGNAL(A) symbols fields.
FETCh:WLAN:SUMMARY:VHTSig:B? (on page 1514)	Returns the decimal values of the received packet VHT-SIGNAL(B) symbols fields.
FETCh:LTE subgroup	
FETCh:LTE:ACLR:MHITs:COUNT? (on page 1214)	Returns the number of rows in the results table.
FETCh:LTE:ACLR:MHITs<x>:BANDwidth? (on page 1214)	Returns the bandwidth value of the channel (row).
FETCh:LTE:ACLR:MHITs<x>:CHANnel:NAME? (on page 1215)	Returns the channel name (row) of the specified index in the results table.
FETCh:LTE:ACLR:MHITs<x>:FREQuency:OFFSet? (on page 1215)	Returns the frequency offset of the specified channel (row).

Command	Description
FETCh:LTE:ACLR:MHITs<x>:INTeg:LOWEr:ABSolute? (on page 1216)	Returns the lower absolute value of the channel (row).
FETCh:LTE:ACLR:MHITs<x>:INTeg:LOWEr:RELative? (on page 1216)	Returns the lower relative value of the channel (row).
FETCh:LTE:ACLR:MHITs<x>:INTeg:UPPEr:ABSolute? (on page 1216)	Returns the upper absolute value of the channel (row).
FETCh:LTE:ACLR:MHITs<x>:INTeg:UPPEr:RELative? (on page 1217)	Returns the upper relative value of the channel (row).
FETCh:LTE:ACLR:REFerence:POWEr? (on page 1217)	Returns the reference power level.
FETCh:LTE:ACLR:RESUltS:STATus? (on page 1218)	Returns the pass or fail status.
FETCh:LTE:ACLR:SPECtrum:X? (on page 1218)	Returns the frequencies of the spectrum trace.
FETCh:LTE:ACLR:SPECtrum:XY? (on page 1219)	Returns the frequency and amplitude pairs of the spectrum trace.
FETCh:LTE:ACLR:SPECtrum:Y? (on page 1219)	Returns the amplitude of the spectrum trace.
FETCh:LTE:CHSPectrum:OBW? (on page 1220)	Returns the Occupied Bandwidth (OBW) in Hz.
FETCh:LTE:CHSPectrum:POWEr:CHANnel? (on page 1220)	Returns the Channel Power value.
FETCh:LTE:CHSPectrum:SPECtrum? (on page 1220)	Returns spectrum trace data.
FETCh:LTE:CONStE:CELL:ID? (on page 1221)	Queries the Cell ID value.
FETCh:LTE:CONStE:FREQuency:ERRor? (on page 1221)	Queries Frequency Error value in Hz.
FETCh:LTE:CONStE:GROUp:ID? (on page 1222)	Queries the Group ID value.
FETCh:LTE:CONStE:SECTor:ID? (on page 1222)	Queries the Sector ID value.
FETCh:LTE:PVTime:OFFSlot:POWEr? (on page 1222)	Returns the TOff power measurement value in dBm/MHz.
FETCh:LTE:PVTime:RESUltS:STATus (on page 1223)	Returns the pass or fail status.
FETCh:LTE:PVTime:TRACe:X? (on page 1223)	Returns the horizontal values (time in seconds).
FETCh:LTE:PVTime:TRACe:XY? (on page 1224)	Returns the horizontal value (time in seconds) and vertical value (power).
FETCh:LTE:PVTime:TRACe:Y? (on page 1224)	Returns the vertical values (power).

Command	Description
FETCh:SIGNalvu:ACQuisition:MATHchannels	Fetches Math inputs available on the oscilloscope.

Initiate commands

Use the INITiate commands to control the acquisition of data.

Initiate commands

Command	Description
INITiate:CONTInuous (on page 1515)	Sets or queries whether to acquire data continuously.
INITiate[:IMMediate] (on page 1516)	Starts input signal acquisition.
INITiate:RESume (on page 1516)	Starts data acquisition.

Input commands

Use the INPut commands to control the characteristics of the signal input. These commands are only available when an RSA306, RSA306B, RSA500A series, RSA600A series, RSA7100A, MDO4000B series, or an MDO4000C series instrument is connected.

Input commands

Command	Description
INPut:CORRection:EXTErnal:EDIT<x>:INTerpolation (on page 1517)	Sets or queries the interpolation setting to use with the indicated external gain table.
INPut:CORRection:EXTErnal:EDIT<x>:NEW (on page 1518)	Creates the indicated external loss table.
INPut:CORRection:EXTErnal:TYPE (on page 1521)	Sets or queries the data type to use when applying the external loss table corrections.
INPut[:MLEVel RLEVel] (on page 1521)	Sets or queries the reference level.
INPut[:RF]:ATTenuation (on page 1521)	Sets or queries the input attenuation.
NPut[:RF]:ATTenuation:AUTO (on page 1522)	Sets or queries whether to set the attenuation automatically.
INPut[:RF]:ATTenuation:MONitor:STATE (on page 1522)	Sets or queries whether to enable to monitor attenuator use.
INPut[:RF]:GAIN:STATE (on page 1523) (Option 50 or 51 only)	Sets or queries whether to enable the internal preamplifier.
INPut:TYPE (on page 1524)	Sets or queries the source type.

Input commands

Command	Description

INPut:CORRection:EXTErnal:EDIT<x>:INTERpolation (on page 1517)	Sets or queries the interpolation setting to use with the indicated external gain table.
INPut:CORRection:EXTErnal:EDIT<x>:NEW (on page 1518)	Creates the indicated external loss table.
INPut:CORRection:EXTErnal:TYPE (on page 1521)	Sets or queries the data type to use when applying the external loss table corrections.
INPut:{MLEVel RLEVel} (on page 1521)	Sets or queries the reference level.

Mass memory commands

Use the MMEMemory commands to manipulate files on the mass memory devices. See the Index for commands not listed in the following table.

For the trace specifier TRACe<x>, refer to [Trace Mnemonics](#) (on page 378).

If the file extension is not included, it is assumed to be .tiq.

Not all of these commands apply to SignalVu-PC and connected instruments. See the individual command descriptions for details.

Mass memory (MMEMemory) commands

Command	Description
MMEMemory:{AM FM PM} subgroup	AM/FM/PM measurement
MMEMemory:{AM FM PM}:LOAD:TRACe (on page 1524)	Loads trace data from the specified file.
MMEMemory:TXGain subgroup	Transmission Gain measurements
MMEMemory:TXGain:LOAD:TRACe<x> (on page 1575)	Loads the specified saved trace from a file.
MMEMemory:TXGain:SHOW:TRACe<x> (on page 1575)	Displays a saved trace instead of a live trace.
MMEMemory:TXGain:STORe:TRACe<x> (on page 1576)	Saves the selected trace to a file for later recall and analysis.
MMEMemory:Noise subgroup	Noise Figure and Gain measurements
MMEMemory:NOISe:GAIN:LOAD:TRACe (on page 1553)	Loads the Noise Gain trace data from the specified file.
MMEMemory:NOISe:GAIN:SHOW:TRACe (on page 1554)	Show or hide the Noise Gain trace from the specified file.
MMEMemory:NOISe:GAIN:STORe:TRACe (on page 1554)	Stores the Noise Gain trace data in the specified file.
MMEMemory:Noise:LOAD:ENRCALibration (on page 1555)	Loads the specified Noise Figure ENR table.

Command	Description
MMEMory:Noise:LOAD:FREQTable (on page 1555)	Loads the specified Noise Figure Frequency table.
MMEMory:Noise:STORe:ENRCALibration (on page 1556)	Saves the Noise Figure ENR table to the specified location.
MMEMory:Noise:STORe:FREQTable (on page 1556)	Saves the Noise Figure Frequency table to the specified location.
MMEMory:{AM FM PM}:SHOW:TRACe<x> (on page 1525)	Enables display of a recalled trace file.
MMEMory:{AM FM PM}:STORe:TRACe (on page 1525)	Stores trace data in the specified file.
MMEMory:Audio subgroup	Audio measurements
MMEMory:Audio:LOAD:FiLTeR (on page 1526)	Loads a user-defined audio filter from the specified file.
MMEMory:AVTime subgroup	Amplitude versus Time measurement
MMEMory:AVTime[:MEASview<y>]:LOAD:TRACe<x> (on page 1526)	Loads trace data from the specified file.
MMEMory:AVTime[:MEASview<y>]:SHOW:TRACe<x> (on page 1527)	Enables display of a recalled trace file.
MMEMory:AVTime[:MEASview<y>]:STORe:TRACe<x> (on page 1528)	Stores trace data in the specified file.
MMEMory:CALibration subgroup	Measurement calibration
MMEMory:CALibration:LOAD:CORRection:EXTeRnal:EDIT<x> (on page 1529)	Loads the external loss table data from a specified file.
MMEMory:CALibration:STORe:CORRection:EXTeRnal:EDIT<x> (on page 1529)	Stores an external loss table to a specified file.
MMEMory:CCDF subgroup	CCDF measurement
MMEMory:CCDF:LOAD:TRACe<x> (on page 1529)	Loads trace data from the specified file.
MMEMory:CCDF:SHOW:TRACe<x> (on page 1530)	Enables display of a recalled trace file.
MMEMory:CCDF:STORe:TRACe<x> (on page 1530)	Stores trace data in the specified file.
MMEMory:DDEMod subgroup	DPX spectrum measurement
MMEMory:DDEMod[:SOURce<x>]:LOAD:FiLTeR:MEASurement:USER<y> (on page 1531)	Loads a user-defined measurement filter from the specified file.
MMEMory:DDEMod[:SOURce<x>]:LOAD:FiLTeR:MEASurement:UOTHeR (on page 1531)	Loads a user-defined measurement filter from the specified file.

Command	Description
MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:REFerence:USER<y> (on page 1531)	Loads the specified user-defined reference filter.
MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:REFerence:UOTHer (on page 1532)	Loads the specified user-defined reference filter
MMEMory:DDEMod[:SOURce<x>]:LOAD:SYMBol:MAP (on page 1533)	Loads the specified symbol map filename.
MMEMory:DPX subgroup	DPX spectrum measurement
MMEMory:DPX:TDM:FREQuency:TXBer:LOAD:PATtern (on page 1534)	Loads the Tx BER User data pattern from the specified file.
MMEMory:DPX:LOAD:TRACe<x> (on page 1533)	Loads trace data from the specified file.
MMEMory:DPX:SHOW:TRACe<x> (on page 1534)	Enables display of a recalled trace file.
MMEMory:DPX:STORe:TRACe<x> (on page 1534)	Stores trace data in the specified file.
MMEMory:{FSETtling PSETtling} subgroup	Frequency and Phase Settling time measurements
[MMEMory:{FSETtling PSETtling}:LOAD:TRACe<x> (on page 1543)	Loads the Frequency or Phase Settling Time trace data from the specified file.
[MMEMory:{FSETtling PSETtling}:SHOW:TRACe<x> (on page 1543)	Enables display of a recalled Frequency or Phase Settling trace file in Trace<x>.
[MMEMory:{FSETtling PSETtling}:STORe:TRACe<x> (on page 1544)	Stores the Frequency or Phase Settling trace data in the specified file.
MMEMory:FVTime subgroup	Frequency versus Time measurement
MMEMory:FVTime[:MEASview<y>]:LOAD:TRACe (on page 1544)	Loads trace data from the specified file.
MMEMory:FVTime[:MEASview<y>]:SHOW:TRACe<x> (on page 1545)	Enables display of a recalled trace file.
MMEMory:FVTime[:MEASview<y>]:STORe:TRACe (on page 1545)	Stores trace data in the specified file.
MMEMory:IQVTime subgroup	RF I&Q versus Time measurement
MMEMory:IQVTime[:MEASview<y>]:LOAD:TRACe:I (on page 1546)	Loads I trace data from the specified file.
MMEMory:IQVTime[:MEASview<y>]:LOAD:TRACe:Q (on page 1546)	Loads Q trace data from the specified file.
MMEMory:IQVTime[:MEASview<y>]:SHOW:TRACe:I (on page 1547)	Loads trace data from the specified file.

Command	Description
MMEMory:IQVTime[:MEASview<y>]:SHOW:TRACe<x>:Q (on page 1547)	Enables display of a recalled trace file.
MMEMory:IQVTime[:MEASview<y>]:STORE:TRACe:I (on page 1548)	Stores I trace data in the specified file.
MMEMory:IQVTime[:MEASview<y>]:STORE:TRACe:Q (on page 1548)	Stores Q trace data in the specified file.
MMEMory:LTE subgroup	
MMEMory:LTE:ACLR:LOAD:TABLE (on page 1551)	Loads the LTE ACLR table containing the limits for enabled ranges from the specified .csv file.
MMEMory:LTE:ACLR:STORE:TABLE (on page 1552)	Stores the LTE ACLR table containing the limits for enabled ranges in a specified .csv file, allowing you to export the file into Microsoft Excel or other database system.
MMEMory:LOAD subgroup	Load commands
MMEMory:LOAD:IQ (on page 1549)	Loads time-domain IQ waveform from a specified file.
MMEMory:LOAD:STATe (on page 1549)	Loads the instrument setup from a specified file.
MMEMory:LOAD:TRACe (on page 1549)	Loads the trace data from a specified file.
MMEMory:OFDM CONSTe subgroup	OFDM Constellation commands
MMEMory:OFDM:CONSte:LOAD:TRACe (on page 1556)	Loads trace data from the specified file.
MMEMory:OFDM:CONSte:SHOW:TRACe (on page 1557)	Enables the display of a recalled trace file.
MMEMory:OFDM:CONSte:STORE:TRACe (on page 1557)	Stores trace data in the specified file.
MMEMory:PHVTime subgroup	Phase versus Time measurement
MMEMory:PHVTime[:MEASview<y>]:LOAD:TRACe (on page 1558)	Loads trace data from the specified file.
MMEMory:PHVTime[:MEASview<y>]:SHOW:TRACe (on page 1558)	Enables display of a recalled trace file.
MMEMory:PHVTime[:MEASview<y>]:STORE:TRACe (on page 1559)	Stores trace data in the specified file.
MMEMory:PN0ise subgroup	Phase noise measurement
MMEMory:PNOise:LOAD:TRACe<x> (on page 1559)	Loads the Phase Noise trace data from the specified file.

Command	Description
MMEMory:PNOise:SHOW:TRACe<x> (on page 1559)	Enables display of a recalled Phase Noise trace file.
MMEMory:PNOise:STORe:TRACe<x> (on page 1560)	Stores the Phase Noise trace data in the specified file.
MMEMory:SEM subgroup	Spectral Emissions Mask measurement
MMEMory:SEM:LOAD:TABLE (on page 1560)	Loads the SEM table from the specified file.
MMEMory:SEM:STORe:TABLE (on page 1561)	Stores the SEM table in the specified file.
MMEMory:SGRam subgroup	Spurious measurement
MMEMory:SGRam[:MEASview<y>]:LOAD:TRACe (on page 1561)	Loads the trace data from a specified file.
MMEMory:SGRam[:MEASview<y>]:SHOW:TRACe (on page 1562)	Enables display of a recalled trace file.
MMEMory:SGRam[:MEASview<y>]:STORe:TRACe (on page 1561)	Stores the Spectrogram trace data in the specified file.
MMEMory:SPECTrum subgroup	Spectrum measurement
MMEMory:SPECTrum[:MEASview<y>]:LOAD:TRACe (on page 1564)	Loads the trace data from a specified file.
MMEMory:SPECTrum[:MEASview<y>]:SHOW:TRACe<x> (on page 1564)	Enables display of a recalled trace file.
MMEMory:SPECTrum[:MEASview<y>]:STORe:TRACe<x>	Stores the spectrum trace data in the specified file.
MMEMory:SPURious subgroup	Spurious measurement
MMEMory:SPURious:LOAD:TABLE (on page 1566)	Loads the spurious table from the specified file.
MMEMory:SPURious:STORe:TABLE (on page 1568)	Stores the spurious table in the specified file.
MMEMory:STORe subgroup	Store commands
MMEMory:STORe:IQ (on page 1569)	Saves time-domain IQ waveform in the acquisition memory to a specified file.
MMEMory:STORe:IQ:CSV (on page 1569)	Saves time-domain IQ waveform in the acquisition memory to a specified file in the CSV (Comma Separated Values) format.
MMEMory:STORe:IQ:MAT (on page 1569)	Saves time-domain IQ waveform in the acquisition memory to a specified file in the MATLAB format.
MMEMory:STORe:IQ:SELEct:DATA (on page 1570)	Sets or queries the type of data stored in an acquisition data file.

Command	Description
MMEMory:STORe:IQ:SELEct:FRAMes (on page 1570)	Sets or queries which frames to save when saving TIQ acquisition data files.
MMEMory:STORe:IQ:SELEct:LENGth (on page 1571)	Sets or queries what portion of each record is saved when saving acquisition data.
MMEMory:STORe:MSTate (on page 1571)	Stores the measurement parameters in a specified file.
MMEMory:STORe:RESults (on page 1571)	Stores the measurement results including measurement parameters and trace data to a specified file.
MMEMory:STORe:SCReen (on page 1572)	Stores the measurement results in a specified file.
MMEMory:STORe:STATe (on page 1572)	Stores the instrument setup in a specified file.
MMEMory:STORe:TRACe (on page 1573)	Stores trace data in a specified file.
MMEMory:TOVerview subgroup	Spurious measurement
MMEMory:TOVerview[:MEASview<y>]:LOAD:TRACe1 (on page 1573)	Loads the trace data from a specified file.
MMEMory:TOVerview[:MEASview<y>]:SHOW:TRACe1 (on page 1574)	Enables display of a recalled trace file.
MMEMory:TOVerview[:MEASview<y>]:STORe:TRACe1 (on page 1574)	Stores the selected trace data into the specified file.
MMEMory:WLAN subgroup	Wireless LAN measurements
MMEMory:WLAN:CRESPonse:LOAD:TRACe<x> (on page 1578)	Loads the selected WLAN Channel Response trace data from the specified file.
MMEMory:WLAN:CRESPonse:SHOW:TRACe<x> (on page 1578)	Enables the display of a recalled WLAN Channel Response trace.
MMEMory:WLAN:CRESPonse:STORe:TRACe<x> (on page 1579)	Stores the WLAN Channel Response measurement trace data in the specified file.

Mass memory (MMEMory) commands

Command	Description
MMEMory:{AM FM PM} subgroup	AM/FM/PM measurement
MMEMory:{AM FM PM}:LOAD:TRACe (on page 1524)	Loads trace data from the specified file.
MMEMory:MAPIt subgroup	MapIt feature
MMEMory:MAPIt:LOAD (on page 1552)	Loads the MapIt measurement results from the specified file.

MMEMory:MAPit:STORe (on page 1553)	Save the selected MapIt measurement results to a file.
MMEMory:MAPit:STORe:ALL (on page 1553)	Saves all of the MapIt measurement results from memory to the specified file.
MMEMory:Noise subgroup	Noise Figure and Gain measurements
MMEMory:NOISe:GAIN:LOAD:TRACe (on page 1553)	Loads the Noise Gain trace data from the specified file.
MMEMory:NOISe:GAIN:SHOW:TRACe (on page 1554)	Show or hide the Noise Gain trace from the specified file.
MMEMory:NOISe:GAIN:STORe:TRACe (on page 1554)	Stores the Noise Gain trace data in the specified file.
MMEMory:Noise:LOAD:ENRCALibration (on page 1555)	Loads the specified Noise Figure ENR table.
MMEMory:Noise:LOAD:FREQTABLE (on page 1555)	Loads the specified Noise Figure Frequency table.
MMEMory:Noise:STORe:ENRCALibration (on page 1556)	Saves the Noise Figure ENR table to the specified location.
MMEMory:Noise:STORe:FREQTABLE (on page 1556)	Saves the Noise Figure Frequency table to the specified location.
MMEMory:{AM FM PM}:SHOW:TRACe<x> (on page 1525)	Enables display of a recalled trace file.
MMEMory:{AM FM PM}:STORe:TRACe (on page 1525)	Stores trace data in the specified file.
MMEMory:AUDio subgroup	Audio measurements
MMEMory:AUDio:LOAD:FILTER (on page 1526)	Loads a user-defined audio filter from the specified file.
MMEMory:AVTime subgroup	Amplitude versus Time measurement
MMEMory:AVTime[:MEASview<y>]:LOAD:TRACe<x> (on page 1526)	Loads trace data from the specified file.
MMEMory:AVTime[:MEASview<y>]:SHOW:TRACe<x> (on page 1527)	Enables display of a recalled trace file.
MMEMory:AVTime[:MEASview<y>]:STORe:TRACe<x> (on page 1528)	Stores trace data in the specified file.
MMEMory:CALibration subgroup (Requires an RSA306, RSA306B, RSA500A series, RSA600A series, MDO4000B series, or MDO4000C series instrument be connected.)	Measurement calibration

MMEMory:CALibration:LOAD:CORRection:EXTernal:EDIT<x> (on page 1529)	Loads the external loss table data from a specified file.
MMEMory:CALibration:STORe:CORRection:EXTernal:EDIT<x> (on page 1529)	Stores an external loss table to a specified file.
MMEMory:DDEMod subgroup	DPX spectrum measurement
MMEMory:DDEMod:LOAD:FILTER:MEASurement:USER<x>	Loads a user-defined measurement filter from the specified file.
MMEMory:DDEMod:LOAD:FILTER:MEASurement:UOTHer (on page 1531)	Loads a user-defined measurement filter from the specified file.
MMEMory:DDEMod:LOAD:FILTER:REFerence:USER<x>	Loads the specified user-defined reference filter.
MMEMory:DDEMod:LOAD:FILTER:REFerence:UOTHer (on page 1532)	Loads the specified user-defined reference filter
MMEMory:DDEMod:LOAD:SYMBOL:MAP (on page 1533)	Loads the specified symbol map filename.
MMEMory:DPX subgroup	DPX spectrum measurement
MMEMory:DPX:TDM:FREQuency:TXBer:LOAD:PATtern (on page 1534)	Loads the Tx BER User data pattern from the specified file.
MMEMory:DPX:LOAD:TRACe<x> (on page 1533)	Loads trace data from the specified file.
MMEMory:DPX:SHOW:TRACe<x> (on page 1534)	Enables display of a recalled trace file.
MMEMory:DPX:STORe:TRACe<x> (on page 1534)	Stores trace data in the specified file.
MMEMory:{FSETtling PSETtling} subgroup	Frequency and Phase Settling time measurements
[MMEMory:{FSETtling PSETtling}:LOAD:TRACe<x> (on page 1543)	Loads the Frequency or Phase Settling Time trace data from the specified file.
[MMEMory:{FSETtling PSETtling}:SHOW:TRACe<x> (on page 1543)	Enables display of a recalled Frequency or Phase Settling trace file in Trace<x>.
[MMEMory:{FSETtling PSETtling}:STORe:TRACe<x> (on page 1544)	Stores the Frequency or Phase Settling trace data in the specified file.
MMEMory:FVTime subgroup	Frequency versus Time measurement
MMEMory:FVTime[:MEASview<y>]:LOAD:TRACe (on page 1544)	Loads trace data from the specified file.
MMEMory:FVTime[:MEASview<y>]:SHOW:TRACe<x> (on page 1545)	Enables display of a recalled trace file.
MMEMory:FVTime[:MEASview<y>]:STORe:TRACe (on page 1545)	Stores trace data in the specified file.

MMEMory:IQVTime subgroup	RF I&Q versus Time measurement
MMEMory:IQVTime[:MEASview<y>]:LOAD:TRACe:I (on page 1546)	Loads I trace data from the specified file.
MMEMory:IQVTime[:MEASview<y>]:LOAD:TRACe:Q (on page 1546)	Loads Q trace data from the specified file.
MMEMory:IQVTime[:MEASview<y>]:SHOW:TRACe:I (on page 1547)	Loads trace data from the specified file.
MMEMory:IQVTime[:MEASview<y>]:SHOW:TRACe<x>:Q (on page 1547)	Enables display of a recalled trace file.
MMEMory:IQVTime[:MEASview<y>]:STORe:TRACe:I (on page 1548)	Stores I trace data in the specified file.
MMEMory:IQVTime[:MEASview<y>]:STORe:TRACe:Q (on page 1548)	Stores Q trace data in the specified file.
MMEMory:LTE subgroup	
MMEMory:LTE:ACLR:LOAD:TABLE (on page 1551)	Loads the LTE ACLR table containing the limits for enabled ranges from the specified .csv file.
MMEMory:LTE:ACLR:STORe:TABLE (on page 1552)	Stores the LTE ACLR table containing the limits for enabled ranges in a specified .csv file, allowing you to export the file into Microsoft Excel or other database system.
MMEMory:LOAD subgroup	Load commands
MMEMory:LOAD:IQ (on page 1549)	Loads time-domain IQ waveform from a specified file.
MMEMory:LOAD:STATe (on page 1549)	Loads the instrument setup from a specified file.
MMEMory:LOAD:TRACe (on page 1549)	Loads the trace data from a specified file.
MMEMory:OFDM CONSTe subgroup	OFDM Constellation commands
MMEMory:OFDM:CONSte:LOAD:TRACe (on page 1556)	Loads trace data from the specified file.
MMEMory:OFDM:CONSte:SHOW:TRACe (on page 1557)	Enables the display of a recalled trace file.
MMEMory:OFDM:CONSte:STORe:TRACe (on page 1557)	Stores trace data in the specified file.
MMEMory:PHVTime subgroup	Phase versus Time measurement
MMEMory:PHVTime [:MEASview<y>]:LOAD:TRACe (on page 1558)	Loads trace data from the specified file.
MMEMory:PHVTime [:MEASview<y>]:SHOW:TRACe (on page 1558)	Enables display of a recalled trace file.

MMEMory:PHVTime[:MEASview<y>]:STORE:TRACe (on page 1559)	Stores trace data in the specified file.
MMEMory:PN0ise subgroup	Phase noise measurement
MMEMory:PNOise:LOAD:TRACe<x> (on page 1559)	Loads the Phase Noise trace data from the specified file.
MMEMory:PNOise:SHOW:TRACe<x> (on page 1559)	Enables display of a recalled Phase Noise trace file.
MMEMory:PNOise:STORE:TRACe<x> (on page 1560)	Stores the Phase Noise trace data in the specified file.
MMEMory:SEM subgroup	Spectral Emissions Mask measurement
MMEMory:SEM:LOAD:TABLE (on page 1560)	Loads the SEM table from the specified file.
MMEMory:SEM:STORE:TABLE (on page 1561)	Stores the SEM table in the specified file.
MMEMory:SGRam subgroup	Spurious measurement
MMEMory:SGRam[:MEASview<y>]:LOAD:TRACe (on page 1561)	Loads the trace data from a specified file.
MMEMory:SGRam[:MEASview<y>]:SHOW:TRACe (on page 1562)	Enables display of a recalled trace file.
MMEMory:SGRam[:MEASview<y>]:STORE:TRACe (on page 1562)	Stores the Spectrogram trace data in the specified file.
MMEMory:SPECTrum subgroup	Spectrum measurement
MMEMory:SPECTrum[:MEASview<y>]:LOAD:TRACe (on page 1564)	Loads the trace data from a specified file.
MMEMory:SPECTrum[:MEASview<y>]:SHOW:TRACe<x> (on page 1564)	Enables display of a recalled trace file.
MMEMory:SPECTrum[:MEASview<y>]:STORE:TRACe<x> (on page 1566)	Stores the spectrum trace data in the specified file.
MMEMory:SPURious subgroup	Spurious measurement
MMEMory:SPURious:LOAD:TABLE (on page 1566)	Loads the spurious table from the specified file.
MMEMory:SPURious:STORE:TABLE (on page 1568)	Stores the spurious table in the specified file.
MMEMory:STORE subgroup	Store commands
MMEMory:STORE:IQ (on page 1569)	Saves time-domain IQ waveform in the acquisition memory to a specified file.
MMEMory:STORE:IQ:CSV (on page 1569)	Saves time-domain IQ waveform in the acquisition memory to a specified file in the CSV (Comma Separated Values) format.

MMEMory:STORe:IQ:MAT (on page 1569)	Saves time-domain IQ waveform in the acquisition memory to a specified file in the MATLAB format.
MMEMory:STORe:IQ:SELEct:DATA (on page 1570)	Sets or queries the type of data stored in an acquisition data file.
MMEMory:STORe:IQ:SELEct:FRAMES (on page 1570)	Sets or queries which frames to save when saving TIQ acquisition data files.
MMEMory:STORe:IQ:SELEct:LENGTh (on page 1571)	Sets or queries what portion of each record is saved when saving acquisition data.
MMEMory:STORe:MState (on page 1571)	Stores the measurement parameters in a specified file.
MMEMory:STORe:RESults (on page 1571)	Stores the measurement results including measurement parameters and trace data to a specified file.
MMEMory:STORe:SCReen (on page 1572)	Stores the measurement results in a specified file.
MMEMory:STORe:STATe (on page 1572)	Stores the instrument setup in a specified file.
MMEMory:STORe:TRACe (on page 1573)	Stores trace data in a specified file.
MMEMory:TOVerview subgroup	Spurious measurement
MMEMory:TOVerview[:MEASview<y>]:LOAD:TRACe1 (on page 1573)	Loads the trace data from a specified file.
MMEMory:TOVerview[:MEASview<y>]:SHOW:TRACe1 (on page 1574)	Enables display of a recalled trace file.
MMEMory:TOVerview[:MEASview<y>]:STORe:TRACe1 (on page 1574)	Stores the selected trace data into the specified file.
MMEMory:WLAN subgroup	Wireless LAN measurements
MMEMory:WLAN:CRESPonse:LOAD:TRACe<x> (on page 1578)	Loads the selected WLAN Channel Response trace data from the specified file.
MMEMory:WLAN:CRESPonse:SHOW:TRACe<x> (on page 1578)	Enables the display of a recalled WLAN Channel Response trace.
MMEMory:WLAN:CRESPonse:STORe:TRACe<x> (on page 1579)	Stores the WLAN Channel Response measurement trace data in the specified file.

Specifying the File

For loading and storing a file, specify the file following these rules

- You can omit the file extension to load and store data. The measurement-specific extension is automatically added.
- You can use the absolute path to specify the file name. For example, specify the SAMPLE1 file in the My Documents folder on the C drive as "C:\My Documents\SAMPLE1".

C:\Program Files\Tektronix\SignalVu-PC initially.

Once a file is saved to a different directory, the new directory will be used as the default for all load and store operations.

Output commands

Use the OUTPut commands to control the characteristics of the signal output. See the Index for commands not listed in the following table.

Not all commands apply to all products. See the command descriptions for details.

Output commands

Command		Description
OUTPut:IF:{BANDwidth BWIDth} (on page 1583)	(Option 05 only)	Sets or queries the IF output filter.
OUTPut:IF[:STATe] (on page 1584)	(Option 05 only)	Sets or queries whether to turn on or off IF output.
OUTPut:IQ:SOURce (on page 1584)	(Option 05 only)	Sets or queries the IQ data transfer via the LVDS card.
OUTPut:IQ[:STATe] (on page 1585)	(Option 05 only)	Sets or queries whether to turn on or off IQ output.
OUTPut:NOISe[:STATe] (on page 1585)		Sets or queries whether to turn on or off 28 V DC power.
OUTPut:ZS:{BANDwidth BWIDth} (on page 1588)		Sets or queries the resolution bandwidth RBW filter.
OUTPut:ZS:{BANDwidth BWIDth}:AUTO (on page 1588)		Sets or queries whether the resolution bandwidth will be set manually or automatically.
OUTPut:ZS:{BANDwidth BWIDth}:STATe (on page 1589)		Sets or queries the state of the resolution bandwidth filter.
OUTPut:ZS[:STATe] (on page 1590)		Enable or disable the Zero Span output.
OUTPut:ZS:DELay? (on page 1589)		Queries the delay from the input connector to the Zero Span output.
OUTPut:ZS:FILTer:STATe (on page 1590)		Sets or queries the signal path of the filter to the Zero Span output.
OUTPut:ZS:VOLTage (on page 1590)		Sets or queries the voltage level at the Zero Span output.
OUTPut:ZS:VOLTage:AUTO (on page 1591)		Sets or queries or queries how the output voltage is referenced.
OUTPut:TGen:BRIDge:MODE (on page 1585)	(Option 04 only; available for the RSA500A/600A series only)	Sets or queries the tracking generator bridge mode.
OUTPut:TGen:ENABLE (on page 1586)	(Option 04 only; available for the RSA500A/600A series only)	Sets or queries the power state of the tracking generator.

Command		Description
OUTPut:TGen:FREQuency (on page 1586)	(Option 04 only; available for the RSA500A/600A series only))	Sets or queries the tracking generator frequency in Hz.
OUTPut:TGen:INSTalled? (on page 1587)	(Option 04 only; available for the RSA500A/600A series only))	Queries for the presence of the tracking generator hardware.
OUTPut:TGen:LEVel (on page 1587)	(Option 04 only; available for the RSA500A/600A series only))	Sets or queries the tracking generator output level in dBm.
OUTPut:IF:{BANDwidth BWIDth} (on page 1583)	(Option 05 only)	Sets or queries the IF output filter.
OUTPut:IF[:STATe] (on page 1584)	(Option 05 only)	Sets or queries whether to turn on or off IF output.
OUTPut:IQ:SOURce (on page 1584)	(Option 05 only)	Sets or queries the IQ data transfer via the LVDS card.
OUTPut:IQ[:STATe] (on page 1585)	(Option 05 only)	Sets or queries whether to turn on or off IQ output.
OUTPut:NOISe[:STATe] (on page 1585)		Sets or queries whether to turn on or off 28 V DC power.
OUTPut:ZS:{BANDwidth BWIDth} (on page 1588)		Sets or queries the resolution bandwidth RBW filter.
OUTPut:ZS:{BANDwidth BWIDth}:AUTO (on page 1588)		Sets or queries whether the resolution bandwidth will be set manually or automatically.
OUTPut:ZS:{BANDwidth BWIDth}:STATe (on page 1589)		Sets or queries the state of the resolution bandwidth filter.
OUTPut:ZS[:STATe] (on page 1590)		Enable or disable the Zero Span output.
OUTPut:ZS:DELay? (on page 1589)		Queries the delay from the input connector to the Zero Span output.
OUTPut:ZS:FILTer:STATe (on page 1590)		Sets or queries the signal path of the filter to the Zero Span output.
OUTPut:ZS:VOLTage (on page 1590)		Sets or queries the voltage level at the Zero Span output.
OUTPut:ZS:VOLTage:AUTO (on page 1591)		Sets or queries or queries how the output voltage is referenced.
OUTPut:TGen:BRIDge:MODE (on page 1585)	(Option 04 only; available for the RSA500A/600A series only))	Sets or queries the tracking generator bridge mode.
OUTPut:TGen:ENABle (on page 1586)	(Option 04 only; available for the RSA500A/600A series only))	Sets or queries the power state of the tracking generator.

Command		Description
OUTPut:TGen:FREQuency (on page 1586)	(Option 04 only; available for the RSA500A/600A series only))	Sets or queries the tracking generator frequency in Hz.
OUTPut:TGen:INSTalled? (on page 1587)	(Option 04 only; available for the RSA500A/600A series only))	Queries for the presence of the tracking generator hardware.
OUTPut:TGen:LEVel (on page 1587)	(Option 04 only; available for the RSA500A/600A series only))	Sets or queries the tracking generator output level in dBm.

Read commands

The READ commands acquire an input signal once in the single mode and obtain the measurement results from that data. See the Index for commands not listed in the following table.

To fetch the measurement results from the data currently residing in the memory without acquiring the input signal, use the FETCh commands.

Not all commands apply to all products. See the command descriptions for details.

Read commands

Command	Description
READ:ACPower subgroup	Channel power and ACPR measurement
READ:ACPower? (on page 1591)	Returns the ACPR measurement results.
READ:PULSe subgroup	Pulse measurements
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:HIGHer? (on page 1798)	Returns the outliers value exceeding the upper limit.
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:LOWer? (on page 1798)	Returns the outliers value below the lower limit.
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:COUNt? (on page 1799)	Returns the number of pulses in the bin.
READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:TOTal? (on page 1800)	Returns the total number of pulses.
READ:PULSe:CUMulative:STATistics[:MEASview<y>] (on page 1800)	Returns the PulseCount, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average and Standard Deviation values for the chosen measurement.
READ:PULSe[:RESult[:MEASview<y>]:ADVanced (on page 1803)	Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement in pulse table.
READ:PULSe[:RESult[:MEASview<y>]:ADVanced:RANGE (on page 1804)	Queries the Pulse Count, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average, and Standard Deviation values for the chosen measurement in the Pulse Table display.
READ:PULSe[:RESult[:MEASview<y>]:FABS? (on page 1811)	Returns the computed absolute frequency from the carrier in the pulse table.

Command	Description
READ:PULSe:RESult[:MEASview<y>]:PPFD? (on page 1817)	Returns the computed pulse to pulse frequency difference from the carrier in the pulse table.
READ:PULSe:RESult[:MEASview<y>]:PPPD? (on page 1819)	Returns the computed pulse to pulse phase difference from the carrier in the pulse table.
READ:PULSe:STATistics[:MEASview<y>]:ADVanced (on page 1826)	Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement in pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:FABS (on page 1833)	Returns the absolute frequency in pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMber (on page 1836)	Returns the maximum value at a certain pulse number in pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMber? (on page 1837)	Returns the minimum value at a certain pulse number in pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:PPFD (on page 1841)	Returns the pulse-pulse frequency difference in pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:PPPD (on page 1842)	Returns the pulse-pulse phase difference in pulse statistics.
READ:Bluetooth subgroup	Bluetooth measurements
READ:BIBEmissions:FTX? (on page 1616)	Returns the band number corresponding to the transmitted FTX detected in the display.
READ:BIBEmissions:POWer? (on page 1616)	Returns all channel power results.
READ:BIBEmissions:RESUltS:STATus? (on page 1617)	Returns the Pass/Fail result status.
READ:BLUEtooth:CONStE:FERRor? (on page 1617)	Queries the frequency error.
READ:BLUEtooth:CONStE:TRACe? (on page 1618)	Returns the trace data for the display.
READ:BLUEtooth:EDIagram:FDEViation? (on page 1618)	Returns the frequency deviation vs. time trace data with the X values.
READ:BLUEtooth:EDIagram:FERRor? (on page 1619)	Returns the frequency error.
READ:BLUEtooth:EDIagram:HORiz:SCALE? (on page 1619)	Returns the value of the horizontal scale.
READ:BLUEtooth:EDIagram:I? (on page 1620)	Returns the I vs. time trace.
READ:BLUEtooth:EDIagram:Q? (on page 1620)	Returns the Q vs. time trace.

Command	Description
READ:BLUEtooth:FDVTime:TRACe? (on page 1621)	Returns the trace data or the display.
READ:BLUEtooth:FREQuency:ERROR? (on page 1621)	Returns the frequency error.
READ:BLUEtooth:FREQuency:ERROR:TYPE (on page 1622)	Returns the frequency error type.
READ:BLUEtooth:FREQuency:OFFSet:DRIFt:F1FZero? (on page 1622)	Returns the drift in frequency offset ($f_1 - f_0$ — the frequency offset calculated in the first interval in the payload — the frequency offset calculated in the preamble).
READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5? (on page 1623)	Returns the maximum drift of the frequency offset in payload intervals spaced 50 μ s away.
READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5:INTERval? (on page 1623)	Returns the interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred.
READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO? (on page 1624)	Returns the maximum drift of the frequency offset of the intervals in the payload from the preamble packet in the Bluetooth Frequency Deviation vs. Time display.
READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO:INTERval? (on page 1624)	Returns the interval (n) at which the maximum drift $f_n - f_0$ occurred in the Bluetooth Frequency Deviation vs. Time display.
READ:BLUEtooth:FREQuency:OFFSet:MAX? (on page 1625)	Returns the maximum frequency offset in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.
READ:BLUEtooth:FREQuency:OFFSet:MAX:INTERval? (on page 1625)	Returns the maximum frequency offset interval in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.
READ:BLUEtooth:FREQuency:OFFSet:PREAmble? (on page 1626)	Returns the offset calculated in the preamble region in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.
READ:BLUEtooth:MODUlation:CHARacteristics:AVErage:F? (on page 1626)	Returns the average frequency value when the selected test pattern is Other in the Bluetooth Frequency Deviation vs. Time display.
READ:BLUEtooth:MODUlation:CHARacteristics:AVErage:F2F1ratio? (on page 1627)	Returns the average ratio value for the high and low frequency deviation in the Bluetooth Frequency Deviation vs. Time display.
READ:BLUEtooth:MODUlation:CHARacteristics:AVErage:FONE? (on page 1627)	Returns the average frequency deviation for the low deviation pattern in the Bluetooth Frequency Deviation vs. Time display.
READ:BLUEtooth:MODUlation:CHARacteristics:AVErage:FTWO? (on page 1628)	Returns the average frequency deviation for the high deviation pattern.
READ:BLUEtooth:SUMMmary:FREQuency:OFFSet:DRIFt:COUNt? (on page 1628)	Returns the number of packets analyzed to obtain average drift results.
READ:BLUEtooth:SUMMmary:FREQuency:OFFSet:DRIFt:F1FZero? (on page 1629)	Returns the drift $f_1 - f_0$ value.

Command	Description
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:F1FZero:STATUS? (on page 1629)	Returns the Pass/Fail drift f1–f0 result status in the packet.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFN5? (on page 1630)	Returns the maximum drift of the fn–fn-5 value.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFN5:STATUS? (on page 1630)	Returns the Pass/Fail status of the maximum fn–fn-5 drift in the packet.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFZero? (on page 1631)	Returns the maximum drift fn–f0.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFZero:STATUS? (on page 1631)	Returns the Pass/Fail result status of the fn–f0 maximum drift in the packet.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:MAX? (on page 1635)	Returns the maximum frequency offset present in the packet.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:MAX:STATUS? (on page 1636)	Returns the Pass/Fail result status of the frequency offset maximum in the packet.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:PREAmble? (on page 1636)	Returns the frequency offset value in the preamble region.
READ:BLUEtooth:SUMMARY:FREQUENCY:OFFSET:PREAmble:STATUS? (on page 1637)	Returns the Pass/Fail result status of the frequency offset in the preamble region.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT? (on page 1637)	Returns the number of packets analyzed out of 10 packets for ΔF_{avg} .
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FONE:MAX:PERCENTAGE:COUNT? (on page 1638)	Returns the number of packets analyzed out of 10 packets for the $\Delta F1_{avg}$.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE? (on page 1638)	Returns the percentage of the $\Delta F2_{max}\%$ values that are above the specified limit.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE:COUNT? (on page 1639)	Returns the number of packets analyzed out of 10 packets for $\Delta F2_{avg}$.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE:STATUS? (on page 1639)	Returns the Pass/Fail result status of the $\Delta F2_{Max}\%$ field.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F? (on page 1641)	Returns the ΔF_{avg} value.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F2F1ratio? (on page 1640)	Returns the ratio of the $\Delta F2_{avg}$ to $\Delta F1_{avg}$.

Command	Description
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F2F1ratio:STATUS? (on page 1640)	Returns the Pass/Fail results status of the $\Delta F2_{avg}/\Delta F1_{avg}$ field.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FONE? (on page 1641)	Returns the delta F1 average value.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FONE:STATUS? (on page 1642)	Returns the Pass/Fail results status of the delta F1 average.
READ:BLUEtooth:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FTWO? (on page 1642)	Returns the delta F2 average value,
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:AVERAGE? (on page 1643)	Returns the average output power.
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:AVERAGE:STATUS? (on page 1644)	Returns the Pass/Fail results status of the average output power.
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:COUNT? (on page 1644)	Returns the number of packets analyzed out of 10 packets for the calculation of the output power.
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:EDR:COUNT? (on page 1645)	Returns the number of packets analyzed out of 10 packets for calculation of the output power for EDR.
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:EDR:DPSK? (on page 1645)	Returns the power in the DPSK portion of the EDR burst.
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:EDR:GFSK? (on page 1646)	Returns the power in the GFSK portion of the EDR burst.
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:PEAK? (on page 1646)	Returns the peak output power.
READ:BLUEtooth:SUMMARY:OUTPUT:POWER:PEAK:STATUS? (on page 1647)	Returns the Pass/Fail results status of the peak output power.
READ:BLUEtooth:SUMMARY:PACKET:BDR:CRC? (on page 1647)	Returns the Basic Rate value of the CRC field.
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:ARQN? (on page 1648)	Returns the value of ARQN field.
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:FLOW? (on page 1648)	Returns the value of Flow field.
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:HEC? (on page 1649)	Returns the value of HEC field.
READ:BLUEtooth:SUMMARY:PACKET:BDR:HEADER:LT:ADDRESS? (on page 1649)	Returns the LT address.

Command	Description
READ:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:SEQN? (on page 1650)	Returns the value of SEQN field.
READ:BLUEtooth:SUMMARY:PACKet:BDR:HEADer:TYPE? (on page 1651)	Returns the value of Type field.
READ:BLUEtooth:SUMMARY:PACKet:BDR:PAYLoad:LENGth? (on page 1651)	Returns the preamble of the Basic Rate payload length.
READ:BLUEtooth:SUMMARY:PACKet:BDR:PREAmble? (on page 1652)	Returns the preamble of the Basic Rate packet.
READ:BLUEtooth:SUMMARY:PACKet:BDR:SYNC:WORD? (on page 1652)	Returns the sync word.
READ:BLUEtooth:SUMMARY:PACKet:BDR:TYPE? (on page 1652)	Returns the packet type of the Basic Rate signal.
READ:BLUEtooth:SUMMARY:PACKet:BLE:ACCess:ADDRes? (on page 1653)	Returns the 32-bit Access Address.
READ:BLUEtooth:SUMMARY:PACKet:BLE:CRC? (on page 1653)	Returns the value of the CRC field.
READ:BLUEtooth:SUMMARY:PACKet:BLE:PDU:HEADer:LENGth? (on page 1654)	Returns the value of the PDU length field.
READ:BLUEtooth:SUMMARY:PACKet:BLE:PDU:HEADer:RX:ADDRes? (on page 1656)	Returns the PDU Rx address.
READ:BLUEtooth:SUMMARY:PACKet:BLE:PDU:HEADer:TX:ADDRes? (on page 1657)	Returns the PDU Tx address.
READ:BLUEtooth:SUMMARY:PACKet:BLE:PDU:HEADer:TYPE? (on page 1657)	Returns the PDU packet type.
READ:BLUEtooth:SUMMARY:PACKet:BLE:PREAmble? (on page 1658)	Returns the preamble of the BLE packet.
READ:BLUEtooth:SUMMARY:PACKet:BLE:TYPE? (on page 1658)	Returns the packet type.
READ:NOISe:TABLE:VALue? (on page 1720)	Returns the noise table data.
READ:OBWidth:BOBW:XDBBAndwidth? (on page 1720)	Returns the difference between the higher and lower frequency points corresponding to the value where it is X dB less from the value at the center frequency.
READ:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth? (on page 1721)	Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured inwards (coming from the ends to the center frequency).

Command	Description
READ:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQUENCY? (on page 1721)	Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the inward direction.
READ:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQUENCY? (on page 1722)	Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the inward direction.
READ:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth? (on page 1723)	Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured outwards (from the center frequency to the ends).
READ:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQUENCY? (on page 1723)	Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the outward direction.
READ:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQUENCY? (on page 1724)	Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the outward direction.
READ:P25 subgroup	P25 measurements
READ:P25:CONSt:FERRor? (on page 1754)	Returns the frequency error.
READ:P25:SUMMry:LIMIt:SRA (on page 1757)	Returns Limit of Symbol Rate Accuracy measurement results.
READ:P25:SUMMry:MODUlation:MEASurement:FIDelity:STATus (on page 1758)	Returns the Modulation Fidelity measurement status.
READ:P25:SUMMry:MODUlation:MEASurement:FIDelity? (on page 1758)	Returns the Modulation Fidelity measurement results.
READ:P25:SUMMry:MODUlation:MEASurement:FREQUENCY:ACCUracy? (on page 1759)	Returns the Operational Frequency Accuracy measurement results.
READ:P25:SUMMry:MODUlation:MEASurement:FREQUENCY:ACCUracy:STATus (on page 1760)	Returns the status of Frequency Accuracy measurement status.
READ:P25:SUMMry:MODUlation:MEASurement:FREQUENCY:DEVlation:NEGPeak:STATus (on page 1761)	Returns the Status of Frequency Deviation, negative peak status.
READ:P25:SUMMry:MODUlation:MEASurement:FREQUENCY:DEVlation:POSPeak:STATus (on page 1762)	Returns the status of Frequency Deviation, positive peak status.
READ:P25:SUMMry:MODUlation:MEASurement:FREQUENCY:ERRor (on page 1762)	Returns the Frequency Error measurement results.
READ:P25:SUMMry:MODUlation:MEASurement:SRA:STATus (on page 1763)	Returns Status of Symbol Rate Accuracy measurement status.
READ:P25:SUMMry:POWER:MEASurement:HCPM:MAXOFF:STATus? (on page 1764)	Returns HCPM Pmax-off measurement status.
READ:P25:SUMMry:POWER:MEASurement:HCPM:MAXOFF? (on page 1765)	This command returns the HCPM Pmax-off measurement results.

Command	Description
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON:STATUS (on page 1765)	Returns Status of HCPM Pmax-on measurement status.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON? (on page 1766)	This command returns the HCPM Pmax-on measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS:STATUS (on page 1767)	Returns HCPM Pss-max measurement status.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS? (on page 1767)	Returns the HCPM Pss-max measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS? (on page 1768)	Returns status of HCPM Pss-min measurement results based on the limit.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM? (on page 1768)	Returns the HCPM Pss-min measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT:STATUS? (on page 1769)	Returns Status of HCPM Offslot measurement based on the limit.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT? (on page 1769)	Returns the HCPM Offslot power results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI (on page 1770)	Returns P_ACP_HI value which is displayed on P25 Summary display.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:LOW (on page 1770)	Returns P_ACP_LOW value which is displayed on P25 Summary display.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN (on page 1771)	Returns Min Pk ACPR value which is displayed on P25 Summary Display.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN:STATUS (on page 1771)	Returns status of Min Pk ACPR value based on the limit.
READ:P25:SUMMARY:POWER:MEASUREMENT:RF:STATUS (on page 1771)	Returns status of RF measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:RF? (on page 1772)	Returns the RF output power results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:ACQ:COUNT? (on page 1773)	Returns the HCPM Time alignment's t_error_1 acquisition count over which the t_error_1 averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:STATUS (on page 1773)	Returns status of HCPM Time alignment's t_error_1 measurement results based on the limit.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE? (on page 1774)	Returns the HCPM Time alignment t_error_1 measurement results.

Command	Description
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT? (on page 1774)	Returns the HCPM Time alignment's t_error_0 acquisition count over which the t_error_0 averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:STATUS (on page 1775)	Returns status of HCPM Time alignment's t_error_0 measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO? (on page 1775)	Returns the HCPM Time alignment's t_error_0 measurement results over which the t_error_0 averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSYNC:ACQ:COUNT? (on page 1778)	Returns the HCPM Time alignment's t_obsync acquisition counts over which the t_obsync averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSYNC? (on page 1776)	Returns the HCPM Time alignment's t_obsync measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI? (on page 1777)	Returns the Average Transmitter Power Attack time busy/idle acquisition count over which the Phase 1 Attack time averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT? (on page 1776), READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT? (on page 1777)	Returns the Average Transmitter Power Attack acquisition count over which the Phase 1 Attack time averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI:STATUS (on page 1778)	Returns status of Average Transmitter Power Encoder Attack Time measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI?	Returns the Average Transmitter Power Encoder Attack Time busy/idle measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS (on page 1779)	Returns Status of Average Transmitter Encoder Attack Time measurement results based on the limit.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER? (on page 1780)	Returns the Average Transmitter Encoder Attack Time measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI:STATUS (on page 1781)	Returns the Average Transmitter Encoder Attack Time measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI? (on page 1780)	Returns the Average Transmitter Power Attack Time, busy/idle measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:STATUS (on page 1782)	Returns Status of Average Transmitter Power Attack Time measurement results.

Command	Description
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER? (on page 1782)	Returns the Average Transmitter Power Attack Time measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput:DELAY:ACQ:COUNT? (on page 1783)	Returns the Throughput delay acquisition counts over which the Throughput delay averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput:DELAY:STATUS (on page 1784)	Returns Status of Throughput delay measurement results based on the limit.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput:DELAY? (on page 1782)	Returns the Throughput delay measurement results.
READ:P25:EDDiagram:FDEVIATION? (on page 1754)	Returns the Frequency Deviation vs Time trace data with the X values.
READ:P25:EDDiagram:FERROR? (on page 1755)	Returns the frequency error.
READ:P25:PVTime:BURST:POWER? (on page 1755)	Returns the average power of the burst packet, in dBm, for the trace.
READ:P25:PVTime:FALL:TIME? (on page 1755)	Queries the value of the width of the falling edge, in seconds.
READ:P25:PVTime:FTIME? (on page 1756)	Queries the value of the width of the falling edge, in seconds.
READ:P25:PVTime:TRACE:X? (on page 1756)	Returns the horizontal values (time in seconds) for the P25 Power vs. Time trace.
READ:P25:PVTime:TRACE:XY? (on page 1757)	Returns the horizontal value (time in seconds) and vertical value (power) for the P25 Power vs. Time trace <x(n)><y(n)> is the horizontal value and vertical value pair at the <i>n</i> th data point.
READ:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY (on page 1758)	Returns the Modulation Fidelity measurement results.
READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY (on page 1759)	Returns the Operational Frequency Accuracy measurement results.
READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK (on page 1760)	Returns the Frequency Deviation, negative peak, measurement results.
READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK (on page 1761)	Returns the Frequency Deviation, positive peak, measurement results.
READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR (on page 1762)	Returns the Frequency Error measurement results.
READ:P25:SUMMARY:MODULATION:MEASUREMENT:SRA (on page 1763)	Returns the Symbol Rate Accuracy measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF (on page 1765)	This command returns the HCPM Pmax-off measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON (on page 1766)	This command returns the HCPM Pmax-on measurement results.

Command	Description
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS (on page 1766)	Returns the HCPM Pss-max measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM (on page 1768)	Returns the HCPM Pss-min measurement results.
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT (on page 1769)	Returns the HCPM Offslot power results.
READ:P25:SUMMARY:POWER:MEASUREMENT:RF (on page 1772)	Returns the RF output power results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE (on page 1772)	Returns the HCPM Time alignment t_error_1 measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:ACQ:COUNT (on page 1773)	Returns the HCPM Time alignment's t_error_1 acquisition count over which the t_error_1 averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO (on page 1775)	Returns the HCPM Time alignment's t_error_0 measurement results over which the t_error_0 averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT (on page 1774)	Returns the HCPM Time alignment's t_error_0 acquisition count over which the t_error_0 averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSYNC (on page 1776)	Returns the HCPM Time alignment's t_obsync measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSYNC:ACQ:COUNT (on page 1778)	Returns the HCPM Time alignment's t_obsync acquisition counts over which the t_obsync averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT (on page 1776), READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT (on page 1777)	Returns the Average Transmitter Power Attack acquisition count over which the Phase 1 Attack time averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI (on page 1779)	Returns the Average Transmitter Power Attack time busy/idle acquisition count over which the Phase 1 Attack time averaging is done.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER (on page 1780)	Returns the Average Transmitter Encoder Attack Time measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI	Returns the Average Transmitter Power Encoder Attack Time, busy/idle measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER (on page 1780)	Returns the Average Transmitter Power Attack Time measurement results.

Command	Description
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI (on page 1780)	Returns the Average Transmitter Power Attack Time, busy/idle measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput:DELAy (on page 1784)	Returns the Throughput delay measurement results.
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput:DELAy:ACQ:COUNT (on page 1783)	Returns the Throughput delay acquisition counts over which the Throughput delay averaging is done.
READ:ACPower subgroup (continued)	
READ:ACPower:CHANnel:POWer? (on page 1592)	Returns the average power of the main channel.
READ:ACPower:SPECtrum? (on page 1592)	Returns spectrum trace data of the ACPR measurement.
READ:{AM FM PM} subgroup (Option 21 only)	AM/FM/PM measurement
READ:{AM FM PM}? (on page 1593)	Returns the trace data.
READ:AM:AMINdex? (on page 1594)	Returns the modulation index .
READ:AM:AMNegative? (on page 1594)	Returns the negative peak modulation factor (–AM).
READ:AM:AMPositive? (on page 1594)	Returns the positive peak modulation factor (+AM).
READ:AM:RESult? (on page 1595)	Returns the AM measurement results.
READ:FM:PHALf? (on page 1687)	Returns the half peak-peak frequency deviation (Pk-Pk/2).
READ:{FM PM}:FERRor? (on page 1686)	Returns the frequency error in the Frequency modulation and Phase modulation measurements.
READ:FM:PNEGative? (on page 1687)	Returns the negative peak frequency deviation (–Pk).
READ:FM:PPOSitive? (on page 1688)	Returns the positive peak frequency deviation (+Pk).
READ:FM:PTPeak? (on page 1688)	Returns the peak-peak frequency deviation (Pk-Pk).
READ:FM:RESult? (on page 1689)	Returns the FM measurement results.
READ:FM:RMS? (on page 1689)	Returns the RMS frequency deviation.
READ:PM:PNEGative? (on page 1791)	Returns the negative peak phase deviation (–Pk).
READ:PM:PPOSitive? (on page 1791)	Returns the positive peak phase deviation (+Pk).
READ:PM:PTPeak? (on page 1792)	Returns the peak-peak phase deviation (Pk-Pk).
READ:PM:RESult? (on page 1792)	Returns the PM measurement results.

Command	Description
READ:PM:RMS? (on page 1793)	Returns the RMS phase deviation.
READ:AUDio subgroup	Audio measurement
READ:AUDio:FERRor? (on page 1595)	Returns the carrier frequency error in the audio measurement.
READ:AUDio:FREQuency? (on page 1596)	Returns the audio frequency.
READ:AUDio:HARMonic:COUNt? (on page 1596)	Returns the number of harmonics in the audio spectrum measurement.
READ:AUDio:HARMonic<x>:AMPLitude? (on page 1597)	Returns the amplitude of the specified harmonic in the audio spectrum measurement.
READ:AUDio:HARMonic<x>:FREQuency? (on page 1597)	Returns the frequency of the specified harmonic in the audio spectrum measurement.
READ:AUDio:HNOise? (on page 1598)	Returns the difference between the current RMS modulation value and the reference value.
READ:AUDio:HNREFerence? (on page 1599)	Returns the Hum and Noise RMS modulation reference value.
READ:AUDio:HPTPeak? (on page 1599)	Returns the half peak-to-peak modulation excursion.
READ:AUDio:MODDist? (on page 1600)	Returns the modulation distortion for the audio measurement.
READ:AUDio:NHARmonic:COUNt? (on page 1600)	Returns the number of non-harmonics in the audio spectrum measurement.
READ:AUDio:NHARmonic<x>:AMPLitude? (on page 1601)	Returns the amplitude of the specified non-harmonic in the audio spectrum measurement.
READ:AUDio:NHARmonic<x>:FREQuency? (on page 1601)	Returns the frequency of the specified non-harmonic in the audio spectrum measurement.
READ:AUDio:PNEGative? (on page 1602)	Returns the minus peak modulation excursion.
READ:AUDio:POWer? (on page 1602)	Returns the carrier power or signal power depending the signal type.
READ:AUDio:PPOSitive? (on page 1603)	Returns the positive peak modulation excursion.
READ:AUDio:RMS? (on page 1603)	Returns the RMS modulation excursion for the audio measurement.
READ:AUDio:SINad? (on page 1604)	Returns the signal-to-noise and distortion for the audio measurement.
READ:AUDio:SNOise? (on page 1604)	Returns the signal level to noise level with the harmonic distortion and non-harmonic distortion components removed.
READ:AUDio:SPECTrum:TRACe<x>? (on page 1605)	Returns the audio spectrum trace data for the audio measurement.
READ:AUDio:THDist:DB? (on page 1606)	Returns the total harmonic distortion in dB in the audio measurement.

Command	Description
READ:AUDio:THDist? (on page 1605)	Returns the percentage of the total harmonic distortion in the audio measurement.
READ:AUDio:TNHDist:DB? (on page 1607)	Returns the total non-harmonic distortion in dB in the audio measurement.
READ:AUDio:TNHDist? (on page 1606)	Returns the percentage of the total non-harmonic distortion in the audio measurement.
READ:AVTime subgroup	Amplitude versus Time measurement
READ:AVTime[:MEASview<y>]:AVERage? (on page 1607)	Returns the RMS value.
READ:AVTime[:MEASview<y>]:{FIRST SECond THIRd FOURth}? (on page 1608)	Returns the trace data.
READ:AVTime[:MEASview<y>]:MAXimum? (on page 1612)	Returns the maximum value.
READ:AVTime[:MEASview<y>]:MAXLocation?	Returns the time at the maximum.
READ:AVTime[:MEASview<y>]:MINimum? (on page 1614)	Returns the minimum value.
READ:AVTime[:MEASview<y>]:MINLocation? (on page 1614)	Returns the time at the minimum.
READ:AVTime[:MEASview<y>]:RESult? (on page 1615)	Returns the measurement results.
READ:CCDF subgroup	CCDF measurement
READ:CCDF? (on page 1659)	Returns the CCDF measurement results.
READ:CCDF:{FIRST SECond THIRd}:X? (on page 1660)	Returns the horizontal values of the specified trace.
READ:CCDF:{FIRST SECond THIRd}:XY? (on page 1660)	Returns the horizontal and vertical value pairs of the specified trace.
READ:CCDF:{FIRST SECond THIRd}:Y? (on page 1661)	Returns the vertical values of the specified trace.
READ:CONSte subgroup (Option 21 only)	Constellation measurement
READ:CONSte[:MEASview<x>]:FERRor? (on page 1662)	Returns the frequency error in Hz. The frequency error is the difference between the measured carrier frequency of the signal and the user selected center frequency of the analyzer.
READ:CONSte[:MEASview<x>]:RESults? (on page 1662)	Returns the constellation measurement results of EVM RMS, peak and location displayed on the bottom of the screen.
READ:CONSte[:MEASview<x>]:TRACe? (on page 1663)	Returns the constellation trace data.

Command	Description
READ:DDEMod subgroup (Option 21 only)	General purpose digital modulation measurements
READ:DDEMod[:MEASview<y>]:STABLE? (on page 1664)	Returns the symbol table data.
READ:DIQVtime subgroup (Option 21 only)	Demodulated I&Q versus Time measurement
READ:DIQVtime[:MEASview<y>]:FERRor? (on page 1665)	Returns the frequency error.
READ:DIQVtime[:MEASview<y>]:I? (on page 1665)	Returns the I versus Time trace data.
READ:DIQVtime[:MEASview<y>]:Q? (on page 1666)	Returns the Q versus Time trace data.
READ:DPX subgroup	DPX Spectrum measurement
READ:DPX:DDENsity? (on page 1666)	Returns the calculated (DPX) density for the selected region.
READ:DPX:DGRam:LINE:COUnT? (on page 1667)	Returns the number of lines in the DPXogram measurement.
READ:DPX:DGRam:TIME[:SCALE]:OFFSet? (on page 1667)	Returns the time scale offset in the DPXogram measurement.
READ:DPX:RESults:TRACe<x>? (on page 1668)	Returns waveform data of specified trace.
READ:DPX:TRACe:AVERAge? (on page 1668)	Returns waveform data of the average trace.
READ:DPX:TRACe:BITMap? (on page 1669)	Returns trace waveform data of the bitmap trace.
READ:DPX:TRACe:MATH? (on page 1669)	Returns waveform data of the math trace.
READ:DPX:TRACe:MAXimum? (on page 1670)	Returns waveform data of the maximum trace.
READ:DPX:TRACe:MINimum? (on page 1671)	Returns waveform data of the minimum trace.
READ:EDlagram subgroup (Option 21 only)	Eye diagram
READ:EDlagram[:MEASview<y>]:FDEViation? (on page 1671)	Returns the frequency deviation versus Time trace data with the X values.
READ:EDlagram[:MEASview<y>]:FERRor? (on page 1672)	Returns the frequency error in the eye diagram measurement.
READ:EDlagram[:MEASview<y>]:I? (on page 1672)	Returns the I versus Time trace data.
READ:EDlagram[:MEASview<y>]:Q? (on page 1673)	Returns the Q versus Time trace data.
READ:EVM subgroup (Option 21 only)	EVM versus Time measurement
READ:EVM[:MEASview<y>]:FERRor? (on page 1682)	Returns the frequency error in the EVM versus Time measurement.

Command	Description
READ:EVM[:MEASview<y>]:PEAK? (on page 1683)	Returns the peak value.
READ:EVM[:MEASview<y>]:PINDeX? (on page 1683)	Returns the time at the EVM peak.
READ:EVM[:MEASview<y>]:RMS? (on page 1684)	Returns the RMS value.
READ:EVM[:MEASview<y>]:TRACe? (on page 1685)	Returns the EVM versus Time trace data.
READ:FDVTime subgroup (Option 21 only)	Frequency deviation versus Time measurement
READ:FDVTime[:MEASview<y>]:FERRor? (on page 1685)	Returns the frequency error in the Frequency deviation versus Time measurement.
READ:FDVTime[:MEASview<y>]:TRACe? (on page 1686)	Returns the Frequency deviation versus Time trace data.
READ:{FSETtling PSETtling} subgroup	Frequency and Phase Settling Time measurements
READ:FSETtling:ERRor? (on page 1696)	Returns the settled error in Hz in Frequency Settling.
READ:{FSETtling PSETtling}:FTTime? (on page 1690)	Returns the settling time from the trigger position in seconds.
READ:{FSETtling PSETtling}:MASK[:PASS]? (on page 1690)	Returns whether the input signal passes the mask test.
READ:{FSETtling PSETtling}:SETTled:FREQuency? (on page 1691)	Returns the frequency at which the signal is considered settled.
READ:{FSETtling PSETtling}:SETTled[:PASS]? (on page 1691)	Returns whether the input signal is settled with the tolerance range.
READ:{FSETtling PSETtling}:SETTled:TIME? (on page 1692)	Returns the settled time in seconds.
READ:{FSETtling PSETtling}:SLMSd[:PASS]? (on page 1692)	Returns whether the input signal is settled within the specified tolerance and the signal is settled longer than the Minimum Settled Duration.
READ:{FSETtling PSETtling}:START:TIME? (on page 1692)	Returns the start time for the measurement in seconds.
READ:{FSETtling PSETtling}:TIME? (on page 1693)	Returns the settling time in seconds.
READ:{FSETtling PSETtling}:TRACe<x>:X? (on page 1693)	Returns the Frequency or Phase values of the specified trace.
READ:{FSETtling PSETtling}:TRACe<x>:XY? (on page 1694)	Returns the time and frequency or phase value pairs of the specified trace.
READ:{FSETtling PSETtling}:TRACe<x>[:Y]? (on page 1695)	Returns the frequency or phase values of the specified trace.

Command	Description
READ:{FSETtling PSETtling}:TRIGger:TIME? (on page 1695)	Returns the time when the trigger occurred in seconds.
READ:{FSETtling PSETtling}:VALue? (on page 1696)	Returns the settled value in Hz for Frequency Settling and in degrees for Phase Settling.
READ:FVTime subgroup	Frequency versus Time measurement
READ:FVTime[:MEASview<y>]? (on page 1697)	Returns the Frequency versus Time trace data.
READ:FVTime[:MEASview<y>]:MAXimum? (on page 1697)	Returns the maximum value.
READ:FVTime[:MEASview<y>]:MAXLocation? (on page 1698)	Returns the time at which the frequency drift is maximum.
READ:FVTime[:MEASview<y>]:MINimum? (on page 1698)	Returns the minimum value.
READ:FVTime[:MEASview<y>]:MINLocation? (on page 1699)	Returns the time at which the frequency drift is minimum.
READ:FVTime[:MEASview<y>]:RESult? (on page 1699)	Returns the measurement results.
READ:IQVTime subgroup	RF I&Q versus Time measurement
READ:IQVTime[:MEASview<y>]:I? (on page 1700)	Returns the I versus Time trace data.
READ:IQVTime[:MEASview<y>]:MAXimum? (on page 1701)	Returns the maximum value.
READ:IQVTime[:MEASview<y>]:MAXLocation? (on page 1701)	Returns the time at which the I or Q level is maximum.
READ:IQVTime[:MEASview<y>]:MINimum? (on page 1702)	Returns the minimum value.
READ:IQVTime[:MEASview<y>]:MINLocation? (on page 1702)	Returns the time at which the I or Q level is minimum.
READ:IQVTime[:MEASview<y>]:Q? (on page 1703)	Returns the Q versus Time trace data.
READ:IQVTime[:MEASview<y>]:RESult? (on page 1703)	Returns the measurement results.
READ:MCPower subgroup	MCPR measurement
READ:MCPower:ADJacent:CHANnels? (on page 1714)	Returns the power of adjacent channels.
READ:MCPower:CHANnel:POWer? (on page 1715)	Returns the reference power.

Command	Description
READ:MCPower:MAIN:CHANnels? (on page 1715)	Returns the power of main channels.
READ:MCPower:SPECtrum? (on page 1716)	Returns spectrum trace data.
READ:MERRor subgroup (Option 21 only)	Magnitude Error versus Time measurement
READ:MERRor[:MEASview<y>]:FERRor? (on page 1717)	Returns the frequency error.
READ:MERRor[:MEASview<y>]:PEAK? (on page 1717)	Returns the peak value.
READ:MERRor[:MEASview<y>]:PINdex? (on page 1718)	Returns the time at the Magnitude error peak.
READ:MERRor[:MEASview<y>]:RMS? (on page 1719)	Returns the RMS (Root-Mean-Square) value.
READ:MERRor[:MEASview<y>]:TRACe? (on page 1719)	Returns the Magnitude error versus Time trace data.
READ:OBWidth subgroup	Occupied Bandwidth measurement
READ:OBWidth:FREQuency:ERRor? (on page 1724)	Returns the frequency error.
READ:OBWidth:OBWidth:BANDwidth? (on page 1725)	Returns the occupied bandwidth.
READ:OBWidth:OBWidth:LEFT:FREQuency? (on page 1725)	Returns the left (lower) frequency of the occupied bandwidth.
READ:OBWidth:OBWidth:LEFT:LEVel? (on page 1726)	Returns the level at the left frequency of the occupied bandwidth.
READ:OBWidth:OBWidth:POWer? (on page 1726)	Returns the reference power in the Occupied Bandwidth measurement.
READ:OBWidth:OBWidth:RIGHT:FREQuency? (on page 1727)	Returns the right (higher) frequency of the occupied bandwidth.
READ:OBWidth:OBWidth:RIGHT:LEVel? (on page 1727)	Returns the level at the right frequency of the occupied bandwidth.
READ:OBWidth:SPECtrum? (on page 1728)	Returns spectrum trace data of the Occupied Bandwidth measurement.
READ:OBWidth:XDBBandwidth:BANDwidth? (on page 1728)	Returns the x dB bandwidth.
READ:OBWidth:XDBBandwidth:LEFT:FREQuency? (on page 1729)	Returns the left (lower) frequency of the x dB bandwidth.
READ:OBWidth:XDBBandwidth:LEFT:LEVel? (on page 1729)	Returns the level at the left frequency of the x dB bandwidth.

Command	Description
READ:OBWidth:XDBBandwidth:POWer? (on page 1730)	Returns the reference power in the x dB bandwidth measurement.
READ:OBWidth:XDBBandwidth:RIGHT:FREQuency? (on page 1730)	Returns the right (higher) frequency of the x dB bandwidth.
READ:OBWidth:XDBBandwidth:RIGHT:LEVel? (on page 1731)	Returns the level at the right frequency of the x dB bandwidth.
READ:OFDM subgroup	Orthogonal Frequency Division Multiplexing measurement
READ:OFDM:APOWer? (on page 1731)	Returns the average power.
READ:OFDM:APOWer:PEAK? (on page 1732)	Returns the peak-to-average power.
READ:OFDM:CONSt:MAgNitude? (on page 1732)	Returns the constellation magnitude data.
READ:OFDM:CONSt:PHASe? (on page 1733)	Returns the constellation phase data.
READ:OFDM:CONSt:TYPE? (on page 1733)	Returns the constellation context value
READ:OFDM:CONSt:VALue? (on page 1734)	Returns the constellation value.
READ:OFDM:CPE? (on page 1735)	Returns the Common Pilot Error magnitude.
READ:OFDM:CRESPonse:MAgNitude? (on page 1735)	Returns the channel response magnitude data.
READ:OFDM:CRESPonse:PHASe? (on page 1736)	Returns the channel response phase data.
READ:OFDM:EVM:PEAK:DECibel:ALL? (on page 1737)	Returns the peak EVM data for all subcarriers.
READ:OFDM:EVM:PEAK:DECibel:DATA? (on page 1737)	Returns the peak EVM data for the data subcarriers.
READ:OFDM:EVM:PEAK:DECibel:PILots? (on page 1737)	Returns the peak EVM data for the pilot subcarriers.
READ:OFDM:EVM:PEAK:PERCent:ALL? (on page 1738)	Returns the peak EVM data for all subcarriers.
READ:OFDM:EVM:PEAK:PERCent:DATA? (on page 1738)	Returns the peak EVM data for the data subcarriers.
READ:OFDM:EVM:PEAK:PERCent:PILots? (on page 1739)	Returns the peak EVM data for the pilot subcarriers.
READ:OFDM:EVM:PEAK:SCARrier:ALL? (on page 1739)	Returns the peak EVM data for all subcarriers.

Command	Description
READ:OFDM:EVM:PEAK:SCARrier:DATA? (on page 1740)	Returns the peak EVM data for the data subcarriers.
READ:OFDM:EVM:PEAK:SCARrier:PILOTS? (on page 1740)	Returns the peak EVM data for the pilot subcarriers.
READ:OFDM:EVM:PEAK:SYMBOL:ALL? (on page 1741)	Returns the peak EVM data for all subcarriers.
READ:OFDM:EVM:PEAK:SYMBOL:DATA? (on page 1741)	Returns the peak EVM data for the data subcarriers.
READ:OFDM:EVM:PEAK:SYMBOL:PILOTS? (on page 1741)	Returns the peak EVM data for the pilot subcarriers.
READ:OFDM:EVM:RMS:DECibel:ALL? (on page 1742)	Returns the RMS EVM data for all subcarriers.
READ:OFDM:EVM:RMS:DECibel:DATA? (on page 1742)	Returns the RMS EVM data for the data subcarriers.
READ:OFDM:EVM:RMS:DECibel:PILOTS? (on page 1743)	Returns the RMS EVM data for the pilot subcarriers.
READ:OFDM:EVM:RMS:PERCent:ALL? (on page 1743)	Returns the peak RMS data for all subcarriers.
READ:OFDM:EVM:RMS:PERCent:DATA? (on page 1744)	Returns the peak RMS data for the data subcarriers.
READ:OFDM:EVM:RMS:PERCent:PILOTS? (on page 1744)	Returns the peak RMS data for the pilot subcarriers.
READ:OFDM:EVM:TRACE<x>? (on page 1745)	Returns the EVM trace data.
READ:OFDM:FERRor? (on page 1745)	Returns the Frequency error reading.
READ:OFDM:FLATness:PASS? (on page 1746)	Verifies the average power levels of the subcarriers remain within the limits defined for a particular standard.
READ:OFDM:FLATness:RESult? (on page 1746)	Returns the summary results of each segment.
READ:OFDM:FLATness:TRACE<x>? (on page 1747)	Returns the OFDM Spectral Flatness trace data.
READ:OFDM:GAIN:IMBalance? (on page 1747)	Returns the gain imbalance.
READ:OFDM:IQ:ORIGin:OFFSet? (on page 1748)	Returns the IQ origin offset.
READ:OFDM:MERRor:TRACE<x>? (on page 1748)	Returns the magnitude error trace data.
READ:OFDM:PACKet:DIRection? (on page 1749)	Returns the direction of the packet.

Command	Description
READ:OFDM:PERRor:TRACe<x>? (on page 1749)	Returns the phase error trace data.
READ:OFDM:POWer:TRACe<x>? (on page 1750)	Returns the power trace data.
READ:OFDM:QUADrature:OFFSet? (on page 1751)	Returns the quadrature offset.
READ:OFDM:SCARriers? (on page 1751)	Returns the number of subcarriers.
READ:OFDM:SCARriers:SPACing? (on page 1752)	Returns the subcarrier spacing.
READ:OFDM:STABle:VALUe? (on page 1752)	Returns the number of bytes in the symbol table.
READ:OFDM:SYMBol:CERRor? (on page 1753)	Returns the symbol clock error.
READ:OFDM:SYMBol:COUNt? (on page 1753)	Returns the number of symbols.
READ:PERRor subgroup (Option 21 only)	Phase error versus Time measurement
READ:PERRor[:MEASview<y>]:FERRor? (on page 1785)	Returns the frequency error in the Phase error versus Time measurement.
READ:PERRor[:MEASview<y>]:PEAK? (on page 1785)	Returns the peak value in the Phase error versus Time measurement.
READ:PERRor[:MEASview<y>]:PINDeX? (on page 1786)	Returns the time at the phase error peak.
READ:PERRor[:MEASview<y>]:RMS (on page 1786)	Returns the RMS (Root-Mean-Square) value in the Phase error versus Time measurement.
READ:PERRor[:MEASview<y>]:TRACe? (on page 1787)	Returns the Phase error versus Time trace data.
READ:PHVTime subgroup	Phase versus Time measurement
READ:PHVTime[:MEASview<y>]? (on page 1788)	Returns the Phase versus Time trace data.
READ:PHVTime[:MEASview<y>]:MAXimum? (on page 1788)	Returns the maximum value.
READ:PHVTime[:MEASview<y>]:MAXLocation? (on page 1789)	Returns the time at which the phase is maximum.
READ:PHVTime[:MEASview<y>]:MINimum? (on page 1789)	Returns the minimum value.
READ:PHVTime[:MEASview<y>]:MINLocation? (on page 1790)	Returns the time at which the phase is minimum.
READ:PHVTime[:MEASview<y>]:RESult? (on page 1790)	Returns the results.
READ:PNOise subgroup (Option 11 only)	Phase noise measurements

Command	Description
READ:PNOise:ALL? (on page 1793)	Returns all the measurement results.
READ:PNOise:CARRier:FERRor? (on page 1794)	Returns the carrier frequency error.
READ:PNOise:CARRier:POWer? (on page 1794)	Returns the carrier power.
READ:PNOise:RESidual:FM? (on page 1795)	Returns the residual FM.
READ:PNOise:RMS:PNOise? (on page 1796)	Returns the RMS phase noise.
READ:PNOise:SPECtrum<x>:X? (on page 1796)	Returns the frequencies of the specified trace.
READ:PNOise:SPECtrum<x>:XY? (on page 1797)	Returns the frequency and phase noise pairs of the specified trace.
READ:PNOise:SPECtrum<x>:Y? (on page 1797)	Returns the phase noise values of the specified trace.
READ:PNOise:JITTer? (on page 1795)	Returns the jitter.
READ:PULSe subgroup	Pulsed RF measurements
READ:PULSe[:RESult][:MEASview<y>]:ATX? (on page 1808)	Returns the average transmitted power in the results table.
READ:PULSe[:RESult][:MEASview<y>]:AVERage? (on page 1808)	Returns the average on power in the results table.
READ:PULSe[:RESult][:MEASview<y>]:DRODb? (on page 1809)	Returns the droop in dB in the pulse table.
READ:PULSe[:RESult][:MEASview<y>]:DROop? (on page 1809)	Returns the droop in the pulse table.
READ:PULSe[:RESult][:MEASview<y>]:DUTPct? (on page 1810)	Returns the duty factor (%) in the results table.
READ:PULSe[:RESult][:MEASview<y>]:DUTRatio? (on page 1810)	Returns the duty factor (ratio) in the results table.
READ:PULSe[:RESult][:MEASview<y>]:FALL? (on page 1812)	Returns the fall time in the results table.
READ:PULSe[:RESult][:MEASview<y>]:FDELta? (on page 1812)	Returns the delta frequency in the results table.
READ:PULSe[:RESult][:MEASview<y>]:FRDeviation? (on page 1813)	Returns the frequency deviation in the results table.
READ:PULSe[:RESult][:MEASview<y>]:IRAMplitude? (on page 1813)	Returns the pulse impulse response amplitude in the pulse table.
READ:PULSe[:RESult][:MEASview<y>]:IRTime? (on page 1814)	Returns the impulse response time in the pulse table.

Command	Description
READ:PULSe[:RESult][:MEASview<y>]:MFRerror? (on page 1814)	Returns the maximum frequency error in the results table.
READ:PULSe[:RESult][:MEASview<y>]:MPHerror? (on page 1815)	Returns the maximum phase error in the results table.
READ:PULSe[:RESult][:MEASview<y>]:OVEdB? (on page 1815)	Returns the overshoot in dB in the pulse table.
READ:PULSe[:RESult][:MEASview<y>]:OVERshoot? (on page 1816)	Returns the overshoot in the pulse table.
READ:PULSe[:RESult][:MEASview<y>]:PHDeviation? (on page 1817)	Returns the phase deviation in the results table.
READ:PULSe[:RESult][:MEASview<y>]:PPFRequency? (on page 1818)	Returns the pulse-pulse carrier frequency in the results table.
READ:PULSe[:RESult][:MEASview<y>]:PPOWer? (on page 1818)	Returns the peak power in the results table.
READ:PULSe[:RESult][:MEASview<y>]:PPPHase? (on page 1820)	Returns the pulse-pulse carrier phase in the results table.
READ:PULSe[:RESult][:MEASview<y>]:RINTerval? (on page 1820)	Returns the repetition interval in the results table.
READ:PULSe[:RESult][:MEASview<y>]:RIPDb? (on page 1821)	Returns the ripple in dB in the pulse table.
READ:PULSe[:RESult][:MEASview<y>]:RIPple? (on page 1822)	Returns the ripple in the results table.
READ:PULSe[:RESult][:MEASview<y>]:RISE? (on page 1821)	Returns the rise time in the results table.
READ:PULSe[:RESult][:MEASview<y>]:RMSFregerror? (on page 1823)	Returns the RMS frequency error in the results table.
READ:PULSe[:RESult][:MEASview<y>]:RMSPherror? (on page 1823)	Returns the RMS phase error in the results table.
READ:PULSe[:RESult][:MEASview<y>]:RRATe? (on page 1824)	Returns the repetition rate in the results table.
READ:PULSe[:RESult][:MEASview<y>]:TIME? (on page 1824)	Returns the time in the results table.
READ:PULSe[:RESult][:MEASview<y>]:WIDTh? (on page 1825)	Returns the pulse width in the results table.
READ:PULSe:STATistics[:MEASview<y>]? (on page 1825)	Returns the trace data of the pulse statistics measurement.

Command	Description
READ:PULSe:STATistics[:MEASview<y>]:ATX?	Returns the average transmitted power of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:AVERage? (on page 1829)	Returns the average on power of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:DRODb? (on page 1830)	Returns the droop in dB of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:DROop? (on page 1831)	Returns the droop of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:DUTPct? (on page 1831)	Returns the duty factor (%) of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:DUTRatio? (on page 1832)	Returns the duty factor (ratio) of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:FALL? (on page 1833)	Returns the fall time of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:FDELta? (on page 1834)	Returns the delta frequency in the pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:FRDeviation? (on page 1834)	Returns the frequency deviation of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:IRAMplitude? (on page 1835)	Returns the Pulse Impulse Response amplitude measurement in the pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:IRTime? (on page 1836)	Returns the impulse response time in the pulse statistics.
READ:PULSe:STATistics[:MEASview<y>]:MFReqerror? (on page 1837)	Returns the maximum frequency error of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:MPHError? (on page 1838)	Returns the maximum phase error of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:OVEDb? (on page 1839)	Returns the overshoot measurement result in dB in the pulse statistics
READ:PULSe:STATistics[:MEASview<y>]:OVERshoot? (on page 1839)	Returns the overshoot measurement result in the pulse statistics
READ:PULSe:STATistics[:MEASview<y>]:PHDeviation? (on page 1840)	Returns the phase deviation of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:PPFRequency? (on page 1841)	Returns the pulse-pulse carrier frequency of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:PPOWer? (on page 1842)	Returns the peak power of the statistics.

Command	Description
READ:PULSe:STATistics[:MEASview<y>]:PPPHase? (on page 1843)	Returns the pulse-pulse carrier phase of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:RINterval? (on page 1844)	Returns the repetition interval of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:RIPDb? (on page 1844)	Returns the ripple in dB of the statistics
READ:PULSe:STATistics[:MEASview<y>]:RIPple? (on page 1845)	Returns the ripple of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:RISE? (on page 1846)	Returns the rise time of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:RMSFreqerror? (on page 1846)	Returns the RMS frequency error of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:RMSPherror? (on page 1847)	Returns the RMS phase error of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:RRATe? (on page 1848)	Returns the repetition rate of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:WIDTh? (on page 1848)	Returns the pulse width of the statistics.
READ:PULSe:STATistics[:MEASview<y>]:X? (on page 1849)	Returns the horizontal values of the trace data of the pulse statistics measurement.
READ:PULSe:STATistics[:MEASview<y>]:XY? (on page 1850)	Returns the horizontal and vertical values of the trace data of the pulse statistics measurement.
READ:PULSe:STATistics[:MEASview<y>]:Y?	Returns the vertical values of the trace data of the pulse statistics measurement.
READ:PULSe:TRACe[:MEASview<y>]:X? (on page 1849)	Returns the time values of the pulse trace.
READ:PULSe:TRACe[:MEASview<y>]:XY? (on page 1850)	Returns the horizontal (time) and vertical value pairs of the pulse trace.
READ:PULSe:TRACe[:MEASview<y>]:Y? (on page 1850)	Returns the vertical values of the pulse trace.
READ:SEM subgroup	Spectral Emissions Mask measurement
READ:SEM:MHITs:COUNt? (on page 1852)	Returns the number of rows in the results table.
READ:SEM:MHITs<x>:AMPLitude:ABSolute? (on page 1853)	Returns the absolute amplitude of the specified mask hit signal.

Command	Description
READ:SEM:MHITs<x>:AMPLitude:RELative? (on page 1853)	Returns the relative amplitude of the specified mask hit signal.
READ:SEM:MHITs<x>:FREQuency? (on page 1854)	Returns the frequency of the specified mask hit signal.
READ:SEM:MHITs<x>:INTEg:ABSolute? (on page 1854)	Returns the absolute integration amplitude of the specified mask hit signal.
READ:SEM:MHITs<x>:INTEg:RELative? (on page 1855)	Returns the relative integration amplitude of the specified mask hit signal.
READ:SEM:MHITs<x>:MARGin:ABSolute? (on page 1855)	Returns the absolute margin for the specified mask hit signal.
READ:SEM:MHITs<x>:MARGin:RELative? (on page 1856)	Returns the relative margin for the specified mask hit signal.
READ:SEM:MHITs<x>:OFFSet? (on page 1856)	Returns the offset for the specified mask hit signal.
READ:SEM:PASS? (on page 1857)	Returns the pass/fail limit test result.
READ:SEM:REF:POWer? (on page 1857)	Returns the reference power level.
READ:SEM:SPECTrum:X? (on page 1858)	Returns the frequencies of the spectrum trace.
READ:SEM:SPECTrum:XY? (on page 1858)	Returns the frequency and amplitude pairs of the spectrum trace.
READ:SEM:SPECTrum[:Y]? (on page 1859)	Returns the amplitude of the spectrum trace.
READ:SGRam subgroup	Spectrogram measurement
READ:SGRam? (on page 1859)	Returns the spectrogram trace data.
READ:SPECTrum subgroup	Spectrum measurement
READ:SPECTrum:TRACe<x>? (on page 1860)	Returns the trace data in the Spectrum Analyzer measurement.
READ:SPURious subgroup	Spurious measurement
READ:SPURious:CARRier:POWer? (on page 1861)	Returns the carrier power.
READ:SPURious:COUNt? (on page 1861)	Returns the number of spurious signals.
READ:SPURious:PASS? (on page 1861)	Returns the pass/fail limit test result.
READ:SPURious:SPECTrum:X? (on page 1862)	Returns the frequencies of the spectrum trace.
READ:SPURious:SPECTrum:XY? (on page 1862)	Returns the frequency and amplitude pairs of the spectrum trace.
READ:SPURious:SPECTrum[:Y]? (on page 1863)	Returns the amplitudes of the spectrum trace.

Command	Description
READ:SPURious:SPUR<x>:AMPLitude:ABSolute? (on page 1864)	Returns the absolute amplitude of the specified spurious signal.
READ:SPURious:SPUR<x>:AMPLitude:RELative? (on page 1864)	Returns the relative amplitude of the specified spurious signal.
READ:SPURious:SPUR<x>:FREQuency:ABSolute? (on page 1865)	Returns the absolute frequency of the specified spurious signal.
READ:SPURious:SPUR<x>:FREQuency:RELative? (on page 1865)	Returns the relative frequency of the specified spurious signal.
READ:SPURious:SPUR<x>:LIMit:ABSolute? (on page 1866)	Returns the absolute amplitude of the limit for a spurious signal.
READ:SPURious:SPUR<x>:LIMit:RELative? (on page 1866)	Returns the relative amplitude of the limit for a spurious signal.
READ:SPURious:SPUR<x>:LIMit:VIOLation? (on page 1867)	Returns whether the specified spurious signal exceeds the limit or not.
READ:SPURious:SPUR<x>:RANGe? (on page 1867)	Returns the frequency range in which the spurious signal occurred.
READ:SQUality subgroup (Option 21 only)	Signal quality measurement
READ:SQUality[:MEASview<y>]:FREQuency:DEViation? (on page 1868)	Returns the frequency deviation in the signal quality measurement.
READ:SQUality[:MEASview<y>]:FREQuency:DEViation:TABLE? (on page 1868)	Returns the frequency deviation measurement results table.
READ:SQUality[:MEASview<y>]:FREQuency:ERRor? (on page 1869)	Returns the frequency error in the signal quality measurement.
READ:SQUality[:MEASview<y>]:GAIN:IMBalance? (on page 1870)	Returns the gain imbalance in the signal quality measurement.
READ:SQUality[:MEASview<y>]:ORIGin:OFFSet? (on page 1870)	Returns the origin offset in the signal quality measurement.
READ:SQUality[:MEASview<y>]:PEAK:EVM? (on page 1871)	Returns the peak EVM (%) in the signal quality measurement.
READ:SQUality[:MEASview<y>]:PEAK:EVM:DB? (on page 1871)	Returns the peak EVM (dB) in the signal quality measurement.
READ:SQUality[:MEASview<y>]:PEAK:EVM:DB:OFFSet? (on page 1872)	Returns the peak offset EVM (dB) in the signal quality measurement.
READ:SQUality[:MEASview<y>]:PEAK:EVM:LOCation? (on page 1872)	Returns the time at which the EVM is peak.

Command	Description
READ:SQUALity[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet? (on page 1873)	Returns the time at which the offset EVM is peak.
READ:SQUALity[:MEASview<y>]:PEAK:EVM:OFFSet? (on page 1874)	Returns the peak offset EVM (%) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:PEAK:FERRor? (on page 1874)	Returns the peak FSK error in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:PEAK:MERRor? (on page 1875)	Returns the peak magnitude error (%) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:PEAK:MERRor:DB? (on page 1875)	Returns the peak magnitude error (dB) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:PEAK:MERRor:LOCation? (on page 1876)	Returns the time at which the magnitude error is peak.
READ:SQUALity[:MEASview<y>]:PEAK:PERRor? (on page 1876)	Returns the peak phase error in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:PEAK:PERRor:LOCation? (on page 1877)	Returns the time at which the phase error is peak.
READ:SQUALity[:MEASview<y>]:QUADrature:ERRor? (on page 1878)	Returns the quadrature error in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RHO? (on page 1878)	Returns the ρ (waveform quality) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:EVM? (on page 1879)	Returns the RMS EVM (%) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:EVM:DB? (on page 1879)	Returns the RMS EVM (dB) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:EVM:DB:OFFSet? (on page 1880)	Returns the RMS offset EVM (dB) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:EVM:OFFSet? (on page 1880)	Returns the RMS offset EVM (dB) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:FERRor? (on page 1881)	Returns the RMS FSK error in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:MER:DB? (on page 1881)	Returns the RMS MER (dB) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:MERRor? (on page 1882)	Returns the RMS magnitude error (%) in the signal quality measurement.
READ:SQUALity[:MEASview<y>]:RMS:MERRor:DB? (on page 1883)	Returns the RMS magnitude error (dB) in the signal quality measurement.

Command	Description
READ:SQUality[:MEASview<y>]:RMS:PERRor? (on page 1883)	Returns the RMS phase error in the signal quality measurement.
READ:SQUality[:MEASview<y>]:SYMBOL:LENGth? (on page 1884)	Returns the number of analyzed symbols.
READ:SQUality[:MEASview<y>]:SYMBOL:RATE? (on page 1884)	Returns the calculated symbol rate in Hz.
READ:SQUality[:MEASview<y>]:SYMBOL:RATE:ERRor? (on page 1885)	Returns the value of the symbol rate error in percent.
READ:TDIagram subgroup (Option 21 only)	Trellis diagram
READ:TDIagram[:MEASview<y>]:FERRor? (on page 1885)	Returns the frequency error.
READ:TDIagram[:MEASview<y>]:TRACe? (on page 1886)	Returns the Trellis diagram trace data.
READ:TOVerview subgroup	Time overview
READ:TOVerview[:MEASview<y>]? (on page 1887)	Returns the trace data.
READ:WLAN subgroup	Wireless LAN measurements
READ:WLAN:CONSt:MAgNitude? (on page 1938)	Returns the magnitude data for the WLAN Constellation measurement.
READ:WLAN:CONSt:PHASe? (on page 1938)	Returns the phase values for the WLAN Constellation measurement.
READ:WLAN:CONSt:TYPE? (on page 1939)	Returns the type (context) for the WLAN Constellation measurement.
READ:WLAN:CONSt:VALue? (on page 1939)	Returns the value (decoded symbol) for the WLAN Constellation measurement.
READ:WLAN:CRESPonse:MAgNitude? (on page 1940)	Returns the magnitude data of the WLAN Channel Response measurement.
READ:WLAN:CRESPonse:PHASe? (on page 1940)	Returns the phase data of the WLAN Channel Response measurement.
READ:WLAN:EVM:TRACe<x>? (on page 1941)	Returns the trace data for the selected WLAN EVM trace.
READ:WLAN:FLATness:PASS? (on page 1942)	Verifies the average power level values of the subcarriers remain within the limits defined for a particular standard.
READ:WLAN:FLATness:RESult? (on page 1942)	Returns the summary results of each segment of the WLAN Spectral Flatness display.
READ:WLAN:FLATness:TRACe<x>? (on page 1943)	Returns the WLAN Spectral Flatness trace data.
READ:WLAN:MERRor:TRACe<x>? (on page 1943)	Returns the trace data for the selected WLAN Magnitude Error trace.
READ:WLAN:PERRor:TRACe<x>? (on page 1944)	Returns the trace data for the selected WLAN Phase Error trace.

Command	Description
READ:WLAN:PVTime:BURSt:POWer? (on page 1944)	Returns the average power of the burst packet.
READ:WLAN:PVTime:BURSt:WIDTh? (on page 1945)	Returns the value of the measured time width of the burst packet from Power-On to Power-Down.
READ:WLAN:PVTime:FALL:TIME? (on page 1945)	Returns the width of the falling edge.
READ:WLAN:PVTime:FALL:TIME:STARt? (on page 1946)	Returns the start time of the falling edge.
READ:WLAN:PVTime:FALL:TIME:STOP? (on page 1946)	Returns the stop time of the falling edge.
READ:WLAN:PVTime:FTIME? (on page 1946)	Returns the width of the falling edge.
READ:WLAN:PVTime:RISE:TIME? (on page 1947)	Returns the width of the rising edge.
READ:WLAN:PVTime:RISE:TIME:STARt? (on page 1947)	Returns the start time of the rising edge.
READ:WLAN:PVTime:RISE:TIME:STOP? (on page 1948)	Returns the stop time of the rising edge.
READ:WLAN:PVTime:RTIME? (on page 1948)	Returns the width of the rising edge.
READ:WLAN:PVTime:TRACe:X? (on page 1948)	Returns the horizontal values.
READ:WLAN:PVTime:TRACe:XY? (on page 1949)	Returns the horizontal value (time in seconds) and vertical value (power).
READ:WLAN:PVTime:TRACe[:Y]? (on page 1950)	Returns the vertical values (power).
READ:WLAN:STABle:VALUe? (on page 1950)	Returns the number of bytes in the symbol table.
READ:WLAN:SUMMary:BURSt:INDex? (on page 1951)	Returns the index of the analyzed packet.
READ:WLAN:SUMMary:BURSt:POWer? (on page 1951)	Returns the average power of all symbols in the packet.
READ:WLAN:SUMMary:BURSt:POWer:CFACtor? (on page 1951)	Returns the peak-to-average burst power factor.
READ:WLAN:SUMMary:CERRor? (on page 1952)	Returns the symbol clock error.
READ:WLAN:SUMMary:CPE? (on page 1952)	Returns the RMS magnitude error of the pilots.
READ:WLAN:SUMMary:EVM:PEAK:ALL? (on page 1953)	Returns the peak EVM value for all subcarriers or all chips.
READ:WLAN:SUMMary:EVM:PEAK:CHIP:ALL? (on page 1953)	Returns the chip at which the reported peak EVM value occurred.

Command	Description
READ:WLAN:SUMMARY:EVM:PEAK:CHIP:ONEKchips? (on page 1953)	Returns the chip at which the reported peak EVM value over the first 1000 chips occurred.
READ:WLAN:SUMMARY:EVM:PEAK:DATA? (on page 1954)	Returns the peak EVM value for the data subcarriers.
READ:WLAN:SUMMARY:EVM:PEAK:ONEKchips? (on page 1954)	Returns the peak EVM value measured over the first 1000 chips.
READ:WLAN:SUMMARY:EVM:PEAK:PILOTS? (on page 1955)	Returns the peak EVM value for the pilots in the WLAN measurement.
READ:WLAN:SUMMARY:EVM:PEAK:SCARRIER:ALL? (on page 1955)	Returns the subcarrier on which the ALL peak EVM value occurred.
READ:WLAN:SUMMARY:EVM:PEAK:SCARRIER:DATA? (on page 1956)	Returns the subcarrier on which the DATA peak EVM value occurred.
READ:WLAN:SUMMARY:EVM:PEAK:SCARRIER:PILOTS? (on page 1956)	Returns the subcarrier on which the PILOT peak EVM value occurred.
READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:ALL? (on page 1956)	Returns the symbol on which the reported EVM value occurred.
READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:DATA? (on page 1957)	Returns the symbol on which the DATA peak EVM value occurred.
READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:PILOTS? (on page 1957)	Returns the symbol on which the PILOT peak EVM value occurred.
READ:WLAN:SUMMARY:EVM:RMS:ALL? (on page 1958)	Returns the RMS EVM data for all subcarriers.
READ:WLAN:SUMMARY:EVM:RMS:AVERAGE? (on page 1958)	Returns the average RMS EVM value.
READ:WLAN:SUMMARY:EVM:RMS:DATA? (on page 1958)	Returns the RMS EVM data for the data subcarriers.
READ:WLAN:SUMMARY:EVM:RMS:MAXIMUM? (on page 1959)	Returns the maximum RMS EVM value.
READ:WLAN:SUMMARY:EVM:RMS:ONEKchips? (on page 1959)	Returns the RMS EVM data for the 1k chips in the WLAN measurement measured over the first 1000 chips.
READ:WLAN:SUMMARY:EVM:RMS:PILOTS? (on page 1960)	Returns the RMS EVM data for the pilot subcarriers.
READ:WLAN:SUMMARY:FERROR? (on page 1960)	Returns the difference between the measured carrier frequency of the signal and the measurement frequency setting.
READ:WLAN:SUMMARY:HEADER? (on page 1961)	Returns the received packet header information.

Command	Description
READ:WLAN:SUMMARY:HTSig? (on page 1961)	Returns the decimal values of the received packet HT-SIGNAL.
READ:WLAN:SUMMARY:IQOffset? (on page 1961)	Returns the average magnitude of the DC subcarrier level relative to total signal power.
READ:WLAN:SUMMARY:LSIG? (on page 1962)	Returns the decimal values of the received packet (legacy) SIGNAL symbols fields.
READ:WLAN:SUMMARY:PACKet? (on page 1962)	Returns the type and number of symbols in the Preamble and Data portions of the packet.
READ:WLAN:SUMMARY:PACKet:DMODulation? (on page 1962)	Returns the modulation used in the Data symbols.
READ:WLAN:SUMMARY:PACKet:FORMat? (on page 1963)	Returns the packet format setting.
READ:WLAN:SUMMARY:PACKet:GUARd? (on page 1963)	Returns the packet guard interval used by the DATA symbols.
READ:WLAN:SUMMARY:SIG? (on page 1964)	Returns the decimal values of the received packet SIGNAL symbols fields.
READ:WLAN:SUMMARY:VHTSig:A? (on page 1964)	Returns the decimal values of the received packet VHT-SIGNAL(A) symbols fields.
READ:WLAN:SUMMARY:VHTSig:B? (on page 1965)	Returns the decimal values of the received packet VHT-SIGNAL(B) symbols fields.
READ:LTE subgroup	
READ:LTE:ACLR:MHITs:COUNt? (on page 1704)	Returns the number of rows in the results table.
READ:LTE:ACLR:MHITs<x>:BANDwidth? (on page 1704)	Returns the bandwidth value of the row (channel).
READ:LTE:ACLR:MHITs<x>:CHANnel:NAME? (on page 1705)	Returns the channel name of the specified index in the results table.
READ:LTE:ACLR:MHITs<x>:FREQuency:OFFSet? (on page 1705)	Returns the frequency offset of the channel.
READ:LTE:ACLR:MHITs<x>:INTeg:LOWEr:ABSolute? (on page 1705)	Returns the lower absolute value of the channel.
READ:LTE:ACLR:MHITs<x>:INTeg:LOWEr:RELative? (on page 1706)	Returns the lower relative value of the channel.
READ:LTE:ACLR:MHITs<x>:INTeg:UPPEr:ABSolute? (on page 1706)	Returns the upper absolute value of the channel.
READ:LTE:ACLR:REFerence:POWEr? (on page 1707)	Returns the frequency and amplitude pairs of the spectrum trace.

Command	Description
READ:LTE:ACLR:RESUltS:STATUs? (on page 1707)	Returns the pass or fail status.
READ:LTE:ACLR:SPECtrum:X? (on page 1708)	Returns the frequency of the spectrum trace.
READ:LTE:ACLR:SPECtrum:XY? (on page 1708)	Returns the frequency and amplitude pairs of the spectrum trace
READ:LTE:ACLR:SPECtrum:Y? (on page 1709)	Returns the amplitude of the spectrum trace.
READ:LTE:CHSPpectrum:OBW? (on page 1709)	Returns the Occupied Bandwidth (Hz).
READ:LTE:CHSPpectrum:POWer:CHANnel? (on page 1710)	Returns the Channel Power value.
READ:LTE:CHSPpectrum:SPECtrum? (on page 1710)	Returns spectrum trace data.
READ:LTE:CONStE:CELL:ID? (on page 1710)	Queries the Cell ID value.
READ:LTE:CONStE:FREQuency:ERRor? (on page 1711)	Queries Frequency Error value in Hz.
READ:LTE:CONStE:GROUp:ID? (on page 1711)	Queries the Group ID value.
READ:LTE:CONStE:SECTor:ID? (on page 1712)	Queries the Sector ID value.
READ:LTE:PVTime:OFFSlot:POWer? (on page 1712)	Returns the TOff power measurement value in dBm/MHz.
READ:LTE:PVTime:RESUltS:STATUs (on page 1712)	Returns the pass or fail status.
READ:LTE:PVTime:TRACe:X? (on page 1713)	Returns the horizontal values (time in seconds).
READ:LTE:PVTime:TRACe:XY? (on page 1713)	Returns the horizontal value (time in seconds) and vertical value (power).
READ:LTE:PVTime:TRACe:Y? (on page 1714)	Returns the vertical values (power).

Sense commands

Use the SENSE commands to set up detailed measurement conditions. See the Index for commands not listed in the following table.

If the file extension is not included, it is assumed to be .tiq.

The Record and Playback command subgroup may not apply to your instrument. Details can be found in the command descriptions.

Sense commands

Command	Description
[SENSE] basic command subgroup	General analysis parameter control

Command	Description
[SENSe]:ACQuisition:{BANDwidth BWIDth} (on page 1974)	Sets or queries the acquisition bandwidth.
[SENSe]:ACQuisition:RECOrd command subgroup	Record and Playback function for USB RSA products
[SENSe]:ACQuisition:RECOrd:FILE:LENGth (on page 1982)	Sets or queries how much data (time in milliseconds, seconds, or minutes) is recorded when recording starts.
[SENSe]:ACQuisition:RECOrd:FILE:LENGth:ENABLE (on page 1982)	Sets or queries the file length conditions to determine how much data is recorded.
[SENSe]:ACQuisition:RECOrd:FILE:LENGth:UNITs (on page 1983)	Sets or queries the units used for the file length setting.
[SENSe]:ACQuisition:RECOrd:FILE:LOCation (on page 1983)	Sets the file location of the saved data records.
[SENSe]:ACQuisition:RECOrd:FILE:NAME:INDEX (on page 1984)	Sets or queries the record file name index value. (RSA7100A only).
[SENSe]:ACQuisition:RECOrd:FILE:MAXimum (on page 1984)	Sets or queries how many times a record is created, of the specified File Length setting.
[SENSe]:ACQuisition:RECOrd:FILE:NAME:BASE (on page 1984)	Sets or queries the base file name that is used for all data recordings.
[SENSe]:ACQuisition:RECOrd:FILE:NAME:SUFFIX (on page 1985)	Sets or queries the record file name suffix to append to the output base filename. (RSA7100A only)
[SENSe]:ACQuisition:RECOrd:FILE:STRucture (on page 1986)	Sets or queries the file structure to use for the recorded data files.
[SENSe]:ACQuisition:RECOrd:STOP (on page 1988)	Starts the data recording.
[SENSe]:ACQuisition:RECOrd:TYPE (on page 1988)	Sets or queries when the recording starts streaming data to the specified file.
[:SENSe]:ANALysis:BANDwidth:FILTer:MODE (on page 1993)	Sets or queries measurement bandwidth filter mode.
[SENSe]:AUDio:DEMod command subgroup	Record and Playback function for USB RSA products
[SENSe]:AUDio:DEMod:MUTE (on page 2000)	Sets or queries the mute setting for the audio demodulation.
[SENSe]:AUDio:DEMod[:STATe] (on page 2001)	Sets or queries the audio demodulation state.
[SENSe]:AUDio:DEMod:STReam:ACTivate (on page 2001)	Sets or queries the Stream to File function.
[SENSe]:AUDio:DEMod:STReam[:FILE] (on page 2002)	Sets the file name and file location of the audio file when streaming to disc.
[SENSe]:AUDio:DEMod:TYPE (on page 2002)	Sets or queries both the audio signal demodulation type and bandwidth.

Command	Description
[SENSe]:AUDio:DEMod:VOLUME (on page 2003)	Sets or queries the volume of the demodulated audio signal when played out through the PC speakers.
[SENSe] TXGain command subgroup	Transmission Gain measurements
SENSe:TXGain:{BANDwidth BWIDth}[:RESolution] (on page 2435)	Sets or queries the resolution bandwidth.
SENSe:TXGain:FREQuency:CENTer (on page 2435)	Sets or queries the frequency at the center of the selected Span.
SENSe:TXGain:FREQuency:POINts (on page 2436)	Sets or queries the number of frequency steps in the measurement range.
SENSe:TXGain:FREQuency:SPAN (on page 2436)	Sets or queries the difference between the start and stop frequencies (span).
SENSe:TXGain:FREQuency:STARt (on page 2437)	Sets or queries the lowest frequency in the span.
SENSe:TXGain:FREQuency:STEP (on page 2437)	Sets or queries the frequency increment.
SENSe:TXGain:FREQuency:STOP (on page 2438)	Sets or queries the highest frequency in the span.
[SENSe] Bluetooth command subgroup	Bluetooth measurements
[SENSe]:BLUEtooth:ANALysis:LENGth (on page 2017)	Sets or returns the analysis length.
[SENSe]:BLUEtooth:ANALysis:LENGth:ACTual? (on page 2018)	Sets the actual analysis length.
[SENSe]:BLUEtooth:ANALysis:LENGth:AUTO (on page 2018)	Sets or queries the length mode.
[SENSe]:BLUEtooth:ANALysis:MEAS[:BANDwidth BWIDth] (on page 2019)	Sets or returns the measurement bandwidth.
[SENSe]:BLUEtooth:ANALysis:MEAS:SOURce (on page 2019)	Sets or returns the analysis measurement source.
[SENSe]:BLUEtooth:ANALysis:OFFSet (on page 2020)	Sets or returns the symbol analysis offset.
[SENSe]:BLUEtooth:ANALysis:OFFSet:AUTO (on page 2020)	Determines whether to set the carrier frequency error automatically or manually.
[SENSe]:BLUEtooth:ANALysis:TIME:UNITs (on page 2020)	Sets the time units.
[SENSe]:BLUEtooth[:BANDwidth]:BWIDth:MODE (on page 2021)	Sets or returns the measurement bandwidth mode.
[SENSe]:BLUEtooth[:BANDwidth]:BWIDth:TINterval (on page 2021)	Sets or returns the measurement bandwidth frequency span.

Command	Description
[SENSe]:BLUEtooth[:BANDwidth]:BWIDth: TINterval:AUTO (on page 2022)	Sets or returns the bandwidth to Auto or Manual.
[SENSe]:BLUEtooth:CONStellation:PREFs: GRATicule:SHOW (on page 2022)	Show or hides the graticule state.
[SENSe]:BLUEtooth:CONStellation:PREFs: MARKERS:SHOW (on page 2023)	Show or hides the marker readout.
[SENSe]:BLUEtooth:CONStellation:PREFs:RADix (on page 2023)	Sets or returns the radix of the marker readout.
[SENSe]:BLUEtooth:CONStellation:TRACE<x>: CONTent (on page 2024)	Sets or returns the appearance of the specified trace (Trace 1 or Trace 2).
[SENSe]:BLUEtooth:CONStellation:TRACE<x>: FREEze (on page 2024)	Sets or freezes the updates of the specified trace (Trace 1 or Trace 2).
[SENSe]:BLUEtooth:CONStellation:TRACE<x>: POINTsPerSymbol (on page 2024)	Sets or returns the number of points per symbol (how many points to use between symbols) for the specified trace (Trace 1 or Trace 2).
[SENSe]:BLUEtooth:CONStellation:TRACE<x>: SHOW (on page 2025)	Shows or hides the specified trace (Trace 1 or Trace 2).
[SENSe]:BLUEtooth:DELTA:AVERage:FONE (on page 2025)	Sets or returns the average frequency for the low deviation pattern.
[SENSe]:BLUEtooth:DELTA:AVERage:FTWO (on page 2026)	Sets or returns the average frequency for the high deviation pattern.
[SENSe]:BLUEtooth:FDVTime:TRACE:OCTet? (on page 2026)	Returns the selected octet number on the Frequency Deviation vs. Time display.
[SENSe]:BLUEtooth:FDVTime:TRACE:OCTet: TOTAL:COUNT? (on page 2027)	Returns the total octet value to be selected on the Frequency Deviation vs. Time display.
[SENSe]:BLUEtooth:FDVTime:TRACE:VIEW:MODE (on page 2027)	Sets or queries view mode in the Frequency Deviation vs. Time display.
[SENSe]:BLUEtooth:FILTer:ALPHa (on page 2028)	Sets or returns the alpha filter factor (α /BT).
[SENSe]:BLUEtooth:FILTer:MEASurement (on page 2028)	Sets or returns the measurement filter setting.
[SENSe]:BLUEtooth:FILTer:REFerence (on page 2028)	Sets or returns the reference filter setting.
[SENSe]:BLUEtooth:FREQuency:DEViation (on page 2029)	ets or returns the frequency deviation.
[SENSe]:BLUEtooth:FREQuency:DEViation:AUTO (on page 2030)	Determines whether to detect the frequency deviation automatically or manually.

Command	Description
[SENSe]:BLUEtooth:FREQuency:ERRor (on page 2030)	Sets or returns the frequency error in the Bluetooth analysis parameters (when Auto is off).
[SENSe]:BLUEtooth:FREQuency:ERRor:AUTO (on page 2030)	Determines whether the frequency error is set to Auto or Manual.
[SENSe]:BLUEtooth:INBEmissions:POWEr:LIMIt<x> (on page 2031)	Sets or queries the limits of the Bluetooth InBand Emission settings.
[SENSe]:BLUEtooth:POWEr:CLASs (on page 2031)	Sets or queries the power class of the Bluetooth standard.
[SENSe]:BLUEtooth:STANDard (on page 2032)	Sets or queries the Bluetooth standard.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FONE:AVERAge:MAX (on page 2032)	Sets or returns the maximum limit of the Basic Rate $\Delta F1$ average.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FONE:AVERAge:MIN (on page 2033)	Sets or returns the minimum limit of the Basic Rate $\Delta F1$ average.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FTWO:PERcent (on page 2033)	Sets or returns the limit of the Basic Rate $\Delta F2$ percentage.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FTWO:RESult (on page 2034)	Sets or returns the limit of the Basic Rate $\Delta F2$ result.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:DRIFT:FNFZero (on page 2034)	Sets or returns the limit of the Basic Rate maximum drift $f_n - f_0$.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:FREQuency:OFFSet (on page 2034)	Sets or queries the limit of the Basic Rate maximum frequency offset.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:FREQuency:OFFSet:PREAmBDR (on page 2035)	Sets or queries the limit of the Basic Rate maximum frequency offset value from the preamble region.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPOWer:CLASs:ONE:AVERAge:MAX (on page 2035)	Sets or queries the limit of the Basic Rate Power Class 1 maximum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPOWer:CLASs:ONE:AVERAge:MIN (on page 2036)	Sets or queries the limit of the Basic Rate Power Class 1 minimum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPOWer:CLASs:ONE:PEAK:MAX (on page 2036)	Sets or queries the limit of the Basic Rate Power Class 1 maximum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPOWer:CLASs:ONE:PEAK:MIN (on page 2037)	Sets or queries the limit of the Basic Rate Power Class 1 minimum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPOWer:CLASs:THREe:AVERAge:MAX (on page 2037)	Sets or queries the limit of the Basic Rate Power Class 3 maximum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPOWer:CLASs:THREe:AVERAge:MIN (on page 2038)	Sets or queries the limit of the Basic Rate Power Class 3 minimum average output power value.

Command	Description
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:THREe:PEAK:MAX (on page 2038)	Sets or queries the limit of the Basic Rate Power Class 3 maximum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:THREe:PEAK:MIN (on page 2038)	Sets or queries the limit of the Basic Rate Power Class 3 minimum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:AVERAge:MAX (on page 2039)	Sets or queries the limit of the Basic Rate Power Class 2 maximum average output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:AVERAge:MIN (on page 2039)	Sets or queries the limit of the Basic Rate Power Class 2 minimum average output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MAX (on page 2040)	Sets or queries the limit of the Basic Rate Power Class 2 maximum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MIN (on page 2040)	Sets or queries the limit of the Basic Rate Power Class 2 minimum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FONE:AVERAge:MAX (on page 2044)	Sets or returns the maximum limit of the Low Energy $\Delta F1$ average.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FONE:AVERAge:MIN (on page 2041)	Sets or returns the minimum limit of the Low Energy $\Delta F1$ average.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FTWO:PERcent (on page 2041)	Sets or returns the limit of the Low Energy $\Delta F2$ percentage.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FTWO:RESult (on page 2042)	Sets or returns the limit of the Low Energy $\Delta F2$ result.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:DRIFT:FNFZero (on page 2042)	Sets or returns the limit of the Low Energy maximum drift $f_n - f_0$.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet (on page 2042)	Sets or returns the limit of the Low Energy maximum frequency offset.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet:PREAmble (on page 2043)	Sets or returns the limit of the Low Energy maximum frequency offset value from the preamble region.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPower:AVERAge:MAX (on page 2043)	Sets or returns the limit of the Low Energy maximum average output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPower:AVERAge:MIN (on page 2044)	Sets or returns the limit of the Low Energy minimum average output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPower:PEAK:MAX (on page 2044)	Sets or returns the limit of the Low Energy maximum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPower:PEAK:MIN (on page 2045)	Sets or returns the limit of the Low Energy minimum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFT:F1FZero (on page 2045)	Sets or returns the limit of the maximum $f_n - f_0$ drift in the packet.

Command	Description
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFT:FNFN5 (on page 2046)	Sets or returns the limit of the maximum f_n – f_{n5} drift in the packet.
[SENSe]:BLUEtooth:SYMBol:POINts (on page 2048)	Sets or returns the number of points per symbol (how many points to use between symbols).
[SENSe]:BLUEtooth:TEST:PATtern (on page 2048)	Sets or returns the test pattern type in the Bluetooth displays.
[SENSe]:BLUEtooth:TEST:PATtern:AUTO:DETEct (on page 2049)	Sets or returns the auto detect setting for the Bluetooth displays.
[SENSe]:BLUEtooth:TIME:ZERO:REFERENCE (on page 2049)	Sets or returns the Time Zero Reference setting in the Bluetooth displays.
[SENSe]:BLUEtooth:TRACe:TYPE (on page 2050)	Sets or returns the trace type.
SENSe:EDiagram subgroup	Eye diagram
[SENSe]:EDiagram[:MEASview<y>]:SELEcted:SOURce (on page 2103)	Sets or queries the source of Eye Diagram for a selected Measurement view number.
SENSe:EVM subgroup	EVM measurement
[SENSe]:DEMOd:EVM[:MEASview<y>]:SELEcted:SOURce (on page 2104)	Sets or queries the source of EVM versus Time for a selected Measurement view number.
SENSe:FDVTime subgroup	FDVTime measurement
[SENSe]:FDVTime[:MEASview<y>]:SELEcted:SOURce (on page 2151)	Sets or queries the source of Frequency deviation versus Time for a selected Measurement view number
[SENSe]:MERRor subgroup	MERRor measurement
[SENSe]:MERRor[:MEASview<y>]:SELEcted:SOURce (on page 2215)	Sets or queries the source of Magnitude error versus Time for a selected Measurement view number
[SENSe]:NOISe subgroup	Noise Figure and Gain measurements
[SENSe]:NOISe:AVERage:COUNt (on page 2215)	Sets or queries the acquisition counts over which the noise average is computed.
[SENSe]:NOISe:BANDwidth (on page 2216)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:NOISe:CONTRol:SETTling:OFF[:TIME] (on page 2216)	Sets or queries the analyzer off settle time.
[SENSe]:NOISe:CONTRol:SETTling:ON[:TIME] (on page 2217)	Sets or queries the analyzer on settle time.
[SENSe]:NOISe:CORRection:ENR:CONSTant (on page 2217)	Sets and queries the excess noise ratio (ENR) constant.
[SENSe]:NOISe:CORRection:ENR:MODE (on page 2218)	Sets and queries the Noise Source mode for the noise displays.

Command	Description
[SENSe]:NOISe:CORRection:ENR:TABLE:DATA? (on page 2218)	Queries the Noise Source model, serial number, and table values for frequency and ENR for the noise displays.
[SENSe]:NOISe:CORRection:ENR:TABLE:ID (on page 2219)	Sets or queries the Noise Source Model for the noise displays.
[SENSe]:NOISe:CORRection:ENR:TABLE:NEW (on page 2219)	Sets the Noise Source Model for the noise displays.
[SENSe]:NOISe:CORRection:ENR:TABLE:SERial (on page 2220)	Sets or queries the Noise Source serial number for the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:ADUT:UREFERENCE (on page 2220)	Sets or queries the analyzer to use the reference temperature (K) for the loss at the DUT output in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:ADUT[:VALue] (on page 2221)	Sets or queries the temperature value (K) for the loss at the DUT output in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:BDUT:UREFERENCE (on page 2221)	Sets or queries the analyzer to use the reference temperature (K) for the loss at the DUT input in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:BDUT[:VALue] (on page 2222)	Sets or queries the temperature value (K) for the loss at the DUT input in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd[:REFERENCE] (on page 2222)	Sets or queries the reference temperature value (K) in the display.
[SENSe]:NOISe:FIGure:POINTs:COUNT (on page 2223)	Sets the number of sample points for the display.
[SENSe]:NOISe:FREQuency:CENTer (on page 2223)	Sets or queries the center frequency value (Hz).
[SENSe]:NOISe:FREQuency:MODE (on page 2224)	Sets or queries the frequency mode in the display.
[SENSe]:NOISe:FREQuency:SPAN (on page 2225)	Sets or queries the frequency Span value (Hz).
[SENSe]:NOISe:FREQuency:STARt (on page 2225)	Sets or queries the Start Frequency value.
[SENSe]:NOISe:FREQuency:STEPs (on page 2226)	Sets or queries the frequency Steps value.
[SENSe]:NOISe:FREQuency:STOP (on page 2226)	Sets or queries the Stop Frequency value.
[SENSe]:NOISe:FREQuency:TABLE:DATA? (on page 2227)	Queries the data in the Frequency Table.
[SENSe]:NOISe:FREQuency:TABLE:NEW (on page 2227)	Creates a new Frequency Table with the specified values for the noise display.
[SENSe]:OBWidth:BOBW:XDBM:MEASurement:DIREction (on page 2231)	Sets or queries the measurement direction.

Command	Description
[SENSe]:OBWidth:BOBW:XDBM:RANGe (on page 2231)	Sets or queries the measurement range.
[SENSe]:P25 subgroup	APCO P25 measurements
[SENSe]:P25:ANALysis:OFFSet (on page 2248)	Sets or queries the offset value.
[SENSe]:P25:ANALysis:OFFSet:AUTO (on page 2248)	Sets or queries if the offset is set to Auto or if Auto is off.
[SENSe]:P25([:BANDwidth]):BWIDth:MODE (on page 2248)	Sets or queries the Measurement BW (bandwidth) (frequency span) mode as Auto, Manual, or Link to Span.
[SENSe]:P25([:BANDwidth]):BWIDth:TINTerval (on page 2249)	Sets or queries the Measurement BW (bandwidth) (frequency span).
[SENSe]:P25([:BANDwidth]):BWIDth:TINTerval:AUTO (on page 2250)	Sets or queries the Measurement BW (bandwidth) (frequency span) mode as Auto or Manual.
[SENSe]:P25:FILTer:MEASurement (on page 2250)	Sets or queries the Measurement Filter setting.
[SENSe]:P25:FILTer:REFerence (on page 2251)	Sets or queries the Reference Filter setting.
[SENSe]:P25:FREQuency:ERRor (on page 2252)	Sets or queries the Frequency Offset (when Auto is off).
[SENSe]:P25:FREQuency:ERRor:AUTO (on page 2253)	Sets or queries if the Frequency Error is set to Auto or if Auto is off.
[SENSe]:P25:MODUlation:CHANnel:([:BANDwidth]):BWIDth]? (on page 2253)	Queries the actual P25 Preset channel bandwidth.
[SENSe]:P25:MODUlation:STANdard (on page 2253)	Sets or queries the modulation standard.
SENSe:P25:MODUlation:TYPE (on page 2254)	Sets or queries the modulation type.
[SENSe]:P25:SRATe (on page 2255)	Sets or queries the symbol rate value for measurements.
[SENSe]:P25:SUMMARY:CLEar:RESults (on page 2255)	Clears the results from the P25 Summary display.
[SENSe]:P25:SUMMARY:LIMit:FA (on page 2256)	Sets or queries the On/Off state of limit comparison and the upper limit value for Operating Frequency Accuracy.
[SENSe]:P25:SUMMARY:LIMit:FREQuency:DEViation:AVERage:TERRor:ONE (on page 2256)	Sets or queries the On/Off state of limit comparison and the upper limit value for Average t_error_1.
[SENSe]:P25:SUMMARY:LIMit:FREQuency:DEViation:AVERage:TERRor:ZERO (on page 2257)	Sets or queries the On/Off state of limit comparison and the upper limit value for Average t_error_0.
[SENSe]:P25:SUMMARY:LIMit:FREQuency:DEViation:LOGic:CHANnel:OFF:SLOT (on page 2257)	Sets or queries the On/Off state of limit comparison and the upper limit value for HCPM Transmitter Logic channel offslot.

Command	Description
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:LOGic:CHANnel:PEAK:ACPR (on page 2258)	Sets or queries the On/Off state of limit comparison and the upper limit value for HCPM Transmitter Logic channel Peak ACPR.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:NEGAtive:LO (on page 2258)	Sets or queries the On/Off state of limit comparison and the lower limit value for Frequency Deviation, negative peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:NEGAtive:UP (on page 2259)	Sets or queries the On/Off state of limit comparison and the upper limit value for Frequency Deviation, negative peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:POSItive:LO (on page 2259)	Sets or queries the On/Off state of limit comparison and the lower limit value for Frequency Deviation, positive peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:POSItive:UP (on page 2260)	Sets or queries for the On/Off state of limit comparison and the upper limit value for Frequency Deviation, positive peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PHASe[1/2]:F[1/2/3/4]:LO (on page 2261)	Sets or queries the On/Off state of limit comparison and the lower limit value for Frequency Deviation, f1/f2/f3/f4 for Phase1 or Phase2.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PHASe[1/2]:F[1/2/3/4]:UP (on page 2262)	Sets or queries the On/Off state of limit comparison and the upper limit value for Frequency Deviation, f1/f2/f3/f4 for Phase1 or Phase2.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMAX:OFF (on page 2263)	Sets or queries the On/Off state of limit comparison and the upper limit value for Pmax-off.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMAX:ON (on page 2264)	Sets or queries the On/Off state of limit comparison and the upper limit value for Pmax-on.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMAX:SS (on page 2265)	Sets or queries the On/Off state of limit comparison and the upper limit value for Pss-max.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMIN:SS (on page 2265)	Sets or queries the On/Off state of limit comparison and the upper limit value for Pss-min.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter:AVERAge:ATTK:ENCODer (on page 2266)	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack encoder.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter:AVERAge:ATTK:ENCODer:BI (on page 2266)	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack encoder, busy/idle.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:ATTK:POWER (on page 2267)	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack power.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:ATTK:POWER:BI (on page 2267)	Sets or queries for the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack power, busy/idle.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:THRUput:DLAY (on page 2268)	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average throughput delay.

Command	Description
[SENSe]:P25:SUMMary:LIMIt:MF (on page 2268)	Sets or queries the On/Off state of limit comparison and the upper limit value for Modulation Fidelity.
[SENSe]:P25:SUMMary:LIMIt:RF:OUTPower (on page 2269)	Sets or queries the On/Off state of limit comparison and the upper limit value for RF Output Power.
[SENSe]:P25:SUMMary:LIMIt:SRA (on page 2269)	Sets or queries the On/Off state of limit comparison and the upper limit value for Symbol Rate Accuracy.
[SENSe]:P25:SYMBols:POINts (on page 2270)	Sets or queries the Points/Symbols to display.
[SENSe]:P25:TEST:PATtern (on page 2271)	Sets or returns the test pattern type in the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement (on page 2272)	Sets or queries the Trigger Measurement from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TOBSync (on page 2272)	Sets or returns the tOB_sync (measured) value in the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TOBSync:AUtO (on page 2272)	Sets or queries the Auto checkbox selection from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAviour (on page 2273)	Sets or queries the Trigger Measurements option Phase1-Transient Frequency Behavior from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAviour:TIME:OFF (on page 2274)	Sets or queries the 't off' value when the Transient Frequency option is Transient Frequency Behavior On to Off for Phase1-Transient Frequency Behavior from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAviour:TIME:OFF:AUtO (on page 2274)	Sets or queries the Auto checkbox selection when Transient Frequency is chosen as Transient Frequency Behavior On to Off from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAviour:TIME:ON (on page 2275)	Sets or queries the 't on' value when the Transient Frequency option is Transient Frequency Behavior Off to On for Phase1-Transient Frequency Behavior from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAviour:TIME:ON:AUtO (on page 2275)	Sets or queries the Auto checkbox selection when Transient Frequency is chosen as Transient Frequency behavior Off to On from the P25 displays.
[SENSe]:P25:TIME:UNITs (on page 2271)	Sets or queries the fundamental unit of time for the P25 measurements.
SENSe:PERRor subgroup	Perror measurement
[SENSe]:PERRor[:MEASview<y>]:SELEcted:SOURce (on page 2276)	Sets or queries the source of Phase error versus Time for a selected Measurement view number.
SENSe:PULSe subgroup	Pulse measurements
[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE (on page 2297)	Sets or Queries the Measurement(s) parameter from the Control panel settings of Define tab which is common across the Pulse displays.

Command	Description
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:BIN:COUNT (on page 2305)	Sets the Bins value in Histogram settings table in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:CLEar:RESults (on page 2305)	Clears all scalar results in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:MODE (on page 2306)	Sets the Histogram settings mode to Auto or Manual in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:ORDinate (on page 2306)	Sets the Histogram readout in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:ORDinate (on page 2307)	Sets the outlier readout in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:SETtings:APPLY (on page 2307)	Applies the new settings to the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:XLIMit (on page 2308)	Sets the Xlimit in Histogram settings table in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:CLEar:RESults (on page 2309)	Clears all scalar results in the Cumulative Statistics display.
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis (on page 2317)	Sets or queries the type of Filter shape from Analysis tab of Frequency vs Time from the Pulse-Ogram display.
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:SPECTrum:ANALysis:REGion	Sets or queries the Spectrum Analysis region from Analysis tab of Frequency vs Time in the Pulse-Ogram display.
[SENSe]:PULSe:STATistics[:MEASview<y>]:IN:LINear:SCALE	Sets or queries the Calculate statistics in linear scale selection from the Pulse Statistics display.
[SENSe]:ROSCillator:SOURce (on page 2341)	Sets or queries the frequency reference oscillator source.
[SENSe]:ACQuisition subgroup	Acquisition measurements
[SENSe]:SVPC:ACQuisition:FFRame:ACTual? (on page 2427)	Queries the actual number of Fast Frames.
[SENSe]:SVPC:ACQuisition:FFRame:LIMit (on page 2427)	Sets or queries the limit number of Fast Frames.
[SENSe]:SVPC:ACQuisition:FFRame:STATE (on page 2428)	Determines whether to enable or disable the Fast Frame.
[SENSe]:ACQuisition:FSAVe:ENable (on page 1976)	Set or queries the FastSave acquisition mode.

Command	Description
[SENSe]:ACQuisition:FSAVe:FILEs:MAXimum (on page 1976)	Set or queries the FastSave maximum number of files saved per run.
[SENSe]:ACQuisition:FSAVe:FORMat (on page 1977)	Set or queries the FastSave file format.
[SENSe]:ACQuisition:FSAVe:LOCation (on page 1977)	Set or queries the FastSave file save location (a directory).
[SENSe]:ACQuisition:FSAVe:NAME:BASE (on page 1978)	Set or queries the FastSave Base file name.
[SENSe]:ACQuisition:MEMory:AVaiLable:SAMPles? (on page 1978)	Returns the amount of acquisition memory available in the instrument.
[SENSe]:ACQuisition:MEMory:CAPacity[:TIME]? (on page 1978)	Returns the acquisition memory capacity.
[SENSe]:ACQuisition:MEMory:USED[:PERCent]? (on page 1979)	Returns the percentage of the capacity used.
[SENSe]:ACQuisition:MODE (on page 1979)	Sets or queries the acquisition mode.
[SENSe]:ACQuisition:OPTimization (on page 1980)	Sets or queries the method of the global gain and input bandwidth optimization.
[SENSe]:ACQuisition:SAMPles (on page 1989)	Sets or queries the acquisition samples.
[SENSe]:ACQuisition:SEConds (on page 1989)	Sets or queries the acquisition length.
[SENSe]:ANALysis:ADVanced:DITHer (on page 1992)	Determines whether to enable or disable dithering.
[SENSe]:ANALysis:ADVanced:DITHer:HWARe:STATus? (on page 1992)	Returns the dithering hardware status.
[SENSe]:ANALysis:LENGth[:SOURce<z>]:ACTual (on page 1994)	Sets or queries the analysis length. Programming a specified length sets [SENSe]:ANALysis:AUTO OFF.
[SENSe]:ANALysis:LENGth:ACTual?	Queries the actual analysis length.
[SENSe]:ANALysis:LENGth[:SOURce<z>]:AUTO (on page 1994)	Determines whether to set the analysis length automatically or manually.
[SENSe]:ANALysis:REFerence[:SOURce<z>] (on page 1995)	Sets or queries the analysis time reference.
[SENSe]:ANALysis:STARt[:SOURce<z>] (on page 1995)	Sets or queries the analysis offset time. Programming a specified offset time sets [SENSe]:ANALysis:STARt:AUTO OFF.
[SENSe]:ANALysis:STARt[:SOURce<z>]:AUTO (on page 1996)	Determines whether to set the analysis offset automatically or manually.

Command	Description
[SENSe]:ANSpectrum:START:AUTO:METHod (on page 1996)	Sets or queries the method used for computing auto analysis and spectrum offsets.
[SENSe]:MEASurement:FREQuency[:SOURce<z>] (on page 2213)	Sets or queries the measurement frequency.
[SENSe]:MEASurement:FREQuency[:SOURce<z>]:CENTer:LOCK (on page 2214)	Sets or queries locking the measurement center frequency.
[SENSe]:POWER:UNITs (on page 2287)	Sets or queries the fundamental unit of power.
[SENSe]:ROSCillator:SOURce (on page 2341)	Sets or queries the reference oscillator source.
[SENSe]:SIGNalpath:PRiority (on page 2381)	Sets or queries the signal path priority for the measurements (for RSA5000 series only).
[SENSe]:USETtings (on page 2438)	Updates the analyzer settings.
[SENSe]:ACPower subgroup	Channel power and ACPR measurement
[SENSe]:ACPower:AVERage (on page 1965)	Sets or queries how to average waveform.
[SENSe]:ACPower:AVERage:COUNt (on page 1966)	Sets or queries the number of traces for averaging.
[SENSe]:ACPower:{BANDwidth BWIDth[:RESolution]} (on page 1966)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:ACPower:{BANDwidth BWIDth[:RESolution]:ACTual?} (on page 1966)	Queries the actual resolution bandwidth (RBW).
[SENSe]:ACPower:{BANDwidth BWIDth[:RESolution]:AUTO} (on page 1967)	Sets or queries whether to set the RBW automatically.
[SENSe]:ACPower:{BANDwidth BWIDth}:VIDeo (on page 1967)	Sets or queries the video bandwidth (VBW).
[SENSe]:ACPower:{BANDwidth BWIDth}:VIDeo:STATe (on page 1968)	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:ACPower:CHANnel:{BANDwidth BWIDth} (on page 1968)	Sets or queries the channel bandwidth.
[SENSe]:ACPower:CHANnel:FILTer (on page 1969)	Sets or queries the adjacent channel filter.
[SENSe]:ACPower:CHANnel:PAIRs (on page 1969)	Sets or queries the number of adjacent channel pairs.
[SENSe]:ACPower:CHANnel:SPACing (on page 1970)	Sets or queries the channel-to-channel spacing.
[SENSe]:ACPower:CHIPrate (on page 1970)	Sets or queries the chip rate.

Command	Description
[SENSe]:ACPower:CLEar:RESults (on page 1970)	Restarts the average trace.
[SENSe]:ACPower:FREQuency (on page 1971)	Sets or queries the center frequency.
[SENSe]:ACPower:FREQuency:STEP (on page 1971)	Sets or queries the frequency step size.
[SENSe]:ACPower:FREQuency:STEP:AUTO (on page 1972)	Sets or queries whether to set the frequency step size automatically.
[SENSe]:ACPower:NFLoor:STATe (on page 1972)	Sets or queries whether to enable the correction for noise floor.
[SENSe]:ACPower:POINts:COUNt (on page 1973)	Sets or queries the number of trace points.
[SENSe]:ACPower:RRCRolloff (on page 1973)	Sets or queries the filter parameter for the Root Raised Cosine filter.
[SENSe]:ACPower:SYMBrate (on page 1974)	Sets or queries the symbol rate.
[SENSe]:{AM FM PM} subgroup (Option 21 only)	AM/FM/PM measurement
[SENSe]:{AM FM PM}:{BANDwidth BWIDth}:MEASurement (on page 1990)	Sets measurement bandwidth for the AM, FM, or PM demodulation to analyze.
[SENSe]:{AM FM PM}:CLEar:RESults (on page 1990)	Clears measurement results.
[SENSe]:{AM FM PM}:{MTPoints MAXTracepoints} (on page 1991)	Sets or queries the maximum trace points.
[SENSe]:AM:DETECT:AMPLitude (on page 1991)	Sets or queries the carrier amplitude detection method.
[SENSe]:{FM PM}:BURSt:THReshold (on page 2151)	Sets or queries the threshold level to detect bursts.
[SENSe]:{FM PM}:FREQuency:OFFSet (on page 2152)	Sets or queries the carrier frequency offset in the FM/PM measurement.
[SENSe]:{FM PM}:FREQuency:OFFSet:MARKer (on page 2152)	Sets the frequency offset from selected marker or delta marker location.
[SENSe]:{FM PM}:FREQuency:SEARch:AUTO (on page 2153)	Sets or queries whether to detect the carrier frequency automatically.
[SENSe]:PM:PHASe:OFFSet (on page 2281)	Sets the phase offset from the selected marker location.
[SENSe]:PM:PHASe:OFFSet:MARKer (on page 2282)	Sets the carrier frequency offset from the selected marker.
[SENSe]:PM:PHASe:SEARch:AUTO (on page 2282)	Sets or queries whether to detect the phase automatically or manually.
{SENSe}:AUDio subgroup	Audio measurement

Command	Description
[SENSe]:AUDio:AVERage:COUNt (on page 1997)	Sets or queries the number of harmonics to average in the audio measurement.
[SENSe]:AUDio:AVERage:ENABLE (on page 1997)	Enables or disables averaging of harmonics in the audio measurement.
[SENSe]:AUDio:BANDwidth BWIDth (on page 1998)	Sets or queries the audio measurement bandwidth.
[SENSe]:AUDio:BANDwidth BWIDth:RESolution (on page 1998)	Sets or queries the resolution bandwidth for the audio measurement.
[SENSe]:AUDio:BANDwidth BWIDth:RESolution:AUTO (on page 1998)	Sets or queries the resolution bandwidth for the audio measurement.
[SENSe]:AUDio:BANDwidth BWIDth:RESolution:SHAPE (on page 1999)	Sets or queries the shape of the resolution bandwidth for the audio measurement.
[SENSe]:AUDio:CARRier:OFFSet (on page 1999)	Sets or queries the carrier frequency offset.
[SENSe]:AUDio:CARRier:OFFSet:AUTO (on page 2000)	Determines whether to set the carrier frequency error automatically or manually.
[SENSe]:AUDio:FILTer:DEEMphasis (on page 2003)	Sets or queries the de-emphasis filter type.
[SENSe]:AUDio:FILTer:DEEMphasis:ENABLE (on page 2004)	Enables or disables the de-emphasis filter for the audio measurement.
[SENSe]:AUDio:FILTer:DEEMphasis:USER (on page 2004)	Sets or queries a user-defined de-emphasis audio filter.
[SENSe]:AUDio:FILTer:HPF (on page 2004)	Sets or queries the high-pass filter type.
[SENSe]:AUDio:FILTer:HPF:ENABLE (on page 2005)	Enables or disables the high-pass audio filter for the audio measurement.
[SENSe]:AUDio:FILTer:HPF:USER (on page 2005)	Sets or queries a user-defined high-pass audio filter.
[SENSe]:AUDio:FILTer:DEEMphasis:USER (on page 2004)	Sets or queries a user-defined high-pass audio filter.
[SENSe]:AUDio:FILTer:LPF (on page 2006)	Sets or queries the low-pass filter type.
[SENSe]:AUDio:FILTer:LPF:ENABLE (on page 2006)	Enables or disables the low-pass filter for the audio measurement.
[SENSe]:AUDio:FILTer:LPF:USER (on page 2007)	Sets or queries a user-defined low-pass audio filter.
[SENSe]:AUDio:FILTer:MODE:PREDefined (on page 2007)	Selects a predefined audio filter or a filter stored on the instrument file.
[SENSe]:AUDio:FILTer:SOURce? (on page 2008)	Queries the measurement filter from the user-defined source file.
[SENSe]:AUDio:FILTer:STANdard (on page 2008)	Sets or queries the Standard audio filter.

Command	Description
[SENSe]:AUDio:FILTer:STANdard:ENABle (on page 2009)	Enables or disables a Standard filter for the audio measurement.
[SENSe]:AUDio:FREQuency (on page 2009)	Sets or queries the reference audio frequency.
[SENSe]:AUDio:FREQuency:AUTO (on page 2009)	Determines whether to set the reference audio frequency automatically or manually.
[SENSe]:AUDio:HNOise:ENABle (on page 2010)	Enables or disables the Hum and Noise information in the Audio Summary display.
[SENSe]:AUDio:HNOise:REFerence (on page 2010)	Captures the current Hum and Noise information in the Audio Summary display.
[SENSe]:AUDio:SIGnal:TYPE (on page 2011)	Sets or queries the audio signal type.
[SENSe]:AUDio:SPECtrum:CLEar:RESults (on page 2011)	Clears the results of the audio spectrum measurement.
[SENSe]:AUDio:SPECtrum:POINts:COUNt (on page 2012)	Sets or queries the number of trace points acquired for the audio spectrum display.
[SENSe]:AUDio:UNITs (on page 2012)	Sets or queries the units of the audio spectrum measurement.
[SENSe]:AVTime subgroup	Amplitude versus Time measurement
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth BWIDth} (on page 2014)	Sets or queries the time-domain bandwidth filter.
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth BWIDth}:ACTual? (on page 2015)	Queries the actual resolution bandwidth (RBW).
[SENSe]:AVTime[:MEASview<y>]:CLEar:RESults (on page 2015)	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:AVTime[:MEASview<y>]:MAXTracepoints (on page 2016)	Sets or queries the maximum trace points.
[SENSe]:AVTime[:MEASview<y>]:METHod (on page 2016)	Sets or queries the method to set the measurement bandwidth.
[SENSe]:AVTime[:MEASview<y>]:SPAN (on page 2017)	Sets or queries the frequency span.
[SENSe]:CCDF subgroup	CCDF measurement
[SENSe]:CCDF:{BANDwidth BWIDth} (on page 2051)	Sets or queries the CCDF measurement bandwidth.
[SENSe]:CCDF:CLEar (on page 2051)	Clears the CCDF accumulator and restarts the measurement.
[SENSe]:CCDF:TIME:TOTal:LENGth (on page 2051)	Sets or queries the CCDF measurement time.

Command	Description
[SENSe]:CCDF:TIME:TYPE (on page 2052)	Sets or queries how to repeat the CCDF measurement.
[SENSe]:CONStellation:MEASView<y>:SELEcted:SOURce (on page 2050)	Sets or queries the Source of Constellation for a selected Measurement view number.
[SENSe]:DDEMod subgroup (Option 21 only)	General purpose digital modulation measurements
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth (on page 2052)	Sets or queries the analysis length.
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:ACTual? (on page 2053)	Queries the actual analysis length.
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:AUTO (on page 2054)	Sets or queries whether to set the analysis length automatically.
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth BWIDth}:MODE (on page 2054)	Sets or queries the measurement bandwidth mode.
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth BWIDth}:TINTerval (on page 2055)	Sets or queries the measurement bandwidth (frequency span).
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth BWIDth}:TINTerval:AUTO (on page 2056)	Sets the measurement bandwidth (frequency span) automatically.
[SENSe]:DDEMod[:SOURce<x>]:BURSt:DETEct (on page 2056)	Sets or queries how to detect bursts.
[SENSe]:DDEMod[:SOURce<x>]:BURSt:THReshold (on page 2057)	Sets or queries the threshold level to determine a burst.
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet (on page 2057)	Sets or queries the carrier frequency offset.
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet:AUTO (on page 2058)	Sets or queries whether to detect the carrier frequency automatically.
[SENSe]:DDEMod[:SOURce<x>]:EQUAlizer:AVAILable? (on page 2059)	Determines if the equalizer is available.
[SENSe]:DDEMod[:SOURce<x>]:EQUAlizer:CONVergence (on page 2059)	Sets or queries the Convergence value (also known as tap update rate).
[SENSe]:DDEMod[:SOURce<x>]:EQUAlizer:ENABle (on page 2059)	Sets or queries the Equalizer state.
[SENSe]:DDEMod[:SOURce<x>]:EQUAlizer:LENGth (on page 2060)	Sets or queries the equalizer filter length.
[SENSe]:DDEMod[:SOURce<x>]:EQUAlizer:MODE (on page 2060)	Sets or queries the equalizer mode. The equalizer can in learning mode (train) or enabled (hold).

Command	Description
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:RESet (on page 2061)	Resets the equalizer settings to default values.
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TAPS (on page 2061)	Sets or queries the number of filter coefficients for the equalizer.
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TSRAtio (on page 2062)	Sets or queries the Equalizer Taps/Symbol parameter.
[SENSe]:DDEMod[:SOURce<x>]:FILTer:ALPHa (on page 2062)	Sets or queries the filter factor (a/BT).
[SENSe]:DDEMod[:SOURce<x>]:FILTer:MEASurement (on page 2063)	Sets or queries the measurement filter.
[SENSe]:DDEMod[:SOURce<x>]:FILTer:REFerence (on page 2064)	Sets or queries the reference filter.
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation (on page 2065)	Sets or queries the frequency deviation to determine two states for FSK.
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation:AUTO (on page 2066)	Sets or queries whether to detect the frequency deviation automatically.
[SENSe]:DDEMod[:SOURce<x>]:MAGNitude:NORMalize (on page 2066)	Sets or queries the method for the magnitude normalization.
[SENSe]:DDEMod[:SOURce<x>]:MINDEX (on page 2067)	Sets or queries the modulation index for a CPM signal.
[SENSe]:DDEMod[:SOURce<x>]:MINDEX:AUTO (on page 2067)	Sets or queries whether to detect the modulation index automatically.
[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE (on page 2068)	Sets or queries the modulation type.
[SENSe]:DDEMod[:SOURce<x>]:PRESet (on page 2069)	Presets the modulation analysis to a communication standard.
[SENSe]:DDEMod[:SOURce<x>]:RING:RADIus (on page 2073)	Sets or queries the APSK radius parameter.
[SENSe]:DDEMod[:SOURce<x>]:RING:ROTation (on page 2073)	Sets or queries the APSK rotation parameter.
[SENSe]:DDEMod[:SOURce<x>]:SRATe (on page 2074)	Sets or queries the symbol rate.
[SENSe]:DDEMod[:SOURce<x>]:SWAP:IQ (on page 2074)	Sets or queries whether or not to swap I and Q data.
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:HSSHift (on page 2074)	Sets or queries the Q data half-symbol shift for OQPSK and SOQPSK signals.

Command	Description
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:MAP:SOURce? (on page 2075)	Specifies or queries the user symbol map file.
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:MAP:STATe (on page 2075)	Sets or queries whether to use the user symbol map.
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:PLOT:POSition (on page 2076)	Sets or queries the symbol point location on an SOQPSK waveform.
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:POINts (on page 2077)	Sets or queries the number of points per symbol.
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:RATE:SEARCh (on page 2077)	Determines whether to enable a symbol rate search.
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD (on page 2078)	Sets or queries whether to enable the synchronization word.
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD:SYMBol (on page 2078)	Sets or queries the synchronization word.
[SENSe]:DDEMod[:SOURce<x>]:TIme:UNITs (on page 2079)	Sets or queries the fundamental unit of time.
[SENSe]:DIQVtime subgroup	Demodulated I&Q versus time measurement view number
[SENSe]:DIQVtime[:MEASview<y>]:SELEcted:SOURce (on page 2080)	Sets or queries the source for a selected Measurement view number.
[SENSe]:DPX subgroup	DPX spectrum measurement
[SENSe]:DPX:AUDio:DEMod:GAIN (on page 2080)	Sets or queries the gain for the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:RXBWidth (on page 2081)	Sets or queries the receiver bandwidth for the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:RXFRrequency? (on page 2081)	Queries the receiver frequency for the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:STATe (on page 2081)	Sets or queries whether to enable or disable the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:TUNE (on page 2082)	Sets or queries how to determine the tuning frequency.
[SENSe]:DPX:AUDio:DEMod:TYPE (on page 2083)	Sets or queries the modulation type for the audio demodulation.
[SENSe]:DPX:{BANDwidth BWIDth}:ACTual? (on page 2083)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:DPX:{BANDwidth BWIDth}:RESolution (on page 2083)	Sets or queries the resolution bandwidth.
[SENSe]:DPX:{BANDwidth BWIDth}[:RESolution]:AUTO (on page 2084)	Determines whether to set the resolution bandwidth (RBW) automatically or manually in the DPX spectrum measurement.

Command	Description
[SENSe]:DPX:FREQuency:SPAN: {BANDwidth BWIDth[:RESolution]:RATio (on page 2093)	Sets or queries whether to set the RBW automatically.
[SENSe]:DPX:CLEar:RESults (on page 2084)	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:DPX:COLor (on page 2085)	Sets or queries the color palette of three-dimensional graphs.
[SENSe]:DPX:COLor:MAXimum (on page 2085)	Sets or queries the maximum value of the color axis.
[SENSe]:DPX:COLor:MINimum (on page 2086)	Sets or queries the minimum value of the color axis.
[SENSe]:DPX:DDENsity:MEASurement:SHOW (on page 2086)	Sets or queries the Show measurement value (measurement always visible for DPX Trigger).
[SENSe]:DPX:DGRam:COLor:MAXimum (on page 2087)	Sets or queries the maximum value of the color axis in the DPXogram measurement.
[SENSe]:DPX:DGRam:COLor:MINimum (on page 2087)	Sets or queries the minimum value of the color axis in the DPXogram measurement.
[SENSe]:DPX:DGRam:POINts:COUNt (on page 2088)	Sets the number of trace points acquired for the DPXogram display.
[SENSe]:DPX:DGRam:TIME:CAPacity? (on page 2088)	Returns the time capacity of the DPXogram measurement.
[SENSe]:DPX:DGRam:TIME:RESolution (on page 2089)	Sets the time resolution of the DPXogram measurement.
[SENSe]:DPX:DGRam:TIME:RESolution:AUTO (on page 2089)	Sets the time resolution automatically or manually in the DPXogram measurement.
[SENSe]:DPX:DGRam:WATERfall:DIRection (on page 2089)	Sets or queries the direction of the Waterfall (DPXogram) display.
[SENSe]:DPX:DGRam:WATERfall:ENABLE (on page 2090)	Sets or queries the Waterfall (DPXogram) display.
[SENSe]:DPX:DGRam:Y[:SCALE]:AUTO (on page 2090)	Rescales the height axis automatically to fit the waveform to the screen in the DPXogram display.
[SENSe]:DPX:DGRam:Y[:SCALE]:RESet (on page 2091)	Resets the height scale of the DPXogram display.
[SENSe]:DPX:DWELI (on page 2091)	Sets or queries the value of the Dwell time for the DPX spectrum measurement.
[SENSe]:DPX:DWELI:AUTO (on page 2092)	Sets the value of the Dwell time automatically.
[SENSe]:DPX:PLOT (on page 2096)	Sets or queries the plot in the DPX spectrum measurement.
[SENSe]:DPX:POINts:COUNt (on page 2096)	Sets or queries the number of DPX trace points.

Command	Description
[SENSe]:DPX:FREQuency:CENTer (on page 2092)	Sets or queries the center frequency.
[SENSe]:DPX:FREQuency:SPAN (on page 2093)	Sets or queries the frequency span.
[SENSe]:DPX:FREQuency:STARt (on page 2094)	Sets or queries the measurement start frequency.
[SENSe]:DPX:FREQuency:STEP (on page 2094)	Sets or queries the frequency step size.
[SENSe]:DPX:FREQuency:STEP:AUTO (on page 2095)	Sets or queries whether to set the frequency step size automatically.
[SENSe]:DPX:FREQuency:STOP (on page 2095)	Sets or queries the measurement stop frequency.
[SENSe]:DPX:TDM:{BANDwidth BWIDth} (on page 2097)	Sets or queries the value of the measurement bandwidth in the DPX measurement.
[SENSe]:DPX:TDM:{BANDwidth BWIDth}:ACTual? (on page 2097)	Queries the actual bandwidth in the DPX measurement.
[SENSe]:DPX:TDM:FREQuency:CENTer (on page 2098)	Sets or queries the center frequency in the DPX spectrum measurement.
[SENSe]:DPX:TDM:FREQuency:TXBer:CLEar:RESults (on page 2098)	Clears the measurement results of the active Tx BER measurement.
[SENSe]:DPX:TDM:FREQuency:TXBer:ENABle (on page 2099)	Sets or queries the Tx BER measurement.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern (on page 2099)	Sets or queries the Tx BER data pattern.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:INVert (on page 2100)	Sets or queries the data pattern Invert setting.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:REPeat (on page 2100)	Sets or queries the test duration for a User Pattern.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:REVerse (on page 2101)	Sets or queries whether the data pattern is in normal order or reversed.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:SOURce? (on page 2101)	Returns the path and file name of the user-defined pattern file.
[SENSe]:DPX:TDM:RBW (on page 2102)	Sets or queries the value of the RBW filter.
[SENSe]:DPX:TDM:RBW:STATe (on page 2102)	Determines whether to set the resolution bandwidth (RBW) automatically or manually.
[SENSe]:DPX:TDM:SWEep:TIME (on page 2102)	Sets or queries the sweep time.
[SENSe]:DPX:TDM:TMOtion (on page 2103)	Sets or queries the scroll direction.

Command	Description
[SENSe]:{FSETtling PSETtling} subgroup	Settling time measurements
[SENSe]:{FSETtling PSETtling}:{BANDwidth BWIDTh} (on page 2153)	Sets or queries the measurement bandwidth for the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:{BANDwidth BWIDTh}:ACTual? (on page 2154)	Queries the actual measurement bandwidth in the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:FREQUency:CENTer (on page 2154)	Queries the actual measurement bandwidth in the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:FREQUency:OFFSet (on page 2155)	Sets or queries the offset frequency.
[SENSe]:{FSETtling PSETtling}:LENGTh (on page 2155)	Sets or queries the measurement length.
[SENSe]:{FSETtling PSETtling}:LENGTh:ACTual? (on page 2155)	Queries the actual measurement length for the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:MASK:LIMit (on page 2156)	Sets or queries the frequency or phase limit for the specified region.
[SENSe]:{FSETtling PSETtling}:MASK:STATe (on page 2157)	Sets or queries mask test state.
[SENSe]:{FSETtling PSETtling}:MASK:TIME:REFerence (on page 2157)	Sets or queries the mask time reference.
[SENSe]:{FSETtling PSETtling}:MASK:TIME:START (on page 2157)	Sets or queries the mask region start time in seconds.
[SENSe]:{FSETtling PSETtling}:MASK:TIME:STOP (on page 2158)	Sets or queries the mask region stop time in seconds.
[SENSe]:{FSETtling PSETtling}:MAXTracepoints (on page 2158)	Sets or queries the maximum trace points in the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:SDURation:MINimum (on page 2159)	Sets or queries the minimum settled duration in seconds.
[SENSe]:{FSETtling PSETtling}:TARGet:REFerence (on page 2159)	Sets or queries the target reference frequency.
[SENSe]:{FSETtling PSETtling}:TOLerance (on page 2160)	Sets or queries the frequency or phase range into which the signal must settle.
[SENSe]:FVTime subgroup	Frequency versus Time measurement
[SENSe]:FVTime[:MEASview<y>]:CLEar:RESults (on page 2160)	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:FVTime[:MEASview<y>]:FREQUency:CENTer (on page 2161)	Sets or queries the center frequency.

Command	Description
[SENSe]:FVTime[:MEASview<y>]:FREQuency:SPAN (on page 2161)	Sets or queries the frequency span.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STARt (on page 2162)	Sets or queries the measurement start frequency.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP (on page 2163)	Sets or queries the frequency step size.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP:AUTO (on page 2163)	Sets or queries whether to set the frequency step size automatically.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STOP (on page 2164)	Sets or queries the measurement stop frequency.
[SENSe]:FVTime[:MEASview<y>]:MAXTracepoints (on page 2164)	Sets or queries the maximum trace points.
[:SENSe]:FVTime[:MEASview<y>]:SELEcted:SOURce (on page 2165)	Sets or queries the Source with respect to the Frequency versus Time Measurement View number
[SENSe]:IQVTime subgroup	RF I&Q versus Time measurement
[SENSe]:IQVTime[:MEASview<y>]:CLEar:RESults (on page 2165)	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer (on page 2166)	Sets or queries the center frequency.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN (on page 2166)	Sets or queries the frequency span.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STARt (on page 2167)	Sets or queries the measurement start frequency.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP (on page 2168)	Sets or queries the frequency step size.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP:AUTO (on page 2169)	Sets or queries whether to set the frequency step size automatically.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STOP (on page 2169)	Sets or queries the measurement stop frequency.
[SENSe]:IQVTime[:MEASview<y>]:MAXTracepoints (on page 2170)	Sets or queries the maximum trace points.
[SENSe]:IQVTime[:MEASview<y>]:SELEcted:SOURce (on page 2170)	Sets or queries the Source with respect to the RF I&Q versus Time Measurement View number
[SENSe]:MCPower subgroup	MCPR measurement
[SENSe]:MCPower:AVERage (on page 2201)	Sets or queries how to average waveform.

Command	Description
[SENSe]:MCPower:AVERage:COUNT (on page 2201)	Sets or queries the number of waveforms for average.
[SENSe]:MCPower:{BANDwidth BWIDth}[:RESolution] (on page 2202)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:MCPower:{BANDwidth BWIDth}[:RESolution]:ACTual? (on page 2202)	Queries the actual resolution bandwidth (RBW).
[SENSe]:MCPower:{BANDwidth BWIDth}[:RESolution]:AUTO (on page 2203)	Sets or queries whether to set the RBW automatically.
[SENSe]:MCPower:{BANDwidth BWIDth}:VIDeo (on page 2203)	Sets or queries the video bandwidth (VBW).
[SENSe]:MCPower:{BANDwidth BWIDth}:VIDeo:STATe (on page 2204)	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:MCPower:CHANnel:ADJacent:ADD (on page 2204)	Adds a pair of upper and lower adjacent channels.
[SENSe]:MCPower:CHANnel:ADJacent:DELeTe (on page 2205)	Deletes a selected adjacent channel.
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>:ENABLE? (on page 2206)	Queries whether the adjacent channel is selected or not in the P25 MCPR display.
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x> (on page 2205)	Sets or queries the selected adjacent upper and lower limit values in the P25 MCPR display.
[SENSe]:MCPower:CHANnel:FILTer (on page 2206)	Sets or queries the measurement filter.
[SENSe]:MCPower:CHANnel:MAIN:{BANDwidth BWIDth} (on page 2207)	Sets or queries the frequency bandwidth of the main channels.
[SENSe]:MCPower:CHANnel:MAIN:COUNT (on page 2207)	Sets or queries the number of main channels.
[SENSe]:MCPower:CHANnel:MAIN:INACTive (on page 2207)	Makes a main channel inactive or queries the inactive main channels.
[SENSe]:MCPower:CHANnel:MAIN:SPACing (on page 2208)	Sets or queries the main channel spacing.
[SENSe]:MCPower:CHIPrate (on page 2208)	Sets or queries the chip rate.
[SENSe]:MCPower:CLEar:RESults (on page 2209)	Restarts the average trace.
[SENSe]:MCPower:FREQuency (on page 2209)	Sets or queries the center frequency.
[SENSe]:MCPower:FREQuency:STEP (on page 2210)	Sets or queries the frequency step size.

Command	Description
[SENSe]:MCPower:FREQuency:STEP:AUTO (on page 2210)	Sets or queries whether to set the frequency step size automatically.
[SENSe]:MCPower:NFLoor:STATe (on page 2211)	Sets or queries whether to enable the correction for noise floor.
[SENSe]:MCPower:POINts:COUNt (on page 2211)	Sets or queries the number of trace points.
[SENSe]:MCPower:RCHannels? (on page 2212)	Queries the power reference.
[SENSe]:MCPower:RCHannels:MAIN<x> (on page 2212)	Sets the power reference to the main channel with the index (<x>).
[SENSe]:MCPower:RCHannels:TOTal (on page 2213)	Sets the power reference to the total power of all the active channels.
[SENSe]:MCPower:RRCRolloff (on page 2213)	Sets or queries the filter parameter for the Root Raised Cosine filter.
[SENSe]:OBWidth subgroup	Occupied Bandwidth measurement
[SENSe]:OBWidth:AVERAge (on page 2227)	Sets or queries whether to enable or disable averaging.
[SENSe]:OBWidth:AVERAge:COUNt (on page 2228)	Sets or queries the number of measurements for averaging.
[SENSe]:OBWidth:{BANDwidth BWIDth}:MEASurement (on page 2228)	Sets or queries the measurement bandwidth.
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution] (on page 2229)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution]:ACTual? (on page 2229)	Queries the actual resolution bandwidth (RBW).
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution]:AUTO (on page 2230)	Sets or queries whether to set the RBW automatically.
[SENSe]:OBWidth:{BANDwidth BWIDth}:VIDeo (on page 2230)	Sets or queries the video bandwidth (VBW).
[SENSe]:OBWidth:{BANDwidth BWIDth}:VIDeo:STATe (on page 2230)	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:OBWidth:CLEar:RESults (on page 2232)	Restarts the averaging.
[SENSe]:OBWidth:FREQuency:CENTer (on page 2232)	Sets or queries the center frequency.
[SENSe]:OBWidth:FREQuency:STEP (on page 2233)	Sets or queries the frequency step size.
[SENSe]:OBWidth:FREQuency:STEP:AUTO (on page 2233)	Determines whether to set the frequency step size automatically.

Command	Description
[SENSe]:OBWidth:PERCent (on page 2234)	Sets or queries the occupied bandwidth percent power.
[SENSe]:OBWidth:XDBLevel (on page 2234)	Sets or queries the x dB level.
[SENSe]:OFDM subgroup	Orthogonal Frequency Division Multiplexing measurement
[SENSe]:OFDM:CHANnel:ESTimation (on page 2236)	Sets or queries the channel estimation.
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth] (on page 2235)	Sets or queries the channel bandwidth.
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth]:SRATe? (on page 2235)	Returns the FFT sample rate.
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth]:STATe (on page 2235)	Determines whether the channel bandwidth is on or off.
[SENSe]:OFDM:CONSt:DETermination (on page 2236)	Sets or queries the constellation determination.
[SENSe]:OFDM:CONSt:DETermination:MANual (on page 2237)	Sets or queries a manual constellation type.
[SENSe]:OFDM:FFT:LENGth? (on page 2243)	Returns the FFT length.
[SENSe]:OFDM:GUARd:INTerval (on page 2237)	Sets or queries the guard interval.
[SENSe]:OFDM:GUARd:INTerval:USER (on page 2238)	Sets or queries a user-defined guard interval.
[SENSe]:OFDM:PILot:TRACking:AMPLitude:STATe (on page 2238)	Determines whether to select the Amplitude pilot tracking.
[SENSe]:OFDM:PILot:TRACking:PHASe:STATe (on page 2239)	Determines whether to select the Phase pilot tracking.
[SENSe]:OFDM:PILot:TRACking:TIMing:STATe (on page 2239)	Determines whether to select the Timing pilot tracking.
[SENSe]:OFDM:RADix (on page 2239)	Sets the radix for the OFDM measurements.
[SENSe]:OFDM:SCARrier:SPACing (on page 2240)	Sets or queries the subcarrier spacing.
[SENSe]:OFDM:SCARrier:SPACing:STATe (on page 2240)	Determines whether the subcarrier spacing is on or off.
[SENSe]:OFDM:SCARriers (on page 2241)	Sets or queries the Subcarriers to display.
[SENSe]:OFDM:SCARriers:RANGe:STARt (on page 2241)	Sets or queries the subcarrier start range.

Command	Description
[SENSe]:OFDM:SCARriers:RANGe:STOP (on page 2242)	Sets or queries the subcarrier stop range.
[SENSe]:OFDM:SCARriers:SINGLe:INDeX (on page 2242)	Sets or queries the index of a single subcarrier.
[SENSe]:OFDM:STANdard (on page 2243)	Sets or queries the OFDM standard.
[SENSe]:OFDM:SWAP:IQ (on page 2243)	Determines whether or not to exchange I and Q data.
[SENSe]:OFDM:SYMBol:ANALysis:OFFSet (on page 2244)	Sets or queries the OFDM symbol analysis offset.
[SENSe]:OFDM:SYMBols (on page 2244)	Sets or queries the symbols to display.
[SENSe]:OFDM:SYMBols:MAX (on page 2245)	Sets or queries the maximum number of symbols to analyze.
[SENSe]:OFDM:SYMBols:MAX:STATe (on page 2245)	Enables or disables the maximum number of symbols to analyze.
[SENSe]:OFDM:SYMBols:RANGe:COUNt (on page 2246)	Sets or queries the number of symbols to display.
[SENSe]:OFDM:SYMBols:RANGe:STARt (on page 2246)	Sets or queries the symbols start range.
[SENSe]:OFDM:SYMBols:SINGLe:INDeX (on page 2246)	Sets or queries the symbol index
[SENSe]:OFDM:UNIT:FREQuency (on page 2247)	Specifies the frequency units.
[SENSe]:OFDM:UNIT:TIME (on page 2247)	Specifies the time units.
[SENSe]:PHVTime subgroup	Phase versus Time measurement
[SENSe]:PHVTime[:MEASview<y>]:CLEAr:RESUltS (on page 2276)	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:CENTer (on page 2276)	Sets or queries the center frequency.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:SPAN (on page 2277)	Sets or queries the frequency span.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STARt (on page 2278)	Sets or queries the measurement start frequency.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STEP (on page 2279)	Sets or queries the frequency step size.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STEP:AUTO (on page 2279)	Sets or queries whether to set the frequency step size automatically.

Command	Description
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STOP (on page 2280)	Sets or queries the measurement stop frequency.
[SENSe]:PHVTime[:MEASview<y>]:MAXTracepoints (on page 2280)	Sets or queries the maximum trace points.
[SENSe]:PHVTime[:MEASview<y>]:SELEcted:SOURce (on page 2281)	Sets or queries the Source with respect to the Phaseversus Time Measurement View number
[SENSe]:PNOise subgroup (Option 11 only)	Phase noise measurement
[SENSe]:PNOise:AVERage:COUNt (on page 2283)	Sets or queries the number of traces to combine for averaging.
[SENSe]:PNOise:AVERage:ENABLE (on page 2283)	Sets or queries whether to enable or disable averaging trace.
[SENSe]:PNOise:CARRier:FREQuency:TRACk (on page 2283)	Sets or queries whether to enable tracking the carrier frequency.
[SENSe]:PNOise:CARRier:THReshold (on page 2284)	Sets or queries the threshold level to detect the carrier.
[SENSe]:PNOise:CLEar:RESults (on page 2284)	Restarts the average process.
[SENSe]:PNOise:FREQuency:INTegration:OFFSet:STARt (on page 2285)	Sets or queries the start offset frequency for integration.
[SENSe]:PNOise:FREQuency:INTegration:OFFSet:STOP (on page 2285)	Sets or queries the stop offset frequency for integration.
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STARt (on page 2285)	Sets or queries the start offset frequency for plot.
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STOP (on page 2286)	Sets or queries the stop offset frequency for plot.
[SENSe]:PNOise:OPTimization (on page 2286)	Sets or queries the method of optimization.
[SENSe]:PULSe subgroup	Pulsed RF measurements
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:ALENgtH (on page 2288)	Sets or queries the absolute amount of time included in the Frequency-Domain Linearity measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:METHod (on page 2288)	Sets or queries the measurement time method for the Frequency-Domain Linearity measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RLENgtH (on page 2289)	Sets or queries the relative amount of time included in the Frequency-Domain Linearity measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RLEVel (on page 2290)	Sets or queries the Frequency-Domain Linearity measurement reference level.

Command	Description
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:STARt (on page 2290)	Sets or queries the start time for the Frequency-Domain Linearity measurements
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:CORRection:AMPLitude[:STATe] (on page 2291)	Enables or disables the impulse response measurement amplitude corrections for window and for delay of the highest side lobe.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:KOTime (on page 2291)	Sets or queries the impulse response measurement Keep-out time.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:ALENgtH (on page 2292)	Sets or queries the absolute amount of time included in impulse response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:METHod (on page 2292)	Sets or queries the impulse response measurement time method.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:RELEvEl (on page 2293)	Sets or queries the relative amount of time included in Impulse Response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:RLEvEl (on page 2294)	Sets or queries the measurement reference level for Impulse Response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:STARt (on page 2294)	Sets or queries the start time for the Impulse Response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEvEl (on page 2295)	Sets or queries how to determine the 50% level.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEvEl:FIFTy (on page 2295)	Sets or queries how to determine the 50% level.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEvEl:HUNDred (on page 2296)	Sets or queries how to determine the 50% level.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:ALENgtH (on page 2298)	Sets or queries the absolute amount of time included in the Overshoot measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:METHod (on page 2298)	Sets or queries the measurement time method for the Overshoot measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RELEvEl (on page 2299)	Sets or queries the relative amount of time included in the Overshoot measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RLEvEl (on page 2300)	Sets or queries the measurement reference level for the Overshoot measurements.

Command	Description
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:STARt (on page 2300)	Sets or queries the start time for the Overshoot measurements
[SENSe]:PULSe[:MEASview<y>]:ANALyze:PMLocation (on page 2301)	Sets or queries the phase measurement location.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:POINT:LOCation (on page 2301)	Sets or queries the point location method.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RFALt (on page 2302)	Sets or queries the threshold levels to measure the rise/fall time.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RIPple (on page 2302)	Sets or queries the ripple portion of the pulse top.
[SENSe]:PULSe[:MEASview<y>]:CARRier:FREQuency? (on page 2303)	Queries the carrier frequency.
[SENSe]:PULSe[:MEASview<y>]:CARRier:OFFSet (on page 2304)	Sets or queries the carrier frequency offset.
[SENSe]:PULSe[:MEASview<y>]:CARRier:SEARch (on page 2304)	Sets or queries how to detect the carrier.
[SENSe]:PULSe[:MEASview<y>]:DETECT:MEASurement (on page 2310)	Sets or queries whether to set the maximum number of pulses.
[SENSe]:PULSe[:MEASview<y>]:DETECT:NUMBer (on page 2310)	Sets or queries the maximum number of pulses to detect.
[SENSe]:PULSe[:MEASview<y>]:DETECT:POWer[:THReshold]	Sets or queries the power threshold to detect pulses.
[SENSe]:PULSe[:MEASview<y>]:DETECT:TIME[:THReshold] (on page 2312)	Sets or queries the minimum off-time between pulses.
[SENSe]:PULSe[:MEASview<y>]:FILTer:{BANDwidth BWIDTH} (on page 2312)	Sets or queries the filter bandwidth for the Gaussian filter.
[SENSe]:PULSe[:MEASview<y>]:FILTer:MEASurement (on page 2313)	Sets or queries the measurement filter.
[SENSe]:PULSe[:MEASview<y>]:FREference:AUTO (on page 2314)	Determines whether to estimate the frequency reference automatically.
[SENSe]:PULSe[:MEASview<y>]:FREference:CSLoPe (on page 2314)	Sets or queries the Chirp Slope.
[SENSe]:PULSe[:MEASview<y>]:FREference:CSLoPe:AUTO (on page 2315)	Sets or queries enabling automatic Chirp Slope estimating.

Command	Description
[SENSe]:PULSe[:MEASview<y>]:FREFerence:OFFSet (on page 2315)	Sets or queries the frequency reference offset.
[SENSe]:PULSe[:MEASview<y>]:MODulation:TYPE (on page 2316)	Sets or queries the modulation type.
[SENSe]:PULSe[:MEASview<y>]:SIGNal:TYPE (on page 2320)	Sets or queries the signal type in the pulsed RF measurements.
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:ORDinate (on page 2321)	Sets or queries the Histogram Y unit.
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINTS (on page 2322)	Sets or queries the number of bins in the Histogram plot.
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINTS:AUTO (on page 2322)	Sets or queries enabling automatic Histogram plot bins count.
[SENSe]:REANalyze subgroup	Spectrogram measurement
[SENSe]:REANalyze (on page 2324)	Sets all measurements to reanalyze the current acquisition record.
[SENSe]:REANalyze:ACQuisition:SETTings? (on page 2325)	Queries the settings of all acquisitions in acquisition history.
[SENSe]:REANalyze:ALL	Replay all items in the current acquisition history selection.
[SENSe]:REANalyze:ALL:LOOP (on page 2325)	Replay all selected records/frames in a continuous loop.
[SENSe]:REANalyze:CURREnt (on page 2325), [SENSe]:REANalyze:CURREnt (on page 2326)	Replay the currently selected acquisition (or frame).
[SENSe]:REANalyze:CURREnt:ACQuisition? (on page 2325)	Queries the Acquisition record identifier (ID) of the currently selected acquisition (or frame).
[SENSe]:REANalyze:CURREnt:FRAMe? (on page 2326)	Queries the Frame identifier (ID) of the currently selected acquisition (or frame).
[SENSe]:REANalyze:CURREnt:TIMestamp? (on page 2326)	Queries the time stamp of the currently selected acquisition (or frame).
[SENSe]:REANalyze:DELeTe:DATA (on page 2326)	Deletes all acquisition data.
[SENSe]:REANalyze:FIRSt (on page 2327)	Replays the first item in the current acquisition history selection.
[SENSe]:REANalyze:LAST (on page 2327)	Replays the last item in the current acquisition history selection.
[SENSe]:REANalyze:NEXt (on page 2327)	Replays the next item in the current acquisition history selection.
[SENSe]:REANalyze:PAUSe (on page 2327)	Sets or queries the reanalysis pause state.
[SENSe]:REANalyze:PREVious (on page 2328)	Replays the previous item in the current Replay selection.

Command	Description
[SENSe]:REANalyze:SElect:ACQuisition:DATA:TYPE (on page 2328)	Sets or queries the acquisition data type.
[SENSe]:REANalyze:SElect:ACQuisition:FIRSt? (on page 2328)	Queries the first selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SElect:ACQuisition:FIRSt:TIMestamp? (on page 2329)	Queries the time stamp associated with the first selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SElect:ACQuisition:LAST? (on page 2329)	Queries the last selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SElect:ACQuisition:LAST:TIMestamp? (on page 2329)	Queries the time stamp associated with the last selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SElect:ACQuisition:START (on page 2330)	Sets or queries the Acquisition Start value in the acquisition history selection.
[SENSe]:REANalyze:SElect:ACQuisition:START:TIMestamp? (on page 2330)	Queries the time stamp associated with the current Acquisition Start selection.
[SENSe]:REANalyze:SElect:ACQuisition:STOP (on page 2330)	Sets or queries the Acquisition Stop value in the acquisition history selection.
[SENSe]:REANalyze:SElect:ACQuisition:STOP:TIMestamp? (on page 2331)	Queries the time stamp associated with the current Acquisition Stop selection.
[SENSe]:REANalyze:SElect:ALL (on page 2331)	Selects all acquisitions and frames in the current acquisition history.
[SENSe]:REANalyze:SElect:FRAME:FIRSt? (on page 2331)	Queries the first available Frame Start or Stop value available for acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:FIRSt:TIMestamp? (on page 2332)	Queries the time stamp associated with the first available frame of the first available Acquisition Start or Stop value.
[SENSe]:REANalyze:SElect:FRAME:LAST? (on page 2332)	Queries the last available Frame Start or Stop value available for acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:LAST:TIMestamp? (on page 2332)	Queries the time stamp associated with the last available frame of the last available Acquisition Start or Stop value.
[SENSe]:REANalyze:SElect:FRAME:START (on page 2333)	Sets or queries the Frame Start value in the acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:START:TIMestamp? (on page 2333)	Queries the time stamp associated with the current Frame Start selection.
[SENSe]:REANalyze:SElect:FRAME:STOP (on page 2333)	Sets or queries the frame stop value in acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:STOP:TIMestamp? (on page 2334)	Queries the time stamp associated with the current frame stop selection.

Command	Description
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:ALL (on page 2334)	Selects all spectra acquisitions and frames in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:CURRENT:ACQuisition? (on page 2334)	Queries the acquisition record identifier (ID) of the currently selected acquisition.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:CURRENT:TIMestamp? (on page 2335)	Queries the time stamp of the currently selected acquisition.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRST? (on page 2335)	Queries the first selectable acquisition start or stop value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRST:TIMestamp? (on page 2336)	Queries the time stamp of the first selectable acquisition history start or stop value in the currently selected acquisition set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST? (on page 2336)	Queries the last selectable acquisition start or stop value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST:TIMestamp? (on page 2336)	Queries the time stamp of the last selectable acquisition start or stop value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START (on page 2337)	Sets or queries the acquisition start value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START:TIMestamp? (on page 2337)	Queries the time stamp of the current acquisition start selection.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP (on page 2338)	Sets or queries the acquisition stop value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP:TIMestamp? (on page 2338)	Queries the time stamp of the current acquisition stop selection.
[SENSe]:REANalyze:SPEed (on page 2339)	Sets or queries the time delay value inserted between reanalysis of frames or acquisitions.
[SENSe]:REANalyze:STOP (on page 2339)	Stops the current reanalysis.
[SENSe]:REANalyze:TIMestamp:DECimal (on page 2339)	Sets or queries the number of values to the right of the decimal point to include in all time stamps.
SENSe:ROSCillator:EXternal: TIME (on page 2339)	Sets or queries the timing reference.
SENSe:ROSCillator:EXternal: TIME:STATus? (on page 2340)	Queries if the timing reference source is locked.
[SENSe]:SEM subgroup	Spectrum Emissions Mask measurements
[SENSe]:SEM:{BANDwidth BWIDth}:{RESolution} (on page 2341)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:SEM:{BANDwidth BWIDth}:VIDeo (on page 2342)	Sets or queries the video bandwidth (VBW).

Command	Description
[SENSe]:SEM:{BANDwidth BWIDth}:VIDeo:STATe (on page 2342)	Sets or queries the state of the video bandwidth (VBW) of the reference channel.
[SENSe]:SEM:CHANnel:FILTer (on page 2342)	Sets or queries the reference Channel Filter.
[SENSe]:SEM:CHANnel:IBANDwidth (on page 2343)	Sets or queries the reference channel integration bandwidth.
[SENSe]:SEM:CHANnel:WIDTh (on page 2343)	Sets or queries the reference Channel Filter bandwidth.
[SENSe]:SEM:CHIPrate (on page 2344)	Sets or queries the Chip rate.
[SENSe]:SEM:CLEar:RESults (on page 2344)	Clears the results in the Spectral Emissions Mask measurement.
[SENSe]:SEM:FREQuency (on page 2345)	Sets or queries the measurement frequency.
[SENSe]:SEM:FREQuency:SPAN? (on page 2345)	Returns the frequency span.
[SENSe]:SEM:MFILter (on page 2345)	Sets or queries the shape of the filter.
[SENSe]:SEM:MODE:REALtime (on page 2346)	Sets or queries the Real-time SEM measurement mode.
[SENSe]:SEM:MTYPe (on page 2346)	Sets or queries the measurement type.
[SENSe]:SEM:OFFSet:DETection (on page 2347)	Sets or queries the detection settings for all offsets.
[SENSe]:SEM:OFFSet<x>:BANDwidth:FILTer? (on page 2347)	Returns the bandwidth filter setting.
[SENSe]:SEM:OFFSet<x>:BANDwidth[:RESolution] (on page 2348)	Sets or queries the resolution bandwidth.
[SENSe]:SEM:OFFSet<x>:BANDwidth:RESolution:COUNT (on page 2348)	Sets or queries the count of Resolution Bandwidths (RBWs).
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo (on page 2349)	Sets or queries the video bandwidth setting.
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo:STATe (on page 2349)	Sets or queries the state of the video bandwidth.
[SENSe]:SEM:OFFSet<x>:FREQuency:START (on page 2350)	Sets or queries the start frequency.
[SENSe]:SEM:OFFSet<x>:FREQuency:STOP (on page 2350)	Sets or queries the stop frequency.
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:SAME (on page 2350)	Sets or queries the state of the limits for the absolute start and stop settings.
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:START (on page 2351)	Sets or queries the absolute power start limit.

Command	Description
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:STOP (on page 2351)	Sets or queries the absolute power stop limit.
[SENSe]:SEM:OFFSet<x>:LIMIT:MASK (on page 2352)	Sets or queries the limit mask setting.
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:SAME (on page 2352)	Sets or queries the state of the limits for the relative start and stop settings
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:START (on page 2353)	Sets or queries the relative power start limit.
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:STOP (on page 2353)	Sets or queries the relative power stop limit.
[SENSe]:SEM:OFFSet<x>:LIMIT:SIDE (on page 2353)	Sets or queries the side of the offset limit.
[SENSe]:SEM:OFFSet<x>:STATE (on page 2354)	Determines whether to display the specified row of the Offsets & Limits table.
[SENSe]:SEM:POINts:COUNt (on page 2354)	Sets or queries the maximum number of trace points.
[SENSe]:SEM:PRESet (on page 2355)	Defines the standard protocol settings for the measurement.
[SENSe]:SEM:REFeRence:AUTO (on page 2355)	Determines whether to automatically update the Power Reference.
[SENSe]:SEM:REFeRence:DETection (on page 2356)	Sets or queries the reference channel detection setting.
[SENSe]:SEM:REFeRence[:MAGNitude] (on page 2356)	Sets or queries the power magnitude.
[SENSe]:SEM:RRCRolloff (on page 2357)	Sets or queries the filter parameter (roll-off ratio).
[SENSe]:SEM:STEP:AUTO (on page 2357)	Determines whether to automatically update the center frequency.
[SENSe]:SEM:STEP[:MAGNitude] (on page 2358)	Sets or queries the step magnitude.
[SENSe]:SEM:WIDTh:DEFinition (on page 2358)	Sets or queries the offset definition.
[SENSe]:SGRam subgroup	Spectrogram measurements
[SENSe]:SGRam[:MEASview<y>]:[BANDwidth BWIDth]:RESolution (on page 2359)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:SGRam[:MEASview<y>]:[BANDwidth BWIDth]:[RESolution]:ACTual? (on page 2359)	Queries the actual resolution bandwidth (RBW).
[SENSe]:SGRam[:MEASview<y>]:[BANDwidth BWIDth]:[RESolution]:AUTO (on page 2360)	Sets or queries whether to set the RBW automatically.

Command	Description
[SENSe]:SGRam[:MEASview<y>]:[BANDwidth BWIDth]:[RESolution]:MODE (on page 2360)	Sets or queries whether to enable or disable the RBW processing.
[SENSe]:SGRam[:MEASview<y>]:[BANDwidth BWIDth]:VIDeo (on page 2361)	Sets or queries the video bandwidth (VBW).
[SENSe]:SGRam[:MEASview<y>]:[BANDwidth BWIDth]:VIDeo:STATe (on page 2361)	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:SGRam[:MEASview<y>]:COLor (on page 2363)	Sets or queries the color palette of three-dimensional graphs.
[SENSe]:SGRam[:MEASview<y>]:COLor:MAXimum (on page 2364)	Sets or queries the maximum value of the color axis.
[SENSe]:SGRam[:MEASview<y>]:COLor:MINimum (on page 2364)	Sets or queries the minimum value of the color axis.
[SENSe]:SGRam[:MEASview<y>]:FFT:WINDow (on page 2365)	Sets or queries the FFT window.
[SENSe]:SGRam[:MEASview<y>]:FILTer[:SHAPE] (on page 2366)	Sets or queries the filter shape.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:CENTer (on page 2367)	Sets or queries the center frequency.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN (on page 2367)	Sets or queries the frequency span.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio (on page 2368)	Sets or queries the ratio of span to RBW.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:MAXimum (on page 2369)	Sets the frequency range to the maximum real-time span.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:START (on page 2369)	Sets or queries the measurement start frequency.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP (on page 2370)	Sets or queries the frequency step size.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP:AUTO (on page 2370)	Sets or queries whether to set the frequency step size automatically.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STOP (on page 2371)	Sets or queries the measurement stop frequency.
[SENSe]:SGRam[:MEASview<y>]TIME[:SCALE]:MODE (on page 2371)	Sets or queries the vertical mode.

Command	Description
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap:PERCent (on page 2373)	Sets or queries the Overlap in percent.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision (on page 2373)	Sets or queries the vertical Time/division value.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:MINutes (on page 2376)	Sets or queries the Spectrum Monitor mode Time/Update value for minutes.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:ENABLE (on page 2378)	Sets or queries the Waterfall (3-D spectrogram) display.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:SECONDS (on page 2376)	Sets or queries the Spectrum Monitor mode Time/Update value
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:SPECtrums:PERLine? (on page 2377)	Queries the Spectrums/Line value.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START:DIVisions (on page 2377)	Sets or queries the Vertical offset or Position in divisions.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:DIRection (on page 2378)	Sets or queries the direction of the Waterfall display.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y:AUTO (on page 2379)	Rescales the height axis automatically to fit the waveform to the screen in the 3-D Waterfall display.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y:OFFSet (on page 2379)	Sets or queries the height offset (the value at the top edge of the vertical axis) of the 3-D Waterfall display.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y:RESet (on page 2380)	Resets the height scale of the 3-D Waterfall display to the default values.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y[:SCALE] (on page 2380)	Sets or queries the height (vertical) range of the Waterfall (3-D spectrogram) display.
[SENSE]:SIGNALvu subgroup	Signalvu measurement
[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:COUPling (on page 2386)	Sets or queries the per channel coupling of the measurement.
[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:DESKew (on page 2387)	Sets or queries the per channel deskew of the measurement.
[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:EXTattn (on page 2387)	Sets or queries the per channel external attenuation of the measurement.
[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:INSTrument:BWIDth (on page 2388)	Queries the per channel instrument bandwidth of the measurement.
[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:REFlevel (on page 2388)	Sets or queries per channel reference level of the measurement.

Command	Description
[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:TERMination (on page 2389)	Sets or queries the per channel Termination of the measurement.
[SENSe]:SIGNALvu:ACQuisition:CONTRol:SOURce<x>:STATe (on page 2382)	Sets or queries the Source checkbox state of measurement source for RF, I and Q, Diff I and Q data type.
[SENSe]:SIGNALvu:ACQuisition:GLOBal:REFlevel (on page 2385)	Sets or queries the Global Reference level of the measurement source.
[SENSe]:SIGNALvu:ACQuisition:INPuttype:REFlevel (on page 2385)	Sets or queries the input type of ref level of the measurement source.
[SENSe]:SIGNALvu:ACQuisition:NULL:IQ:OFFSet:CLEAR (on page 2386)	To clear Null IQ offset values that were calculated using Calibrate IQ, use the above PI command.
[SENSe]:SIGNALvu:ACQuisition:CONTRol:HORIZontal (on page 2381)	Sets or queries the Acquisition or Horizontal settings. When the checkbox is checked, the SignalVu controls horizontal settings of the oscilloscope.
[SENSe]:SIGNALvu:ACQuisition:CONTRol:SAMPLE:RATE (on page 2382)	Sets or queries the Sample rate when the checkbox is checked, the SignalVu controls Sample rate of the oscilloscope.
[SENSe]:SIGNALvu:ACQuisition:CONTRol:TRIGger:POSition (on page 2383)	Sets or queries the Trigger position, when checkbox is checked, the SignalVu controls Trigger position of the oscilloscope.
[SENSe]:SIGNALvu:ACQuisition:CONTRol:VERTical (on page 2383)	Sets or queries the Vertical settings, when the checkbox is checked, the SignalVu controls the vertical settings of the oscilloscope.
[SENSe]:SIGNALvu:ACQuisition:DIGitizer:SAMPLE:RATE (on page 2384)	Sets or queries the oscilloscope sample rate from the Acquisition control panel oscilloscope settings of SignalVu.
[SENSe]:SIGNALvu:ACQuisition:DIGitizer:SAMPLE:RATE:AUTo (on page 2384)	Sets the oscilloscope sample rate automatically or manually from the Acquisition control panel oscilloscope settings of SignalVu.
[SENSe]:SIGNALvu:ACQuisition:IQ:CALibrate (on page 2386)	Starts the IQ calibration.
[SENSe]:SIGNALvu:ACQuisition:RESet (on page 2389)	Clears the acquisition data and restarts the SignalVu acquisitions from the oscilloscope.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CALibrate:IQ (on page 2389)	For performing null IQ offset operation for each source use the above-mentioned PI command. It will be effective from the next acquisition.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:I (on page 2390)	Sets or queries the channel of measurement source for I data type.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IMINus (on page 2392)	Sets or queries the channel of measurement source for IMinus data type.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IPLus (on page 2391)	Sets or queries the channel of measurement source for IPlus data type.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:Q (on page 2391)	Sets or queries the channel of measurement source for Q data type.

Command	Description
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QMINus (on page 2393)	Sets or queries the channel of measurement source for QMinus data type.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QPLus (on page 2392)	Sets or queries the channel of measurement source for QPlus data type.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel[:RF] (on page 2390)	Sets or queries the channel of measurement source for RF data type.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJectionside (on page 2393)	Sets or queries the downconverter injection side.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MAXFreq (on page 2393)	Sets or queries the maximum range of instrument bandwidth.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MINFreq (on page 2394)	Sets or queries the minimum range of instrument bandwidth.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:LOFReq (on page 2394)	Sets or queries the downconverter low frequency.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:STATe (on page 2395)	Sets or queries the downconverter state.
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:PERSrc:REFlevel (on page 2395)	Sets or queries the Reference level Per source.
[SENSe]:SPECTrum subgroup	Spectrum measurement
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]} (on page 2396)	Sets or queries the resolution bandwidth (RBW).
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]:ACTual?} (on page 2397)	Queries the actual resolution bandwidth (RBW).
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]:AUTO} (on page 2397)	Sets or queries whether to set the RBW automatically.
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]:MODE} (on page 2398)	Sets or queries whether to enable or disable the RBW process.
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth}:VIDeo (on page 2398)	Sets or queries the video bandwidth (VBW).
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth}:VIDeo:STATe (on page 2399)	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:SPECTrum[:MEASview<y>]:CLEar:RESults (on page 2399)	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:SPECTrum[:MEASview<y>]:FFT:WINDow (on page 2400)	Sets or queries the FFT window.

Command	Description
[SENSe]:SPECTrum[:MEASview<y>]:FILTer[:SHApe] (on page 2400)	Sets or queries the filter shape.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:CENTer (on page 2401)	Sets or queries the center frequency.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN (on page 2402)	Sets or queries the frequency span.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio (on page 2402)	Sets or queries the ratio of span to RBW.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:START (on page 2403)	Sets or queries the measurement start frequency.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP (on page 2403)	Sets or queries the frequency step size.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP:AUTO (on page 2404)	Sets or queries whether to set the frequency step size automatically.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STOP (on page 2405)	Sets or queries the measurement stop frequency.
[SENSe]:SPECTrum[:MEASview<y>]:LENGth (on page 2405)	Sets or queries the spectrum length.
[SENSe]:SPECTrum[:MEASview<y>]:LENGth:ACTual? (on page 2406)	Queries the actual spectrum length.
[SENSe]:SPECTrum[:MEASview<y>]:LENGth:AUTO (on page 2406)	Sets or queries the spectrum length mode (automatic or manual).
[SENSe]:SPECTrum[:MEASview<y>]:MAX:SPAN (on page 2407)	Sets the frequency span to the maximum span.
[SENSe]:SPECTrum[:MEASview<y>]:POINts:COUNt (on page 2407)	Sets or queries the number of sample points on the signal spectrum.
[SENSe]:SPECTrum[:MEASview<y>]:START (on page 2408)	Sets or queries the spectrum offset time.
[SENSe]:SPECTrum[:MEASview<y>]:START:AUTO (on page 2408)	Sets or queries the spectrum offset mode (automatic or manual).
[SENSe]:SPECTrum[:MEASview<y>]:TIME:MODE (on page 2409)	Sets or queries the spectrum time parameter mode (automatic or manual).
[SENSe]:SPURious subgroup	Spurious measurement
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth} (on page 2409)	Sets or queries the channel width for the carrier as power reference.

Command	Description
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}:INTegration (on page 2410)	Sets or queries the integration bandwidth to calculate the carrier power.
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}:RESolution (on page 2410)	Sets or queries the resolution bandwidth to measure the carrier power.
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}:RESolution:AUTO (on page 2411)	Sets or queries whether to set the resolution bandwidth automatically.
[SENSe]:SPURious:CARRier:DETectioN (on page 2411)	Sets or queries the carrier detection method.
[SENSe]:SPURious:CARRier:FREQuency (on page 2412)	Sets or queries the carrier frequency.
[SENSe]:SPURious:CARRier:THReshold (on page 2412)	Sets or queries the threshold level to detect the carrier.
[SENSe]:SPURious:CLEar:RESults (on page 2413)	Restarts multi-trace functions (Average and Max Hold).
[SENSe]:SPURious:FREQuency:OVERlap? (on page 2413)	Queries whether any of the frequency ranges (A to T) overlap.
[SENSe]:SPURious:LIST (on page 2413)	Sets or queries how to list the spurious signals.
[SENSe]:SPURious:MODE (on page 2414)	Sets or queries the frequency range mode (Multi or Single).
[SENSe]:SPURious:OPTimization (on page 2414)	Sets or queries the method of optimization.
[SENSe]:SPURious:POINts:COUNt (on page 2415)	Sets or queries the trace point count for the frequency range.
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo (on page 2415)	Sets or queries the VBW for the specified frequency range.
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo:STATe (on page 2416)	Sets or queries whether to enable the VBW for the frequency range.
[SENSe]:SPURious:RANGe<x>:DETectioN (on page 2416)	Sets or queries the display detector for the frequency range.
[SENSe]:SPURious:RANGe<x>:EXCursion (on page 2417)	Sets or queries the excursion level in the frequency range.
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE] (on page 2417)	Sets or queries the filter shape for the frequency range.
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth (on page 2418)	Sets or queries the filter bandwidth for the frequency range.
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO (on page 2418)	Sets or queries whether to set the filter bandwidth automatically.

Command	Description
[SENSe]:SPURious:RANGe<x>:FREQuency:STARt (on page 2419)	Sets or queries the start frequency of the range.
[SENSe]:SPURious:RANGe<x>:FREQuency:STOP (on page 2419)	Sets or queries the stop frequency of the range.
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STARt (on page 2420)	Sets or queries the absolute start amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STOP (on page 2420)	Sets or queries the absolute stop amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:LIMit:MASK (on page 2421)	Sets or queries the limit mask function mode for the frequency range.
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STARt (on page 2422)	Sets or queries the relative start amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STOP (on page 2422)	Sets or queries the relative stop amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:STATe (on page 2423)	Sets or queries whether to enable or disable the frequency range.
[SENSe]:SPURious:RANGe<x>:THReshold (on page 2423)	Sets or queries the threshold level to detect spurious signals in a range.
[SENSe]:SPURious:REFerence (on page 2424)	Sets or queries the power reference.
[SENSe]:SPURious:REFerence:MANual:POWer (on page 2424)	Sets or queries the reference power level.
[SENSe]:SQUality subgroup	Signal quality
[SENSe]:SQUality[:MEASview<y>]:EVM:ALL[:STATe] (on page 2425)	Sets or queries the display of Offset EVM results.
[SENSe]:SVPC subgroup	Channel trigger
[SENSe]:SVPC:ACQuisition:CONTRol:CHANnel (on page 2427)	Sets or queries the Channel Settings checkbox state.
[SENSe]:SVPC:ACQuisition:CONTRol:TRIGger (on page 2426)	Sets or queries the Trigger Settings checkbox state.
[SENSe]:TOVerview subgroup	Time overview
[SENSe]:TOVerview[:MEASview<y>]:FREQuency:CENTer (on page 2429)	Sets or queries the center frequency.
[SENSe]:TOVerview[:MEASview<y>]:MAXTracepoints (on page 2430)	Sets or queries the maximum trace points.

Command	Description
[SENSe]:TOVerView[:MEASview<y>]:TIME:PER:DIVision (on page 2430)	Sets or queries the time per division (dB/div) value in the Time Overview display.
[SENSe]:USETtings subgroup	All measurements
[SENSe]:USETtings (on page 2438)	Updates the analyzer settings.
[SENSe]:WLAN subgroup	Wireless LAN settings
[SENSe]:WLAN:ANALysis:LENGth (on page 2456)	Specifies the length of the analysis period.
[SENSe]:WLAN:ANALysis:LENGth:ACTual? (on page 2456)	Returns the value of the actual analysis length.
[SENSe]:WLAN:ANALysis:LENGth:AUTO (on page 2457)	Sets the analysis length value based on the requirements of the selected display.
[SENSe]:WLAN:ANALysis:OFFSet (on page 2457)	Specifies or queries the analysis offset in the symbol interval.
[SENSe]:WLAN:BURSt (on page 2478)	Specifies the burst to measure when multiple bursts are present in an acquisition.
[SENSe]:WLAN:CHANnel[:BANDwidth]:BWIDth (on page 2479)	Specifies or queries a nominal channel bandwidth to use for the WLAN measurements.
[SENSe]:WLAN:EQUalizer:TRAIning (on page 2479)	Specifies the method for estimating channel frequency response and equalization.
[SENSe]:WLAN:FFT:LENGth? (on page 2480)	Returns the fixed FFT length for the WLAN measurements.
[SENSe]:WLAN:FFT:SRATe? (on page 2480)	Returns the FFT sample rate for the WLAN measurements.
[SENSe]:WLAN:FREQuency:ERRor (on page 2481)	Sets or queries the frequency error in the WLAN analysis parameters.
[SENSe]:WLAN:FREQuency:ERRor:AUTO (on page 2481)	Turns on the automatic determination of the frequency error.
[SENSe]:WLAN:GUARd:INTerval (on page 2482)	Sets or queries the Guard Interval to use in the input signal.
[SENSe]:WLAN:MODulation:DETEct:QAM1024 (on page 2482)	Specifies a fixed modulation type.
[SENSe]:WLAN:MODulation:SOURce (on page 2483)	Specifies the method of data symbol modulation identification.
[SENSe]:WLAN:PILot:TRACking:AMPLitude:STATe (on page 2484)	Specifies the pilot subcarrier to use to correct amplitude variations over the packet.
[SENSe]:WLAN:PILot:TRACking:PHASe:STATe (on page 2484)	Specifies the pilot subcarrier to use to correct phase variations over the packet.
[SENSe]:WLAN:PILot:TRACking:TIMing:STATe (on page 2485)	Specifies the pilot subcarrier to use to correct timing variations over the packet.

Command	Description
[SENSe]:WLAN:RADix (on page 2485)	Specifies or queries the format for displaying the symbol values.
[SENSe]:WLAN:SCARriers (on page 2485)	Sets or queries which subcarriers to display in the WLAN view.
[SENSe]:WLAN:SCARriers:RANGe:STARt (on page 2486)	Sets or queries the start value of the subcarrier range.
[SENSe]:WLAN:SCARriers:RANGe:STOP (on page 2486)	Sets or queries the stop value of the subcarrier range.
[SENSe]:WLAN:SCARriers:SINGle:INDex (on page 2487)	Specifies or queries the single subcarrier to display in the WLAN view.
[SENSe]:WLAN:SCARriers:SPACing (on page 2487)	Sets or queries the subcarrier spacing.
[SENSe]:WLAN:SCARriers:SPACing:AUTO (on page 2488)	Automatically sets the subcarrier spacing.
[SENSe]:WLAN:SIGNal:STANdard:TYPE (on page 2488)	Sets or queries the WLAN signal standard.
[SENSe]:WLAN:SubCARrier:DERotation (on page 2489)	Shows subcarriers for displays with or without the Gamma subcarrier phase rotation removed.
[SENSe]:WLAN:SUMMary:CLEar:RESults (on page 2489)	Clears the results of the WLAN Summary display.
[SENSe]:WLAN:SUMMary:CLEar:RESults (on page 2489)	Clears the results in the WLAN Summary measurement.
[SENSe]:WLAN:SUMMary:EVM:RMS:AVERAge:COUNT (on page 2490)	Specifies the maximum number of bursts to average.
[SENSe]:WLAN:SUMMary:EVM:RMS:AVERAge:COUNT:ENABle (on page 2490)	Enables the burst average function.
[SENSe]:WLAN:SWAP:IQ (on page 2491)	Specifies to swap the I and Q components of a signal.
[SENSe]:WLAN:SYMBols CHIPs (on page 2491)	Specifies or queries the symbols or chips are displayed in the WLAN Symbol Table.
[SENSe]:WLAN:SYMBols CHIPs:MAX (on page 2492)	Sets or queries the value for the maximum number of symbols/chips to analyze.
[SENSe]:WLAN:SYMBols CHIPs:MAX:STATe (on page 2492)	Turns the maximum data symbols to analyze feature on or off.
[SENSe]:WLAN:SYMBols CHIPs:RANGe:COUNT (on page 2493)	Sets or queries the number of symbols or chips to display.
[SENSe]:WLAN:SYMBols CHIPs:RANGe:STARt (on page 2493)	Sets or queries the symbols/chips start value.

Command	Description
[SENSe]:WLAN:SYMBOLs CHIPs:RANGe:STOP (on page 2494)	Sets or queries the symbols or chips stop value.
[SENSe]:WLAN:SYMBOLs CHIPs:SINGLE:INDEX (on page 2494)	Sets or queries the symbol or chip to use when displaying results from a single symbol.
[SENSe]:WLAN:UNIT:FREQuency (on page 2494)	Specifies or queries whether the displayed frequency units are frequency (Hz) or subcarrier.
[SENSe]:WLAN:UNIT:TIME (on page 2495)	Specifies or queries whether the displayed time units are seconds, symbols or chips.
SENSe:LTE subgroup	
SENSe:LTE:ACLR:BANDwidth:RESolution (on page 2171)	Sets or queries the resolution bandwidth (RBW).
SENSe:LTE:ACLR:BANDwidth:VIDeo (on page 2171)	Sets or queries the video bandwidth (VBW).
SENSe:LTE:ACLR:BANDwidth:VIDeo:STATe (on page 2172)	Sets or queries enabling or disabling the video bandwidth (VBW).
SENSe:LTE:ACLR:CHANnel:IBANDwidth (on page 2172)	Sets or queries the reference channel integration bandwidth.
SENSe:LTE:ACLR:CHANnel:WIDTh (on page 2173)	Sets or queries the reference channel width.
SENSe:LTE:ACLR:CLEar:RESults (on page 2173)	Clears the results in the measurement.
SENSe:LTE:ACLR:FREQuency (on page 2173)	Sets or queries the measurement center frequency.
SENSe:LTE:ACLR:MFILter (on page 2174)	Sets or queries the shape of the filter.
SENSe:LTE:ACLR:MODE:REALtime (on page 2174)	Sets or queries the real-time LTE ACLR measurement mode.
SENSe:LTE:ACLR:NFLoor:ACQuire (on page 2175)	Enables measurement of the noise floor.
SENSe:LTE:ACLR:NFLoor:CORRected? (on page 2175)	Returns whether or not noise correction was applied on the last acquisition.
SENSe:LTE:ACLR:NFLoor:STATe (on page 2176)	Determines whether to enable or disable the correction for noise floor.
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution (on page 2176)	Sets or queries the resolution bandwidth (RBW) value in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:COUNt (on page 2177)	Sets or queries the count for the resolution bandwidths in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<X>:BANDwidth:RESolution:FILTer (on page 2177)	Sets or queries the filter bandwidth resolution under Offset & Limit table.

Command	Description
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo (on page 2178)	Sets or queries the resolution video bandwidth (VBW) value in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo:STATe (on page 2178)	Sets or queries whether to enable or disable the video resolution bandwidth (VBW) in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:DETectiOn (on page 2179)	Sets or queries the detection settings for all offsets.
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:BANDwidth (on page 2179)	Sets or queries the frequency bandwidth value for the specified row of the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:OFFSet (on page 2180)	Sets or queries the frequency offset value of the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:LIMit:ABSolute (on page 2180)	Sets or queries the absolute limit value of the row in the Offset & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:LIMit:MASK (on page 2181)	Sets or queries the limit mask setting for the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:LIMit:RELative (on page 2181)	Sets or queries the relative limit value of channel under Offset & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:LIMit:SIDE (on page 2182)	Sets or queries the side of the offset limit for the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:STATe (on page 2183)	Sets or queries the specified row of the Offsets & Limits table.
SENSe:LTE:ACLR:POINts:COUNt (on page 2183)	Sets or queries the number of points used for the trace.
SENSe:LTE:ACLR:REFerence:MAGNitude:AUTO (on page 2184)	Sets or queries the reference magnitude to automatic or manual.
SENSe:LTE:ACLR:REFerence:MAGNitude:DETectiOn (on page 2185)	Sets or queries the reference magnitude detection.
SENSe:LTE:ACLR:REFerence:MAGNitude (on page 2184)	Sets or queries the reference power magnitude.
SENSe:LTE:ACLR:STEP:AUTO (on page 2185)	Determines whether to automatically update the center frequency increment/decrement step size.
SENSe:LTE:ACLR:STEP:MAGNitude (on page 2186)	Sets or queries the step magnitude for the center frequency.
SENSe:LTE:ANALysis:EQUALization:STATe (on page 2187)	Sets or queries the Enable Equalization state in the LTE Analysis Params tab.
SENSe:LTE:ANALysis:LENGth:ACTual? (on page 2188)	Queries the actual analysis length for the LTE Constellation and LTE Power vs Time displays.

Command	Description
[SENSe]:LTE:ANALysis:OFFSet (on page 2188)	Sets or queries the LTE analysis offset for the LTE Constellation or LTE Power vs Time.
SENSe:LTE:ANALysis:OFFSet:AUTO (on page 2189)	Sets or queries the Auto checkbox state for analysis offset.
SENSe:LTE:ANALysis:TIME:UNIT (on page 2189)	Sets or queries the unit preference under the LTE Analysis tab.
SENSe:LTE:CHANnel:BANDwidth (on page 2192)	Specifies or queries the channel bandwidth to use.
SENSe:LTE:CHSPectrum:AVERage (on page 2192)	Sets or queries how to average the waveform.
SENSe:LTE:CHSPectrum:AVERage:COUNt (on page 2193)	Sets or queries the number of traces for averaging.
SENSe:LTE:CHSPectrum:BANDwidth:RESolution (on page 2193)	Sets or queries the resolution bandwidth (RBW).
SENSe:LTE:CHSPectrum:BANDwidth:RESolution:AUTO (on page 2194)	Determines whether to set the resolution bandwidth (RBW) automatically or manually. Queries this setting.
SENSe:LTE:CHSPectrum:BANDwidth:VIDeo (on page 2194)	Sets or queries the video bandwidth (VBW).
SENSe:LTE:CHSPectrum:BANDwidth:VIDeo:STATE (on page 2195)	Sets or queries enabling or disabling the video bandwidth (VBW).
SENSe:LTE:CHSPectrum:CHANnel:BANDwidth (on page 2195)	Specifies or queries a nominal channel bandwidth to use.
SENSe:LTE:CHSPectrum:CLEar:RESults (on page 2196)	Clears the results in the LTE Channel Spectrum measurement.
SENSe:LTE:CHSPectrum:DETection (on page 2196)	Sets or queries the trace detection settings.
SENSe:LTE:CHSPectrum:FREQuency (on page 2197)	Sets or queries the measurement center frequency.
SENSe:LTE:CHSPectrum:FREQuency:SPAN (on page 2197)	Sets or queries the frequency span.
SENSe:LTE:CHSPectrum:FREQuency:STEP (on page 2198)	Sets or queries the frequency step size.
SENSe:LTE:CHSPectrum:FREQuency:STEP:AUTO (on page 2198)	Determines whether to set the frequency step size automatically or manually. Queries this setting.
SENSe:LTE:CHSPectrum:POINts:COUNt (on page 2199)	Sets or queries the number of points used for the trace.
SENSe:LTE:FRAME:STRUcture (on page 2200)	Sets or queries the frame structure.

Command	Description
[SENSe]: TDlagram	TDlagram measurement
[SENSe]:TDlagram[:MEASview<y>]:SELEcted:SOURce (on page 2428)	Sets or queries the source of Trellis diagram for a selected Measurement view number.
SENSe:TOFF:POWER:SPECTral:DENSity (on page 2429)	Sets or queries the limit set for comparison of the Toff power spectral density value.

Command	Description
[SENSe] basic command subgroup	General analysis parameter control
[SENSe]:ACQuisition:{BANDwidth BWIDth}	Sets or queries the acquisition bandwidth.
[SENSe] Bluetooth command subgroup	Bluetooth measurements
[SENSe]:BLUEtooth:ANALysis:LENGth	Sets or returns the analysis length.
[SENSe]:BLUEtooth:ANALysis:LENGth:ACTual?	Sets the actual analysis length.
[SENSe]:BLUEtooth:ANALysis:LENGth:AUTO	Sets or queries the length mode.
[SENSe]:BLUEtooth:ANALysis:MEAS[:BANDwidth BWIDth]	Sets or returns the measurement bandwidth.
[SENSe]:BLUEtooth:ANALysis:MEAS:SOURce	Sets or returns the analysis measurement source.
[SENSe]:BLUEtooth:ANALysis:OFFSet	Sets or returns the symbol analysis offset.
[SENSe]:BLUEtooth:ANALysis:OFFSet:AUTO	Determines whether to set the carrier frequency error automatically or manually.
[SENSe]:BLUEtooth:ANALysis:TIME:UNITs	Sets the time units.
[SENSe]:BLUEtooth([:BANDwidth]):BWIDth):MODE	Sets or returns the measurement bandwidth mode.
[SENSe]:BLUEtooth([:BANDwidth]):BWIDth):TINTerval	Sets or returns the measurement bandwidth frequency span.
[SENSe]:BLUEtooth([:BANDwidth]):BWIDth):TINTerval:AUTO	Sets or returns the bandwidth to Auto or Manual.
[SENSe]:BLUEtooth:CONStellation:PREFs:GRATICule:SHOW	Show or hides the graticule state.
[SENSe]:BLUEtooth:CONStellation:PREFs:MARKERS:SHOW	Show or hides the marker readout.
[SENSe]:BLUEtooth:CONStellation:PREFs:RADIx	Sets or returns the radix of the marker readout.
[SENSe]:BLUEtooth:CONStellation:TRACE<x>:CONTent	Sets or returns the appearance of the specified trace (Trace 1 or Trace 2).

Command	Description
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:FREEze	Sets or freezes the updates of the specified trace (Trace 1 or Trace 2).
[SENSe]:BLUEtooth:CONStellation:TRACE<x>:POINTsPerSymbol	Sets or returns the number of points per symbol (how many points to use between symbols) for the specified trace (Trace 1 or Trace 2).
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:SHOW	Shows or hides the specified trace (Trace 1 or Trace 2).
[SENSe]:BLUEtooth:DELTA:AVERage:FONE	Sets or returns the average frequency for the low deviation pattern.
[SENSe]:BLUEtooth:DELTA:AVERage:FTWO	Sets or returns the average frequency for the high deviation pattern.
[SENSe]:BLUEtooth:FDVTime:TRACE:OCTEt?	Returns the selected octet number on the Frequency Deviation vs. Time display.
[SENSe]:BLUEtooth:FDVTime:TRACE:OCTEt:TOTAL: COUNT?	Returns the total octet value to be selected on the Frequency Deviation vs. Time display.
[SENSe]:BLUEtooth:FDVTime:TRACE:VIEW:MODE	Sets or queries view mode in the Frequency Deviation vs. Time display.
[SENSe]:BLUEtooth:FILTer:ALPHa	Sets or returns the alpha filter factor (α /BT).
[SENSe]:BLUEtooth:FILTer:MEASurement	Sets or returns the measurement filter setting.
[SENSe]:BLUEtooth:FILTer:REFerence	Sets or returns the reference filter setting.
[SENSe]:BLUEtooth:FREQuency:DEViation	ets or returns the frequency deviation.
[SENSe]:BLUEtooth:FREQuency:DEViation:AUTO	Determines whether to detect the frequency deviation automatically or manually.
[SENSe]:BLUEtooth:FREQuency:ERRor	Sets or returns the frequency error in the Bluetooth analysis parameters (when Auto is off).
[SENSe]:BLUEtooth:FREQuency:ERRor:AUTO	Determines whether the frequency error is set to Auto or Manual.
[SENSe]:BLUEtooth:INBEmissions:POWER:LIMIt<x>	Sets or queries the limits of the Bluetooth InBand Emission settings.
[SENSe]:BLUEtooth:POWER:CLASs	Sets or queries the power class of the Bluetooth standard.
[SENSe]:BLUEtooth:STANdard	Sets or queries the Bluetooth standard.
[SENSe]:BLUEtooth:SUMMAry:LIMIt:BDR:DELTA:FONE:AVERage:MAX	Sets or returns the maximum limit of the Basic Rate $\Delta F1$ average.
[SENSe]:BLUEtooth:SUMMAry:LIMIt:BDR:DELTA:FONE:AVERage:MIN	Sets or returns the minimum limit of the Basic Rate $\Delta F1$ average.
[SENSe]:BLUEtooth:SUMMAry:LIMIt:BDR:DELTA:FTWO:PERcent	Sets or returns the limit of the Basic Rate $\Delta F2$ percentage.

Command	Description
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FTWO:RESult	Sets or returns the limit of the Basic Rate $\Delta F2$ result.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:DRIFT:FNFZero	Sets or returns the limit of the Basic Rate maximum drift $f_n - f_0$.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:FREQUENCY:OFFSet	Sets or queries the limit of the Basic Rate maximum frequency offset.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:FREQUENCY:OFFSet:PREAmBDR	Sets or queries the limit of the Basic Rate maximum frequency offset value from the preamble region.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:ONE:AVERAge:MAX	Sets or queries the limit of the Basic Rate Power Class 1 maximum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:ONE:AVERAge:MIN	Sets or queries the limit of the Basic Rate Power Class 1 minimum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:ONE:PEAK:MAX	Sets or queries the limit of the Basic Rate Power Class 1 maximum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:ONE:PEAK:MIN	Sets or queries the limit of the Basic Rate Power Class 1 minimum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:THREe:AVERAge:MAX	Sets or queries the limit of the Basic Rate Power Class 3 maximum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:THREe:AVERAge:MIN	Sets or queries the limit of the Basic Rate Power Class 3 minimum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:THREe:PEAK:MAX	Sets or queries the limit of the Basic Rate Power Class 3 maximum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:THREe:PEAK:MIN	Sets or queries the limit of the Basic Rate Power Class 3 minimum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:TWO:AVERAge:MAX	Sets or queries the limit of the Basic Rate Power Class 2 maximum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:TWO:AVERAge:MIN	Sets or queries the limit of the Basic Rate Power Class 2 minimum average output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MAX	Sets or queries the limit of the Basic Rate Power Class 2 maximum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MIN	Sets or queries the limit of the Basic Rate Power Class 2 minimum peak output power value.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:DELTA:FONE:AVERAge:MAX	Sets or returns the maximum limit of the Low Energy $\Delta F1$ average.
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:DELTA:FONE:AVERAge:MIN	Sets or returns the minimum limit of the Low Energy $\Delta F1$ average.

Command	Description
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FTWO:PERcent	Sets or returns the limit of the Low Energy ΔF_2 percentage.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FTWO:RESult	Sets or returns the limit of the Low Energy ΔF_2 result.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:DRIFt: FNFZero	Sets or returns the limit of the Low Energy maximum drift $f_n - f_0$.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet	Sets or returns the limit of the Low Energy maximum frequency offset.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet:PREAmble	Sets or returns the limit of the Low Energy maximum frequency offset value from the preamble region.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:AVERAge:MAX	Sets or returns the limit of the Low Energy maximum average output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:AVERAge:MIN	Sets or returns the limit of the Low Energy minimum average output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:PEAK:MAX	Sets or returns the limit of the Low Energy maximum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:PEAK:MIN	Sets or returns the limit of the Low Energy minimum peak output power value.
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFt:F1FZero	Sets or returns the limit of the maximum $f_n - f_{n0}$ drift in the packet.
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFt:FNFN5	Sets or returns the limit of the maximum $f_n - f_{n5}$ drift in the packet.
[SENSe]:BLUEtooth:SYMBol:POINts	Sets or returns the number of points per symbol (how many points to use between symbols).
[SENSe]:BLUEtooth:TEST:PATtern	Sets or returns the test pattern type in the Bluetooth displays.
[SENSe]:BLUEtooth:TEST:PATtern:AUTO:DETEct	Sets or returns the auto detect setting for the Bluetooth displays.
[SENSe]:BLUEtooth:TIME:ZERO:REFERENCE	Sets or returns the Time Zero Reference setting in the Bluetooth displays.
[SENSe]:BLUEtooth:TRACe:TYPE	Sets or returns the trace type.
[SENSe]: NOISe subgroup	Noise Figure and Gain measurements
[SENSe]:NOISe:AVERAge:COUNT	Sets or queries the acquisition counts over which the noise average is computed.
[SENSe]:NOISe:BANDwidth	Sets or queries the resolution bandwidth (RBW).
[SENSe]:NOISe:CONTRol:SETTling:OFF[TIME]	Sets or queries the analyzer off settle time.

Command	Description
[SENSE]:NOISe:CONTRol:SETTling:ON[:TIME]	Sets or queries the analyzer on settle time.
[SENSe]:NOISe:CORRection:ENR:CONSTant	Sets and queries the excess noise ratio (ENR) constant.
[SENSe]:NOISe:CORRection:ENR:MODE	Sets and queries the Noise Source mode for the noise displays.
[SENSe]:NOISe:CORRection:ENR:TABLE:DATA?	Queries the Noise Source model, serial number, and table values for frequency and ENR for the noise displays.
[SENSe]:NOISe:CORRection:ENR:TABLE:ID	Sets or queries the Noise Source Model for the noise displays.
[SENSe]:NOISe:CORRection:ENR:TABLE:NEW	Sets the Noise Source Model for the noise displays.
[SENSe]:NOISe:CORRection:ENR:TABLE:SERial	Sets or queries the Noise Source serial number for the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:ADUT:UREFERENCE	Sets or queries the analyzer to use the reference temperature (K) for the loss at the DUT output in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:ADUT[:VALue]	Sets or queries the temperature value (K) for the loss at the DUT output in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:BDUT:UREFERENCE	Sets or queries the analyzer to use the reference temperature (K) for the loss at the DUT input in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd:BDUT[:VALue]	Sets or queries the temperature value (K) for the loss at the DUT input in the noise displays.
[SENSe]:NOISe:CORRection:TCOLd[:REFERENCE]	Sets or queries the reference temperature value (K) in the display.
[SENSe]:NOISe:FIGure:POINTs:COUNT	Sets the number of sample points for the display.
[SENSe]:NOISe:FREQuency:CENTer	Sets or queries the center frequency value (Hz).
[SENSe]:NOISe:FREQuency:MODE	Sets or queries the frequency mode in the display.
[SENSe]:NOISe:FREQuency:SPAN	Sets or queries the frequency Span value (Hz).
[SENSe]:NOISe:FREQuency:STARt	Sets or queries the Start Frequency value.
[SENSe]:NOISe:FREQuency:STEPs	Sets or queries the frequency Steps value.
[SENSe]:NOISe:FREQuency:STOP	Sets or queries the Stop Frequency value.
[SENSe]:NOISe:FREQuency:TABLE:DATA?	Queries the data in the Frequency Table.
[SENSe]:NOISe:FREQuency:TABLE:NEW	Creates a new Frequency Table with the specified values for the noise display.
[SENSe]:OBWidth:BOBW:XDBM:MEASurement:DIREction	Sets or queries the measurement direction.

Command	Description
[SENSe]:OBWidth:BOBW:XDBM:RANGe	Sets or queries the measurement range.
[SENSe]:P25 subgroup	APCO P25 measurements
[SENSe]:P25:SUMMary:LIMit:FREQuency:DEVlation:PHASe[1/2]:F[1/2/3/4]:LO	Sets or queries for two values namely, the On/Off state of limit comparison and the lower limit value for Frequency deviation, f1/f2/f3/f4 for Phase1 or Phase2.
[SENSe]:P25:SUMMary:LIMit:FREQuency:DEVlation:PHASe[1/2]:F[1/2/3/4]:UP	Sets or queries for two values namely, the On/Off state of limit comparison and the upper limit value for Frequency deviation, f1/f2/f3/f4 for Phase1 or Phase2.
[SENSe]:P25:SUMMary:LIMit:FREQuency:DEVlation:PMAX:OFF	Sets or queries for two values namely, the On/Off state of limit comparison and the upper limit value for Pmax-off.
[SENSe]:P25:SUMMary:LIMit:FREQuency:DEVlation:PMAX:ON	Sets or queries for two values namely, the On/Off state of limit comparison and the upper limit value for Pmax-on.
[SENSe]:P25:TEST:PATtern	Sets or returns the test pattern type in the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement	Sets or queries the Trigger Measurement from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TOBSync	Sets or returns the tOB_sync (measured) value in the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TOBSync:AUTO	Sets or queries the Auto checkbox selection from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANSient:FREQuency:BEHAViour	Sets or queries the Trigger Measurements option Phase1-Transient Frequency Behavior from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANSient:FREQuency:BEHAViour:TIME:OFF	Sets or queries the 't off' value when the Transient Frequency option is Transient Frequency Behavior On to Off for Phase1-Transient Frequency Behavior from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANSient:FREQuency:BEHAViour:TIME:OFF:AUTO	Sets or queries the Auto checkbox selection when Transient Frequency is chosen as Transient Frequency Behavior On to Off from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANSient:FREQuency:BEHAViour:TIME:ON	Sets or queries the 't on' value when the Transient Frequency option is Transient Frequency Behavior Off to On for Phase1-Transient Frequency Behavior from the P25 displays.
[SENSe]:P25:TRIGgger:MEASurement:TRANSient:FREQuency:BEHAViour:TIME:ON:AUTO	Sets or queries the Auto checkbox selection when Transient Frequency is chosen as Transient Frequency behavior Off to On from the P25 displays.
SENSe:PERRor subgroup	Perror measurement
[SENSe]:PERRor[:MEASview<y>]:SELEcted:SOURce	Sets or queries the source of Phase error versus Time for a selected Measurement view number.
SENSe:PULSe subgroup	Pulse measurements

Command	Description
[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE	Sets or Queries the Measurement(s) parameter from the Control panel settings of Define tab which is common across the Pulse displays.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:BIN:COUNT	Sets the Bins value in Histogram settings table in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:CLEar:RESults	Clears all scalar results in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:MODE	Sets the Histogram settings mode to Auto or Manual in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:ORDinate	Sets the Histogram readout in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier: ORDinate	Sets the outlier readout in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:SETtings: APPLY	Applies the new settings to the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:XLIMit	Sets the Xlimit in Histogram settings table in the Cumulative Histogram display.
[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:CLEar: RESults	Clears all scalar results in the Cumulative Statistics display.
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:FILTer:SHAPE	Sets or queries the type of Filter shape from Analysis tab of Frequency vs Time from the Pulse-Ogram display.
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:SPECTrum:ANALysis:REGion	Sets or queries the Spectrum Analysis region from Analysis tab of Frequency vs Time in the Pulse-Ogram display.
[SENSe]:PULSe:STATistics[:MEASview<y>]:IN:LINear:SCALE	Sets or queries the Calculate statistics in linear scale selection from the Pulse Statistics display.
[SENSe]:ROSCillator:SOURce	Sets or queries the frequency reference oscillator source.
SENSe:TXGain subgroup	Transmission Gain measurements
SENSe:TXGain:{BANDwidth BWIDth}[:RESolution]	Sets or queries the resolution bandwidth.
SENSe:TXGain:FREQuency:CENTer	Sets or queries the frequency at the center of the selected Span.
SENSe:TXGain:FREQuency:POINts	Sets or queries the number of frequency steps in the measurement range.
SENSe:TXGain:FREQuency:SPAN	Sets or queries the difference between the start and stop frequencies (span).
SENSe:TXGain:FREQuency:STARt	Sets or queries the lowest frequency in the span.

Command	Description
SENSe:TXGain:FREQuency:STEP	Sets or queries the frequency increment. Measurements are made at frequency points from Start Freq to Stop Freq in Step Size increments.
SENSe:TXGain:FREQuency:STOP	Sets or queries the highest frequency in the span.
SENSe:P25 subgroup	P25 measurements
[SENSe]:P25:ANALysis:OFFSet	Sets or queries the offset value.
[SENSe]:P25:ANALysis:OFFSet:AUTO	Sets or queries if the offset is set to Auto or if Auto is off.
[SENSe]:P25([:BANDwidth]):BWIDth:MODE	Sets or queries the Measurement BW (bandwidth) (frequency span) mode as Auto, Manual, or Link to Span.
[SENSe]:P25([:BANDwidth]):BWIDth:TINTerval	Sets or queries the Measurement BW (bandwidth) (frequency span).
[SENSe]:P25([:BANDwidth]):BWIDth:TINTerval:AUTO	Sets or queries the Measurement BW (bandwidth) (frequency span) mode as Auto or Manual.
[SENSe]:P25:FILTer:MEASurement	Sets or queries the Measurement Filter setting.
[SENSe]:P25:FILTer:REFerence	Sets or queries the Reference Filter setting.
[SENSe]:P25:FREQuency:ERRor	Sets or queries the Frequency Offset (when Auto is off).
[SENSe]:P25:FREQuency:ERRor:AUTO	Sets or queries if the Frequency Error is set to Auto or if Auto is off.
[SENSe]:P25:MODUlation:CHANnel(:[BANDwidth]):BWIDth)?	Queries the actual P25 Preset channel bandwidth.
[SENSe]:P25:MODUlation:STANdard	Sets or queries the modulation standard.
SENSe:P25:MODUlation:TYPE	Sets or queries the modulation type.
[SENSe]:P25:SRATe	Sets or queries the symbol rate value for measurements.
[SENSe]:P25:SUMMARY:CLEar:RESults	Clears the results from the P25 Summary display.
[SENSe]:P25:SUMMARY:LIMIt:FA	Sets or queries the On/Off state of limit comparison and the upper limit value for Operating Frequency Accuracy.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:AVERage:TERRor:ONE	Sets or queries the On/Off state of limit comparison and the upper limit value for Average t_error_1.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:AVERage:TERRor:ZERO	Sets or queries the On/Off state of limit comparison and the upper limit value for Average t_error_0.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:LOGic:CHANnel:OFF:SLOT	Sets or queries the On/Off state of limit comparison and the upper limit value for HCPM Transmitter Logic channel offslot.

Command	Description
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:LOGic:CHANnel:PEAK:ACPR	Sets or queries the On/Off state of limit comparison and the upper limit value for HCPM Transmitter Logic channel Peak ACPR.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:NEGAtive:LO	Sets or queries the On/Off state of limit comparison and the lower limit value for Frequency Deviation, negative peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:NEGAtive:UP	Sets or queries the On/Off state of limit comparison and the upper limit value for Frequency Deviation, negative peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:POSItive:LO	Sets or queries the On/Off state of limit comparison and the lower limit value for Frequency Deviation, positive peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PEAK:POSItive:UP	Sets or queries for the On/Off state of limit comparison and the upper limit value for Frequency Deviation, positive peak.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PHASe[1/2]:F[1/2/3/4]:LO	Sets or queries the On/Off state of limit comparison and the lower limit value for Frequency Deviation, f1/f2/f3/f4 for Phase1 or Phase2.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PHASe[1/2]:F[1/2/3/4]:UP	Sets or queries the On/Off state of limit comparison and the upper limit value for Frequency Deviation, f1/f2/f3/f4 for Phase1 or Phase2.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMAX:OFF	Sets or queries the On/Off state of limit comparison and the upper limit value for Pmax-off.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMAX:ON	Sets or queries the On/Off state of limit comparison and the upper limit value for Pmax-on.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMAX:SS	Sets or queries the On/Off state of limit comparison and the upper limit value for Pss-max.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:PMIN:SS	Sets or queries the On/Off state of limit comparison and the upper limit value for Pss-min.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:ATTK:ENCOder	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack encoder.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:ATTK:ENCOder:BI	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack encoder, busy/idle.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:ATTK:POWER	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack power.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:ATTK:POWER:BI	Sets or queries for the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack power, busy/idle.
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVlation:TRANsmitter: AVERAge:THRUput:DLAY	Sets or queries the On/Off state of limit comparison and the upper limit value for Transmitter Average throughput delay.
[SENSe]:P25:SUMMARY:LIMIt:MF	Sets or queries the On/Off state of limit comparison and the upper limit value for Modulation Fidelity.

Command	Description
[SENSe]:P25:SUMMary:LIMIt:RF:OUTPower	Sets or queries the On/Off state of limit comparison and the upper limit value for RF Output Power.
[SENSe]:P25:SUMMary:LIMIt:SRA	Sets or queries the On/Off state of limit comparison and the upper limit value for Symbol Rate Accuracy.
[SENSe]:P25:SYMBols:POINts	Sets or queries the Points/Symbols to display.
SENSe:P25:TiMe:UNITs	Sets or queries the time units as Seconds or Symbols in the display.
[SENSe]:P25:TiMe:UNITs	Sets or queries the fundamental unit of time for the P25 measurements.
[sense]:acquisition subgroup	Acquisition measurements
[SENSe]:ACQuisition:MODE	Sets or queries the acquisition mode.
[SENSe]:ACQuisition:OPTimization	Sets or queries the method of the global gain and input bandwidth optimization.
[SENSe]:ACQuisition:SAMPles	Sets or queries the acquisition samples.
[SENSe]:ACQuisition:SEConds	Sets or queries the acquisition length.
[SENSe]:ANALysis:ADVanced:DITHer	Determines whether to enable or disable dithering.
[SENSe]:ANALysis:ADVanced:DITHer:HWARe: STATus?	Returns the dithering hardware status.
[SENSe]:ANALysis:LENGth	Sets or queries the analysis length.
[SENSe]:ANALysis:LENGth:ACTual?	Queries the actual analysis length.
[SENSe]:ANALysis:LENGth:AUTO	Sets or queries whether to set the analysis length automatically.
[SENSe]:ANALysis:REFerence	Sets or queries the analysis time reference.
[SENSe]:ANALysis:STARt	Sets or queries the analysis offset time.
[SENSe]:ANALysis:STARt:AUTO	Sets or queries whether to set the analysis offset automatically.
[SENSe]:ANSpectrum:STARt:AUTO:METHod	Sets or queries the method used for computing auto analysis and spectrum offsets.
[SENSe]:MEASurement:FREQuency	Sets or queries the measurement frequency.
[SENSe]:MEASurement:FREQuency:CENTer:LOCK	Sets or queries locking the measurement center frequency.
[SENSe]:POWER:UNITs	Sets or queries the unit of power.
[SENSe]:SIGNAlpath:PRIOriety	Sets or queries the signal path priority for the measurements (for RSA5000 series only).

Command	Description
[SENSe]:USETtings	Updates the analyzer settings.
[SENSe]:ACPower subgroup	Channel power and ACPR measurement
[SENSe]:ACPower:AVERage	Sets or queries how to average waveform.
[SENSe]:ACPower:AVERage:COUNT	Sets or queries the number of traces for averaging.
[SENSe]:ACPower:{BANDwidth BWIDth}{:RESolution}	Sets or queries the resolution bandwidth (RBW).
[SENSe]:ACPower:{BANDwidth BWIDth}{:RESolution}:ACTual?	Queries the actual resolution bandwidth (RBW).
[SENSe]:ACPower:{BANDwidth BWIDth}{:RESolution}:AUTO	Sets or queries whether to set the RBW automatically.
[SENSe]:ACPower:{BANDwidth BWIDth}:VIDeo	Sets or queries the video bandwidth (VBW).
[SENSe]:ACPower:{BANDwidth BWIDth}:VIDeo:STATe	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:ACPower:CHANnel:{BANDwidth BWIDth}	Sets or queries the channel bandwidth.
[SENSe]:ACPower:CHANnel:FILTer	Sets or queries the adjacent channel filter.
[SENSe]:ACPower:CHANnel:PAIRs	Sets or queries the number of adjacent channel pairs.
[SENSe]:ACPower:CHANnel:SPACing	Sets or queries the channel-to-channel spacing.
[SENSe]:ACPower:CHIPrate	Sets or queries the chip rate.
[SENSe]:ACPower:CLEAR:RESults	Restarts the average trace.
[SENSe]:ACPower:FREQuency	Sets or queries the center frequency.
[SENSe]:ACPower:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:ACPower:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:ACPower:NFLoor:STATe	Sets or queries whether to enable the correction for noise floor.
[SENSe]:ACPower:POINTs:COUNT	Sets or queries the number of trace points.
[SENSe]:ACPower:RRCRolloff	Sets or queries the filter parameter for the Root Raised Cosine filter.
[SENSe]:ACPower:SYMBrate	Sets or queries the symbol rate.
[SENSe]:{AM FM PM} subgroup (Option 21 only)	AM/FM/PM measurement
[SENSe]:{AM FM PM}:{BANDwidth BWIDth}:MEASurement	Sets measurement bandwidth for the AM, FM, or PM demodulation to analyze.

Command	Description
[SENSe]:{AM FM PM}:CLEar:RESults	Clears measurement results.
[SENSe]:{AM FM PM}:{MTPoints MAXTracepoints}	Sets or queries the maximum trace points.
[SENSe]:AM:DETECT:AMPLitude	Sets or queries the carrier amplitude detection method.
[SENSe]:{FM PM}:BURSt:THReshold	Sets or queries the threshold level to detect bursts.
[SENSe]:{FM PM}:FREQuency:OFFSet	Sets or queries the carrier frequency offset in the FM/PM measurement.
[SENSe]:{FM PM}:FREQuency:OFFSet:MARKer	Sets the frequency offset from selected marker or delta marker location.
[SENSe]:{FM PM}:FREQuency:SEARch:AUTO	Sets or queries whether to detect the carrier frequency automatically.
[SENSe]:PM:PHASe:OFFSet	Sets the phase offset from the selected marker location.
[SENSe]:PM:PHASe:OFFSet:MARKer	Sets the carrier frequency offset from the selected marker.
[SENSe]:PM:PHASe:SEARch:AUTO	Sets or queries whether to detect the phase automatically or manually.
{SENSe}:AUDio subgroup	Audio measurement
[SENSe]:AUDio:AVERage:COUNT	Sets or queries the number of harmonics to average in the audio measurement.
[SENSe]:AUDio:AVERage:ENABLE	Enables or disables averaging of harmonics in the audio measurement.
[SENSe]:AUDio:BANDwidth BWIDth	Sets or queries the audio measurement bandwidth.
[SENSe]:AUDio:BANDwidth BWIDth:RESolution	Sets or queries the resolution bandwidth for the audio measurement.
[SENSe]:AUDio:BANDwidth BWIDth:RESolution:AUTO	Sets or queries the resolution bandwidth for the audio measurement.
[SENSe]:AUDio:BANDwidth BWIDth:RESolution:SHAPE	Sets or queries the shape of the resolution bandwidth for the audio measurement.
[SENSe]:AUDio:CARRier:OFFSet	Sets or queries the carrier frequency offset.
[SENSe]:AUDio:CARRier:OFFSet:AUTO	Determines whether to set the carrier frequency error automatically or manually.
[SENSe]:AUDio:FILTer:DEEMphasis	Sets or queries the de-emphasis filter type.
[SENSe]:AUDio:FILTer:DEEMphasis:ENABLE	Enables or disables the de-emphasis filter for the audio measurement.

Command	Description
[SENSe]:AUDio:FILTer:DEEMphasis:USER	Sets or queries a user-defined de-emphasis audio filter.
[SENSe]:AUDio:FILTer:HPF	Sets or queries the high-pass filter type.
[SENSe]:AUDio:FILTer:HPF:ENABle	Enables or disables the high-pass audio filter for the audio measurement.
[SENSe]:AUDio:FILTer:HPF:USER	Sets or queries a user-defined high-pass audio filter.
[SENSe]:AUDio:FILTer:DEEMphasis:USER	Sets or queries a user-defined high-pass audio filter.
[SENSe]:AUDio:FILTer:LPF	Sets or queries the low-pass filter type.
[SENSe]:AUDio:FILTer:LPF:ENABle	Enables or disables the low-pass filter for the audio measurement.
[SENSe]:AUDio:FILTer:LPF:USER	Sets or queries a user-defined low-pass audio filter.
[SENSe]:AUDio:FILTer:MODE:PREDefined	Selects a predefined audio filter or a filter stored on the instrument file.
[SENSe]:AUDio:FILTer:SOURce?	Queries the measurement filter from the user-defined source file.
[SENSe]:AUDio:FILTer:STANdard	Sets or queries the Standard audio filter.
[SENSe]:AUDio:FILTer:STANdard:ENABle	Enables or disables a Standard filter for the audio measurement.
[SENSe]:AUDio:FREQuency	Sets or queries the reference audio frequency.
[SENSe]:AUDio:FREQuency:AUTO	Determines whether to set the reference audio frequency automatically or manually.
[SENSe]:AUDio:HNOise:ENABle	Enables or disables the Hum and Noise information in the Audio Summary display.
[SENSe]:AUDio:HNOise:REFerence	Captures the current Hum and Noise information in the Audio Summary display.
[SENSe]:AUDio:SIGnal:TYPE	Sets or queries the audio signal type.
[SENSe]:AUDio:SPECtrum:CLEar:RESults	Clears the results of the audio spectrum measurement.
[SENSe]:AUDio:SPECtrum:POINts:COUNT	Sets or queries the number of trace points acquired for the audio spectrum display.
[SENSe]:AUDio:UNITs	Sets or queries the units of the audio spectrum measurement.
[SENSe]:AVTime subgroup	Amplitude versus Time measurement
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth BWIDth}	Sets or queries the time-domain bandwidth filter.

Command	Description
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth BWIDth}:ACTual?	Queries the actual resolution bandwidth (RBW).
[SENSe]:AVTime[:MEASview<y>]:CLEar:RESults	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:AVTime[:MEASview<y>]:MAXTracepoints	Sets or queries the maximum trace points.
[SENSe]:AVTime[:MEASview<y>]:METHod	Sets or queries the method to set the measurement bandwidth.
[SENSe]:AVTime[:MEASview<y>]:SPAN	Sets or queries the frequency span.
[SENSe]:DDEMod subgroup (Option 21 only)	General purpose digital modulation measurements
[SENSe]:DDEMod:ANALysis:LENGth	Sets or queries the analysis length.
[SENSe]:DDEMod:ANALysis:LENGth:ACTual?	Queries the actual analysis length.
[SENSe]:DDEMod:ANALysis:LENGth:AUTO	Sets or queries whether to set the analysis length automatically.
[SENSe]:DDEMod:{BANDwidth BWIDth}:MODE	Sets or queries the measurement bandwidth mode.
[SENSe]:DDEMod:{BANDwidth BWIDth}:TINTerval	Sets or queries the measurement bandwidth (frequency span).
[SENSe]:DDEMod:{BANDwidth BWIDth}:TINTerval:AUTO	Sets the measurement bandwidth (frequency span) automatically.
[SENSe]:DDEMod:BURSt:DETECT	Sets or queries how to detect bursts.
[SENSe]:DDEMod:BURSt:THReshold	Sets or queries the threshold level to determine a burst.
[SENSe]:DDEMod:CARRier:OFFSet	Sets or queries the carrier frequency offset.
[SENSe]:DDEMod:CARRier:OFFSet:AUTO	Sets or queries whether to detect the carrier frequency automatically.
[SENSe]:DDEMod:EQUalizer:AVAILable?	Determines if the equalizer is available.
[SENSe]:DDEMod:EQUalizer:CONVergence	Sets or queries the Convergence value (also known as tap update rate).
[SENSe]:DDEMod:EQUalizer:ENABLe	Sets or queries the Equalizer state.
[SENSe]:DDEMod:EQUalizer:LENGth	Sets or queries the equalizer filter length.
[SENSe]:DDEMod:EQUalizer:MODE	Sets or queries the equalizer mode. The equalizer can in learning mode (train) or enabled (hold).
[SENSe]:DDEMod:EQUalizer:RESet	Resets the equalizer settings to default values.
[SENSe]:DDEMod:EQUalizer:TAPS	Sets or queries the number of filter coefficients for the equalizer.

Command	Description
[SENSe]:DDEMod:EQualizer:TSRatIo	Sets or queries the Equalizer Taps/Symbol parameter.
[SENSe]:DDEMod:FILTer:ALPHa	Sets or queries the filter factor (a/BT).
[SENSe]:DDEMod:FILTer:MEASurement	Sets or queries the measurement filter.
[SENSe]:DDEMod:FILTer:REFerence	Sets or queries the reference filter.
[SENSe]:DDEMod:FREQuency:DEViation	Sets or queries the frequency deviation to determine two states for FSK.
[SENSe]:DDEMod:FREQuency:DEViation:AUTO	Sets or queries whether to detect the frequency deviation automatically.
[SENSe]:DDEMod:MAGNitude:NORMalize	Sets or queries the method for the magnitude normalization.
[SENSe]:DDEMod:MINdex	Sets or queries the modulation index for a CPM signal.
[SENSe]:DDEMod:MINdex:AUTO	Sets or queries whether to detect the modulation index automatically.
[SENSe]:DDEMod:MODulation:TYPE	Sets or queries the modulation type.
[SENSe]:DDEMod:PRESet	Presets the modulation analysis to a communication standard.
[SENSe]:DDEMod:RING:RADius	Sets or queries the APSK radius parameter.
[SENSe]:DDEMod:RING:ROTation	Sets or queries the APSK rotation parameter.
[SENSe]:DDEMod:SRATe	Sets or queries the symbol rate.
[SENSe]:DDEMod:SWAP:IQ	Sets or queries whether or not to swap I and Q data.
[SENSe]:DDEMod:SYMBol:HSSHift	Sets or queries the Q data half-symbol shift for OQPSK and SOQPSK signals.
[SENSe]:DDEMod:SYMBol:MAP:SOURce?	Specifies or queries the user symbol map file.
[SENSe]:DDEMod:SYMBol:MAP[:STATe]	Sets or queries whether to use the user symbol map.
[SENSe]:DDEMod:SYMBol:PLOT:POSition	Sets or queries the symbol point location on an SOQPSK waveform.
[SENSe]:DDEMod:SYMBol:POINts	Sets or queries the number of points per symbol.
[SENSe]:DDEMod:SYMBol:RATE:SEARch	Determines whether to enable a symbol rate search.
[SENSe]:DDEMod:SYNCh:WORD	Sets or queries whether to enable the synchronization word.
[SENSe]:DDEMod:SYNCh:WORD:SYMBol	Sets or queries the synchronization word.

Command	Description
[SENSe]:DDEMod:Time:UNITs	Sets or queries the fundamental unit of time.
[SENSe]:DPX subgroup	DPX spectrum measurement
[SENSe]:DPX:AUDio:DEMod:GAIN	Sets or queries the gain for the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:RXBWidth	Sets or queries the receiver bandwidth for the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:RXFrequency?	Queries the receiver frequency for the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:STATe	Sets or queries whether to enable or disable the audio demodulation.
[SENSe]:DPX:AUDio:DEMod:TUNE	Sets or queries how to determine the tuning frequency.
[SENSe]:DPX:AUDio:DEMod:TYPE	Sets or queries the modulation type for the audio demodulation.
[SENSe]:DPX:{BANDwidth BWIDTH}:ACTual?	Sets or queries the resolution bandwidth (RBW).
[SENSe]:DPX:{BANDwidth BWIDTH}:RESolution	Sets or queries the resolution bandwidth.
[SENSe]:DPX:{BANDwidth BWIDTH}[:RESolution]:AUTO	Determines whether to set the resolution bandwidth (RBW) automatically or manually in the DPX spectrum measurement.
[SENSe]:DPX:FREQuency:SPAN: {BANDwidth BWIDTH}[:RESolution]:RATio	Sets or queries whether to set the RBW automatically.
[SENSe]:DPX:CLEar:RESults	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:DPX:COLor	Sets or queries the color palette of three-dimensional graphs.
[SENSe]:DPX:COLor:MAXimum	Sets or queries the maximum value of the color axis.
[SENSe]:DPX:COLor:MINimum	Sets or queries the minimum value of the color axis.
[SENSe]:DPX:DDENsity:MEASurement:SHOW	Sets or queries the Show measurement value (measurement always visible for DPX Trigger).
[SENSe]:DPX:DGRam:COLor:MAXimum	Sets or queries the maximum value of the color axis in the DPXogram measurement.
[SENSe]:DPX:DGRam:COLor:MINimum	Sets or queries the minimum value of the color axis in the DPXogram measurement.
[SENSe]:DPX:DGRam:POINts:COUNT	Sets the number of trace points acquired for the DPXogram display.
[SENSe]:DPX:DGRam:TIME:CAPacity?	Returns the time capacity of the DPXogram measurement.
[SENSe]:DPX:DGRam:TIME:RESolution	Sets the time resolution of the DPXogram measurement.

Command	Description
[SENSe]:DPX:DGRam:TIME:RESolution:AUTO	Sets the time resolution automatically or manually in the DPXogram measurement.
[SENSe]:DPX:DGRam:WATERfall:DIRection	Sets or queries the direction of the Waterfall (DPXogram) display.
[SENSe]:DPX:DGRam:WATERfall:ENABle	Sets or queries the Waterfall (DPXogram) display.
[SENSe]:DPX:DGRam:Y[:SCALe]:AUTO	Rescales the height axis automatically to fit the waveform to the screen in the DPXogram display.
[SENSe]:DPX:DGRam:Y[:SCALe]:RESet	Resets the height scale of the DPXogram display.
[SENSe]:DPX:DWELI	Sets or queries the value of the Dwell time for the DPX spectrum measurement.
[SENSe]:DPX:DWELI:AUTO	Sets the value of the Dwell time automatically.
[SENSe]:DPX:PLOT	Sets or queries the plot in the DPX spectrum measurement.
[SENSe]:DPX:POINts:COUnT	Sets or queries the number of DPX trace points.
[SENSe]:DPX:FREQuency:CENTer	Sets or queries the center frequency.
[SENSe]:DPX:FREQuency:SPAN	Sets or queries the frequency span.
[SENSe]:DPX:FREQuency:STARt	Sets or queries the measurement start frequency.
[SENSe]:DPX:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:DPX:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:DPX:FREQuency:STOP	Sets or queries the measurement stop frequency.
[SENSe]:DPX:TDM:{BANDwidth BWIDth}	Sets or queries the value of the measurement bandwidth in the DPX measurement.
[SENSe]:DPX:TDM:{BANDwidth BWIDth}:ACTual?	Queries the actual bandwidth in the DPX measurement.
[SENSe]:DPX:TDM:FREQuency:CENTer	Sets or queries the center frequency in the DPX spectrum measurement.
[SENSe]:DPX:TDM:FREQuency:TXBer:CLEar:RESults	Clears the measurement results of the active Tx BER measurement.
[SENSe]:DPX:TDM:FREQuency:TXBer:ENABle	Sets or queries the Tx BER measurement.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern	Sets or queries the Tx BER data pattern.

Command	Description
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:INVert	Sets or queries the data pattern Invert setting.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:REPeat	Sets or queries the test duration for a User Pattern.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern:REVerse	Sets or queries whether the data pattern is in normal order or reversed.
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern: SOURce?	Returns the path and file name of the user-defined pattern file.
[SENSe]:DPX:TDM:RBW	Sets or queries the value of the RBW filter.
[SENSe]:DPX:TDM:RBW:STATe	Determines whether to set the resolution bandwidth (RBW) automatically or manually.
[SENSe]:DPX:TDM:SWEep:TIME	Sets or queries the sweep time.
[SENSe]:DPX:TDM:TMOTion	Sets or queries the scroll direction.
[SENSe]:{FSETtling PSETtling} subgroup	Settling time measurements
[SENSe]:{FSETtling PSETtling}:{BANDwidth BWIDTH}	Sets or queries the measurement bandwidth for the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:{BANDwidth BWIDTH}:ACTual?	Queries the actual measurement bandwidth in the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:FREQuency:CENTer	Queries the actual measurement bandwidth in the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:FREQuency:OFFSet	Sets or queries the offset frequency.
[SENSe]:{FSETtling PSETtling}:LENGth	Sets or queries the measurement length.
[SENSe]:{FSETtling PSETtling}:LENGth:ACTual?	Queries the actual measurement length for the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:MASK:LIMit	Sets or queries the frequency or phase limit for the specified region.
[SENSe]:{FSETtling PSETtling}:MASK:STATe	Sets or queries mask test state.
[SENSe]:{FSETtling PSETtling}:MASK:TIME:REFerence	Sets or queries the mask time reference.
[SENSe]:{FSETtling PSETtling}:MASK:TIME:START	Sets or queries the mask region start time in seconds.
[SENSe]:{FSETtling PSETtling}:MASK:TIME:STOP	Sets or queries the mask region stop time in seconds.

Command	Description
[SENSe]:{FSETtling PSETtling}:MASK:TIME:STOP	Sets or queries the mask region stop time in seconds.
[SENSe]:{FSETtling PSETtling}:MAXTracepoints	Sets or queries the maximum trace points in the Settling Time measurements.
[SENSe]:{FSETtling PSETtling}:SDURation:MINimum	Sets or queries the minimum settled duration in seconds.
[SENSe]:{FSETtling PSETtling}:TARGet:REFerence	Sets or queries the target reference frequency.
[SENSe]:{FSETtling PSETtling}:TOLerance	Sets or queries the frequency or phase range into which the signal must settle.
[SENSe]:FVTime subgroup	Frequency versus Time measurement
[SENSe]:FVTime[:MEASview<y>]:CLEar:RESults	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:FVTime[:MEASview<y>]:FREQuency:CENTer	Sets or queries the center frequency.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:SPAN	Sets or queries the frequency span.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STARt	Sets or queries the measurement start frequency.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STOP	Sets or queries the measurement stop frequency.
[SENSe]:FVTime[:MEASview<y>]:MAXTracepoints	Sets or queries the maximum trace points.
[SENSe]:IQVTime subgroup	RF I&Q versus Time measurement
[SENSe]:IQVTime[:MEASview<y>]:CLEar:RESults	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer	Sets or queries the center frequency.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN	Sets or queries the frequency span.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STARt	Sets or queries the measurement start frequency.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STOP	Sets or queries the measurement stop frequency.
[SENSe]:IQVTime[:MEASview<y>]:MAXTracepoints	Sets or queries the maximum trace points.
[SENSe]:MCPower subgroup	MCPR measurement

Command	Description
[SENSe]:MCPower:AVERage	Sets or queries how to average waveform.
[SENSe]:MCPower:AVERage:COUNT	Sets or queries the number of waveforms for average.
[SENSe]:MCPower:{BANDwidth BWIDth}[:RESolution]	Sets or queries the resolution bandwidth (RBW).
[SENSe]:MCPower:{BANDwidth BWIDth}[:RESolution]:ACTual?	Queries the actual resolution bandwidth (RBW).
[SENSe]:MCPower:{BANDwidth BWIDth}[:RESolution]:AUTO	Sets or queries whether to set the RBW automatically.
[SENSe]:MCPower:{BANDwidth BWIDth}:VIDeo	Sets or queries the video bandwidth (VBW).
[SENSe]:MCPower:{BANDwidth BWIDth}:VIDeo:STATe	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:MCPower:CHANnel:ADJacent:ADD	Adds a pair of upper and lower adjacent channels.
[SENSe]:MCPower:CHANnel:ADJacent:DELeTe	Deletes a selected adjacent channel.
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>: ENABLE?	Queries whether the adjacent channel is selected or not in the P25 MCPR display.
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>	Sets or queries the selected adjacent upper and lower limit values in the P25 MCPR display.
[SENSe]:MCPower:CHANnel:FILTer	Sets or queries the measurement filter.
[SENSe]:MCPower:CHANnel:MAIN:{BANDwidth BWIDth}	Sets or queries the frequency bandwidth of the main channels.
[SENSe]:MCPower:CHANnel:MAIN:COUNT	Sets or queries the number of main channels.
[SENSe]:MCPower:CHANnel:MAIN:INACTive	Makes a main channel inactive or queries the inactive main channels.
[SENSe]:MCPower:CHANnel:MAIN:SPACing	Sets or queries the main channel spacing.
[SENSe]:MCPower:CHIPRate	Sets or queries the chip rate.
[SENSe]:MCPower:CLEar:RESults	Restarts the average trace.
[SENSe]:MCPower:FREQuency	Sets or queries the center frequency.
[SENSe]:MCPower:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:MCPower:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:MCPower:NFLoor:STATe	Sets or queries whether to enable the correction for noise floor.
[SENSe]:MCPower:POINts:COUNT	Sets or queries the number of trace points.

Command	Description
[SENSe]:MCPower:RCHannels?	Queries the power reference.
[SENSe]:MCPower:RCHannels:MAIN<x>	Sets the power reference to the main channel with the index (<x>).
[SENSe]:MCPower:RCHannels:TOTal	Sets the power reference to the total power of all the active channels.
[SENSe]:MCPower:RRCRolloff	Sets or queries the filter parameter for the Root Raised Cosine filter.
[SENSe]:OBWidth subgroup	Occupied Bandwidth measurement
[SENSe]:OBWidth:AVERage	Sets or queries whether to enable or disable averaging.
[SENSe]:OBWidth:AVERage:COUNT	Sets or queries the number of measurements for averaging.
[SENSe]:OBWidth:{BANDwidth BWIDth}:MEASurement	Sets or queries the measurement bandwidth.
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution]	Sets or queries the resolution bandwidth (RBW).
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution]:ACTual?	Queries the actual resolution bandwidth (RBW).
[SENSe]:OBWidth:{BANDwidth BWIDth}[:RESolution]:AUTO	Sets or queries whether to set the RBW automatically.
[SENSe]:OBWidth:{BANDwidth BWIDth}:VIDeo	Sets or queries the video bandwidth (VBW).
[SENSe]:OBWidth:{BANDwidth BWIDth}:VIDeo:STATe	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:OBWidth:CLEar:RESults	Restarts the averaging.
[SENSe]:OBWidth:FREquency:CENTer	Sets or queries the center frequency.
[SENSe]:OBWidth:FREquency:STEP	Sets or queries the frequency step size.
[SENSe]:OBWidth:FREquency:STEP:AUTO	Determines whether to set the frequency step size automatically.
[SENSe]:OBWidth:PERCent	Sets or queries the occupied bandwidth percent power.
[SENSe]:OBWidth:XDBLevel	Sets or queries the x dB level.
[SENSe]:OFDM subgroup	Orthogonal Frequency Division Multiplexing measurement
[SENSe]:OFDM:CHANnel:ESTimation	Sets or queries the channel estimation.
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth]	Sets or queries the channel bandwidth.
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth]:SRATe?	Returns the FFT sample rate.

Command	Description
[SENSe]:OFDM:CHANnel[:BANDwidth BWIDth]:STATe	Determines whether the channel bandwidth is on or off.
[SENSe]:OFDM:CONSt:DETermination	Sets or queries the constellation determination.
[SENSe]:OFDM:CONSt:DETermination:MANual	Sets or queries a manual constellation type.
[SENSe]:OFDM:FFT:LENGTh?	Returns the FFT length.
[SENSe]:OFDM:GUARd:INTerval	Sets or queries the guard interval.
[SENSe]:OFDM:GUARd:INTerval:USER	Sets or queries a user-defined guard interval.
[SENSe]:OFDM:PILot:TRACking:AMPLitude:STATe	Determines whether to select the Amplitude pilot tracking.
[SENSe]:OFDM:PILot:TRACking:PHASe:STATe	Determines whether to select the Phase pilot tracking.
[SENSe]:OFDM:PILot:TRACking:TIMing:STATe	Determines whether to select the Timing pilot tracking.
[SENSe]:OFDM:RADix	Sets the radix for the OFDM measurements.
[SENSe]:OFDM:SCARrier:SPACing	Sets or queries the subcarrier spacing.
[SENSe]:OFDM:SCARrier:SPACing:STATe	Determines whether the subcarrier spacing is on or off.
[SENSe]:OFDM:SCARriers	Sets or queries the Subcarriers to display.
[SENSe]:OFDM:SCARriers:RANGe:START	Sets or queries the subcarrier start range.
[SENSe]:OFDM:SCARriers:RANGe:STOP	Sets or queries the subcarrier stop range.
[SENSe]:OFDM:SCARriers:SINGLe:INDEX	Sets or queries the index of a single subcarrier.
[SENSe]:OFDM:STANdard	Sets or queries the OFDM standard.
[SENSe]:OFDM:SWAP:IQ	Determines whether or not to exchange I and Q data.
[SENSe]:OFDM:SYMBol:ANALysis:OFFSet	Sets or queries the OFDM symbol analysis offset.
[SENSe]:OFDM:SYMBols	Sets or queries the symbols to display.
[SENSe]:OFDM:SYMBols:MAX	Sets or queries the maximum number of symbols to analyze.
[SENSe]:OFDM:SYMBols:MAX:STATe	Enables or disables the maximum number of symbols to analyze.
[SENSe]:OFDM:SYMBols:RANGe:COUNt	Sets or queries the number of symbols to display.
[SENSe]:OFDM:SYMBols:RANGe:START	Sets or queries the symbols start range.
[SENSe]:OFDM:SYMBols:SINGLe:INDEX	Sets or queries the symbol index

Command	Description
[SENSe]:OFDM:UNIT:FREQuency	Specifies the frequency units.
[SENSe]:OFDM:UNIT:TIME	Specifies the time units.
[SENSe]:PHVTime subgroup	Phase versus Time measurement
[SENSe]:PHVTime[:MEASview<y>]:CLEar:RESults	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:CENTer	Sets or queries the center frequency.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:SPAN	Sets or queries the frequency span.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:START	Sets or queries the measurement start frequency.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STOP	Sets or queries the measurement stop frequency.
[SENSe]:PHVTime[:MEASview<y>]:MAXTracepoints	Sets or queries the maximum trace points.
[SENSe]:PNOise subgroup (Option 11 only)	Phase noise measurement
[SENSe]:PNOise:AVERage:COUNT	Sets or queries the number of traces to combine for averaging.
[SENSe]:PNOise:AVERage:ENABLE	Sets or queries whether to enable or disable averaging trace.
[SENSe]:PNOise:CARRier:FREQuency:TRACK	Sets or queries whether to enable tracking the carrier frequency.
[SENSe]:PNOise:CARRier:THReshold	Sets or queries the threshold level to detect the carrier.
[SENSe]:PNOise:CLEar:RESults	Restarts the average process.
[SENSe]:PNOise:FREQuency:INTegration:OFFSet:START	Sets or queries the start offset frequency for integration.
[SENSe]:PNOise:FREQuency:INTegration:OFFSet:STOP	Sets or queries the stop offset frequency for integration.
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:START	Sets or queries the start offset frequency for plot.
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STOP	Sets or queries the stop offset frequency for plot.
[SENSe]:PNOise:OPTimization	Sets or queries the method of optimization.
[SENSe]:PULSe subgroup	Pulsed RF measurements
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:ALENgtH	Sets or queries the absolute amount of time included in the Frequency-Domain Linearity measurements.

Command	Description
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:METHod	Sets or queries the measurement time method for the Frequency-Domain Linearity measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RENGth	Sets or queries the relative amount of time included in the Frequency-Domain Linearity measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RLEVel	Sets or queries the Frequency-Domain Linearity measurement reference level.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:STARt	Sets or queries the start time for the Frequency-Domain Linearity measurements
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpone:CORRection:AMPLitude[:STATe]	Enables or disables the impulse response measurement amplitude corrections for window and for delay of the highest side lobe.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpone:KOTime	Sets or queries the impulse response measurement Keep-out time.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpone:MEASurement:TIME:ALENGth	Sets or queries the absolute amount of time included in impulse response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpone:MEASurement:TIME:METHod	Sets or queries the impulse response measurement time method.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpone:MEASurement:TIME:RENGth	Sets or queries the relative amount of time included in Impulse Response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpone:MEASurement:TIME:RLEVel	Sets or queries the measurement reference level for Impulse Response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpone:MEASurement:TIME:STARt	Sets or queries the start time for the Impulse Response measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel	Sets or queries how to determine the 50% level.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:FIFTy	Sets or queries how to determine the 50% level.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:HUNDred	Sets or queries how to determine the 50% level.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:ALENGth	Sets or queries the absolute amount of time included in the Overshoot measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:METHod	Sets or queries the measurement time method for the Overshoot measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RENGth	Sets or queries the relative amount of time included in the Overshoot measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RLEVel	Sets or queries the measurement reference level for the Overshoot measurements.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:STARt	Sets or queries the start time for the Overshoot measurements

Command	Description
[SENSe]:PULSe[:MEASview<y>]:ANALyze:PMLOCation	Sets or queries the phase measurement location.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:POINT:LOCation	Sets or queries the point location method.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RFALI	Sets or queries the threshold levels to measure the rise/fall time.
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RIPPlE	Sets or queries the ripple portion of the pulse top.
[SENSe]:PULSe[:MEASview<y>]:CARRier:FREQuency?	Queries the carrier frequency.
[SENSe]:PULSe[:MEASview<y>]:CARRier:OFFSet	Sets or queries the carrier frequency offset.
[SENSe]:PULSe[:MEASview<y>]:CARRier:SEARCh	Sets or queries how to detect the carrier.
[SENSe]:PULSe[:MEASview<y>]:DETEct:MEASurement	Sets or queries whether to set the maximum number of pulses.
[SENSe]:PULSe[:MEASview<y>]:DETEct:NUMBer	Sets or queries the maximum number of pulses to detect.
[SENSe]:PULSe[:MEASview<y>]:DETEct:POWer [:THREshold]	Sets or queries the power threshold to detect pulses.
[SENSe]:PULSe[:MEASview<y>]:DETEct:TIME [:THREshold]	Sets or queries the minimum off-time between pulses.
[SENSe]:PULSe[:MEASview<y>]:FILTer :{BANDwidth BWIDth}	Sets or queries the filter bandwidth for the Gaussian filter.
[SENSe]:PULSe[:MEASview<y>]:FILTer :MEASurement	Sets or queries the measurement filter.
[SENSe]:PULSe[:MEASview<y>]:FREFerence:AUTO	Determines whether to estimate the frequency reference automatically.
[SENSe]:PULSe[:MEASview<y>]:FREFerence:CSLOpe	Sets or queries the Chirp Slope.
[SENSe]:PULSe[:MEASview<y>]:FREFerence: CSLOpe:AUTO	Sets or queries enabling automatic Chirp Slope estimating.
[SENSe]:PULSe[:MEASview<y>]:FREFerence:OFFSet	Sets or queries the frequency reference offset.
[SENSe]:PULSe[:MEASview<y>]:MODulation:TYPE	Sets or queries the modulation type.
[SENSe]:PULSe[:MEASview<y>]:SIGNal:TYPE	Sets or queries the signal type in the pulsed RF measurements.
[SENSe]:PULSe[:MEASview<y>]:STATistics: HISTogram:ORDinate	Sets or queries the Histogram Y unit.
[SENSe]:PULSe[:MEASview<y>]:STATistics: HISTogram:POINts	Sets or queries the number of bins in the Histogram plot.

Command	Description
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINTS:AUTO	Sets or queries enabling automatic Histogram plot bins count.
[SENSe]:REANalyze subgroup	Spectrogram measurement
[SENSe]:REANalyze	Sets all measurements to reanalyze the current acquisition record.
[SENSe]:REANalyze:ACQuisition:SETTings?	Queries the settings of all acquisitions in acquisition history.
[SENSe]:REANalyze:ALL	Replay all items in the current acquisition history selection.
[SENSe]:REANalyze:ALL:LOOP	Replay all selected records/frames in a continuous loop.
[SENSe]:REANalyze:CURREnt	Replay the currently selected acquisition (or frame).
[SENSe]:REANalyze:CURREnt:ACQuisition?	Queries the Acquisition record identifier (ID) of the currently selected acquisition (or frame).
[SENSe]:REANalyze:CURREnt:FRAMe?	Queries the Frame identifier (ID) of the currently selected acquisition (or frame).
[SENSe]:REANalyze:CURREnt:TIMeStamp?	Queries the time stamp of the currently selected acquisition (or frame).
[SENSe]:REANalyze:DELete:DATA	Deletes all acquisition data.
[SENSe]:REANalyze:FIRSt	Replays the first item in the current acquisition history selection.
[SENSe]:REANalyze:LAST	Replays the last item in the current acquisition history selection.
[SENSe]:REANalyze:NEXT	Replays the next item in the current acquisition history selection.
[SENSe]:REANalyze:PAUSe	Sets or queries the reanalysis pause state.
[SENSe]:REANalyze:PREVious	Replays the previous item in the current Replay selection.
[SENSe]:REANalyze:SELEct:ACQuisition:DATA:TYPE	Sets or queries the acquisition data type.
[SENSe]:REANalyze:SELEct:ACQuisition:FIRSt?	Queries the first selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SELEct:ACQuisition:FIRSt:TIMeStamp?	Queries the time stamp associated with the first selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SELEct:ACQuisition:LAST?	Queries the last selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SELEct:ACQuisition:LAST:TIMeStamp?	Queries the time stamp associated with the last selectable acquisition history Start or Stop value.
[SENSe]:REANalyze:SELEct:ACQuisition:START	Sets or queries the Acquisition Start value in the acquisition history selection.

Command	Description
[SENSe]:REANalyze:SElect:ACQuisition:START:TIMestamp?	Queries the time stamp associated with the current Acquisition Start selection
[SENSe]:REANalyze:SElect:ACQuisition:STOP	Sets or queries the Acquisition Stop value in the acquisition history selection.
[SENSe]:REANalyze:SElect:ACQuisition:STOP:TIMestamp?	Queries the time stamp associated with the current Acquisition Stop selection.
[SENSe]:REANalyze:SElect:ALL	Selects all acquisitions and frames in the current acquisition history.
[SENSe]:REANalyze:SElect:FRAME:FIRSt?	Queries the first available Frame Start or Stop value available for acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:FIRSt:TIMestamp?	Queries the time stamp associated with the first available frame of the first available Acquisition Start or Stop value
[SENSe]:REANalyze:SElect:FRAME:LAST?	Queries the last available Frame Start or Stop value available for acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:LAST:TIMestamp?	Queries the time stamp associated with the last available frame of the last available Acquisition Start or Stop value
[SENSe]:REANalyze:SElect:FRAME:START	Sets or queries the Frame Start value in the acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:START:TIMestamp?	Queries the time stamp associated with the current Frame Start selection.
[SENSe]:REANalyze:SElect:FRAME:STOP	Sets or queries the frame stop value in acquisition history selection.
[SENSe]:REANalyze:SElect:FRAME:STOP:TIMestamp?	Queries the time stamp associated with the current frame stop selection.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:ALL	Selects all spectra acquisitions and frames in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:CURRent:ACQuisition?	Queries the acquisition record identifier (ID) of the currently selected acquisition.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:CURRent:TIMestamp?	Queries the time stamp of the currently selected acquisition.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRSt?	Queries the first selectable acquisition start or stop value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRSt:TIMestamp?	Queries the time stamp of the first selectable acquisition history start or stop value in the currently selected acquisition set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST?	Queries the last selectable acquisition start or stop value in the currently selected set.

Command	Description
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST:TIMestamp?	Queries the time stamp of the last selectable acquisition start or stop value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START	Sets or queries the acquisition start value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START:TIMestamp?	Queries the time stamp of the current acquisition start selection.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP	Sets or queries the acquisition stop value in the currently selected set.
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP:TIMestamp?	Queries the time stamp of the current acquisition stop selection.
[SENSe]:REANalyze:SPEed	Sets or queries the time delay value inserted between reanalysis of frames or acquisitions.
[SENSe]:REANalyze:STOP	Stops the current reanalysis.
[SENSe]:REANalyze:TIMestamp:DECimal	Sets or queries the number of values to the right of the decimal point to include in all time stamps.
[SENSe]:SEM subgroup	Spectrum Emissions Mask measurements
[SENSe]:SEM:{BANDwidth BWIDth}{:RESolution}	Sets or queries the resolution bandwidth (RBW).
[SENSe]:SEM:{BANDwidth BWIDth}:VIDeo	Sets or queries the video bandwidth (VBW).
[SENSe]:SEM:{BANDwidth BWIDth}:VIDeo:STATe	Sets or queries the state of the video bandwidth (VBW) of the reference channel.
[SENSe]:SEM:CHANnel:FILTer	Sets or queries the reference Channel Filter.
[SENSe]:SEM:CHANnel:IBANDwidth	Sets or queries the reference channel integration bandwidth.
[SENSe]:SEM:CHANnel:WIDTh	Sets or queries the reference Channel Filter bandwidth.
[SENSe]:SEM:CHIPrate	Sets or queries the Chip rate.
[SENSe]:SEM:CLEar:RESults	Clears the results in the Spectral Emissions Mask measurement.
[SENSe]:SEM:FREQuency	Sets or queries the measurement frequency.
[SENSe]:SEM:FREQuency:SPAN?	Returns the frequency span.
[SENSe]:SEM:MFILter	Sets or queries the shape of the filter.
[SENSe]:SEM:NFLoor:STATe (This command only applies when an MDO4000B or MDO4000C series instrument is connected.)	Sets or queries if Noise Correction is enabled or disabled.

Command	Description
[SENSE]:SEM:NFLoor:ACQuire (This command only applies when an MDO4000B or MDO4000C series instrument is connected.)	Measures the noise floor on the next acquisition.
[SENSe]:SEM:NFLoor:CORReCted? (This command only applies when an MDO4000B or MDO4000C series instrument is connected.)	Queries whether or not noise correction was performed.
[SENSe]:SEM:MODE:REALtime	Sets or queries the Real-time SEM measurement mode.
[SENSe]:SEM:MTYPe	Sets or queries the measurement type.
[SENSe]:SEM:OFFSet:DETEction	Sets or queries the detection settings for all offsets.
[SENSe]:SEM:OFFSet<x>:BANDwidth:FILTer?	Returns the bandwidth filter setting.
[SENSe]:SEM:OFFSet<x>:BANDwidth[:RESolution]	Sets or queries the resolution bandwidth.
[SENSe]:SEM:OFFSet<x>:BANDwidth:RESolution:COUNt	Sets or queries the count of Resolution Bandwidths (RBWs).
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo	Sets or queries the video bandwidth setting.
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo:STATe	Sets or queries the state of the video bandwidth.
[SENSe]:SEM:OFFSet<x>:FREQuency:STARt	Sets or queries the start frequency.
[SENSe]:SEM:OFFSet<x>:FREQuency:STOP	Sets or queries the stop frequency.
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:SAME	Sets or queries the state of the limits for the absolute start and stop settings.
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:STARt	Sets or queries the absolute power start limit.
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:STOP	Sets or queries the absolute power stop limit.
[SENSe]:SEM:OFFSet<x>:LIMIT:MASK	Sets or queries the limit mask setting.
[SENSe]:SEM:OFFSet<x>:LIMIT:RELAtive:SAME	Sets or queries the state of the limits for the relative start and stop settings
[SENSe]:SEM:OFFSet<x>:LIMIT:RELAtive:STARt	Sets or queries the relative power start limit.
[SENSe]:SEM:OFFSet<x>:LIMIT:RELAtive:STOP	Sets or queries the relative power stop limit.
[SENSe]:SEM:OFFSet<x>:LIMIT:SIDE	Sets or queries the side of the offset limit.
[SENSe]:SEM:OFFSet<x>:STATe	Determines whether to display the specified row of the Offsets & Limits table.
[SENSe]:SEM:POINts:COUNt	Sets or queries the maximum number of trace points.

Command	Description
[SENSe]:SEM:PRESet	Defines the standard protocol settings for the measurement.
[SENSe]:SEM:REfERENCE:AUTO	Determines whether to automatically update the Power Reference.
[SENSe]:SEM:REfERENCE:DETEction	Sets or queries the reference channel detection setting.
[SENSe]:SEM:REfERENCE[:MAGNitude]	Sets or queries the power magnitude.
[SENSe]:SEM:RRCRolloff	Sets or queries the filter parameter (roll-off ratio).
[SENSe]:SEM:STEP:AUTO	Determines whether to automatically update the center frequency.
[SENSe]:SEM:STEP[:MAGNitude]	Sets or queries the step magnitude.
[SENSe]:SEM:WIDTh:DEFinition	Sets or queries the offset definition.
[SENSe]:SGRam subgroup	Spectrogram measurements
[SENSe]:SGRam[:MEASview<y>]: {BANDwidth BWIDth}:RESolution	Sets or queries the resolution bandwidth (RBW).
[SENSe]:SGRam[:MEASview<y>]: {BANDwidth BWIDth}[:RESolution]: ACTual?	Queries the actual resolution bandwidth (RBW).
[SENSe]:SGRam[:MEASview<y>]: {BANDwidth BWIDth}[:RESolution]:AUTO	Sets or queries whether to set the RBW automatically.
[SENSe]:SGRam[:MEASview<y>]: {BANDwidth BWIDth}[:RESolution]:MODE	Sets or queries whether to enable or disable the RBW processing.
[SENSe]:SGRam[:MEASview<y>]: {BANDwidth BWIDth}:VIDeo	Sets or queries the video bandwidth (VBW).
[SENSe]:SGRam[:MEASview<y>]: {BANDwidth BWIDth}:VIDeo:STATe	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:SGRam[:MEASview<y>]:COLor	Sets or queries the color palette of three-dimensional graphs.
[SENSe]:SGRam[:MEASview<y>]:COLor:MAXimum	Sets or queries the maximum value of the color axis.
[SENSe]:SGRam[:MEASview<y>]:COLor:MINimum	Sets or queries the minimum value of the color axis.
[SENSe]:SGRam[:MEASview<y>]:FFT:WINDow	Sets or queries the FFT window.
[SENSe]:SGRam[:MEASview<y>]:FILTer[:SHAPE]	Sets or queries the filter shape.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:CENTer	Sets or queries the center frequency.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN	Sets or queries the frequency span.

Command	Description
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio	Sets or queries the ratio of span to RBW.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:MAXimum	Sets the frequency range to the maximum real-time span.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STARt	Sets or queries the measurement start frequency.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STOP	Sets or queries the measurement stop frequency.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:MODE	Sets or queries the vertical mode.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap:PERCent	Sets or queries the Overlap in percent.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision	Sets or queries the vertical Time/division value.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:MINutes	Sets or queries the Spectrum Monitor mode Time/Update value for minutes.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:ENABLE	Sets or queries the Waterfall (3-D spectrogram) display.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:SECONDS	Sets or queries the Spectrum Monitor mode Time/Update value
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:SPECTrums:PERLine?	Queries the Spectrums/Line value.
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:STARt:DIVisions	Sets or queries the Vertical offset or Position in divisions.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:DIRection	Sets or queries the direction of the Waterfall display.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y:AUTO	Rescales the height axis automatically to fit the waveform to the screen in the 3-D Waterfall display.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y:OFFSet	Sets or queries the height offset (the value at the top edge of the vertical axis) of the 3-D Waterfall display.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y:RESet	Resets the height scale of the 3-D Waterfall display to the default values.
[SENSe]:SGRam[:MEASview<y>]:WATERfall:Y[:SCALE]	Sets or queries the height (vertical) range of the Waterfall (3-D spectrogram) display.
[SENSe]:SPECTrum subgroup	Spectrum measurement
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]}	Sets or queries the resolution bandwidth (RBW).

Command	Description
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]:ACTual?	Queries the actual resolution bandwidth (RBW).
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]:AUTO	Sets or queries whether to set the RBW automatically.
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth[:RESolution]:MODE	Sets or queries whether to enable or disable the RBW process.
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth}:VIDeo	Sets or queries the video bandwidth (VBW).
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth BWIDth}:VIDeo:STATe	Sets or queries whether to enable the video bandwidth (VBW).
[SENSe]:SPECTrum[:MEASview<y>]:CLEar:RESults	Restarts multi-trace functions (Average and Max/Min Hold).
[SENSe]:SPECTrum[:MEASview<y>]:FFT:WINDow	Sets or queries the FFT window.
[SENSe]:SPECTrum[:MEASview<y>]:FILTer[:SHAPE]	Sets or queries the filter shape.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:CENTer	Sets or queries the center frequency.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN	Sets or queries the frequency span.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio	Sets or queries the ratio of span to RBW.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STARt	Sets or queries the measurement start frequency.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP	Sets or queries the frequency step size.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP:AUTO	Sets or queries whether to set the frequency step size automatically.
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STOP	Sets or queries the measurement stop frequency.
[SENSe]:SPECTrum[:MEASview<y>]:LENGth	Sets or queries the spectrum length.
[SENSe]:SPECTrum[:MEASview<y>]:LENGth:ACTual?	Queries the actual spectrum length.
[SENSe]:SPECTrum[:MEASview<y>]:LENGth:AUTO	Sets or queries the spectrum length mode (automatic or manual).
[SENSe]:SPECTrum[:MEASview<y>]:MAX:SPAN	Sets the frequency span to the maximum span.
[SENSe]:SPECTrum[:MEASview<y>]:POINts:COUNT	Sets or queries the number of sample points on the signal spectrum.
[SENSe]:SPECTrum[:MEASview<y>]:STARt	Sets or queries the spectrum offset time.
[SENSe]:SPECTrum[:MEASview<y>]:STARt:AUTO	Sets or queries the spectrum offset mode (automatic or manual).

Command	Description
[SENSe]:SPECTrum[:MEASview<y>]:TIME:MODE	Sets or queries the spectrum time parameter mode (automatic or manual).
[SENSe]:SPURious subgroup	Spurious measurement
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}	Sets or queries the channel width for the carrier as power reference.
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}:INTegration	Sets or queries the integration bandwidth to calculate the carrier power.
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}[:RESolution]	Sets or queries the resolution bandwidth to measure the carrier power.
[SENSe]:SPURious:CARRier:{BANDwidth BWIDth}[:RESolution]:AUTO	Sets or queries whether to set the resolution bandwidth automatically.
[SENSe]:SPURious:CARRier:DETection	Sets or queries the carrier detection method.
[SENSe]:SPURious:CARRier:FREQuency	Sets or queries the carrier frequency.
[SENSe]:SPURious:CARRier:THReshold	Sets or queries the threshold level to detect the carrier.
[SENSe]:SPURious:CLEar:RESults	Restarts multi-trace functions (Average and Max Hold).
[SENSe]:SPURious[:FREQuency]:OVERlap?	Queries whether any of the frequency ranges (A to T) overlap.
[SENSe]:SPURious:LIST	Sets or queries how to list the spurious signals.
[SENSe]:SPURious:MODE	Sets or queries the frequency range mode (Multi or Single).
[SENSe]:SPURious:OPTimization	Sets or queries the method of optimization.
[SENSe]:SPURious:POINts:COUNT	Sets or queries the trace point count for the frequency range.
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo	Sets or queries the VBW for the specified frequency range.
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo:STATE	Sets or queries whether to enable the VBW for the frequency range.
[SENSe]:SPURious:RANGe<x>:DETection	Sets or queries the display detector for the frequency range.
[SENSe]:SPURious:RANGe<x>:EXCURsion	Sets or queries the excursion level in the frequency range.
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]	Sets or queries the filter shape for the frequency range.
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth	Sets or queries the filter bandwidth for the frequency range.
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO	Sets or queries whether to set the filter bandwidth automatically.

Command	Description
[SENSe]:SPURious:RANGe<x>:FREQuency:START	Sets or queries the start frequency of the range.
[SENSe]:SPURious:RANGe<x>:FREQuency:STOP	Sets or queries the stop frequency of the range.
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:START	Sets or queries the absolute start amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STOP	Sets or queries the absolute stop amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:LIMit:MASK	Sets or queries the limit mask function mode for the frequency range.
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:START	Sets or queries the relative start amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STOP	Sets or queries the relative stop amplitude of the limits for the range.
[SENSe]:SPURious:RANGe<x>:STATe	Sets or queries whether to enable or disable the frequency range.
[SENSe]:SPURious:RANGe<x>:THReshold	Sets or queries the threshold level to detect spurious signals in a range.
[SENSe]:SPURious:REFerence	Sets or queries the power reference.
[SENSe]:SPURious:REFerence:MANual:POWer	Sets or queries the reference power level.
[SENSe]:SQUality subgroup	Signal quality
[SENSe]:SQUality[:MEASview<y>]:EVM:ALL[:STATe]	Sets or queries the display of offset EVM results.
[SENSe]:SQUality[:MEASview<y>]:SELEcted:SOURce	Sets or queries the source of Signal quality for a selected Measurement view number.
[SENSe]: STABle subgroup	Source measurement
[SENSe]: STABle[:MEASview<y>]:SELEcted:SOURce	Sets or queries the source of Symbol table for a selected Measurement view number.
[SENSe]:TOVerview subgroup	Time overview
[SENSe]:TOVerview[:MEASview<y>]:FREQuency:CENTer	Sets or queries the center frequency.
[SENSe]:TOVerview[:MEASview<y>]:MAXTracepoints	Sets or queries the maximum trace points.
[SENSe]:TOVerview[:MEASview<y>]:TIME:PER:DIVision	Sets or queries the time per division (dB/div) value in the Time Overview display.
[SENSe]:USETtings subgroup	All measurements
[SENSe]:USETtings	Updates the analyzer settings.

Command	Description
[SENSe]:WLAN subgroup	Wireless LAN settings
[SENSe]:WLAN:ANALysis:LENGth	Specifies the length of the analysis period.
[SENSe]:WLAN:ANALysis:LENGth:ACTual?	Returns the value of the actual analysis length.
[SENSe]:WLAN:ANALysis:LENGth:AUTO	Sets the analysis length value based on the requirements of the selected display.
[SENSe]:WLAN:ANALysis:OFFSet	Specifies or queries the analysis offset in the symbol interval.
[SENSe]:WLAN:BURSt	Specifies the burst to measure when multiple bursts are present in an acquisition.
[SENSe]:WLAN:CHANnel[:BANDwidth]:BWIDth]	Specifies or queries a nominal channel bandwidth to use for the WLAN measurements.
[SENSe]:WLAN:EQUalizer:TRAIning	Specifies the method for estimating channel frequency response and equalization.
[SENSe]:WLAN:FFT:LENGth?	Returns the fixed FFT length for the WLAN measurements.
[SENSe]:WLAN:FFT:SRATe?	Returns the FFT sample rate for the WLAN measurements.
[SENSe]:WLAN:FREQuency:ERRor	Sets or queries the frequency error in the WLAN analysis parameters.
[SENSe]:WLAN:FREQuency:ERRor:AUTO	Turns on the automatic determination of the frequency error.
[SENSe]:WLAN:GUARd:INTerval	Sets or queries the Guard Interval to use in the input signal.
[SENSe]:WLAN:MODulation:DETEct:QAM1024	Specifies a fixed modulation type.
[SENSe]:WLAN:MODulation:SOURce	Specifies the method of data symbol modulation identification.
[SENSe]:WLAN:PILot:TRACking:AMPLitude:STATe	Specifies the pilot subcarrier to use to correct amplitude variations over the packet.
[SENSe]:WLAN:PILot:TRACking:PHASe:STATe	Specifies the pilot subcarrier to use to correct phase variations over the packet.
[SENSe]:WLAN:PILot:TRACking:TIMing:STATe	Specifies the pilot subcarrier to use to correct timing variations over the packet.
[SENSe]:WLAN:RADix	Specifies or queries the format for displaying the symbol values.
[SENSe]:WLAN:SCARriers	Sets or queries which subcarriers to display in the WLAN view.
[SENSe]:WLAN:SCARriers:RANGe:START	Sets or queries the start value of the subcarrier range.
[SENSe]:WLAN:SCARriers:RANGe:STOP	Sets or queries the stop value of the subcarrier range.

Command	Description
[SENSe]:WLAN:SCARriers:SINGLE:INDeX	Specifies or queries the single subcarrier to display in the WLAN view.
[SENSe]:WLAN:SCARriers:SPACing	Sets or queries the subcarrier spacing.
[SENSe]:WLAN:SCARriers:SPACing:AUTO	Automatically sets the subcarrier spacing.
[SENSe]:WLAN:SIGNAL:STANdard:TYPE	Sets or queries the WLAN signal standard.
[SENSe]:WLAN:SubCARrier:DERotation	Shows subcarriers for displays with or without the Gamma subcarrier phase rotation removed.
[SENSe]:WLAN:SUMMary:CLEAr:RESults	Clears the results of the WLAN Summary display.
[SENSe]:WLAN:SUMMary:CLEAr:RESults	Clears the results in the WLAN Summary measurement.
[SENSe]:WLAN:SUMMary:EVM:RMS:AVERage: COUNT	Specifies the maximum number of bursts to average.
[SENSe]:WLAN:SUMMary:EVM:RMS:AVERage: COUNT:ENABle	Enables the burst average function.
[SENSe]:WLAN:SWAP:IQ	Specifies to swap the I and Q components of a signal.
[SENSe]:WLAN:SYMBols CHIPs	Specifies or queries the symbols or chips are displayed in the WLAN Symbol Table.
[SENSe]:WLAN:SYMBols CHIPs:MAX	Sets or queries the value for the maximum number of symbols/chips to analyze.
[SENSe]:WLAN:SYMBols CHIPs:MAX:STATe	Turns the maximum data symbols to analyze feature on or off.
[SENSe]:WLAN:SYMBols CHIPs:RANGe:COUNT	Sets or queries the number of symbols or chips to display.
[SENSe]:WLAN:SYMBols CHIPs:RANGe:START	Sets or queries the symbols/chips start value.
[SENSe]:WLAN:SYMBols CHIPs:RANGe:STOP	Sets or queries the symbols or chips stop value.
[SENSe]:WLAN:SYMBols CHIPs:SINGLE:INDeX	Sets or queries the symbol or chip to use when displaying results from a single symbol.
[SENSe]:WLAN:UNIT:FREQuency	Specifies or queries whether the displayed frequency units are frequency (Hz) or subcarrier.
[SENSe]:WLAN:UNIT:TIME	Specifies or queries whether the displayed time units are seconds, symbols or chips.
SENSe:LTE subgroup	
SENSe:LTE:ACLR:BANDwidth:RESolution	Sets or queries the resolution bandwidth (RBW).
SENSe:LTE:ACLR:BANDwidth:VIDeo	Sets or queries the video bandwidth (VBW).

Command	Description
SENSe:LTE:ACLR:BANDwidth:VIDeo:STATe	Sets or queries enabling or disabling the video bandwidth (VBW).
SENSe:LTE:ACLR:CHANnel:IBANDwidth	Sets or queries the reference channel integration bandwidth.
SENSe:LTE:ACLR:CHANnel:WIDTh	Sets or queries the reference channel width.
SENSe:LTE:ACLR:CLEar:RESults	Clears the results in the measurement.
SENSe:LTE:ACLR:FREQuency	Sets or queries the measurement center frequency.
SENSe:LTE:ACLR:MFILter	Sets or queries the shape of the filter.
SENSe:LTE:ACLR:MODE:REALtime	Sets or queries the real-time LTE ACLR measurement mode.
SENSe:LTE:ACLR:NFLoor:ACQuire	Enables measurement of the noise floor.
SENSe:LTE:ACLR:NFLoor:CORReCted?	Returns whether or not noise correction was applied on the last acquisition.
SENSe:LTE:ACLR:NFLoor:STATe	Determines whether to enable or disable the correction for noise floor.
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth: RESolution	Sets or queries the resolution bandwidth (RBW) value in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth: RESolution: COUNT	Sets or queries the count for the resolution bandwidths in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<X>:BANDwidth:RESolution: FILTer	Sets or queries the filter bandwidth resolution under Offset & Limit table.
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth: RESolution :VIDeo	Sets or queries the resolution video bandwidth (VBW) value in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth: RESolution:VIDeo:STATe	Sets or queries whether to enable or disable the video resolution bandwidth (VBW) in the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:DETection	Sets or queries the detection settings for all offsets.
SENSe:LTE:ACLR:OFFSet<x>:FREQuency: BANDwidth	Sets or queries the frequency bandwidth value for the specified row of the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:OFFSet	Sets or queries the frequency offset value of the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:LIMit:ABSolute	Sets or queries the absolute limit value of the row in the Offset & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:LIMit:MASK	Sets or queries the limit mask setting for the specified row in the Offsets & Limits table.

Command	Description
SENSe:LTE:ACLR:OFFSet<x>:LIMit:RELative	Sets or queries the relative limit value of channel under Offset & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:LIMit:SIDE	Sets or queries the side of the offset limit for the specified row in the Offsets & Limits table.
SENSe:LTE:ACLR:OFFSet<x>:STATe	Sets or queries the specified row of the Offsets & Limits table.
SENSe:LTE:ACLR:POINts:COUNT	Sets or queries the number of points used for the trace.
SENSe:LTE:ACLR:REFerence:MAGNitude:AUTO	Sets or queries the reference magnitude to automatic or manual.
SENSe:LTE:ACLR:REFerence:MAGNitude:DETEction	Sets or queries the reference magnitude detection.
SENSe:LTE:ACLR:REFerence:MAGNitude	Sets or queries the reference power magnitude.
SENSe:LTE:ACLR:STEP:AUTO	Determines whether to automatically update the center frequency increment/decrement step size.
SENSe:LTE:ACLR:STEP:MAGNitude	Sets or queries the step magnitude for the center frequency.
SENSe]:LTE:ANALysis:EQUALization:STATe	Sets or queries the Enable Equalization state in the LTE Analysis Params tab.
SENSe:LTE:ANALysis:LENGth:ACTual?	Queries the actual analysis length for the LTE Constellation and LTE Power vs Time displays.
[SENSe]:LTE:ANALysis:OFFSet	Sets or queries the LTE analysis offset for the LTE Constellation or LTE Power vs Time.
SENSe:LTE:ANALysis:OFFSet:AUTO	Sets or queries the Auto checkbox state for analysis offset.
SENSe:LTE:ANALysis:TIME:UNIT	Sets or queries the unit preference under the LTE Analysis tab.
SENSe:LTE:CHANnel:BANDwidth	Specifies or queries the channel bandwidth to use.
SENSe:LTE:CHSPectrum:AVERage	Sets or queries how to average the waveform.
SENSe:LTE:CHSPectrum:AVERage:COUNT	Sets or queries the number of traces for averaging.
SENSe:LTE:CHSPectrum:BANDwidth:RESolution	Sets or queries the resolution bandwidth (RBW).
SENSe:LTE:CHSPectrum:BANDwidth:RESolution:AUTO	Determines whether to set the resolution bandwidth (RBW) automatically or manually. Queries this setting.
SENSe:LTE:CHSPectrum:BANDwidth:VIDeo	Sets or queries the video bandwidth (VBW).
SENSe:LTE:CHSPectrum:BANDwidth:VIDeo:STATe	Sets or queries enabling or disabling the video bandwidth (VBW).
SENSe:LTE:CHSPectrum:CHANnel:BANDwidth	Specifies or queries a nominal channel bandwidth to use.

Command	Description
SENSe:LTE:CHSPectrum:CLEar:RESults	Clears the results in the LTE Channel Spectrum measurement.
SENSe:LTE:CHSPectrum:DETection	Sets or queries the trace detection settings.
SENSe:LTE:CHSPectrum:FREQuency	Sets or queries the measurement center frequency.
SENSe:LTE:CHSPectrum:FREQuency:SPAN	Sets or queries the frequency span.
SENSe:LTE:CHSPectrum:FREQuency:STEP	Sets or queries the frequency step size.
SENSe:LTE:CHSPectrum:FREQuency:STEP:AUTO	Determines whether to set the frequency step size automatically or manually. Queries this setting.
SENSe:LTE:CHSPectrum:POINts:COUNT	Sets or queries the number of points used for the trace.
SENSe:LTE:FRAME:STRUcture	Sets or queries the frame structure.
SENSe:TOFF:POWER:SPECTral:DENSity	Sets or queries the limit set for comparison of the Toff power spectral density value.
SENSe:ROSCillator:EXTernal:TIME	Sets or queries the timing reference.
SENSe:ROSCillator:EXTernal:TIME:STATUS?	Queries if the timing reference source is locked.
SENSe:ACQuisition:RECORD:FILE:NAME:SUFFix	Sets or queries the record file name suffix to append to the output base filename. (RSA7100A only)
SENSe:ACQuisition:RECORD:FILE:NAME:INDEX	Sets or queries the record file name index value. (RSA7100A only)

Status commands

Use the STATUS commands to control registers defined in the SCPI status reporting structure. See the Index for commands not listed in the following table.

Status commands

Header	Description
STATus:ACPower:EVENTs? (on page 2497)	Returns the current events for the ACPR measurement.
STATus:BIBEmissions:EVENTs? (on page 2500)	Returns the current events and status conditions for the Bluetooth InBand Emission measurement.
STATus:BLUEtooth:CONStellation:EVENTs? (on page 2501)	Returns the current events and status conditions for the Bluetooth Constellation measurement.
STATus:BLUEtooth:EDIAGram:EVENTs? (on page 2501)	Returns the current events and status conditions for the Bluetooth Eye Diagram measurement.
STATus:BLUEtooth:FDVTime:EVENTs? (on page 2502)	Returns the current events and status conditions for the Frequency Deviation versus Time measurement.

Header	Description
STATus:P25:EDiagram:EVENTs? (on page 2520)	Returns the current events and status conditions for the P25 Eye Diagram measurement.
STATus:{AM FM PM}:EVENTs? (on page 2498)	Returns the current events for the AM/FM/PM measurement.
STATus:AUDio:SPECtrum:EVENTs? (on page 2498)	Returns the current events and status conditions for the audio measurement.
STATus:AUDio:SUMMary:EVENTs? (on page 2499)	Returns the current events and status conditions for the audio measurement.
STATus:AVTime[:MEASview<y>]:EVENTs? (on page 2499)	Returns the current events for the Amplitude versus Time measurement.
STATus:CCDF:EVENTs? (on page 2503)	Returns the current events for the CCDF measurement.
STATus:CONStell[:MEASview<x>]:EVENTs? (on page 2504)	Returns the current events and status conditions for the constellation measurement.
STATus:DIQVtime[:MEASview<y>]:EVENTs? (on page 2504)	Returns the current events and status conditions for the Demod I&Q versus Time measurement.
STATus:DPX:EVENTs? (on page 2505)	Returns the current events for the DPX spectrum measurement.
STATus:DPX:EVENTs?	Returns the current events for the DPX spectrum measurement.
STATus:EDiagram[:MEASview<y>]:EVENTs? (on page 2505)	Returns the current events and status conditions for the eye diagram measurement.
STATus:EVM[:MEASview<y>]:EVENTs? (on page 2507)	Returns the current events and status conditions for the EVM versus Time measurement.
STATus:FDVTime[:MEASview<y>]:EVENTs? (on page 2507)	Returns the current events and status conditions for the Frequency deviation versus Time measurement.
STATus:{FSETtling PSETtling}:EVENTs? (on page 2508)	Returns the current events for the specified settling time measurement.
STATus:FVTime[:MEASview<y>]:EVENTs? (on page 2509)	Returns the current events for the Frequency versus Time measurement.
STATus:IQVTime[:MEASview<y>]:EVENTs? (on page 2509)	Returns the current events for the RF I&Q versus Time measurement.
STATus:MCPower:EVENTs? (on page 2512)	Returns the current events for the MCPR measurement.
STATus:MERRor[:MEASview<y>]:EVENTs? (on page 2512)	Returns the current events and status conditions for the Magnitude error versus Time measurement.
STATus:OBWidth:EVENTs? (on page 2513)	Returns the current events for the Occupied Bandwidth measurement.
STATus:OFDM:CONStell:EVENTs? (on page 2514)	Returns the current events and status condition for the OFDM Constellation measurement.

Header	Description
STATus:OFDM:EVM:EVENTs? (on page 2514)	Returns the current events and status condition for the OFDM EVM (Error Vector Magnitude) versus Time measurement.
STATus:OFDM:MERRor:EVENTs? (on page 2515)	Returns the current events and status condition for the OFDM Magnitude versus Time measurement.
STATus:OFDM:PERRor:EVENTs? (on page 2515)	Returns the current events and status condition for the OFDM Phase error versus Time measurement.
STATus:OFDM:POWEr:EVENTs? (on page 2516)	Returns the current events and status condition for the OFDM Power measurement.
STATus:OFDM:STABle:EVENTs? (on page 2517)	Returns the current events and status condition for the OFDM Symbol table measurement.
STATus:OPERation:CONDition? (on page 2517)	Queries the contents of the OCR.
STATus:OPERation:ENABle (on page 2518)	Sets or queries the mask for the OENR.
STATus:OPERation[:EVENTi]? (on page 2518)	Queries the contents of the OEVR.
STATus:OPERation:NTRansition (on page 2519)	Sets or queries the value of the negative transition filter.
STATus:OPERation:PTRansition (on page 2519)	Sets or queries the value of the positive transition filter.
STATus:PERRor[:MEASview<y>]:EVENTs? (on page 2521)	Returns the current events and status conditions for the Phase error versus Time measurement.
STATus:PHVTime[:MEASview<y>]:EVENTs? (on page 2521)	Returns the current events for the Phase versus Time measurement.
STATus:PNOise:EVENTs? (on page 2522)	Returns the current events for the phase noise measurement.
STATus:PRESet (on page 2523)	Presets a status byte.
STATus:PULSe:RESult[:MEASview<y>]:EVENTs? (on page 2525)	Returns the current events for the pulse table measurement.
STATus:PULSe:STATistics[:MEASview<y>]:EVENTs? (on page 2525)	Returns the current events for the pulse statistics measurement.
STATus:PULSe:TRACe[:MEASview<y>]:EVENTs? (on page 2526)	Returns the current events for the pulse trace measurement.
STATus:QUEStionable:CONDition? (on page 2529)	Queries the contents of the QCR.
STATus:QUEStionable:ENABle (on page 2530)	Sets or queries the mask for the OENR.
STATus:QUEStionable[:EVENTi]? (on page 2530)	Queries the contents of the QER.
STATus:QUEStionable:NTRansition (on page 2533)	Sets or queries the value of the negative transition filter.

Header	Description
STATus:QUESTionable:PTRansition (on page 2534)	Sets or queries the value of the positive transition filter.
STATus:QUESTionable:CALibration:CONDition? (on page 2527)	Queries the contents of the questionable calibration condition register.
STATus:QUESTionable:CALibration:ENABLE (on page 2527)	Sets or queries the mask for the questionable calibration enable register.
STATus:QUESTionable:CALibration[:EVENT]? (on page 2528)	Queries the contents of the questionable calibration event register.
STATus:QUESTionable:CALibration:NTRansition (on page 2528)	Sets or queries the value of the negative transition filter.
STATus:QUESTionable:CALibration:PTRansition (on page 2529)	Sets or queries the value of the positive transition filter.
STATus:QUESTionable:FREQuency:CONDition? (on page 2531)	Queries the contents of the questionable frequency condition register.
STATus:QUESTionable:FREQuency:ENABLE (on page 2531)	Sets or queries the mask for the questionable frequency enable register.
STATus:QUESTionable:FREQuency[:EVENT]? (on page 2532)	Queries the contents of the questionable frequency event register.
STATus:QUESTionable:FREQuency:NTRansition (on page 2532)	Sets or queries the value of the negative transition filter.
STATus:QUESTionable:FREQuency:PTRansition (on page 2533)	Sets or queries the value of the positive transition filter.
STATus:SEM:EVENTs? (on page 2534)	Returns the current events and status conditions for the Spectral Emissions Mask measurement.
STATus:SGRam[:MEASview<y>]:EVENTs? (on page 2535)	Returns the current events for the spectrogram measurement.
STATus:SPECTrum[:MEASview<y>]:EVENTs? (on page 2535)	Returns the current events for the spectrum measurement.
STATus:SPURious:EVENTs? (on page 2536)	Returns the current events for the spurious measurement.
STATus:SQUality[:MEASview<y>]:EVENTs? (on page 2536)	Returns the current events and status conditions for the signal quality measurement.
STATus:TDIagram[:MEASview<y>]:EVENTs? (on page 2537)	Returns the current events and status conditions for the trellis diagram measurement.
STATus:WLAN:CONStellation:EVENTs? (on page 2538)	Returns the current status concatenated with WLAN Constellation-specific event information.

Header	Description
STATus:WLAN:CRESponse:EVENTs? (on page 2540)	Returns the current events and status conditions for the WLAN Channel Response display.
STATus:WLAN:EVM:EVENTs? (on page 2540)	Returns the current status concatenated with WLAN EVM-specific event information.
STATus:WLAN:MERRor:EVENTs? (on page 2543)	Returns the current status concatenated with WLAN Magnitude Error-specific event information.
STATus:WLAN:PERRor:EVENTs? (on page 2544)	Returns status concatenated with WLAN Phase Error-specific event information.
STATus:WLAN:PVTime:EVENTs? (on page 2544)	Returns the current status concatenated with WLAN Power vs. Time-specific event information.
STATus:WLAN:STABle:EVENTs? (on page 2545)	Returns status concatenated with WLAN Symbol Table-specific event information.
STATus:WLAN:SUMMary:EVENTs? (on page 2545)	Returns the current events and status conditions for the WLAN summary measurement.
STATus:TXGain subgroup	Transmission Gain measurements
STATus:TXGain:EVENTs? (on page 2538)	Queries events for the Transmission Gain display.
STATus:LTE subgroup	LTE analysis
STATus:LTE:ACLR:EVENTs? (on page 2510)	Returns the current events and status conditions for this display.
STATus:LTE:CHSPpectrum:EVENTs? (on page 2510)	Returns the current events and status conditions for this display.
STATus:LTE:CONSt:EVENTs? (on page 2511)	Returns the current events and status conditions for this display.
STATus:LTE:PVTime:EVENTs? (on page 2511)	Returns the current events and status conditions for this display.

Source commands

Use the SOURce commands to control output power level of the tracking generator. See the Index for commands not listed in the following table.

These commands only apply when a RSA500A and RSA600A Series instrument with Option 04 (Tracking Generator) installed is connected.

Source commands

Command	Description
SOURce:TXGain:POWer (on page 2495)	Sets or queries the output power level of the tracking generator.

System commands

Use the SYSTem commands to set or query system parameters for operation. See the Index for commands not listed in the following table.

System commands

Header	Description
SYSTem:COMMunicate:GPIB[:SELF]:ADDRess (on page 2555)	Sets or queries the GPIB address of the instrument.
SYSTem:PRESet:BLUETOOTH:STANDARD (on page 2567)	Sets or queries the standard, setup, Retaining Current Reflevel, and Retaining Center Frequency in the Bluetooth standard preset.
SYSTem:PRESet:P25:STANDARD (on page 2570)	Restores the analyzer defaults for the P25 Standards preset.
SYSTem:DATE (on page 2555)	Sets or queries the current date.
SYSTem:ERRor:ALL? (on page 2556)	Queries all the error or event information.
SYSTem:ERRor:CODE:ALL? (on page 2556)	Queries all the error or event codes.
SYSTem:ERRor:CODE[:NEXT]? (on page 2557)	Queries the latest error or event information.
SYSTem:ERRor:COUNt? (on page 2557)	Queries the number of errors or events.
SYSTem:ERRor[:NEXT]? (on page 2557)	Queries the latest error or event information.
SYSTem:KLOCK (on page 2564)	Enables or disables the local lockout operation.
SYSTem:LASTaligned:DATEtime? (on page 2564)	Queries the last alignment date and time of device.
SYSTem:LASTaligned:TEMPerature? (on page 2564)	Queries the last aligned temperature of device.
SYSTem:LINK:SETTings (on page 2565)	Sets or queries whether or not global settings linking enabled for the measurements displayed.
SYSTem:LINK:SETTings:SYNC (on page 2565)	Sets the synchronize settings referring to source for the measurements displayed.
SYSTem:OPTions? (on page 2565)	Queries the optional information.
SYSTem:PRESet (on page 2566)	Restores the analyzer to the defaults.
SYSTem:PRESet:APPLication (on page)	Restores the analyzer to the defaults for the application preset type.
SYSTem:PRESet:APPLication:ACTion (on page 2566)	Sets or queries the preset action for the application preset type.
SYSTem:PRESet:APPLication:SELEcted (on page)	Sets or queries the presets for the application preset type.
SYSTem:PRESet:DPX (on page 2567)	Presets the analyzer.
SYSTem:PRESet:DPX:ACTion (on page 2568)	Sets or queries the preset action for the DPX preset type.
SYSTem:PRESet:DPX:SELEcted (on page 2568)	Sets or queries the presets for the DPX preset type.

Header	Description
SYSTem:PRESet[:MAIN] (on page 2569)	Restores the analyzer to the defaults.
SYSTem:PRESet:MAIN:ACTion (on page 2570)	Sets or queries the preset action for the main preset type.
SYSTem:PRESet:MAIN:SElected (on page 2570)	Sets or queries the presets for the main preset type.
SYSTem:PRESet:STANdards (on page 2571)	Restores the instrument to the defaults for the WLAN standards preset type.
SYSTem:PRESet:STANdards:ACTion (on page 2571)	Sets or queries the preset action for the standards preset type.
SYSTem:PRESet:USER (on page 2572)	Restores the analyzer to the defaults for the user preset type.
SYSTem:PRESet:USER:ACTion (on page 2572)	Sets or queries the preset action for the user preset type.
SYSTem:PRESet:USER:SElected (on page 2573)	Sets or queries the presets for the user preset type.
SYSTem:PRESet:WLAN:STANdard (on page 2575)	Sets or queries the standard and bandwidth presets for the WLAN standards preset type.
SYSTem:TEMPerature? (on page 2582)	Queries the current device temperature.
SYSTem:TIME (on page 2583)	Sets or queries the current time.
SYSTem:VERSion? (on page 2583)	Queries the version of the SCPI.
SYSTem:PRESet:LTE:STANdard (on page 2569)	Sets or queries LTE standard preset parameters.
SYSTem:SVPC:HSInterface:ENABLE (on page 2576)	Sets or queries the status of the HSI interface as enabled or disabled.
SYSTem:SVPC:HSInterface:USE:LOCALhost (on page 2577)	Sets or queries whether the HSI interface is connected via the local host.
SYSTem:SVPC:HSInterface:IP:ADDResS (on page 2576)	Sets or queries the IP address of the instrument connected via HIS interface.
SYSTem (on page 2580); SVPC:HSInterface:PORT:NUMBer (on page 2577)	Sets or queries the Port number of the instrument connected via HSI interface.
SYSTem:SVPC:SOURce (on page 2579) <x> (on page 2581); ADD (on page 2579)	Adds Measurement Source.
SYSTem:SVPC:SOURce (on page 2580) <x> (on page 2581); REMOve (on page 2580)	Removes latest user defined measurement Source from source configuration
SYSTem:SVPC:SOURce (on page 2580) <x> (on page 2581); REMOve:ALL (on page 2580)	Removes all user defined measurement Sources from source configuration
SYSTem:SVPC:SOURce<x>:RENAme (on page 2581)	Sets or queries measurement Source name under source configuration

Header	Description
SYSTem:SVPC:VINStr:CONNect (on page 2581)	Connects to the Virtual Instrument MSO5/6, DPO7.
SYSTem:SVPC:VINStr:CHANnel2:CONFig (on page 2582)	Sets or queries the channel configurations of the Virtual Instrument.

Trace commands

Use the TRACe commands to select trace type and to control trace arithmetic. See the Index for commands not listed in the following table.

Trace commands

Commands	Description
TRACe<x>:{AM FM PM} subgroup	AM/FM/PM measurement
TRACe<x>:{AM FM PM} (on page 2629)	Determines whether or not to show the specified trace.
TRACe:{AM FM PM}:DETectioN (on page 2584)	Sets or queries the display detector, the method to be used for decimating traces to fit the available horizontal space on screen.
TRACe:{AM FM PM}:FREeze (on page 2584)	Sets or queries whether or not to freeze the trace display.
TRACe:{AM FM PM}:FUNCTioN (on page 2585)	Sets or queries the trace function.
TRACe<x>:Bluetooth subgroup	Bluetooth measurement
TRACe<x>:BLUEtooth:CONStE (on page 2637)	Determines whether or not to show the specified trace.
TRACe<x>:BLUEtooth:CONStE:FREeze (on page 2637)	Sets or queries whether or not to freeze the specified trace.
TRACe<x>:BLUEtooth:CONStE:MODE (on page 2638)	Sets or queries the trace display mode.
TRACe<x>:BLUEtooth:CONStE:SElect (on page 2638)	Selects the specified trace.
TRACe<x>:BLUEtooth:EDIagram:ENABle:I (on page 2639)	Determines whether to show or hide the I trace.
TRACe<x>:BLUEtooth:EDIagram:ENABle:Q (on page 2639)	Determines whether to show or hide the Q trace.
TRACe<x>:BLUEtooth:EDIagram:SElect:I (on page 2639)	Selects the I trace or queries if the I trace is selected or not.
TRACe<x>:BLUEtooth:EDIagram:SElect:Q (on page 2640)	Selects the Q trace or queries if the Q trace is selected or not.
TRACe<x>:BLUEtooth:FDVTime:MODE (on page 2640)	Sets or queries whether to display the Frequency Deviation vs. Time trace as vectors or symbols (points).

Commands	Description
TRACe:P25 subgroup	APCO P25 measurement
TRACe<x>:P25:CONStellation (on page 2684)	Determines whether or not to show the specified trace.
TRACe<x>:P25:CONStellation:FREeze (on page 2684)	Determines whether or not to freeze (halt updates of) the specified trace.
TRACe<x>:P25:CONStellation:MODE (on page 2685)	Sets or queries how to display the trace content.
TRACe<x>:P25:CONStellation:SElect (on page 2685)	Selects the specified trace.
TRACe<x>:P25:EDiagram:ENABle:I (on page 2686)	Determines whether to show or hide the I trace.
TRACe<x>:P25:EDiagram:ENABle:Q (on page 2687)	Determines whether to show or hide the Q trace.
TRACe<x>:P25:EDiagram:SElect:I (on page 2687)	Selects the I trace or queries if the I trace is selected or not.
TRACe<x>:P25:EDiagram:SElect:Q (on page 2688)	Selects the Q trace or queries if the Q trace is selected or not.
TRACe:Noise subgroup	Noise Figure and Gain measurement
TRACe<x>:NOISe:FIGure:AVERageCOUNt (on page 2662)	Sets or queries the average counts for the specified trace.
TRACe<x>:NOISe:FIGure:COUNt:ENABle (on page 2663)	Sets to enable the count feature, or queries the enables status, of the specified trace.
TRACe<x>:NOISe:FIGure:DETection (on page 2663)	Sets or queries the trace detection method.
TRACe<x>:NOISe:FIGure:FREeze (on page 2664)	Determines whether or not to freeze (halt updates of) the specified trace.
TRACe<x>:NOISe:FIGure:FUNCTION (on page 2664)	Sets or queries the trace processing method (function) in the display.
TRACe<x>:NOISe:FIGure:SElect (on page 2665)	Selects the specified trace.
TRACe<x>:NOISe:FIGure:SHOW (on page 2666)	Determines whether or not to show the specified trace.
TRACe<x>:NOISe:GAIN:AVERage:COUNt (on page 2666)	Sets or queries the average counts for the specified trace.
TRACe<x>:NOISe:GAIN:COUNt:ENABle (on page 2667)	Enables or disables the count feature for the specified trace.
TRACe<x>:NOISe:GAIN:DETection (on page 2667)	Sets or queries the trace detection method.
TRACe<x>:NOISe:GAIN:FREeze (on page 2668)	Determines whether or not to freeze (halt updates of) the specified trace.

Commands	Description
TRACe<x>:NOISe:GAIN:FUNctIon (on page 2668)	Sets or queries the trace processing method (function) in the display.
TRACe<x>:NOISe:GAIN:SElect (on page 2669)	Selects the specified trace.
TRACe<x>:NOISe:GAIN:SHOW (on page 2670)	Determines whether or not to show the specified trace.
TRACe<x>:NOISe:TEMPerature:AVERageCOUNt (on page 2670)	Sets or queries the average counts for the specified trace.
TRACe<x>:NOISe:TEMPerature:COUNt:ENABLE (on page 2671)	Enables or disables the count feature for the specified trace.
TRACe<x>:NOISe:TEMPerature:DETection (on page 2671)	Sets or queries the trace detection method.
TRACe<x>:NOISe:TEMPerature:FREeze (on page 2672)	Determines whether or not to freeze (halt updates of) the specified trace.
TRACe<x>:NOISe:TEMPerature:FUNctIon (on page 2672)	Sets or queries the trace processing method (function) in the display.
TRACe<x>:NOISe:TEMPerature:SElect (on page 2673)	Selects the specified trace.
TRACe<x>:NOISe:TEMPerature:SHOW (on page 2674)	Determines whether or not to show the specified trace.
TRACe<x>:NOISe:YFACTOR:AVERage:COUNt (on page 2674)	Sets or queries the average counts for the specified trace.
TRACe<x>:NOISe:YFACTOR:COUNt:ENABLE (on page 2675)	Enables or disables the count feature for the specified trace.
TRACe<x>:NOISe:YFACTOR:DETection (on page 2675)	Sets or queries the trace detection method.
TRACe<x>:NOISe:YFACTOR:FREeze (on page 2676)	Determines whether or not to freeze (halt updates of) the specified trace.
TRACe<x>:NOISe:YFACTOR:FUNctIon (on page 2676)	Sets or queries the trace processing method (function) in the display.
TRACe<x>:NOISe:YFACTOR:SElect (on page 2677)	Selects the specified trace.
TRACe<x>:NOISe:YFACTOR:SHOW (on page 2678)	Determines whether or not to show the specified trace.
TRACe<x>:AVTime subgroup	Amplitude versus time measurement
TRACe<x>:AVTime[:MEASview<y>] (on page 2630)	Sets or queries whether or not to show the specified trace.
TRACe:{FSETtling PSETtling}:AVERage:COUNt (on page 2597)	Sets or queries the number of traces to combine for averaging.

Commands	Description
TRACe<x>:AVTime[:MEASview<y>]:AVERage:COUNt (on page 2630)	Sets or queries the number of traces to combine.
TRACe<x>:AVTime[:MEASview<y>]:AVERage:RESet (on page 2631)	Clears the average data and resets the average counter.
TRACe<x>:AVTime[:MEASview<y>]:COUNt (on page 2631)	Sets or queries the count for the Max or Min Hold trace.
TRACe<x>:AVTime[:MEASview<y>]:COUNt:ENABLE (on page 2632)	Sets or queries whether or not to enable the count for Max/Min Hold.
TRACe<x>:AVTime[:MEASview<y>]:COUNt:RESet (on page 2633)	Clears the Max or Min Hold data and counter, and restarts the process.
TRACe<x>:AVTime[:MEASview<y>]:DETecton (on page 2633)	Sets or queries the display detector.
TRACe<x>:AVTime[:MEASview<y>]:FREeze (on page 2634)	Sets or queries whether or not to freeze the display of the trace.
TRACe<x>:AVTime[:MEASview<y>]:FUNctIon (on page 2634)	Sets or queries the trace function.
TRACe<x>:AVTime[:MEASview<y>]:LEFToperand (on page 2635)	Sets or queries the left operand for the math trace.
TRACe<x>:AVTime[:MEASview<y>]:RIGHToperand (on page 2635)	Sets or queries the right operand for the math trace.
TRACe<x>:AVTime[:MEASview<y>]:SElect (on page 2636)	Sets or queries the trace number to display the readout.
TRACe<x>:CCDF subgroup	CCDF measurement
TRACe<x>:CCDF:FREeze (on page 2641)	Sets or queries whether or not to freeze the display of the trace.
TRACe<x>:CCDF:SElect (on page 2641)	Sets or queries the trace number to display the readout.
TRACe<x>:CCDF:SHOW (on page 2642)	Sets or queries whether to show or hide the trace.
TRACe<x>:CCDF:X (on page 2642)	Sets or queries the horizontal position of the measurement pointer.
TRACe<x>:CCDF:Y? (on page 2643)	Queries the vertical position (CCDF value) of the measurement pointer.
TRACe:CONSte subgroup (Option 21 only)	Constellation measurement
TRACe<x>:CONSte[:MEASview<y>] (on page 2643)	Specifies whether or not to show the specified trace (Trace 1 or 2) in the Constellation display.
TRACe<x>:CONSte[:MEASview<y>]:FREeze (on page 2644)	Halts updates to the specified trace in the Constellation display.

Commands	Description
TRACe<x>:CONSt[:MEASview<y>]:MODE (on page 2645)	Sets or queries how to display the constellation trace.
TRACe<x>:CONSt[:MEASview<y>]:Q:OFFSet (on page 2645)	Sets the Q offset in the Constellation display to Use shared Pref, remove Q offset, or include Q offset.
TRACe<x>:CONSt[:MEASview<y>]:SElect (on page 2646)	Sets or queries the trace to which the Show, Freeze, Content, and Q Offset settings apply.
TRACe:DIQVtime subgroup (Option 21 only)	Demodulated I&Q versus time measurement
TRACe:DIQVtime[:MEASview<y>]:ENABLE:I (on page 2585)	Enable or disables the trace I.
TRACe:DIQVtime[:MEASview<y>]:ENABLE:Q (on page 2586)	Enable or disables the Q trace.
TRACe:DIQVtime[:MEASview<y>]:MODE (on page 2586)	Sets or queries whether to display the Demod I&Q vs Time trace as vectors or symbols.
TRACe:DIQVtime[:MEASview<y>]:SElect:I (on page 2587)	Selects the I trace.
TRACe:DIQVtime[:MEASview<y>]:SElect:Q (on page 2587)	Selects the Q trace.
TRACe<x>:DPX subgroup	DPX spectrum measurement
TRACe<x>:DPX (on page 2647)	Sets or queries whether or not to show the waveform.
TRACe<x>:DPX:AVERAge:COUNt (on page 2647)	Sets or queries the number of traces to combine for averaging.
TRACe<x>:DPX:COLor:CURVe (on page 2648)	Sets or queries the color intensity.
TRACe<x>:DPX:COLor:INTensity (on page 2648)	Sets or queries the color intensity in the DPX spectrum view.
TRACe<x>:DPX:COLor:SCALE:AUTO (on page 2648)	Automatically adjusts the Max and Min color settings to display the broadest range of colors.
TRACe<x>:DPX:DETectioN (on page 2649)	Sets or queries the function.
TRACe<x>:DPX:DGRAM:SElect:LINE (on page 2649)	Sets or queries a line in the DPXogram display to send to the DPX spectrum display.
TRACe<x>:DPX:DOT:PERSistent (on page 2650)	Sets or queries whether to enable or disable the dot persistence.
TRACe<x>:DPX:DOT:PERSistent:TYPE (on page 2650)	Sets or queries the persistence type.
TRACe<x>:DPX:DOT:PERSistent:VARiable (on page 2651)	Sets or queries the length of time that data points are displayed.
TRACe<x>:DPX:FREeze (on page 2651)	Sets or queries whether or not to freeze the display of the trace.

Commands	Description
TRACe<x>:DPX:FUNCTION (on page 2652)	Sets or queries the trace function for the in the DPX spectrum view.
TRACe<x>:DPX:LEFToperand (on page 2652)	Sets or queries the left operand for the math trace.
TRACe<x>:DPX:RIGHToperand (on page 2653)	Sets or queries the right operand for the math trace.
TRACe<x>:DPX:SElect (on page 2653)	Sets or queries the trace number to display the readout.
TRACe:EDiagram subgroup (Option 21 only)	Eye diagram
TRACe:EDiagram[:MEASview<y>]:ENABLE:I (on page 2588)	Determines whether to show or hide the I trace in the eye diagram.
TRACe:EDiagram[:MEASview<y>]:ENABLE:Q (on page 2588)	Determines whether to show or hide the Q trace in the eye diagram.
TRACe:EDiagram[:MEASview<y>]:SElect:I (on page 2589)	Selects the I trace in the eye diagram. The query version of this command returns whether the I trace is selected or not.
TRACe:EDiagram[:MEASview<y>]:SElect:Q (on page 2589)	Selects the Q trace in the eye diagram. The query version of this command returns whether the Q trace is selected or not.
TRACe:EVM subgroup	EVM measurement
TRACe:EVM[:MEASview<y>]:MODE (on page 2595)	Sets or queries whether to display the EVM versus Time trace as vectors or symbols (points).
TRACe:FDVTime subgroup	Frequency deviation versus time measurement
TRACe:FDVTime:MODE (on page 2596)	Sets or queries whether to display the Frequency Deviation versus Time trace as vectors or symbols.
TRACe:FVTime subgroup	Frequency versus time measurement
TRACe:FVTime[:MEASview<y>] (on page 2599)	Sets or queries whether or not to show the trace.
TRACe:FVTime[:MEASview<y>]:AVERage:COUNT (on page 2600)	Sets or queries the number of traces to combine for averaging.
TRACe:FVTime[:MEASview<y>]:COUNT (on page 2600)	Sets or queries the count for the Max or Min Hold trace.
TRACe:FVTime[:MEASview<y>]:COUNT:ENABLE (on page 2601)	Sets or queries whether or not to enable the count for Max or Min Hold.
TRACe:FVTime[:MEASview<y>]:COUNT:RESet (on page 2601)	Clears the Max or Min Hold data and counter, and restarts the process.
TRACe<x>:FVTime[:MEASview<y>]:DETection (on page 2602), TRACe<x>:FVTime[:MEASview<y>]:DETection (on page 2659)	Enables or queries the type of detection for the specified trace.

Commands	Description
TRACe:FVTime[:MEASview<y>]:FREEze (on page 2602)	Sets or queries whether or not to freeze the display of the trace.
TRACe:FVTime[:MEASview<y>]:FUNCTION (on page 2603)	Sets or queries the trace function.
TRACe:IQVTime subgroup	RF I&Q versus time measurement
TRACe:IQVTime[:MEASview<y>]:AVERage:COUNT (on page 2603)	Sets or queries the number of traces to combine for averaging.
TRACe:IQVTime[:MEASview<y>]:COUNT (on page 2604)	Sets or queries the count for the Max or Min Hold trace.
TRACe:IQVTime[:MEASview<y>]:COUNT:ENABLE (on page 2604)	Determines whether to enable or disable the count for the Max or Min Hold trace.
TRACe:IQVTime[:MEASview<y>]:DETection (on page 2605)	Sets or queries whether or not to enable the count for Max/Min Hold.
TRACe:IQVTime[:MEASview<y>]:COUNT:RESet (on page 2605)	Clears the Max or Min Hold data and counter, and restarts the process.
TRACe:IQVTime[:MEASview<y>]:ENABLE:I (on page 2606)	Sets or queries whether to show or hide the trace I.
TRACe:IQVTime[:MEASview<y>]:ENABLE:Q (on page 2606)	Sets or queries whether to show or hide the trace Q.
TRACe:IQVTime[:MEASview<y>]:FREEze (on page 2607)	Sets or queries whether to freeze the IQ traces.
TRACe:IQVTime[:MEASview<y>]:FUNCTION (on page 2607)	Sets or queries the trace function.
TRACe:IQVTime[:MEASview<y>]:SElect:I (on page 2608)	Sets or queries whether to choose the I trace.
TRACe:IQVTime[:MEASview<y>]:SElect:Q (on page 2608)	Sets or queries whether to choose the Q trace.
TRACe:MERRor subgroup	Magnitude Error measurement
TRACe:MERRor[:MEASview<y>]:MODE (on page 2609)	Sets or queries whether to display the Magnitude error trace as vectors or symbols.
TRACe:OBWidth subgroup	Occupied Bandwidth measurement
TRACe:OBW:MAXHold (on page 2610)	Determines whether to enable or disable the Max Hold trace.
TRACe:OFDM subgroup	OFDM measurements
TRACe:OFDM:CONSte (on page 2610)	Determines whether or not to show the trace.

Commands	Description
TRACe:OFDM:CONSt:FREEze (on page 2610)	Determines whether or not to freeze the display of the trace.
TRACe<x>:OFDM:EVM (on page 2678)	Determines whether or not to show the specified trace.
TRACe<x>:OFDM:EVM:FREEze (on page 2679)	Determines whether or not to freeze the display of the specified trace.
TRACe<x>:OFDM:EVM:SELEct (on page 2679)	Sets or queries the specified trace to display.
TRACe<x>:OFDM:MERRor (on page 2680)	Determines whether or not to show the specified trace.
TRACe<x>:OFDM:MERRor:FREEze (on page 2680)	Determines whether or not to freeze the display of the specified trace.
TRACe<x>:OFDM:MERRor:SELEct (on page 2680)	Sets or queries the specified trace to display.
TRACe<x>:OFDM:PERRor (on page 2681)	Determines whether or not to show the specified trace.
TRACe<x>:OFDM:PERRor:FREEze (on page 2681)	Determines whether or not to freeze the display of the specified trace.
TRACe<x>:OFDM:PERRor:SELEct (on page 2682)	Sets or queries the specified trace to display.
TRACe<x>:OFDM:POWER (on page 2682)	Determines whether or not to show the specified trace.
TRACe<x>:OFDM:POWER:FREEze (on page 2683)	Determines whether or not to freeze the display of the specified trace.
TRACe<x>:OFDM:POWER:SELEct (on page 2683)	Sets or queries the specified trace to display.
TRACe:OFDM:FLATness:FREEze (on page 2611)	Sets or queries whether to freeze the average trace
TRACe:OFDM:FLATness:SHOW (on page 2611)	Displays or hides the trace on the OFDM Spectral Flatness display.
TRACe:PERRpr subgroup	Phase Error measurement
TRACe:PERRor[:MEASview<y>]:MODE (on page 2612)	Sets or queries whether to display the Frequency deviation vs Time trace as vectors or symbols.
TRACe:PHVTime subgroup	Phase versus time measurement
TRACe:PHVTime[:MEASview<y>] (on page 2612)	Sets or queries whether or not to show the trace.
TRACe:PHVTime[:MEASview<y>]:AVERage:COUNT (on page 2613)	Sets or queries the number of traces to combine for averaging.
TRACe:PHVTime[:MEASview<y>]:COUNT (on page 2613)	Sets or queries the count for the Max or Min Hold trace.
TRACe:PHVTime[:MEASview<y>]:COUNT:ENABLE (on page 2614)	Sets or queries whether or not to enable the count for Max/Min Hold.
TRACe:PHVTime[:MEASview<y>]:COUNT:RESet (on page 2614)	Clears the Max or Min Hold data and counter, and restarts the process.

Commands	Description
TRACe<x>:PHVTime[:MEASview<y>]:DETection (on page 2615), TRACe<x>:PHVTime[:MEASview<y>]:DETection (on page 2688)	Sets or queries the display detector.
TRACe<x>:{FSETtling PSETtling}:FREeze (on page 2658)	Sets or queries whether to freeze the trace.
TRACe:PHVTime[:MEASview<y>]:FREeze (on page 2615)	Determines whether to freeze the trace display in the Phase versus Time measurement.
TRACe:PHVTime[:MEASview<y>]:FUNctIon (on page 2616)	Sets or queries the trace function.
TRACe:PNOise subgroup (Option 11 only)	Phase noise measurement
TRACe<x>:{FSETtling PSETtling}:SElect (on page 2659)	Selects a trace or queries the currently selected trace.
TRACe<x>:{FSETtling PSETtling}:SHOW (on page 2659)	Sets or queries whether to show or hide the trace.
TRACe:{FSETtling PSETtling}:AVERage:ENABle (on page 2597)	Sets or queries the number of data points for smoothing the trace.
TRACe<x>:PNOise:SElect (on page 2689)	Selects the trace in the phase noise measurement.
TRACe<x>:PNOise:SHOW (on page 2689)	Shows or hides the specified trace in the phase noise view.
TRACe<x>:PNOise:SMOothing:COUNT (on page 2690)	Sets or queries the number of data points to take the moving average for smoothing the trace.
TRACe<x>:PNOise:SMOothing:ENABle (on page 2690)	Sets or queries whether to enable smoothing the specified trace.
TRACe<x>:PNOise:SMOothing:RESet (on page 2691)	Restarts the smoothing process.
TRACe:{FSETtling PSETtling} subgroup (Option 12 only)	Settling time measurements
TRACe:{FSETtling PSETtling}:AVERage:COUNT (on page 2597)	Sets or queries the number of traces to combine.
TRACe:{FSETtling PSETtling}:AVERage:COUNT:CURRent? (on page 2597)	Queries the current running average count value.
TRACe:{FSETtling PSETtling}:AVERage:ENABle (on page 2597)	Determines whether to enable or disable averaging the trace(s).
TRACe:{FSETtling PSETtling}:RESet (on page 2598)	If trace averaging is enabled, this command resets the current averaged trace to 0.

Commands	Description
TRACe:{FSETtling PSETtling}:SMOothing:COUNT (on page 2598)	Sets or queries the number of data points to take the moving average for smoothing the traces.
TRACe:{FSETtling PSETtling}:SMOothing:ENABLE (on page 2599)	Determines whether to enable or disable smoothing the trace(s).
TRACe<x>:{FSETtling PSETtling}:FREeze (on page 2658)	Determines whether to freeze the specified trace in the Settling Time measurement display.
TRACe<x>:{FSETtling PSETtling}:SElect (on page 2659)	Selects the trace in the settling time measurement.
TRACe<x>:{FSETtling PSETtling}:SHOW (on page 2659)	Determines whether to show or hide the specified trace in the settling time view.
TRACe:SEM subgroup	Spectral Emissions Mask measurements
TRACe:SEM:COUNT (on page 2617)	Sets or queries how many acquisitions run in the single acquisition mode for multi-trace functions.
TRACe:SEM:COUNT:RESet (on page 2617)	Clears the multi-function data and counter and restarts the process.
TRACe:SEM:FUNCTION (on page 2617)	Sets or queries the trace function.
TRACe:SGRam subgroup	Spectrogram measurement
TRACe:SGRam[:MEAview<y>]:DETection (on page 2618)	Sets or queries the method to be used for decimating traces to fit the on screen.
TRACe:SGRam[:MEAview<y>]:FREeze (on page 2619)	Sets or queries whether or not to freeze the spectrogram display.
TRACe:SGRam[:MEAview<y>]:FUNCTION (on page 2619)	Sets or queries the trace function for the specified trace in the spectrogram.
TRACe:SGRam[:MEAview<y>]:FUNCTION:TIME (on page 2620)	Sets or queries the number of traces to combine for the trace function.
TRACe:SGRam[:MEAview<y>]:SElect:LINE (on page 2621)	Sets or queries the line number to send to the spectrum display.
TRACe<x>:SPECTrum subgroup	Spectrum measurement
TRACe<x>:SPECTrum[:MEAview<y>] (on page 2691)	Sets or queries whether to show or hide the specified trace.
TRACe<x>:SPECTrum[:MEAview<y>]:AVERage:COUNT (on page 2692)	Sets or queries the number of traces to combine for averaging.
TRACe<x>:SPECTrum[:MEAview<y>]:AVERage:RESet (on page 2692)	Clears the average data and resets the average counter.
TRACe<x>:SPECTrum[:MEAview<y>]:COUNT (on page 2693)	Sets or queries the count for the Max or Min Hold trace.

Commands	Description
TRACe<x>:SPECtrum[:MEASview<y>]:COUNT:ENABLE (on page 2693)	Sets or queries whether or not to enable the count for Max/Min Hold.
TRACe<x>:SPECtrum[:MEASview<y>]:COUNT:RESet (on page 2694)	Clears the Max or Min Hold data and counter, and restarts the process.
TRACe<x>:SPECtrum[:MEASview<y>]:DETecton (on page 2694)	Sets or queries the display detector.
TRACe<x>:SPECtrum[:MEASview<y>]:FREeze (on page 2695)	Sets or queries whether or not to freeze the display of the trace.
TRACe<x>:SPECtrum[:MEASview<y>]:FUNCTION (on page 2696)	Sets or queries the trace function.
TRACe<x>:SPECtrum[:MEASview<y>]:LEFToperand (on page 2696)	Sets or queries the left operand for the math trace.
TRACe<x>:SPECtrum[:MEASview<y>]:RIGHToperand (on page 2697)	Sets or queries the right operand for the math trace.
TRACe<x>:SPECtrum[:MEASview<y>]:SElect (on page 2697)	Sets or queries the trace number to display the readout.
TRACe:SPURious subgroup	Spurious measurement
TRACe:SPURious:COUNt (on page 2621)	Sets or queries the count for the Max Hold or Average trace.
TRACe:SPURious:COUNt:ENABLE (on page 2622)	Sets or queries whether to enable the count for Max Hold or Average.
TRACe:SPURious:COUNt:RESet (on page 2622)	Clears Max Hold or Average data and counter, and restarts the process.
TRACe:SPURious:FREeze (on page 2623)	Determines whether or not to freeze the display of the trace.
TRACe:SPURious:FUNCTION (on page 2623)	Sets or queries the trace function.
TRACe:TOVerview subgroup	All measurements
TRACe1:TOVerview[:MEASview<y>] (on page 2626)	Enables display of or queries the display status of the specified trace.
TRACe1:TOVerview[:MEASview<y>]:AVERage:COUNt (on page 2626)	Sets or queries the number of traces averaged to generate the specified trace.
TRACe1:TOVerview[:MEASview<y>]:COUNt (on page 2627)	Enables or queries the count set for the specified trace.
TRACe1:TOVerview[:MEASview<y>]:COUNt:ENABLE (on page 2627)	Enables or queries the Average count for the specified trace.
TRACe1:TOVerview[:MEASview<y>]:COUNt:RESet (on page 2628)	Sets or queries whether or not to freeze the display of the trace.

Commands	Description
TRACe1:TOVerview[:MEASview<y>]:DETectIon (on page 2628)	Enables or queries the type of detection for the specified trace.
TRACe1:TOVerview[:MEASview<y>]:FREeze (on page 2628)	Enables or queries a halt to acquisition updates for the specified trace.
TRACe1:TOVerview[:MEASview<y>]:FUNCTION (on page 2629)	Enables or queries the selected Function for the specified trace.
TRACe:WLAN group	Wireless LAN measurements
TRACe:WLAN:FLATness:FREeze (on page 2625)	Sets or queries whether to freeze the average trace on the WLAN Spectral Flatness display.
TRACe:WLAN:FLATness:SHOW (on page 2625)	Displays or hides the trace on the WLAN Spectral Flatness display.
TRACe<x>:WLAN:CONStellation (on page 2704)	Turns the selected trace on or off in the Constellation plot display.
TRACe<x>:WLAN:CONStellation:FREeze (on page 2704)	Turns the freeze state of the selected trace on or off.
TRACe<x>:WLAN:CRESPonse:SElect (on page 2705)	Sets or queries the active trace in the WLAN Channel Response.
TRACe<x>:WLAN:EVM:FREeze (on page 2705)	Turns the freeze state of the selected trace on or off.
TRACe<x>:WLAN:EVM[:SHOW] (on page 2706)	Displays or hides the selected trace.
TRACe<x>:WLAN:MERRor:FREeze (on page 2706)	Turns the freeze state of the selected trace on or off.
TRACe<x>:WLAN:MERRor[:SHOW] (on page 2707)	Displays or hides the selected trace.
TRACe<x>:WLAN:PError:FREeze (on page 2707)	Turns the freeze state of the selected trace on or off.
TRACe<x>:WLAN:PError[:SHOW] (on page 2708)	Displays or hides the selected trace.
TRACe:LTE subgroup	
TRACe<x>:LTE:ACLR:COUNt (on page 2660)	Sets or queries how many acquisitions run in the single acquisition mode for multitrace functions.
TRACe<x>:LTE:ACLR:COUNt:RESet (on page 2661)	Clears the multifunction (Max Hold or Average) data and counter and restarts the process.
TRACe<x>:LTE:ACLR:FUNCTION (on page 2661)	Sets or queries the trace function.
TRACe<x>:LTE:CONStellation:SYNChronization:SEQUence:STATe? (on page 2662)	Returns whether or not a measurement signal (Primary Synchronization Signal/ Secondary Synchronization Signal) is selected for the specified trace.

Trace mnemonics

Trace Mnemonics

Multiple traces can be used in some measurement displays. The traces are specified by the trace specifier TRACe<x> (<x>=1 to 5) which is defined for each measurement display as follows.

Trace mnemonics

Measurement display	TRACe1	TRACe2	TRACe3	TRACe4	TRACe5
Amplitude versus Time	Trace 1	Trace 2	Math trace	NA	NA
Phase noise	Trace 1	Trace 2	NA	NA	NA
Spectrum	Trace 1	Trace 2	Trace 3	Math trace	Spectrogram

NOTE: Valid traces depend on commands. Refer to each command description.

Trigger commands

Use the TRIGger commands to set up the trigger system.

Trigger commands

Commands	Description
*TRG (No Query Form) (on page 2709)	Generates a trigger. It produces the same effect as the Force Trigger button on the Trigger control panel. This command is valid when the trigger mode is Triggered.
TRIGger:ADVanced:SWEep:MODE (on page 2709)	Sets or enables the analyzer to wait for a trigger for each acquisition in a swept spectrum or other measurement requiring multiple acquisitions worth of span.
TRIGger:DPX:SHOW:FRAMes (on page 2709)	Sets or queries whether to trigger each segment in the swept mode.
TRIGger:DPX:TDM:SHOW:ALL (on page 2710)	Sets or queries the selections of the DPX Prefs control panel tab page.
TRIGger:EVENT:EXternal:SLOPe (on page 2710)	Sets or queries the signal slope of the External input to determine a trigger event.
TRIGger:EVENT:INPut:LEVel (on page 2711)	Sets or queries the power level that the signal must pass through to cause a trigger event when the trigger type is set to Power.
TRIGger:EVENT:INPut:SLOPe (on page 2711)	Sets or queries the signal slope of the RF Input to determine a trigger event.
TRIGger:EVENT:INPut:TYPE (on page 2712)	Sets or queries the type of trigger. (Power is the only available setting.)
TRIGger:EVENT:SOURce (on page 2712)	Sets or queries the source of the signal to be monitored for a trigger event.
TRIGger:MASK:NEW (on page 2712)	Loads a new frequency mask.
TRIGger:MASK:NEW:AUTO (on page 2713)	Draws a new frequency mask automatically.
TRIGger:MASK:OPEN (on page 2714)	Opens a trigger mask with a specified file.
TRIGger:MASK:SAVE (on page 2715)	Saves the current trigger mask to a specified file.

Commands	Description
TRIGger:SAVE:COUNt:MAXimum (on page 2715)	Sets or queries the number of times a Save on Trigger action stores a file.
TRIGger:SAVE:COUNt[:STATe] (on page 2715)	Sets or queries the Maximum total number of files feature.
TRIGger:SAVE:DATA:FORMat (on page 2716)	Sets or queries the file format used when saving the acquisition data on a trigger event.
TRIGger:SAVE:DATA[:STATe] (on page 2716)	Sets or queries to save data when a trigger event occurs.
TRIGger:SAVE:PICTure:FORMat (on page 2717)	Sets or queries the file format used when saving a picture of the display when a trigger event occurs.
TRIGger:SAVE:PICTure[:STATe] (on page 2717)	Sets or queries the save picture on trigger setting.
TRIGger[:SEQuence]:ADVanced:HOLDoff (on page 2718)	FIRST Sets or queries the trigger holdoff time.
TRIGger[:SEQuence]:ADVanced:HOLDoff:ENABle (on page 2718)	Sets or queries the trigger delay time.
TRIGger[:SEQuence]:ADVanced:SWEep:MODE (on page 2718)	Determines whether or not to trigger each segment in the swept acquisition mode.
TRIGger[:SEQuence]:ADVanced:SWEpt:SEGment:ENABle (on page 2719)	Determines whether or not to wait for a trigger for each acquisition in a swept spectrum.
TRIGger[:SEQuence]:EVENT:A:EDGE:COUPling (on page 2719)	Sets or queries the choice of Trigger coupling type.
TRIGger[:SEQuence]:EVENT:A:EDGE:HOLDoff:MODE (on page 2720)	Sets or queries the trigger hold off mode.
TRIGger[:SEQuence]:EVENT:A:EDGE:HOLDoff:TIME (on page 2720)	Sets or queries the hold off time.
TRIGger[:SEQuence]:EVENT:A:EDGE:LEVEl (on page 2720)	Sets or queries where the trigger point occurs for trigger source type.
TRIGger[:SEQuence]:EVENT:EXTFront:IMPedance (on page 2721)	Sets or queries the impedance of the external trigger input (front).
TRIGger[:SEQuence]:EVENT:EXTFront:LEVEl (on page 2721)	Sets or queries the trigger level at the external trigger input (front).
TRIGger[:SEQuence]:EVENT:EXTFront:SLOPe (on page 2722)	Sets or queries the trigger slope of the external trigger input (front).
TRIGger[:SEQuence]:EVENT:EXTRear:SLOPe (on page 2722)	Sets or queries the trigger slope of the external trigger input (rear).
TRIGger[:SEQuence]:EVENT:GATed (on page 2723)	Sets or queries the logic for the gated trigger input.

Commands	Description
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude (on page 2723)	Sets or queries the center vertical level for the density trigger region.
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude:TOLerance (on page 2724)	Sets or queries the trigger level for the RF input level trigger.
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency (on page 2724)	Sets or queries the center horizontal level for the density trigger region.
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency:TOLerance (on page 2725)	Sets or queries the left and right extensions of the density trigger region from the center horizontal level.
TRIGger[:SEquence]:EVENT:INPut:DDENsity:THReshold (on page 2725)	Sets or queries the DPX Density threshold that defines a trigger event.
TRIGger[:SEquence]:EVENT:INPut:DDENsity:VIOLation (on page 2726)	Sets or queries whether a density value higher or lower than the THReshold value defines a trigger event.
TRIGger[:SEquence]:EVENT:INPut:FEDGe:LEVel (on page 2726)	Sets or queries the trigger level at the frequency edge input.
TRIGger[:SEquence]:EVENT:INPut:FEDGe:LEVel:ACTual? (on page 2727)	Queries the actual length of the frequency edge input for the DPX measurement.
TRIGger[:SEquence]:EVENT:INPut:FEDGe:SLOPe (on page 2727)	Sets or queries the trigger slope of the frequency edge input.
TRIGger[:SEquence]:EVENT:INPut:FEDGe:THReshold:LEVel (on page 2727)	Set or queries the threshold level in the DPX measurement.
TRIGger[:SEquence]:EVENT:INPut:FEDGe:THReshold:STATe (on page 2728)	Set or queries the threshold state in the DPX measurement.
TRIGger[:SEquence]:EVENT:INPut:FMASK:{ BANDwidth BWIDth[:RESolution] (on page 2728)	Sets or queries the Resolution Bandwidth value to be used in the spectrum view for the frequency mask trigger.
TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth BWIDth[:RESolution]:ACTual? (on page 2729)	Sets or queries when the trigger occurs in the frequency mask trigger.
TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth BWIDth[:RESolution]:AUTO (on page 2729)	Sets or queries whether to automatically set the Resolution Bandwidth value used in the spectrum view for the frequency mask trigger.
TRIGger[:SEquence]:EVENT:INPut:FMASK:VIOLation (on page 2730)	Sets or queries when the analyzer triggers in the frequency mask trigger.
TRIGger[:SEquence]:EVENT:INPut:LEVel (on page 2731)	Sets or queries the trigger level for the RF input level trigger.
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe (on page 2731)	Sets or queries the Runt trigger for a positive or negative going pulse.

Commands	Description
TRIGger[:SEquence]:EVENT:INPut:RUNt:PULSe:HIGH:LEVel (on page 2731)	Sets or queries the trigger slope for the RF input level trigger.
TRIGger[:SEquence]:EVENT:INPut:RUNt:PULSe:LOW:LEVel (on page 2732)	Sets or queries the lower level (second threshold) to qualify a Runt trigger.
TRIGger[:SEquence]:EVENT:INPut:SLOPe (on page 2732)	Sets or queries the trigger slope for the RF input level trigger.
TRIGger[:SEquence]:EVENT:INPut:TDBWidth (on page 2733)	Sets or queries the time-domain bandwidth.
TRIGger[:SEquence]:EVENT:INPut:TDBWidth:ACTual? (on page 2733)	Queries the actual time-domain bandwidth.
TRIGger[:SEquence]:EVENT:INPut:TDBWidth:STATe (on page 2734)	Determines whether to set the time-domain bandwidth automatically.
TRIGger[:SEquence]:EVENT:INPut:TYPE (on page 2734)	Sets or queries the trigger type for the source of RF input.
TRIGger[:SEquence]:EVENT:PPS:UTCtrigger (on page 2735)	Queries the last triggered Global UTC time when 1-PPS trigger is selected.
TRIGger[:SEquence]:EVENT:PPS:SYStrigger (on page 2735)	Queries the last triggered Local system time when 1-PPS trigger is selected
TRIGger[:SEquence]:EVENT:SOURce (on page 2735)	Sets or queries the trigger event source.
TRIGger[:SEquence]:FORCed (on page 2736)	Sets or queries whether to causes a manual trigger.
TRIGger:SEquence:FORCed (No Query Form) (on page 2736)	Causes a trigger event to occur when the trigger mode is set to Triggered, regardless of the set trigger conditions.
TRIGger[:SEquence]:IMMediate (on page 2737)	Causes a trigger immediately.
TRIGger[:SEquence]:STATus (on page 2737)	Sets or queries the trigger mode (Free Run or Triggered).
TRIGger[:SEquence]:STATus (on page 2738)	Sets or queries the trigger mode setting.
TRIGger[:SEquence]:TIME:DELaY (on page 2738)	Sets or queries the trigger delay time.
TRIGger[:SEquence]:TIME:POSition (on page 2738)	Sets or queries the trigger position.
TRIGger[:Sequence]:TIME:POSition:AUTO (on page 2739)	Sets or queries the position of the trigger event (automatic or manual) within the acquisition record.
TRIGger[:SEquence]:TIME:QUALified (on page 2739)	LAST Sets or queries the timing qualification setting for triggers.

Commands	Description
TRIGger[:SEquence]:TIME:QUALified:TIME<x> (on page 2740)	Sets or queries the trigger mode (Free Run or Triggered).
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:ANALog (on page 2740)	Sets or queries where the trigger point occurs for Analog Trigger Source Type.
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:FREQuency (on page 2741)	Sets or queries where the trigger point occurs for FreqVsTime Trigger Source Type.
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:MAGNitude (on page 2741)	Sets or queries where the trigger point occurs for MagVsTime Trigger Source Type.
TRIGger[:SEquence]:EVENT:A:EDGE:SETTings (on page 2742)	Sets or queries the settings of Trigger source type.
TRIGger[:SEquence]:EVENT:A:EDGE:SLOPe (on page 2742)	Sets or queries whether instrument finds the trigger point on rising or falling edge or either edge of a signal.
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce (on page 2742)	Sets or queries the channel on which signal is to be monitored for a trigger event.
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:FORMat (on page 2743)	Sets or queries the vertical scale mode to Amplitude (Vrms) or Power (log).
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:TYPE (on page 2743)	Sets or queries the choice of Trigger source type.
TRIGger[:SEquence]:EVENT:A:TYPE (on page 2743)	Sets or queries the trigger type {supporting only Edge trigger}.
TRIGger[:SEquence]:MODE (on page 2744)	Sets or queries the trigger mode setting.
TRIGger:TIME:POSition (on page 2744)	Sets or queries the point (in percent) along the acquisition record the trigger event should occur.
TRIGger:TIME:POSition:AUTO (on page 2745)	Sets or queries the instrument to automatically set the position of the trigger event.

Unit commands


Specify fundamental units for measurement.

Unit commands

Header	Description
UNIT:POWer (on page 2745)	Sets or queries the unit of power.

Retrieving response message

When receiving a query command from the external controller, the analyzer puts the response message on the Output Queue. This message cannot be retrieved unless you perform retrieval operations through the external controller. (For example, call the IBRD subroutine included in the GPIB software of National Instruments.)

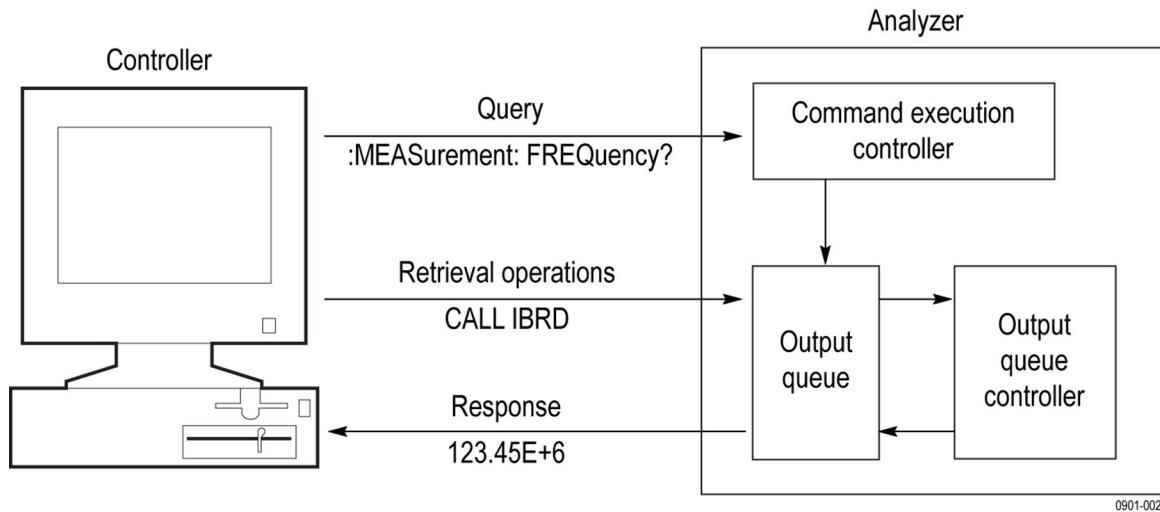

Retrieving response message

When the Output Queue contains a response message, sending another command from the external controller before retrieving this message deletes it from the queue. The Output Queue always contains the response message to the most recent query command.

You can use the MAV bit of the Status Byte Register (SBR) to check whether the Output Queue contains a response message. For details, refer to [Status Byte](#) (on page 2749).

Command descriptions

ABORt (No query form)

Resets the trigger system and places all trigger sequences in the idle state. Any actions related to the trigger system that are in progress, such as a sweep or acquiring a measurement is also aborted.

To start data acquisition, use the INITiate commands.

Conditions

Measurement views: All

Group

Abort commands

Syntax

ABORt

Related Commands

[INITiate:CONTInuous](#) (on page 1515)

[INITiate:RESume](#) (on page 1516)

Arguments

None

Examples

ABORT resets the trigger system and stops data acquisition.

*CAL (Query only)

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*CAL

Returns

<NR1>=1 indicates that the alignment was successful.

<NR1>=0 indicates that the alignment was unsuccessful.

Examples

*CAL performs an internal self-alignment and will return 1 if the alignment is successful.

Calculate commands

CALCulate[:SEARch|:TEST]:LIMit[:STATe]:MATCh:FILE:LOCation

Sets or queries the destination folder for “search match” output files.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

CALCulate[:SEARch|:TEST]:LIMit[:STATe]:MATCh:FILE:LOCation <string>
CALCulate[:SEARch|:TEST]:LIMit[:STATe]:MATCh:FILE:LOCation?

Arguments

<string> specifies the destination folder.

Returns

<string>

Examples

CALCULATE: [:SEARCH|:TEST]:LIMIT[:STATE]:MATCH:FILE:LOCATION? might return c:\rsamap files, indicating the destination folder.

CALCulate[:SEARCh|:TEST]:LIMIT[:STATe]:MATCH:FILE:NAME:BASE

Sets or queries the file basename for “search match” output files.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

CALCulate: [:SEARCh|:TEST]:LIMIT[:STATe]:MATCH:FILE:NAME:BASE<string>
CALCulate: [:SEARCh|:TEST]:LIMIT[:STATe]:MATCH:FILE:NAME:BASE?

Arguments

<string> specifies the output file.

Returns

<string>

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:FILE:NAME:BASE "BASE" sets the base filename as BASE

CALCulate:ACPower:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker in the Channel power and ACPR measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the **CALCulate:MARKer:ADD** command.

Conditions

Measurement views: Channel power and ACPR

Group

Calculate commands

Syntax

CALCulate:ACPower:MARKer<x>:DELTA:X?

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

[CALCulate:ACPower:MARKer<x>:DELTA:Y?](#) (on page 387)

Returns

<NRf> Delta marker frequency for the selected marker.

Examples

`CALCULATE:ACPOWER:MARKER1:DELTA:X?` might return 1.28E+6, indicating that the delta marker frequency is 1.28 MHz.

CALCulate:ACPower:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the Channel power and ACPR measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Channel power and ACPR

Group

Calculate commands

Syntax

`CALCulate:ACPower:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

[CALCulate:ACPower:MARKer<x>:DELTA:X?](#) (on page 386)

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

`CALCULATE:ACPOWER:MARKER1:DELTA:Y?` might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:ACPower:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Channel power and ACPR measurement

Conditions

Measurement views: Channel power and ACPR

Group

Calculate commands

Syntax

`CALCulate:ACPower:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:ACPOWER:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:ACPower:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Calculate commands

Syntax

```
CALCulate:ACPower:MARKer<x>:PEAK:LEFT
```

Related Commands

[CALCulate:ACPower:MARKer<x>:PEAK:RIGHT](#) (on page 388)

Arguments

None

Examples

`CALCULATE:ACPOWER:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:ACPower:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Calculate commands

Syntax

```
CALCulate:ACPower:MARKer<x>:PEAK:RIGHT
```

Related Commands

[CALCulate:ACPower:MARKer<x>:PEAK:LEFT](#) (on page 387)

Arguments

None

Examples

`CALCULATE:ACPOWER:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:ACPower:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Calculate commands

Syntax

```
CALCulate:ACPower:MARKer<x>:X <value>
CALCulate:ACPower:MARKer<x>:X?
```

Related Commands

[CALCulate:ACPower:MARKer<x>:Y?](#) (on page 389)

Arguments

<value>: :=<NRf> specifies the horizontal position of the marker. Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

CALCULATE:ACPOWER:MARKER1:X 800MHz places Marker 1 (M1) at 800 MHz on the trace.

CALCulate:ACPower:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Calculate commands

Syntax

```
CALCulate:ACPower:MARKer<x>:Y?
```

Related Commands

[CALCulate:ACPower:MARKer<x>:X](#) (on page 388)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCULATE:ACPOWER:MARKER1:Y might return -34.28, indicating Marker 1 (M1) is at -34.28 dBm.

CALCulate:{AM|FM|PM}:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker time for the selected marker in the AM/FM/PM measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

`CALCulate:{AM|FM|PM}:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:DELTA:Y?](#) (on page 390)

Arguments

None

Returns

<NRf> Delta marker time for the selected marker.

Examples

`CALCULATE:AM:MARKER1:DELTA:X?` might return 38.0E-6, indicating that the delta marker time is 38.0 μ s.

CALCulate:{AM|FM|PM}:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the AM/FM/PM measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

`CALCulate:{AM|FM|PM}:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:DELTA:X?](#) (on page 389)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker, indicating the difference of modulation factor in percent (AM), frequency deviation in Hz (FM), or phase deviation in degrees (PM) with the reference marker.

Examples

`CALCULATE:AM:MARKER1:DELTA:Y?` might return 45.82, indicating that the delta marker amplitude is the modulation factor difference of 45.82% in the AM measurement.

CALCulate:{AM|FM|PM}:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the AM/FM/PM measurement.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

`CALCulate:{AM|FM|PM}:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:AM:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the AM-demodulated trace.

CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the trace in the AM/FM/PM measurement.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

`CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:LOWer](#) (on page 392)

Arguments

None

Examples

`CALCULATE:AM:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the AM-demodulated trace.

CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the AM/FM/PM measurement.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

`CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:RIGHT](#) (on page 392)

Arguments

None

Examples

`CALCULATE:AM:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the AM-demodulated trace.

CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the trace in the AM/FM/PM measurement.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

`CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:HIGHer](#) (on page 391)

Arguments

None

Examples

`CALCULATE:AM:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the AM-demodulated trace.

CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the AM/FM/PM measurement.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

`CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:PEAK:LEFT](#) (on page 391)

Arguments

None

Examples

CALCULATE:AM:MARKER1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the AM-demodulated trace.

CALCulate:{AM|FM|PM}:MARKer<x>:X

Sets or queries the horizontal position (time) of the selected marker in the AM/FM/PM measurement.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

CALCulate:{AM|FM|PM}:MARKer<x>:X <value>

CALCulate:{AM|FM|PM}:MARKer<x>:X?

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:Y?](#) (on page 393)

Arguments

<value>: :=<NRf> specifies the horizontal position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)].

Examples

CALCULATE:AM:MARKER1:X 1.5us places Marker 1 (M1) at 1.5 μ s on the AM-demodulated trace.

CALCulate:{AM|FM|PM}:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the AM/FM/PM measurement.

Conditions

Measurement views: General purpose analog demodulation

Group

Calculate commands

Syntax

CALCulate:{AM|FM|PM}:MARKer<x>:Y?

Related Commands

[CALCulate:{AM|FM|PM}:MARKer<x>:X](#) (on page 393)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker, indicating the modulation factor in percent (AM), frequency deviation in Hz (FM), or phase deviation in degrees (PM) at the marker.

Examples

`CALCULATE:AM:MARKER1:Y?` might return 23.4, indicating that Marker 1 (M1) reads the modulation factor of 23.4% in the AM measurement.

CALCulate:AUDio:HARMonic:HNUMber

Sets or queries the number of harmonics used for the audio measurement. The range of values is an integer from 1 to 20.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

```
CALCulate:AUDio:HARMonic:HNUMber <value>  
CALCulate:AUDio:HARMonic:HNUMber?
```

Arguments

`<value> ::= <NR1>` specifies the number of harmonics.

Examples

`CALCULATE:AUDIO:HARMONIC:HNUMBER 20` sets the number of harmonics to 20.

CALCulate:AUDio:HARMonic:NHNumber

Sets or queries the number of non-harmonics used for the audio measurement. The range of values is an integer from 0 to 20.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

```
CALCulate:AUDio:HARMonic:NHNumber <value>  
CALCulate:AUDio:HARMonic:NHNumber?
```

Arguments

`<value> ::= <NR1>` specifies the number of non-harmonics.

Examples

`CALCULATE:AUDIO:HARMONIC:NHNUMBER 20` sets the number of non-harmonics to 20.

CALCulate:AUDio:NHARmonic:EXCursion

Sets or queries the non-harmonic excursion value. The range of values is 0 dB to 30 dB.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

```
CALCulate:AUDio:NHARmonic:EXCursion <value>  
CALCulate:AUDio:NHARmonic:EXCursion?
```

Arguments

<value> ::= <NR1> The specifies the non-harmonic excursion value.

Examples

CALCULATE:AUDIO:NHARMONIC:EXCURSION 6 sets the non-harmonic excursion to 6.0 dB.

CALCulate:AUDio:NHARmonic:IGNore

Sets or queries the ignore region of the non-harmonics in the audio measurement. The range of the ignore region is from 0 Hz to the audio bandwidth.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

```
CALCulate:AUDio:NHARmonic:IGNore <value>  
CALCulate:AUDio:NHARmonic:IGNore?
```

Arguments

<value> ::= <NRf> specifies the ignore region.

Examples

CALCULATE:AUDIO:NHARMONIC:IGNORE 1E+3 sets the non-harmonic ignore region to 1.0 kHz.

CALCulate:AUDio:NHARmonic:THReshold

Sets or queries the non-harmonic threshold value for the audio measurement. The range is from -200 dBc to 0 dBc.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

```
CALCulate:AUDio:NHARmonic:THReshold <value>  
CALCulate:AUDio:NHARmonic:THReshold?
```

Arguments

<value> ::= <NR1> specifies the threshold value.

Examples

`CALCulate:AUDIO:NHARMONIC:THRESHOLD -100` sets the non-harmonic threshold value to -100 dBc.

CALCulate:AUDIO:SPECTrum:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker on the spectrum trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

`CALCulate:AUDIO:SPECTrum:MARKer<x>:DELTA:X?`

Arguments

None

Returns

<NRf> the delta marker frequency for the selected marker.

Examples

`CALCulate:AUDIO:SPECTrum:MARKer1:DELTA:X?` might return 5.0020E+3 indicating the delta marker frequency is 5.002 kHz.

CALCulate:AUDIO:SPECTrum:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the spectrum trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

`CALCulate:AUDIO:SPECTrum:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:AUDIO:SPECTrum:MARKer<x>:DELTA:X?](#) (on page 396)

Arguments

None

Returns

<NRf> the delta marker amplitude for the selected marker.

Examples

CALCulate:AUDio:SPECTrum:MARKer1:DELta:Y? might return 3.435 indicating that the delta marker amplitude is 3.435 dB.

CALCulate:AUDio:SPECTrum:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the spectrum trace.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

CALCulate:AUDio:SPECTrum:MARKer<x>:MAXimum

Arguments

None

Examples

CALCulate:AUDio:SPECTrum:MARKer1:MAXimum moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the spectrum trace.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:HIGHer

Related Commands

[CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LOWer](#) (on page 398)

Arguments

None

Examples

`CALCulate:AUDio:SPECTrum:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next higher peak in amplitude on the trace.

CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the spectrum trace.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

`CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:RIGHT](#) (on page 399)

Arguments

None

Examples

`CALCulate:AUDio:SPECTrum:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the spectrum trace.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

`CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:HIGHer](#) (on page 397)

Arguments

None

Examples

`CALCulate:AUDio:SPECTrum:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next lower peak in amplitude on the trace.

CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the spectrum trace.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:RIGHT

Related Commands

[CALCulate:AUDio:SPECTrum:MARKer<x>:PEAK:LEFT](#) (on page 398)

Arguments

None

Examples

CALCulate:AUDio:SPECTrum:MARKer1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:AUDio:SPECTrum:MARKer<x>:TRACe

Sets or queries the trace on which the specified marker is placed in the spectrum measurement.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

CALCulate:AUDio:SPECTrum:MARKer<x>:TRACe TRACE1
CALCulate:AUDio:SPECTrum:MARKer<x>:TRACe?

Arguments

TRACE1 places the specified marker on Trace 1.

Examples

CALCulate:AUDio:SPECTrum:MARKer1 TRACE1 places Marker 1 (M1) on Trace 1.

CALCulate:AUDio:SPECTrum:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the spectrum trace.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

CALCulate:AUDio:SPECTrum:MARKer<x>:X <value>

CALCulate:AUDio:SPECTrum:MARKer<x>:X?

Related Commands

[CALCulate:AUDio:SPECTrum:MARKer<x>:Y?](#) (on page 400)

Arguments

<value> ::= <NRf> specifies the horizontal position of the marker. Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

CALCulate:AUDio:SPECTrum:MARKer1:X 800 places Marker 1 (M1) at 800 Hz on the spectrum trace.

CALCulate:AUDio:SPECTrum:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker on the spectrum trace.

Conditions

Measurement views: Audio Spectrum

Group

Calculate commands

Syntax

CALCulate:AUDio:SPECTrum:MARKer<x>:Y?

Related Commands

[CALCulate:AUDio:SPECTrum:MARKer<x>:X](#) (on page 399)

Arguments

None

Returns

<NRf> the marker amplitude for the selected marker.

Examples

CALCulate:AUDio:SPECTrum:MARKer1:Y? might return 53.818 indicating that Marker 1 (M1) is at 53.818 dBm.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker time for the selected marker in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELta:X?`

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:DELta:Y?](#) (on page 401)

Arguments

The parameter `<x>` = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is 1

Returns

`<NRf>` Delta marker time for the selected marker.

Examples

`CALCULATE:AVTIME:MEASVIEW1:MARKER1:DELTA:X?` might return `38.0E-9`, indicating that the delta marker time is 38.0 ns on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELta:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:DELta:Y?`

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:DELta:X?](#) (on page 400)

Arguments

The parameter `<x>` = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is 1

Returns

`<NRf>` Delta marker amplitude for the selected marker.

Examples

`CALCULATE:AVTIME:MEASVIEW1:MARKER1:DELTA:Y?` might return 23.45, indicating that the delta marker amplitude is 23.45 dB on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time with specified Measurement view number.

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`CALCULATE:AVTIME:MEASVIEW1:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the Amplitude versus Time trace.

Conditions

Measurement views: Amplitude versus Time with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 403)

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`CALCULATE:AVTIME:MEASVIEW1:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 404)

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`CALCulate:AVTime:MEASVIEW1:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the Amplitude versus Time trace

Conditions

Measurement views: Amplitude versus Time with specified Measurement view number.

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 402)

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`CALCULATE:AVTIME:MEASVIEW1:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 403)

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`CALCULATE:AVTIME:MEASVIEW1:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:TRACe

Sets or queries the trace on which the specified marker is placed in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:TRACe { TRACE1 | TRACE2 | TRACE3 | TRACE4 }`
`CALCulate:AVTime[:MEASview<y>]:MARKer<x>:TRACe?`

Arguments

`TRACE1` places the selected marker on Trace 1.

`TRACE2` places the selected marker on Trace 2.

TRACE3 places the selected marker on Trace 3.

TRACE4 places the selected marker on Trace 4 (math trace).

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

CALCULATE:AVTIME:MEASVIEW1:MARKER1:TRACE1 places Marker 1 (M1) on Trace 1 of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Calculate commands

Syntax

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:AVTime[:MEASview<y>]:MARKer<x>:X?

Related Commands

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 405)

Arguments

<value>::=<Nrf> specifies the horizontal position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)].

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

CALCULATE:AVTIME:MEASVIEW1:MARKER1:X 1.5U places Marker 1 (M1) at 1.5 μ s on the trace of Amplitude versus Time Measurement View 1.

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Calculate commands

Syntax

CALCulate:AVTime[:MEASview<y>]:MARKer<x>:Y?

Related Commands

[CALCulate:AVTime\[:MEASview<y>\]:MARKer<x>:X](#) (on page 405)

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCULATE:AVTIME:MEASVIEW1:MARKER1:Y? might return -2.73, indicating Marker 1 (M1) is at -2.73 dBm on the trace of Amplitude versus Time Measurement View 1.

CALCulate:BLUEtooth:CONSte:MARKer<x>:DELTA:X[:TIME]? (Query only)

Queries the delta marker time for the selected marker on the Bluetooth display.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

CALCulate:BLUEtooth:CONSte:MARKer<x>:DELTA:X[:TIME]?

Arguments

None

Returns

<NRf> Delta marker time for the selected marker.

Use [SENSe]:BLUEtooth:ANALysis:TIME:UNITs to select the time unit: symbols or seconds.

Examples

CALCulate:BLUEtooth:CONSte:MARKer1:DELTA:X:TIME? might return 62.75, Indicating that the delta marker time is 62.75 symbols.

CALCulate:BLUEtooth:CONSte:MARKer<x>:FDEViation? (Query Only)

Queries the frequency deviation for the selected marker in the Bluetooth Constellation measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth Constellation.

Applicable when the Trace Type is set to Freq Dev.

Group

Calculate commands

Syntax

```
CALCulate:BLUETooth:CONSt:MARKer<x>:FDEViation?
```

Related Commands

The following commands are applicable when the Trace Type is set to IQ:

[CALCulate:BLUETooth:CONSt:MARKer<x>:MAGNitude?](#) (on page 407)

[CALCulate:BLUETooth:CONSt:MARKer<x>:PHASe?](#) (on page 409)

Use " " to change the Trace Type.

Arguments

None

Returns

<NRf> The frequency deviation readout for the selected marker.

Examples

CALCulate:BLUETooth:CONSt:MARKer1:FDEViation? might return 102.824E+3, indicating the frequency deviation readout of Marker 1 (M1) is 102.824 kHz.

CALCulate:BLUETooth:CONSt:MARKer<x>:MAGNitude? (Query Only)

Queries the magnitude readout of the selected marker in the Bluetooth Constellation.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth Constellation

Applicable when the Trace Type is set to IQ.

Group

Calculate commands

Syntax

```
CALCulate:BLUETooth:CONSt:MARKer<x>:MAGNitude?
```

Arguments

None

Returns

<NRf> The magnitude for the selected marker.

Examples

CALCulate:BLUETOOTH:CONSt:MARKer1:MAGNitude? might return 923E-3, indicating the magnitude readout of Marker 1 (M1) is 923E-3.

CALCulate:BLUETOOTH:CONSt:MARKer<x>:MAXimum (No Query Form)

Positions the selected marker at the symbol in the center of the analyzed time record.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

CALCulate:BLUETOOTH:CONSt:MARKer<x>:MAXimum

Arguments

None

Examples

CALCulate:BLUETOOTH:CONSt:MARKer1:MAXimum positions Marker 1 (M1) at the symbol in the center of the time record.

CALCulate:BLUETOOTH:CONSt:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker in the time domain to the next symbol number to the left, relative to the previous marker position.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

CALCulate:BLUETOOTH:CONSt:MARKer<x>:PEAK:LEFT

Related Commands

[CALCulate:BLUETOOTH:CONSt:MARKer<x>:PEAK:RIGHT](#) (on page 409)

Arguments

None

Examples

`CALCulate:BLUEtooth:CONSt:MARKer1:PEAK:LEFT` moves Marker 1 (M1) in the time domain to the next lower symbol number.

CALCulate:BLUEtooth:CONSt:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker in the time domain to the next higher symbol number, relative to the previous marker position.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:CONSt:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:BLUEtooth:CONSt:MARKer<x>:PEAK:LEFT](#) (on page 408)

Arguments

None

Examples

`CALCulate:BLUEtooth:CONSt:MARKer1:PEAK:RIGHT` moves the Marker 1 (M1) in the time domain to the next higher symbol number.

CALCulate:BLUETooth:CONSt:MARKer<x>:PHASe? (Query Only)

Queries the phase readout of the selected marker in the Bluetooth Constellation.

Conditions

Measurement views: Bluetooth Constellation.

Applicable when the Trace Type is set to IQ.

Group

Calculate commands

Syntax

`CALCulate:BLUETooth:CONSt:MARKer<x>:PHASe?`

Arguments

None

Returns

<NRf>

The phase readout for the selected marker in degrees between -180 and +180.

Examples

`CALCulate:BLUETOOTH:CONStE:MARKer1:PHASe?` might return 35.74, indicating the phase readout of Marker 1 (M1) is 35.74°.

CALCulate:BLUETOOTH:CONStE:MARKer<x>:SYMBol? (Query Only)

Queries the symbol readout value for the selected marker in the Bluetooth Constellation measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

`CALCulate:BLUETOOTH:CONStE:MARKer<x>:SYMBol?`

Related Commands

[CALCulate:BLUETOOTH:CONStE:MARKer<x>:X](#) (on page 411)

Arguments

None

Returns

<NRf> The symbol readout for the selected marker.

Examples

`CALCulate:BLUETOOTH:CONStE:MARKer1:SYMBol?` might return 62.00, indicating the Symbol readout of Marker 1 (M1) is 62.

CALCulate:BLUETOOTH:CONStE:MARKer<x>:Trace

Sets or queries the Trace for the selected marker on the Bluetooth Constellation display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

`CALCulate:BLUETOOTH:CONStE:MARKer<x>:Trace <Enum>`
`CALCulate:BLUETOOTH:CONStE:MARKer<x>:Trace?`

Arguments

<Enum> ::= {TRACE1 | TRACE2}. The arguments specify which trace to place the marker on.

Examples

`CALCulate:BLUETooth:CONStE:MARKer1:TRACe TRACE1` places Marker 1 (M1) on the Trace 1.

CALCulate:BLUETooth:CONStE:MARKer<x>:VALue? (Query Only)

Queries the value readout of the selected marker in the Bluetooth Constellation.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

`CALCulate:BLUETooth:CONStE:MARKer<x>:VALue?`

Arguments

None

Returns

<NRf> The value readout for the selected marker.

Examples

`CALCulate:BLUETooth:CONStE:MARKer2:VALue?` might return 1.00, indicating the value readout of Marker 2(M2) is 1.

CALCulate:BLUETooth:CONStE:MARKer<x>:X

Sets or queries the time position of the selected marker on the Bluetooth Constellation.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Bluetooth Constellation

Group

Calculate commands

Syntax

`CALCulate:BLUETooth:CONStE:MARKer<x>:X <value>`

`CALCulate:BLUETooth:CONStE:MARKer<x>:X?`

Arguments

<value> ::= <NRf> specifies the time position of the marker. Range (analysis offset) to [(analysis offset) + (analysis length)].

Examples

`CALCulate:BLUETooth:CONStE:MARKer1:X -1.63875ms` places the Marker 1 (M1) at -1.63875 ms on the CONSTellation trace.

CALCulate:BLUEtooth:EDiagram:MARKer<x>:DELTA:X[:TIME]? (Query Only)

Returns the delta marker time for the selected marker on the Bluetooth eye diagram display.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

CALCulate:BLUEtooth:EDiagram:MARKer<x>:DELTA:X[:TIME]?

Related Commands

[CALCulate:BLUEtooth:EDiagram:MARKer<x>:DELTA:Y?](#) (on page 412)

Arguments

None

Returns

<NRf> the delta marker time for the selected marker.

Use [SENSe]:BLUEtooth:ANALysis:TIME:UNITs to select the time unit: symbols or seconds.

Examples

CALCulate:BLUEtooth:EDiagram:MARKer1:DELTA:X:TIME? might return 62.75, indicating that the delta marker time is 62.75 symbols.

CALCulate:BLUEtooth:EDiagram:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected markers in the Bluetooth eye diagram.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

CALCulate:BLUEtooth:EDiagram:MARKer<x>:DELTA:Y?

Related Commands

[CALCulate:BLUEtooth:EDiagram:MARKer<x>:DELTA:X\[:TIME\]?](#) (on page 412)

Returns

<NRf>

the delta marker amplitude for the selected marker. Units are in Hz if the Trace Type is set to Freq Dev and no units if the Trace Type is set to IQ.

Examples

CALCulate:BLUEtooth:EDIagram:MARKer1:DELta:Y? might return -1.043, indicating that the delta marker amplitude is -1.043.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the Bluetooth eye diagram trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

CALCulate:BLUEtooth:EDIagram:MARKer<x>:MAXimum

Arguments

None

Examples

CALCulate:BLUEtooth:EDIagram:MARKer1:MAXimum moves Marker 1 (M1) to the Highest peak on the trace.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the Bluetooth eye diagram trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:HIGHer

Related Commands

[CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:LOWer](#) (on page 414)

Arguments

None

Examples

`CALCulate:BLUEtooth:EDIagram:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the Bluetooth eye diagram trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:RIGHT](#) (on page 415)

Arguments

None

Examples

`CALCulate:BLUEtooth:EDIagram:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the Bluetooth eye diagram trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:HIGHer](#) (on page 413)

Arguments

None

Examples

`CALCulate:BLUEtooth:EDIagram:MARKer1:PEAK:LOWer` moves Marker 1(M1) to the next peak lower in amplitude on the trace.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the Bluetooth eye diagram trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:BLUEtooth:EDIagram:MARKer<x>:PEAK:LEFT](#) (on page 414)

Arguments

None

Examples

`CALCulate:BLUEtooth:EDIagram:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:TRACe

The command places the selected marker on the I or Q trace in the Bluetooth eye diagram display. The query returns the name of the trace where the current marker resides.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:EDIagram:MARKer<x>:TRACe <Enum>`
`CALCulate:BLUEtooth:EDIagram:MARKer<x>:TRACe?`

Arguments

`<Enum> ::= {TRACE1 | TRACE2}.`

The arguments specify which trace to place the marker on.

Trace1 specifies the I trace and Trace2 specifies the Q trace.

Returns

For I and Q traces, TRACE1 identifies the I trace and TRACE2 identifies the Q trace.

Examples

`CALCulate:BLUEtooth:EDIagram:MARKer1:TRACe` TRACE1 places Marker 1 (M1) on the I trace.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:X[:TIME]

Sets or queries the horizontal position (time) of the selected marker in the Bluetooth eye diagram measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:EDIagram:MARKer<x>:X[:TIME] <value>`

`CALCulate:BLUEtooth:EDIagram:MARKer<x>:X[:TIME] ?`

Related Commands

[CALCulate:BLUEtooth:EDIagram:MARKer<x>:Y?](#) (on page 416)

Arguments

<value> ::= <NRf> the horizontal position (time) of the marker.

Use [SENSe]:BLUEtooth:ANALysis:TIME:UNITs to select the time unit: symbols or seconds.

Examples

`CALCulate:BLUEtooth:EDIagram:MARKer1:X:TIME 38.5` places Marker 1 (M1) at 38.5 symbols on the trace.

CALCulate:BLUEtooth:EDIagram:MARKer<x>:Y? (Query Only)

Returns the vertical position of the selected marker in the Bluetooth Eye diagram measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth eye diagram

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:EDIagram:MARKer<x>:Y?`

Related Commands

[CALCulate:BLUEtooth:EDIagram:MARKer<x>:X\[:TIME\]](#) (on page 416)

Arguments

None

Returns

<value> ::= <NRf> the vertical position of the selected marker. The units are Hz if the Trace Type is set to Freq Dev; if the Trace Type is set to IQ, there are no units.

Examples

CALCulate:BLUEtooth:EDIagram:MARKer1:Y? might return 571.8E-3, indicating Marker 1 (M1) is at 0.5718.

CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:X[:TIME]? (Query Only)

Queries the delta marker time for the selected marker on the Frequency Deviation vs. Time display

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Use [SENSe]:BLUEtooth:ANALysis:TIME:UNITs to select the time unit symbols or seconds.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:X[:TIME]?

Related Commands

[CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:Y?](#) (on page 417)

Arguments

None

Returns

<NRf> the delta marker time for the selected marker.

Examples

CALCULATE:BLUETOOTH:FDVTIME:MARKER1:DELTA:X:TIME? might return 62.75, indicating that the delta marker time is 62.75 symbols.

CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the Frequency Deviation vs. Time display.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:BLUEtooth:FDVTIME:MARKer<x>:DELTA:X\[:TIME\]? \(on page 417\)](#)

Arguments

None

Returns

<NRf> the delta marker amplitude for the selected marker.

Examples

`CALCulate:BLUEtooth:FDVTIME:MARKer1:DELTA:Y?` return -1.043, indicating that the delta marker amplitude is -1.043.

CALCulate:BLUEtooth:FDVTime:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Frequency Deviation vs. Time display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:FDVTime:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:BLUETOOTH:FDVTIME:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude in the Frequency Deviation vs. Time display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LOWer](#) (on page 419)

Arguments

None

Examples

`CALCULATE:BLUETOOTH:FDVTIME:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Frequency Deviation vs. Time display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:BLUEtooth:CONSt:MARKer<x>:PEAK:RIGHT](#) (on page 409)

Arguments

None

Examples

`CALCULATE:BLUETOOTH:FDVTIME:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on Frequency Deviation vs. Time display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:HIGHer](#) (on page 418)

Arguments

None

Examples

`CALCULATE:BLUETOOTH:FDVTIME:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Frequency Deviation vs. Time display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

`CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:BLUEtooth:FDVTime:MARKer<x>:PEAK:LEFT](#) (on page 419)

Arguments

None

Examples

`CALCULATE:BLUETOOTH:FDVTIME:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:BLUEtooth:FDVTIME:MARKer<x>:X[:TIME]

Sets or queries the marker time in the Frequency Deviation vs. Time display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Use `[SENSe]:BLUEtooth:ANALysis:TIME:UNITs` to select the time unit symbols (default) or seconds.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

```
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:X[:TIME] <value>
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:X[:TIME]?
```

Related Commands

[CALCulate:BLUEtooth:FDVTIME:MARKer<x>:Y](#) (on page 421)

Arguments

<value> ::= <NRf> specifies the marker time in seconds or in symbols based on the Units specified under the Analysis Time.

Examples

CALCULATE:BLUETOOTH:FDVTIME:MARKER1:X:TIME -234.5E-6 places Marker 1 (M1) at -234.5 μ s on the trace.

CALCulate:BLUEtooth:FDVTIME:MARKer<x>:Y

Sets or queries the marker amplitude in the Frequency Deviation vs. Time display.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Calculate commands

Syntax

```
CALCulate:BLUEtooth:FDVTIME:MARKer<x>:Y
```

Related Commands

[CALCulate:BLUEtooth:FDVTIME:MARKer<x>:X\[:TIME\]](#) (on page 420)

Arguments

<value> ::= <NRf> specifies the marker frequency value in Hz.

Examples

CALCULATE:BLUETOOTH:FDVTIME:MARKER1:Y? might return 571.8E-3, indicating Marker 1 (M1) is 0.5718 Hz.

CALCulate:BOBW:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker on the Bluetooth 20 dB bandwidth measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

```
CALCulate:BOBW:MARKer<x>:DELTA:X?
```

Related Commands

[CALCulate:BOBW:MARKer<x>:DELTA:Y?](#) (on page 422)

Arguments

None

Returns

<NRf> Delta marker frequency for the selected marker in Hz.

Examples

CALCULATE:BOBW:MARKER1:DELTA:X? might return 62.75E+3, indicating that the delta marker time is 62.75 kHz.

CALCulate:BOBW:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the Bluetooth 20 dB bandwidth measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

CALCulate:BOBW:MARKer<x>:DELTA:Y?

Related Commands

[CALCulate:BOBW:MARKer<x>:DELTA:X?](#) (on page 421)

Arguments

None

Returns

<NRf> the Delta marker amplitude for the selected marker.

Examples

CALCULATE:BOBW:MARKER1:DELTA:Y? might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:BOBW:MARKer<x>:MAXimum (No Query Form)

Positions the selected marker at the maximum value of the display.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

CALCulate:BOBW:MARKer<x>:MAXimum

Arguments

None

Examples

CALCULATE:BOBW:MARKER1:MAXIMUM positions Marker 1 (M1) at the maximum value of the display.

CALCulate:BOBW:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the BT 20dB bandwidth trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

CALCulate:BOBW:MARKer<x>:PEAK:HIGHer

Related Commands

[CALCulate:BOBW:MARKer<x>:PEAK:LOWer](#) (on page 424)

Arguments

None

Examples

CALCULATE:BOBW:MARKER1:PEAK:HIGHER moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:BOBW:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker in the time domain to the left, relative to the previous marker position on the trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

CALCulate:BOBW:MARKer<x>:PEAK:LEFT

Arguments

None

Examples

`CALCULATE:BOBW:MARKER1:PEAK:LEFT` moves the Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:BOBW:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the BT 20dB bandwidth trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

`CALCulate:BOBW:MARKer<x>:PEAK:LOWer`

Arguments

None

Examples

`CALCULATE:BOBW:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:BOBW:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker in the time domain to the right, relative to the previous marker position on the trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

`CALCulate:BOBW:MARKer<x>:PEAK:RIGHT`

Arguments

None

Examples

`CALCULATE:BOBW:MARKER1:PEAK:RIGHT` moves the Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:BOBW:MARKer<x>[:SET]:CENTer (No Query Form)

Sets the center frequency to the value at the marker position in the BT 20 dB Bandwidth view.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

`CALCulate:BOBW:MARKer<x>[:SET]:CENTer`

Arguments

None

Examples

`CALCULATE:BOBW:MARKER1:SET:CENTER` sets the center frequency to the value at the Marker 1 (M1) position.

CALCulate:BOBW:MARKer<x>:X

Sets or queries the time position of the selected marker on the BT 20 dB Bandwidth measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

`CALCulate:BOBW:MARKer<x>:X <value>`
`CALCulate:BOBW:MARKer<x>:X?`

Related Commands

[CALCulate:BOBW:MARKer<x>:Y?](#) (on page 425)

Arguments

`<value> ::= <NRf>` specifies the horizontal position of the marker.

Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

`CALCULATE:BOBW:MARKER1:X 2.4800000000E+9` places the Marker 1 (M1) at 2.4800000000E+9 on the BT 20dB Bandwidth trace.

CALCulate:BOBW:MARKer<x>:Y? (Query Only)

Returns the amplitude position of the selected marker on the Bluetooth 20 dB Bandwidth trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: BT 20 dB Bandwidth

Group

Calculate commands

Syntax

`CALCulate:BOBW:MARKer<x>:Y?`

Related Commands

[CALCulate:BOBW:MARKer<x>:DELTA:X?](#) (on page 421)

Arguments

None

Returns

`<value> ::= <NRf>` specifies the vertical position of the marker.

Examples

`CALCULATE:BOBW:MARKER1:Y?` returns the marker amplitude in dB on the BT 20dB Bandwidth trace.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)

Returns the delta marker time for the selected marker on the Constellation trace.

The parameter `<x>` = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

`CALCulate:CONSte[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]?`

Returns

`<NRf>` Delta marker time for the selected marker.

The unit can be changed by the `[SENSe]:DDEMod:TIME:UNITs` command.

Examples

`CALCulate:CONSte:MEASview2:MARKer1:DELTA:X:TIME?` might return -62.75, indicating that the delta marker time is -62.75 symbols for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:FDEViation? (Query only)

Queries the frequency deviation of the selected marker in the Constellation measurement for an FSK modulated signal.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

The command is valid for 2, 4, 8, 16 FSK or C4FM modulated signals.

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

`CALCulate:CONSte[:MEASview<y>]:MARKer<x>:FDEVIation?`

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:MAGNitude?](#) (on page 427)

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:PHASe?](#) (on page 430)

Arguments

None

Returns

<NRf> the frequency deviation readout for the selected marker.

Examples

`CALCulate:CONSte:MEASview2:MARKer1:FDEVIation?` might return 102.824E+3, indicating the frequency deviation readout of Marker 1 (M1) is 102.824 kHz for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:MAGNitude? (Query only)

Queries the magnitude readout of the selected marker in the Constellation measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

`CALCulate:CONSte[:MEASview<y>]:MARKer<x>:MAGNitude?`

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:X](#) (on page 432)

Arguments

None

Returns

<NRf> the magnitude readout for the selected marker.

Examples

CALCulate:CONSte:MEASview2:MARKer1:MAGNitude? might return 0.713927, indicating the magnitude readout of Marker 1 (M1) is 0.713927 for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Positions the selected marker at the symbol in the center of the time record.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:MAXimum

Arguments

None

Examples

CALCulate:CONSte:MEASview2:MARKer1:MAXimum positions Marker 1 (M1) at the symbol in the center of the time record for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker in the time domain to the next lower symbol number, relative to the previous marker position.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

```
CALCulate:CONSte[:MEASview<y>]:MARKer<x>:PEAK:LEFT
```

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 429)

Arguments

None

Examples

CALCulate:CONSte:MEASview2:MARKer1:PEAK:LEFT moves Marker 1 (M1) in the time domain to the next lower symbol number for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker in the time domain to the next higher symbol number, relative to the previous marker position.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

```
CALCulate:CONSte[:MEASview<y>]:MARKer<x>:PEAK:RIGHT
```

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 428)

Arguments

None

Examples

CALCulate:CONSte:MEASview2:MARKer1:PEAK:RIGHT moves the Marker 1 (M1) in the time domain to the next higher symbol number for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:PHASe? (Query only)

Queries the phase readout of the selected marker in the Constellation measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:PHASe?

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:X](#) (on page 432)

Arguments

None

Returns

<NRf> The phase readout for the selected marker.

Examples

CALCulate:CONSte:MEASview2:MARKer1:PHASe might return 35.74, indicating the phase readout of Marker 1 (M1) is 35.74 ° for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:SYMBol? (Query only)

Queries the symbol readout of the selected marker in the Constellation measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

`CALCulate:CONSte[:MEASview<y>]:MARKer<x>:SYMBOL?`

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:X](#) (on page 432)

Arguments

None

Returns

<NRf> the symbol readout for the selected marker.

Examples

`CALCulate:CONSte:MEASview2:MARKer1:SYMBOL?` might return 62.00, indicating the symbol readout of Marker 1 (M1) is 62 for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:VALue? (Query only)

Queries the value readout of the selected marker in the Constellation measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

`CALCulate:CONSte[:MEASview<y>]:MARKer<x>:VALue?`

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:X](#) (on page 432)

Arguments

None

Returns

<NRf> the value readout for the selected marker.

Examples

`CALCulate:CONSte:MEASview2:MARKer1:VALue?` might return 2.00, indicating the value readout of Marker 1 (M1) is 2 for measview 2 of constellation.

CALCulate:CONSte[:MEASview<y>]:MARKer<x>:X

Sets or queries the time position of the selected marker on the Constellation trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Calculate commands

Syntax

```
CALCulate:CONSte[:MEASview<y>]:MARKer<x>:X<value>
CALCulate:CONSte[:MEASview<y>]:MARKer<x>:X?
```

Related Commands

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:MAGNitude?](#) (on page 427)

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:PHASe?](#) (on page 430)

[CALCulate:CONSte\[:MEASview<y>\]:MARKer<x>:SYMBol?](#) (on page 430)

Arguments

<value>: :=<NRf> specifies the time position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)].

Examples

CALCulate:CONSte:MEASview2:MARKer1:X -1.63875 m places the Marker 1 (M1) at -1.63875 ms on the Constellation trace for measview 2 of constellation.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)

Returns the delta marker time for the selected marker on the Demodulated I&Q versus Time trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]?`

Related Command

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 433)

Arguments

None

Returns

<NRf> Delta marker time for the selected marker.

Use the `[SENSe]:DDEMod:TIME:UNITs` command to select the time unit, symbols (default) or seconds.

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:DELTA:X:TIME?` might return 62.75, indicating that the delta marker time is 62.75 symbols measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)

Returns the delta marker amplitude for the selected marker on the Demodulated I&Q versus Time trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:DELTA:X\[:TIME\]?](#) (on page 432)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in volts.

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:DELTA:Y?` might return -78.24E-3, indicating that the delta marker amplitude is -78.24 mV measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Moves the selected marker to the highest peak on the Demodulated I&Q versus Time trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak on the trace measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)

Moves the selected marker to the next peak higher in amplitude on the Demodulated I&Q versus Time trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 435)

Arguments

None

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker to the next peak to the left on the Demodulated I&Q versus Time trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 436)

Arguments

None

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)

Moves the selected marker to the next peak lower in amplitude on the Demodulated I&Q versus Time trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 434)

Arguments

None

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker to the next peak to the right on the Demodulated I&Q versus Time trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 435)

Arguments

None

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:TRACe

Places the selected marker on the Demodulated I&Q versus Time trace. The query returns the name of the trace on which the marker resides.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

```
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:TRACe <Enum>
CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:TRACe?
```

Related Commands

[CALCulate:IQVTime:MARKer<x>:TRACe](#) (on page 484)

Arguments

<Enum> ::= TRACE1 | TRACE2 specifies which trace to place the marker on. TRACE1 specifies the “I” trace and TRACE2 specifies the “Q” trace.

Returns

For I and Q traces, TRACE1 identifies the “I” trace and TRACE2 identifies the “Q” trace.

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:TRACe` TRACE1 places Marker 1 (M1) on the I trace measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:Y? (Query only)

Queries the marker amplitude of the selected marker in the Demod I&Q versus Time measurement.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:Y?`

Related Commands

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:X\[:TIME\]](#) (on page 438)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker in volts.

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:Y?` might return 25.803E-3, indicating Marker 1 (M1) is at 25.803 mV measurement view 1.

CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:X[:TIME]

Sets or queries the horizontal position (time) of the selected marker in the Demodulated I&Q versus Time measurement.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Calculate commands

Syntax

`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:X[:TIME] <value>`
`CALCulate:DIQVtime[:MEASview<y>]:MARKer<x>:X[:TIME]?`

Related Commands

[CALCulate:DIQVtime\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 437)

Arguments

<value>::=<NRf> specifies the horizontal position (time) of the marker. Use the `[SENSe]:DDEMod:TIME:UNITs` command to select the time unit, symbols (default) or seconds.

Examples

`CALCulate:DIQVtime:MEASview1:MARKer1:X:TIME 38.5` places Marker 1 (M1) at 38.5 symbols on the trace measurement view 1.

CALCulate:DPX:MARKer<x>:DELTA:X:AMPLitude? (Query Only)

Returns the delta marker amplitude for the selected marker on the DPX spectrum trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command and attached to the Bitmap trace using the CALCulate:DPX:MARKer<x>:TRACE command.

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

CALCulate:DPX:MARKer<x>:DELTA:X:AMPLitude?

Related Commands

[CALCulate:DPX:MARKer<x>:X\[:FREQuency\]](#) (on page 445), [CALCulate:DPX:MARKer<x>:Y?](#) (on page 447)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in dB.

Examples

CALCULATE:DPX:MARKER1:DELTA:X:AMPLITUDE? might return 35.12, indicating that the delta marker amplitude is 35.12 dB for Marker 1 (M1).

CALCulate:DPX:MARKer<x>:DELTA:X[:FREQuency]? (Query Only)

Returns the delta marker frequency for the selected marker on the DPX spectrum trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

CALCulate:DPX:MARKer<x>:DELTA:X[:FREQuency]?

Related Commands

[CALCulate:DPX:MARKer<x>:DELTA:X:AMPLitude?](#) (on page 439)

[CALCulate:DPX:MARKer<x>:DELTA:Y?](#) (on page 440)

Arguments

None

Returns

<NRf> Delta marker frequency for the selected marker in Hz.

Examples

`CALCULATE:DPX:MARKER1:DELTA:X?` might return 1.28E+6, indicating that the delta marker frequency is 1.28 MHz for Marker 1 (M1).

CALCulate:DPX:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the DPX spectrum trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:DPX:MARKer<x>:DELTA:X\[:FREQUENCY\]?](#) (on page 439)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

`CALCULATE:DPX:MARKER1:DELTA:Y?` might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:DPX:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the DPX spectrum trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:DPX:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:DPX:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the DPX spectrum trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:DPX:MARKer<x>:PEAK:LOWer](#) (on page 442)

Arguments

None

Examples

`CALCULATE:DPX:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:DPX:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the DPX spectrum trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:DPX:MARKer<x>:PEAK:RIGHT](#) (on page 442)

Arguments

None

Examples

`CALCULATE:DPX:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:DPX:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the DPX spectrum trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

CALCulate:DPX:MARKer<x>:PEAK:LOWer

Related Commands

[CALCulate:DPX:MARKer<x>:PEAK:HIGHer](#) (on page 441)

Arguments

None

Examples

CALCULATE:DPX:MARKER1:PEAK:LOWER moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:DPX:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the DPX spectrum trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

CALCulate:DPX:MARKer<x>:PEAK:RIGHT

Related Commands

[CALCulate:DPX:MARKer<x>:PEAK:LEFT](#) (on page 441)

Arguments

None

Examples

CALCULATE:DPX:MARKER1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:DPX:MARKer<x>:POWER:DENSITY? (Query Only)

Returns the power density of the specified marker in the DPX measurement.

Conditions

Measurement view: DPX

The parameter <x> = 0 to 4.

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:POWer:DENSity?`

Returns

<NRf> is the power density of the selected marker in dBm/Hz.

Examples

`CALCULATE:DPX:MARKER1:POWER:DENSITY?` might return 80.2432546111, indicating the power density is 80.24 dBm/Hz.

CALCulate:DPX:MARKer<x>:POWer:IDensity? (Query Only)

Returns the integrated power density reading between the MR (reference marker) and the selected marker in the DPX measurement.

Conditions

Measurement view: DPX

The parameter <x> = 0 to 4.

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:POWer:IDensity?`

Returns

<NRf> is the integrated power density reading between the MR (reference marker) and the selected marker in dBm.

Examples

`CALCULATE:DPSA:MARKER1:POWER:REFDENSITY?` might return -78.56 dBm/Hz.

CALCulate:DPX:MARKer<x>:POWer:INTEgrated? (Query Only)

Returns the integrated power reading between the MR (reference marker) and the selected marker in the DPX measurement.

Conditions

Measurement view: DPX

The parameter <x> = 0 to 4.

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:POWer:INTEgrated?`

Returns

<Nrf> is the integrated power reading between MR (reference marker) and the selected marker in dBm.

Examples

`CALCULATE:DPX:MARKER1:POWER:INTEGRATED?` might return -14.66, indicating the integrated power is -14.66 dBm.

CALCulate:DPX:MARKer<x>[:SET]:CENTer (No Query Form)

Sets the center frequency to the marker frequency in the DPX spectrum view.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>[:SET]:CENTer`

Arguments

None

Examples

`CALCULATE:DPX:MARKER1:SET:CENTER` sets the center frequency to the marker frequency in the DPX spectrum view.

CALCulate:DPX:MARKer<x>:TRACe

Sets or queries the trace to attach the specified marker to in the DPX spectrum measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:TRACe { BITMAP | TRACE1 | TRACE2 |TRACE3 | TRACE4 }`
`CALCulate:DPX:MARKer<x>:TRACe?`

Arguments

BITMAP attaches the specified marker to the Bitmap trace.

TRACE1 attaches the specified marker to the +Peak trace.

TRACE2 attaches the specified marker to the -Peak trace.

TRACE3 attaches the specified marker to the Average trace.

TRACE4 attaches the specified marker to the Math trace.

Examples

CALCULATE:DPX:MARKER1:TRACE TRACE1 attaches Marker 1 (M1) to the +Peak trace.

CALCulate:DPX:MARKer<x>:X:AMPLitude

Sets or queries the amplitude position of the selected marker in the DPX spectrum view. This command is valid for the marker on the bitmap trace (refer to the CALCulate:DPX:MARKer<x>:TRACe command). The frequency position is set by the CALCulate:DPX:MARKer<x>:X[:FREQUENCY] command.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

CALCulate:DPX:MARKer<x>:X:AMPLitude <value>
CALCulate:DPX:MARKer<x>:X:AMPLitude?

Arguments

<value>: :=<NRf> specifies the amplitude position of the marker. Range: -100 to 0 dBm.

Examples

CALCULATE:DPX:MARKER1:X:AMPLITUDE -34.5dBm places Marker 1 (M1) at -34.5 dBm.

CALCulate:DPX:MARKer<x>:X[:FREQUENCY]

Sets or queries the frequency position of the selected marker in the DPX spectrum view.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The command is only valid for the Spectrum and Frequency plots.

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

CALCulate:DPX:MARKer<x>:X[:FREQUENCY] <value>
CALCulate:DPX:MARKer<x>:X[:FREQUENCY]?

Related Commands

[CALCulate:DPX:MARKer<x>:Y?](#) (on page 447)

Arguments

<value>: :=<NRf> specifies the frequency position of the marker. Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

`CALCULATE:DPX:MARKER1:X:FREQUENCY 800MHz` places Marker 1 (M1) at 800 MHz on the trace.

CALCulate:DPX:MARKer<x>:X:PHASe

Sets or queries the phase position of the selected marker in the DPX phase plot.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:X:PHASe <value>`
`CALCulate:DPX:MARKer<x>:X:PHASe?`

Arguments

<value>::<NRf> phase setting in degrees for the specified marker.

Examples

`CALCulate:DPX:MARKer0:X:PHASe?` might return 94.0000000 indicating the phase for the reference marker (M0) is 94.00°.

CALCulate:DPX:MARKer<x>:X:TIME

Sets or queries the time position of the selected marker in the DPX spectrum view.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The command is valid for the Amplitude, Frequency, and Phase plots.

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

`CALCulate:DPX:MARKer<x>:X:TIME <value>`
`CALCulate:DPX:MARKer<x>:X:TIME?`

Arguments

<value>::<NRf> Time position of the specified marker.

Examples

`CALCulate:DPX:MARKer0:X:TIME?` might return 1.000000000E-3 indicating the time position of the reference marker (MR0) is 1.000 ms.

CALCulate:DPX:MARKer<x>:Y? (Query Only)

Queries the vertical position of the selected marker in the DPX spectrum view. The data occurrence rate is returned for the bitmap trace, and the amplitude value for the +peak, -peak, average, and math traces. The horizontal position can be set by the CALCulate:DPX:MARKer<x>:X:AMPLitude and CALCulate:DPX:MARKer<x>:X[:FREQUENCY] commands.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

Conditions

Measurement views: DPX spectrum

Group

Calculate commands

Syntax

CALCulate:DPX:MARKer<x>:Y?

Arguments

None

Returns

<NRf> The value type depends on which trace the marker is placed on (refer to the CALCulate:DPX:MARKer<x>:TRACe command):

The amplitude value is returned in dBm for the marker on the +peak, -peak, average, or math trace. The data occurrence rate is returned in percent (%) for the marker on the bitmap trace.

Examples

CALCULATE:DPX:MARKER1:Y? might return -34.28 indicating Marker 1 (M1) is at -34.28 dBm when it is placed on the +peak, -peak, average, or math trace.

CALCULATE:DPX:MARKER1:Y? might return 76.5 indicating Marker 1 (M1) is at 76.5% when it is placed on the bitmap trace.

CALCulate:EDIagram[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)

Returns the delta marker time for the selected marker on the eye diagram trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of the measurement (Example: Eye Diagram).

Group

Calculate commands

Syntax

CALCulate:EDIagram[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]?

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:DELta:Y?](#) (on page 448)

Arguments

None

Returns

<NRf> Delta marker time for the selected marker. Use the [SENSe]:DDEMod:TIME:UNITs command to select the time unit:symbols (default) or seconds.

Examples

CALCulate:EDiagram:MEASview2:MARKer1:DELta:X:TIME? might return 62.75, indicating that the delta marker time is 62.75 symbols for measview2 of the Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:DELta:Y? (Query only)

Returns the delta marker amplitude for the selected marker on the eye diagram trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Calculate commands

Syntax

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:DELta:Y?

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:DELta:X\[:TIME\]?](#) (on page 447)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

CALCulate:EDiagram:MEASview2:MARKer<x>:DELta:Y? might returns -1.043, indicating that the delta marker amplitude is -1.043 for measview2 of the Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Moves the selected marker to the highest peak on the eye diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye Diagram).

Group

Calculate commands

Syntax

```
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:MAXimum
```

Arguments

None

Examples

`CALCulate:EDiagram:MEASview1:MARKer<x>:MAXimum` moves the Marker 1 (M1) to the highest peak on the trace for measview1 of the Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)

Moves the selected marker to the next peak higher in amplitude on the eye diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye Diagram).

Group

Calculate commands

Syntax

```
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer
```

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 450)

Arguments

None

Examples

`CALCulate:EDiagram:MEASview1:MARKer<x>:PEAK:HIGHer` moves the Marker 1 (M1) to the next peak higher in amplitude on the trace for measview2 of the Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker to the next peak to the left on the eye diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Calculate commands

Syntax

`CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 451)

Arguments

None

Examples

`CALCulate:EDiagram:MEASview2:MARKer<x>:PEAK:LEFT` moves the Marker 1 (M1) to the next peak to the left on the trace for measview2 of the Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)

Moves the selected marker to the next peak lower in amplitude on the eye diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye Diagram).

Group

Calculate commands

Syntax

`CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 449)

Arguments

None

Examples

`CALCulate:EDiagram:MEASview2:MARKer<x>:PEAK:LOWer` moves the Marker 1 (M1) to the next peak lower in amplitude on the trace for measview2 of the Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker to the next peak to the right on the eye diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Calculate commands

Syntax

`CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 450)

Arguments

None

Examples

`CALCulate:EDiagram:MEASview2:MARKer<x>:PEAK:RIGHT` moves the Marker 1 (M1) to the next peak to the right on the trace for measview2 of the Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:TRACe

Places the selected marker on the I or Q trace in the eye diagram display. The query returns the name of the trace on which the marker resides. It is valid for all types of modulation except 2|4|8|16 FSK and C4FM.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Calculate commands

Syntax

```
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:TRACe<Enum>
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:TRACe?
```

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:X\[:TIME\]](#) (on page 452)

Arguments

<Enum> ::= TRACE1 | TRACE2 specifies which trace to place the marker on. TRACE1 specifies the “I” trace and TRACE2 specifies the “Q” trace.

Returns

For I and Q traces, TRACE1 identifies the “I” trace and TRACE2 identifies the “Q” trace.

Examples

`CALCulate:EDiagram:MEASview2:MARKer1:TRACe` TRACE1 places the Marker 1 (M1) on the I trace in an eye diagram for the measview2.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:X[:TIME]

Sets or queries the horizontal position (time) of the selected marker in the eye diagram measurement.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye Diagram).

Group

Calculate commands

Syntax

```
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:X[:TIME]<value>
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:X[:TIME]?
```

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 453)

Arguments

<value>: :=<NRf> specifies the horizontal position (time) of the marker. Use the [SENSe]:DDEMod:TIME:UNITs command to select the time unit:symbols (default) or seconds.

Examples

CALCulate:EDiagram:MEASVIEW2:MARKer1:X:TIME 38.5 places Marker 1 (M1) at 38.5 symbols on the trace for the measview2 of Eye diagram.

CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:Y? (Query only)

Queries the vertical position of the selected marker in the eye diagram measurement.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Calculate commands

Syntax

```
CALCulate:EDiagram[:MEASview<y>]:MARKer<x>:Y?
```

Related Commands

[CALCulate:EDiagram\[:MEASview<y>\]:MARKer<x>:X\[:TIME\]](#) (on page 452)

Arguments

None

Returns

<NRf> Vertical position of the selected marker.

Examples

CALCulate:EDiagram:MEASview2:MARKer<x>:Y? might return 571.8E-3, indicating Marker 1 (M1) is at 0.5718 for the measview 2 of Eye diagram.

CALCulate:EMC:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency value for the selected marker in the EMC view.

<x> = 1,2,3,4 is the marker.

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

CALCulate:EMC:MARKer<x>:DELTA:X?

Arguments

None

Returns

<NRf>

Examples

CALCulate:EMC:MARKer1:DELTA:X? might return -178.9375, indicating that the delta marker frequency of Marker 1 (M1) is -178.93 KHz.

CALCulate:EMC:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the EMC view.

<x> = 1,2,3,4 is the marker.

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

CALCulate:EMC:MARKer<x>:DELTA:Y?

Arguments

None

Returns

<NRf>

Examples

CALCulate:EMC:MARKer1:DELTA:Y? might return -2.2589, indicating that the delta marker Amplitude of Marker 1 (M1) is -2.25 dB.

CALCulate:EMC:MARKer<x>:MAXimum (No Query Form)

Positions the specified marker at the maximum value of the display on the EMC trace.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

CALCulate:EMC:MARKer<x>:MAXimum

Arguments

None

Returns

None

Examples

CALCulate:EMC:MARKer1:MAXimum positions the marker 1 (M1) at the maximum value of the display.

CALCulate:EMC:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the specified marker to the next peak higher in amplitude on the EMC trace.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

CALCulate:EMC:MARKer<x>:PEAK:HIGHer

Arguments

None

Returns

None

Examples

CALCulate:EMC:MARKer2:PEAK:HIGHer moves Marker 2 (M2) to the next peak higher in amplitude on the trace.

CALCulate:EMC:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the specified marker to the next peak to the left on the EMC trace.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

```
CALCulate:EMC:MARKer<x>:PEAK:LEFT
```

Arguments

None

Returns

None

Examples

`CALCulate:EMC:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:EMC:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the specified marker to the next peak lower in amplitude on the EMC trace.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

```
CALCulate:EMC:MARKer<x>:PEAK:LOWer
```

Arguments

None

Returns

None

Examples

`CALCulate:EMC:MARKer2:PEAK:LOWer` moves Marker 2 (M2) to the next peak lower in amplitude on the trace.

CALCulate:EMC:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the specified marker to the next peak to the right on the EMC trace.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

`CALCulate:EMC:MARKer<x>:PEAK:RIGHT`

Arguments

None

Returns

None

Examples

`CALCulate:EMC:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:EMC:MARKer<x>[:SET]:CENTer (No Query Form)

Sets the center frequency to the value at the specified marker position in the EMC view.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

`CALCulate:EMC:MARKer<x>[:SET]:CENTer`

Arguments

None

Returns

None

Examples

`CALCulate:EMC:MARKer1[:SET]:CENTer` sets the center frequency to the value at the Marker 1 (M1) position.

CALCulate:EMC:MARKer<x>:X

Sets or queries the frequency position of the selected marker on the EMC view.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

```
CALCulate:EMC:MARKer<x>:X <value>
CALCulate:EMC:MARKer<x>:X ?
```

Arguments

<value> = <NRf> specifies the horizontal position of the marker.

Returns

<NRf>

Examples

CALCulate:EMC:MARKer1:X might return 254.562500000E+3, indicating that the frequency position of the Marker 1 (M1) is 254.56 KHz.

CALCulate:EMC:MARKer<x>:Y

Sets or queries the amplitude position of the selected marker in the EMC view.

<x> = 0,1,2,3,4 is the marker

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

```
CALCulate:EMC:MARKer<x>:Y <value>
CALCulate:EMC:MARKer<x>:Y?
```

Arguments

<value> = <NRf> specifies the amplitude position of the marker.

Returns

<NRf>

Examples

CALCulate:EMC:MARKer1:Y might return 8.9157, indicating that the amplitude position of Marker 1 (M1) is 8.92 dBuV.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:X? (Query only)

Returns the delta marker time for the selected marker in the EVM versus Time measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

```
CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:X?
```

Related Commands

[CALCulate:EVM\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 459)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in percent (%).

Examples

CALCulate:EVM:MEASview2:MARKer<x>:DELTA:X? might return 1.62, indicating that the delta marker duration is 1.62 for measview2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)

Returns the delta marker amplitude for the selected marker in the EVM versus Time measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

```
CALCulate:EVM[:MEASview<y>]:MARKer<x>:DELTA:Y?
```

Related Commands

[CALCulate:EVM\[:MEASview<y>\]:MARKer<x>:DELTA:X?](#) (on page 458)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in percent (%).

Examples

`CALCulate:EVM:MEASview2:MARKer<x>:DELTA:Y?` might return 1.62, indicating that the delta marker amplitude is 1.62% for measview2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Moves the selected marker to the highest peak on the trace in the EVM versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

`CALCulate:EVM[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCulate:EVM:MEASview2:MARKer<x>:MAXimum` moves Marker 1 (M1) to the highest peak on the trace for measview2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)

Moves the selected marker to the next peak higher in amplitude on the EVM versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

`CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:EVM\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 461)

Arguments

None

Examples

`CALCulate:EVM:MEASview2:MARKer<x>:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace for measview2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker to the next peak to the left on the trace in the EVM versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

`CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:EVM\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 462)

Arguments

None

Examples

`CALCulate:EVM:MEASview2:MARKer<x>:PEAK:LEFT` moves the Marker 1 (M1) to next peak to the left on the trace for measview2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)

Moves the selected marker to the next peak lower in amplitude on the EVM versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time)

Group

Calculate commands

Syntax

```
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:LOWer
```

Related Commands

[CALCulate:EVM\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 460)

Arguments

None

Examples

`CALCulate:EVM:MEASview2:MARKer<x>:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace for measview2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker to the next peak to the right on the trace in the EVM versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

```
CALCulate:EVM[:MEASview<y>]:MARKer<x>:PEAK:RIGHT
```

Related Commands

[CALCulate:EVM\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 461)

Arguments

None

Examples

`CALCulate:EVM:MEASview2:MARKer<x>:PEAK:RIGHT` moves the Marker 1 (M1) to the next peak to the right on the trace for measview2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the EVM versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

```
CALCulate:EVM[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:EVM[:MEASview<y>]:MARKer<x>:X?
```

Arguments

<value>: :=<NRf> specifies the horizontal position of the marker Range: (analysis offset) to (analysis offset) + (analysis length). The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

CALCulate:EVM:MEASview2:MARKer1:X 1.5 μ s places Marker 1 (M1) at 1.5 μ s on the trace for measview 2 of EVM.

CALCulate:EVM[:MEASview<y>]:MARKer<x>:Y? (Query only)

Queries the marker amplitude of the selected marker in the EVM versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Calculate commands

Syntax

```
CALCulate:EVM[:MEASview<y>]:MARKer<x>:Y?
```

Related Commands

[CALCulate:EVM\[:MEASview<y>\]:MARKer<x>:X](#) (on page 463)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker in percent (%).

Examples

CALCulate:EVM:MEASview2:MARKer<x>:Y? might return 5.34, indicating Marker 1 (M1) is at 5.34% for measview2 of EVM.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)

Returns the delta marker time for the selected marker on the Frequency deviation versus Time trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

CALCulate:FDVTime:MEASview<y>:MARKer<x>:DELTA:X[:TIME]?

Related Commands

[CALCulate:FDVTime\[:MEASVIEW<y>\]:MARKer<x>:DELTA:Y?](#) (on page 464)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

CALCULATE:FDVTime:MEASview2:MARKER1:DELTA:X? might return 120.0E-9, indicating that the delta marker duration is 120 ns.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)

Returns the delta marker amplitude for the selected marker on the Frequency deviation versus Time trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

`CALCulate:FDVTime:MEASview<y>2:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:FDVTime:MEASVIEW2:MARKer<x>:DELTA:X\[:TIME\]? \(on page 464\)](#)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in Hz.

Examples

`CALCULATE:FDVTime:MEASview2:MARKER1:DELTA:Y?` might return 27.05E+3, indicating that the delta marker amplitude is 27.05 KHz.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Moves the selected marker to the highest peak on the trace in the Frequency deviation versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation vs Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

`CALCulate:FDVTime:MEASview<y>:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:FDVTime:MEASview2:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)

Moves the selected marker to the next peak higher in amplitude on the Frequency deviation versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency Deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer

Related Commands

[CALCulate:FDVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 467)

Arguments

None

Examples

CALCULATE:FDVTime:MEASview2:MARKER1:PEAK:HIGHER moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker to the next peak to the left on the Frequency deviation versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

CALCulate:FDVTime:MEASview<y>:MARKer<x>:PEAK:LEFT

Related Commands

[CALCulate:FDVTime\[:MEASVIEW<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 467)

Arguments

None

Examples

`CALCULATE:FDVTime:MEASview2:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)

Moves the selected marker to the next peak lower in amplitude on the Frequency deviation vs Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation vs Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

`CALCulate:FDVTime:MEASview<y>:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:FDVTime\[:MEASVIEW<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 466)

Arguments

None

Examples

`CALCULATE:FDVTime:MEASview2:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker to the next peak to the right on the trace in the Frequency deviation vs Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation vs Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

`CALCulate:FDVTime:MEASview<y>:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:FDVTime\[:MEASVIEW<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 466)

Arguments

None

Examples

`CALCULATE:FDVTime:MEASview2:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:X[:TIME]

Sets or queries the horizontal position (time) of the selected marker in the Frequency deviation vs Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation vs Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

`CALCulate:FDVTime:MEASview<y>:MARKer<x>:X[:TIME]<value>`

`CALCulate:FDVTime:MEASview<y>:MARKer<x>:X[:TIME]?`

Related Commands

[CALCulate:FDVTime\[:MEASview<y>\]:MARKer<x>:Y? \(Query only\)](#) (on page 469)

Arguments

None.

Returns

<NRf> Marker amplitude of the selected marker in Hz.

Examples

`CALCULATE:FDVTime:MEASview2:MARKER1:X -15.34E+06` places Marker 1 (M1) at -15.34 MHz on the trace.

CALCulate:FDVTime[:MEASview<y>]:MARKer<x>:Y? (Query only)

Queries the marker amplitude of the selected marker in the Frequency deviation versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Calculate commands

Syntax

CALCulate:FDVTime:MEASview<y>:MARKer<x>:Y?

Related Commands

[CALCulate:FDVTime\[:MEASVIEW<y>\]:MARKer<x>:X\[:TIME\]](#) (on page 468)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker in Hz.

Examples

CALCULATE:FDVTime:MEASview2:MARKER1:Y? might return -15.34E+6, indicating Marker 1 (M1) is at -15.34 MHz.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:DELTA:X? (Query only)

Returns the delta marker time for the selected marker in the Frequency and Phase Settling displays.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

CALCulate:{FSETtling|PSETtling}:MARKer<x>:DELTA:X?

Related Commands

[CALCulate:FVTime:MARKer<x>:DELTA:Y?](#) (on page 475)

Arguments

None

Returns

<NRf> Delta marker time for the selected marker.

Examples

CALCULATE:FSETTLING:MARKER1:DELTA:X? might return 120.0E-9, indicating that the delta marker time is 120 ns.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:DELTA:Y? (Query only)

Returns the delta marker frequency for the selected marker in the Frequency and Phase Settling displays.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

CALCulate:{FSETtling|PSETtling}:MARKer<x>:DELTA:Y?

Related Commands

[CALCulate:{FSETtling|PSETtling}:MARKer<x>:DELTA:X?](#) (on page 469)

Arguments

None

Returns

<NRf> Delta marker frequency for the selected marker in Hz.

Examples

CALCULATE:FSETTLING:MARKER1:DELTA:Y? might return 27.05E+3, indicating that the delta marker frequency is 27.05 kHz.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Frequency or Phase Settling display.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

CALCulate:{FSETtling|PSETtling}:MARKer<x>:MAXimum

Arguments

None

Examples

`CALCULATE:FSETTLING:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the Frequency or Phase Settling trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

`CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:LOWer](#) (on page 472)

Arguments

None

Examples

`CALCULATE:FSETTLING:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Frequency or Phase Settling display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

`CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:RIGHT](#) (on page 472)

Arguments

None

Examples

`CALCULATE:FSETTLING:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the Frequency or Phase Settling trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

`CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:HIGHer](#) (on page 471)

Arguments

None

Examples

`CALCULATE:FSETTLING:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Frequency or Phase Settling display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:{FSETtling|PSETtling}:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:FVTimef\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 476)

Arguments

None

Examples

`CALCULATE:FSETTLING:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:TRACe

Sets or queries the trace on which the specified marker is placed in the spectrum measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

```
CALCulate:{FSETtling|PSETtling}:MARKer<x>:TRACe { TRACE1 |TRACE2 }
CALCulate:{FSETtling|PSETtling}:MARKer<x>:TRACe?
```

Arguments

TRACE1 places the specified marker on Trace 1.

TRACE2 places the specified marker on Trace 2.

Examples

`CALCULATE:FSETTLING:MARKER1:TRACE` TRACE1 places Marker 1 (M1) on Trace 1.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Frequency and Phase Settling display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

```
CALCulate:{FSETtling|PSETtling}:MARKer<x>:X <value>
CALCulate:{FSETtling|PSETtling}:MARKer<x>:X?
```

Related Commands

[CALCulate:{FSETtling|PSETtling}:MARKer<x>:Y?](#) (on page 474)

Arguments

<value>::=<Nrf> specifies the horizontal position of the marker.Range: (analysis offset) to [(analysis offset) + (analysis length)].

Examples

`CALCULATE:FVTIME:MARKER1:X 1.5u` places Marker 1 (M1) at 1.5 μ s on the trace.

CALCulate:{FSETtling|PSETtling}:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the Frequency and Phase Settling display.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

Conditions

Measurement views: Frequency and Phase Settling

Group

Calculate commands

Syntax

`CALCulate:{FSETtling|PSETtling}:MARKer<x>:Y?`

Related Commands

[CALCulate:{FSETtling|PSETtling}:MARKer<x>:X](#) (on page 473)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker in Hz or degrees.

Examples

`CALCULATE:FSETTLING:MARKER1:Y?` might return -15.34E+6, indicating Marker 1 (M1) is at -15.34 MHz.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker time for the selected marker in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 475)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Returns

<NRf> Delta marker time for the selected marker.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:DELTA:X?` might return `120.0E-9`, indicating that the delta marker time is 120 ns.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker frequency for the selected marker in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:DELTA:X?](#) (on page 474)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

<x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Returns

<NRf> Delta marker frequency for the selected marker in Hz.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:DELTA:Y?` might return `27.05E+3`, indicating that the delta marker frequency is 27.05 kHz.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the Frequency versus Time trace.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 477)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 477)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`<x>` = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the Frequency versus Time trace.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 476)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`<x>` = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 476)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<x>` = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:X <value>`

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:X?`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 478)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<x>` = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

`<value>::=<NRf>` specifies the horizontal position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)].

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:X 1.5u` places Marker 1 (M1) at 1.5 μ s on the trace.

CALCulate:FVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Programmer Manual

WWW.TEK.COM | 478

Calculate commands

Syntax

`CALCulate:FVTime[:MEASview<y>]:MARKer<x>:Y?`

Related Commands

[CALCulate:FVTime\[:MEASview<y>\]:MARKer<x>:X](#) (on page 478)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Marker amplitude of the selected marker in Hz.

Examples

`CALCULATE:FVTIME:MEASview1:MARKER1:Y?` might return `-15.34E+6`, indicating Marker 1 (M1) is at -15.34 MHz.

CALCulate:HARMonic:APPLy (No Query Form)

Based on the fundamental frequency and harmonic factor values the harmonic markers are applied and markers are placed in their respective positions on the plot.

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

`CALCulate:HARMonic:APPLy`

Arguments

None

Returns

None

Examples

`CALCULATE:HARMONIC:APPLY` places the harmonic markers in their respective positions.

CALCulate:HARMonic:MARKer<x>:FACTor

Sets or queries the factor value for the specified harmonic marker in EMC view.

<x> = <NR1> 1 to 5 (marker number)

Conditions

Measurement view: EMC - EMI Display

Group

Calculate commands

Syntax

```
CALCulate:HARMonic:MARKer<x>:FACTor <value>  
CALCulate:HARMonic:MARKer<x>:FACTor?
```

Arguments

<value> =

Either

OEIG = 1/8

QUAR = 1/4

HALF = 1/2

ONE = 1

TWO = 2

THREE = 3

FOUR = 4

FIVE = 5

SIX = 6

SEVEN = 7

EIGHT = 8

NINE = 9

TEN = 10

Returns

<String> See Arguments

Examples

CALCulate:HARMonic:MARKer1:FACTor? might return 4 indicating that the factor value of harmonic marker 1 is 4.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker time for the selected marker in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

```
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELTA:X?
```

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 481)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Delta marker time for the selected marker.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:DELTA:X? might return 120.0E-9, indicating that the delta marker time is 120 ns.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

Syntax

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:DELTA:Y?

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:DELTA:X?](#) (on page 480)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Delta marker amplitude for the selected marker in volts.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:DELTA:Y? might return -3.45E-3, indicating that the delta marker amplitude is -3.45 mV.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

```
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:MAXimum
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:MAXIMUM moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the RF I&Q versus Time trace.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

```
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer
```

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 483)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:PEAK:HIGHER moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

```
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT
```

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 484)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:PEAK:LEFT moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the RF I&Q versus Time trace.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

```
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer
```

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 482)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:PEAK:LOWER moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 482)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:TRACe

Places the selected marker on the I or Q trace in the RF I&Q versus Time measurement. The query command returns which trace the selected marker is placed on.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:TRACe { TRACE1 | TRACE2 }
CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:TRACe?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

TRACE1 places the selected marker on the I trace.

TRACE2 places the selected marker on the Q trace.

Examples

`CALCULATE:IQVTIME:MEASview1:MARKER1:TRACE TRACE1` places Marker 1 (M1) on the I trace.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

`CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:X <value>`
`CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:X?`

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 485)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<value>: :=<NRf> specifies the horizontal position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)].

Examples

`CALCULATE:IQVTIME:MEASview1:MARKER1:X 1.5us` places Marker 1 (M1) at 1.5 µs on the trace.

CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Calculate commands

Syntax

`CALCulate:IQVTime[:MEASview<y>]:MARKer<x>:Y?`

Related Commands

[CALCulate:IQVTime\[:MEASview<y>\]:MARKer<x>:X](#) (on page 485)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Marker amplitude of the selected marker in volts.

Examples

CALCULATE:IQVTIME:MEASview1:MARKER1:Y? might return 25.803E-3, indicating Marker 1 (M1) is at 25.803 mV.

CALCulate:LTE:ACLR:MARKer:<x>PEAK:HIGHer (No Query Form)

Moves the specified marker to the next peak higher in amplitude on the trace in the LTE ACLR display.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

Conditions

Measurement view: LTE ACLR

Group

Calculate commands

Syntax

CALCulate:LTE:ACLR:MARKer:<x>PEAK:HIGHer

Arguments

None

Examples

CALCULATE:LTE:ACLR:MARKER1:PEAK:HIGHER moves marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:LTE:ACLR:MARKer<x>:DELTA:X? (Query Only)

Returns the frequency of the specified delta marker on the trace in the LTE ACLR display. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement view: LTE ACLR

<x> parameters: <x> = 1,2,3,4 is the marker.

Group

Calculate commands

Syntax

CALCulate:LTE:ACLR:MARKer<x>:DELTA:X?

ReturnsCALCulate:P25:PVTime:MARKer<x>:DELTA:Y[:TIME]? (Query Only)

<NR3>

Examples

CALCULATE:LTE:ACLR:MARKER1:DELTA:X? might return 1.25000000E+6, indicating that the frequency of the specified delta marker is 1.25 MHz.

CALCulate:LTE:ACLR:MARKer<x>:DELTA:Y? (Query Only)

Returns the amplitude for the specified delta marker on the trace in the LTE ACLR display. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement view: LTE ACLR

<x> = 1,2,3,4 is the marker.

Group

Calculate commands

Syntax

[CALCulate:LTE:ACLR:MARKer<x>:DELTA:Y?](#) (on page 487)

Returns

<NRf>

Examples

CALC:LTEACLR:MARK1:DELTA:Y? might return 23.45, indicating that the amplitude of the specified delta marker is 23.45 dB.

CALCulate:LTE:ACLR:MARKer<x>:MAXimum (No Query Form)

Positions the specified marker at the highest peak on the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

CALCulate:LTE:ACLR:MARKer<x>:MAXimum

Arguments

None

Examples

CALCULATE:LTE:ACLR:MARKER1:MAXIMUM moves marker 1 (M1) to the highest peak on the trace.

CALCulate:LTE:ACLR:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:ACLR:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALCULATE:LTE:ACLR:MARKER1:PEAK:LEFT` moves marker 1 (M1) to the next peak to the left on the trace.

CALCulate:LTE:ACLR:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:ACLR:MARKer<x>:PEAK:LOWer`

Arguments

None

Examples

`CALCULATE:LTE:ACLR:MARKER1:PEAK:LOWER` moves marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:LTE:ACLR:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:ACLR:MARKer<x>:PEAK:RIGHT`

Arguments

None

Examples

`CALCULATE:LTE:ACLR:MARKER1:PEAK:RIGHT` moves marker 1 (M1) to the next peak to the right on the trace.

CALCulate:LTE:ACLR:MARKer<x>:SET:CENTer (No Query Form)

Moves the specified marker to the center frequency in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:ACLR:MARKer<x>:SET:CENTer`

Arguments

None

Examples

`CALCULATE:LTE:ACLR:MARKER1:SET:CENTER` moves marker 1 (M1) to the center frequency on the trace.

CALCulate:LTE:ACLR:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:ACLR:MARKer<x>:X <value>`

`CALCulate:LTE:ACLR:MARKer<x>:X?`

Arguments

`<value>::=<NRf>` specifies the horizontal position of the marker.

Returns

`<NRf>`

Examples

`CALCULATE:LTE:ACLR:MARKER1:X 800.000000000E+6` places marker 1 (M1) at 800 MHz on the trace.

CALCulate:LTE:ACLR:MARKer<x>:Y? (Query Only)

Queries the amplitude of the selected marker on the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

CALCulate:LTE:ACLR:MARKer<x>:Y?

Returns

<NRf>

Examples

CALCULATE:LTE:ACLR:MARKER1:Y? might return -34.28, indicating that the amplitude of marker 1 (M1) is -34.28 dBm.

CALCulate:LTE:CHSPpectrum:MARKer<x>:DELTA:X? (Query Only)

Returns the frequency of the specified delta marker on the trace in the LTE Channel Spectrum display. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement view: LTE Channel Spectrum

<x> = 1,2,3,4 is the marker.

Group

Calculate commands

Syntax

CALCulate:LTE:CHSPpectrum:MARKer<x>:DELTA:X?

Returns

<NR3>

Examples

CALCULATE:LTE:CHSPECTRUM:MARKER1:DELTA:X? might return 1.25000000E+6, indicating that the frequency of the specified delta marker is 1.25 MHz.

CALCulate:LTE:CHSPpectrum:MARKer<x>:DELTA:Y? (Query Only)

Returns the amplitude for the specified delta marker on the trace in the LTE Channel Spectrum display. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement view: LTE Channel Spectrum

<x> = 1,2,3,4 is the marker.

Group

Calculate commands

Syntax

`CALCulate:LTE:CHSPepectrum:MARKer<x>:DELta:Y?`

Returns

<NRf>

Examples

`CALC:LTE:CHSPECTRUM:MARK1:DELT:Y?` might return 23.45, indicating that the amplitude of the specified delta marker is 23.45 dB.

CALCulate:LTE:CHSPepectrum:MARKer<x>:MAXimum (No Query Form)

Positions the marker at the highest peak on the trace in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:CHSPepectrum:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:LTE:CHSPECTRUM:MARKER1:MAXIMUM` moves marker 1 (M1) to the highest peak on the trace.

CALCulate:LTE:CHSPepectrum:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:CHSPepectrum:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALCULATE:LTE:CHSPECTRUM:MARKER1:PEAK:LEFT` moves marker 1 (M1) to the next peak to the left on the trace.

CALCulate:LTE:CHSPectrum:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:CHSPectrum:MARKer<x>:PEAK:RIGHT`

Arguments

None

Examples

`CALCULATE:LTE:CHSPECTRUM:MARKER1:PEAK:RIGHT` moves marker 1 (M1) to the next peak to the right on the trace.

CALCulate:LTE:CHSPectrum:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the trace in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:CHSPectrum:MARKer<x>:X <value>`

`CALCulate:LTE:CHSPectrum:MARKer<x>:X?`

Arguments

`<value>::=<NRf>` specifies the horizontal position of the marker.

Returns

`<NRf>`

Examples

`CALCULATE:LTE:CHSPECTRUM:MARKER1:X 800.000000000E+6` places marker 1 (M1) at 800 MHz on the trace.

CALCulate:LTE:CHSPectrum:MARKer<x>:Y? (Query Only)

Queries the amplitude of the selected marker on the trace in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:CHSPectrum:MARKer<x>:Y?`

Returns

<NRf>

Examples

`CALCULATE:LTE:CHSPECTRUM:MARKER1:Y?` might return `-34.28`, indicating that the amplitude of marker 1 (M1) is `-34.28 dBm`.

CALCulate:LTE:CONSte:MARKer<x>:FREQuency

Sets or returns the subcarrier number of the LTE symbol in the LTE Constellation display. This constellation shows only primary and secondary synchronization signals. Any input outside this range will show the marker set to -31 or +31.

Conditions

Measurement view: LTE Constellation

<x> parameters: 0 to 4

Range: -31 to +31

Group

Calculate commands

Syntax

`CALCulate:LTE:CONSte:MARKer<x>:FREQuency <value>`
`CALCulate:LTE:CONSte:MARKer<x>:FREQuency?`

Arguments

`<value>::<NRf>` specifies the subcarrier number of the specified marker

Returns

<NRf> The value type depends on where the marker is placed.

Examples

`CALCULATE:LTE:CONSTE:MARKER2:FREQUENCY?` might return `+31`, indicating that Marker 2 (M2) is positioned at the subcarrier +31 in the LTE Constellation display.

CALCulate:LTE:CONSte:MARKer<x>:MAGNitude? (Query Only)

Queries the marker magnitude of the selected marker in the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

CALCulate:LTE:CONSte:MARKer<x>:MAGNitude?

Returns

<NRf> The magnitude for the selected marker.

Examples

CALCULATE:LTE:CONSte:MARKER2:MAGNITUDE might return "1.004" indicating readout of Marker 2 (M2) is "1.004".

CALCulate:LTE:CONSte:MARKer<x>:PHASe? (Query Only)

Queries the phase readout of the selected marker in the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Calculate commands

Syntax

CALCulate:LTE:CONSte:MARKer<x>:PHASe?

Returns

<NRf> The phase readout for the selected marker.

Examples

CALCULATE:LTE:CONSte:MARKER1:PHASE? might return 35.74, indicating the phase readout of Marker 1 (M1) is 35.74°

CALCulate:LTE:CONSte:MARKer<x>:TIME

Sets or queries the X position (Symbol Value) of the selected marker in the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

<x> parameters: 0 to 4

For FDD, the range is 0 and 1.

For TDD the range is 0 and 3.

Group

Calculate commands

Syntax

```
CALCulate:LTE:CONStE:MARKer<x>:TIME <value>  
CALCulate:LTE:CONStE:MARKer<x>:TIME?
```

Arguments

<value>: :=<NRf> specifies the specified marker symbol number.

Returns

<NR1>

Examples

CALCULATE:LTE:CONSTE:MARKER<x>:TIME 0 places Marker 1 (M1) at the symbol 0 on range for time.

CALCulate:LTE:CONStE:MARKer<x>:TYPE? (Query Only)

Queries the data type of the selected marker in LTE Constellation display. The data type can either be “PSS” (Primary Synchronization Signal) or “SSS” (Secondary Synchronization Signal).

Conditions

Measurement view: LTE Constellation

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:LTE:CONStE:MARKer<x>:TYPE?
```

Returns

PSS means that the data type for the selected marker is Primary Synchronization Signal

SSS means that the data type for the selected marker is Secondary Synchronization Signal

Examples

CALCULATE:LTE:CONSTE:MARKER1:TYPE? might return SSS, indicating that the data type for the Marker 1 (M1) is SSS.

CALCulate:LTE:PVTime:MARKer:<x>PEAK:HIGHer (No Query Form)

Moves the specified marker to the next peak higher in amplitude on the trace in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Parameter <x>: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:PVTime:MARKer:<x>PEAK:HIGHer`

Arguments

None

Examples

`CALCULATE:LTE:PVTIME:MARKER1:PEAK:HIGHER` moves marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:LTE:PVTime:MARKer<x>:DELTA:X? (Query Only)

Returns the frequency of the specified delta marker on the trace in the LTE Power vs Time display. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 1, 2, 3...(valid integral values range from 0 to the number of markers active for the display).

Querying an out-of-range value causes an execution error (-222, "Data out of range").

Group

Calculate commands

Syntax

`CALCulate:LTE:PVTime:MARKer<x>:DELTA:X?`

Returns

<NR3>

Examples

`CALCULATE:LTE:PVTIME:MARKER1:DELTA:X?` might return `1.28000000E-6`, indicating that the frequency of the specified delta marker is 1.28 μ s.

CALCulate:LTE:PVTime:MARKer<x>:DELTA:Y? (Query Only)

Returns the amplitude for the specified delta marker on the trace in the LTE Power vs Time display using the currently selected amplitude unit. You can set/query the amplitude unit with the `SENSe:POWer:UNITs` command. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 1, 2, 3...(valid integral values range from 0 to the number of markers active for the display).

Querying an out-of-range value causes an execution error (-222, "Data out of range").

Group

Calculate commands

Syntax

`CALCulate:LTE:PVTime:MARKer<x>:DELTA:Y?`

Returns

<NRf>

Examples

`CALCULATE:LTE:PVTIME:MARKER3:DELTA:Y?` might return `-12.91`, indicating that the amplitude of the delta marker 3 (M3) is `-12.91` dB.

CALCulate:LTE:PVTime:MARKer<x>:MAXimum (No Query Form)

Positions the specified marker at the highest peak on the trace in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:PVTime:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:LTE:PVTIME:MARKER1:MAXIMUM` moves marker 1 (M1) to the highest peak on the trace.

CALCulate:LTE:PVTime:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

`CALCulate:LTE:PVTime:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALCULATE:LTE:PVTIME:MARKER1:PEAK:LEFT` moves marker 1 (M1) to the next peak to the left on the trace.

CALCulate:LTE:PVTime:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the trace in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

CALCulate:LTE:PVTime:MARKer<x>:PEAK:LOWer

Arguments

None

Examples

CALCULATE:LTE:PVTIME:MARKER1:PEAK:LOWER moves marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:LTE:PVTime:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 0 to 4

Group

Calculate commands

Syntax

CALCulate:LTE:PVTime:MARKer<x>:PEAK:RIGHT

Arguments

None

Examples

CALCULATE:LTE:PVTIME:MARKER1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the trace

CALCulate:LTE:PVTime:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the trace in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 0 to 4

Range: Start to Stop time (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Group

Calculate commands

Syntax

```
CALCulate:LTE:PVTime:MARKer<x>:X <NRf>
CALCulate:LTE:PVTime:MARKer<x>:X?
```

Arguments

<NRf> specifies the value of the horizontal position of the marker.

Returns

<NRf>

Examples

CALCULATE:LTE:PVTIME:MARKER3:X 1.000000000E-6 places Marker 3(M3) at 1 μ s on the trace.

CALCulate:LTE:PVTime:MARKer<x>:Y? (Query Only)

Queries the amplitude of the selected marker on the trace in the LTE Power vs Time display. You can set/query the amplitude units with the `SENSe:POWer:UNITs` command.

Conditions

Measurement view: LTE Power vs Time

<x> parameters: 0 to 4 Querying an out-of-range value causes an execution error (-222, "Data out of range").

Group

Calculate commands

Syntax

```
CALCulate:LTE:PVTime:MARKer<x>:Y?
```

Returns

<NRf> specifies the value of the horizontal position of the marker.

Examples

CALCULATE:LTE:PVTIME:MARKER1:Y? might return 33.393856E-3, indicating that the amplitude of marker 1 (M1) is 0.033 dBm.

CALCulate:MARKer:ADD (No Query Form)

Adds a marker. Every execution of this command adds a marker from MR, then M1 to M4, sequentially.

NOTE: If all markers are already turned on, the error message "Cannot add another marker" (execution error -200) is returned.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:MARKer:ADD`

Related Commands

[CALCulate:MARKer:AOff](#) (on page 500)

[CALCulate:MARKer:DELeTe](#) (on page 500)

Arguments

None

Examples

`CALCulate:MARKer:ADD` adds a marker.

CALCulate:MARKer:AOff (No Query Form)

Turns off all markers.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:MARKer:AOff`

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

[CALCulate:MARKer:DELeTe](#) (on page 500)

Arguments

None

Examples

`CALCulate:MARKer:AOff` turns off all markers.

CALCulate:MARKer:DELeTe (No Query Form)

Deletes the last marker added.

NOTE: If all markers are turned off, the error message "Cannot delete another marker" (execution error -200) is returned.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:MARKer:DElete`

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

[CALCulate:MARKer:AOff](#) (on page 500)

Arguments

None

Examples

`CALCULATE:MARKER:DELETE` deletes the last marker added.

CALCulate:MARKer:DENSity:EXCursion

Sets or queries the minimum excursion of DPX signal density, or how far the density (hit count for pixels) must be above the surrounding noise to be detected as a peak. This command is effective for the DPX bitmap trace.

For marker peak up and marker peak down operations, the signal is considered to be a peak if it exceeds the excursion and the threshold set by the `CALCulate:MARKer:DENSity:THReshold` command.

For marker peak left and marker peak right operations, the signal is considered to be a peak if it first exceeds the amplitude excursion set by `CALCulate:MARKer:PEAK:EXCursion`, the amplitude threshold set by `CALCulate:MARKer:PEAK:THReshold`, the density excursion set by `CALCulate:MARKer:DENSity:EXCursion` and the density threshold set by `CALCulate:MARKer:DENSity:THReshold`.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:MARKer:DENSity:EXCursion <number>`
`CALCulate:MARKer:DENSity:EXCursion?`

Related Commands

[CALCulate:MARKer:DENSity:THReshold](#) (on page 502)

[CALCulate:MARKer:PEAK:EXCursion](#) (on page 504)

[CALCulate:MARKer:PEAK:THReshold](#) (on page 504)

Arguments

`<number>::=<NR1>` specifies the minimum excursion density. Range: 0 to 100%.

Examples

`CALCULATE:MARKER:DENSITY:EXCURSION 30` sets the minimum excursion density to 30.

CALCulate:MARKer:DENSity:SMOothing

Sets or queries the number of pixels squared for smoothing the DPX signal density. This command is effective for the DPX bitmap trace.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:MARKer:DENSity:SMOothing <number>  
CALCulate:MARKer:DENSity:SMOothing?
```

Arguments

<number>::=<NR1> specifies the number of pixels squared for smoothing the DPX signal density. Range: 1 to 20.

Examples

CALCULATE:MARKER:DENSITY:SMOOTHING5 sets the smoothing number to 5.

CALCulate:MARKer:DENSity:THReshold

Sets or queries the threshold of DPX signal density above which the density (hit count for pixels) is detected as a peak. This command is effective for the DPX bitmap trace.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:MARKer:DENSity:THReshold <number>  
CALCulate:MARKer:DENSity:THReshold?
```

Related Commands

[CALCulate:MARKer:DENSity:EXCursion](#) (on page 501)

Arguments

<number>::=<NR1> specifies the threshold density for detecting peaks. Range: 0 to 100%.

Examples

CALCULATE:MARKER:DENSITY:THRESHOLD 300 sets the threshold density to 300.

CALCulate:MARKer:DRAG:SEARch:STATe

Enables or disables peak searching when dragging a marker in a plot.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:MARKer:DRAG:SEARCh:STATe { OFF | ON | 0 | 1 }  
CALCulate:MARKer:DRAG:SEARCh:STATe?
```

Arguments

OFF or 0 disables peak searching in a plot.

ON or 1 enables peak searching in a plot.

Examples

CALCULATE:MARKER:DRAG:SEARCH:STATE OFF disables peak searching when dragging a marker in a plot.

CALCulate:MARKer:MODE

Sets or queries the marker mode.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:MARKer:MODE { ABSolute | DELTa }  
CALCulate:MARKer:MODE?
```

Arguments

ABSolute selects the absolute marker mode, in which the marker readout indicates the absolute value.

DELTA selects the delta marker mode, in which the marker readout indicates the relative value to the reference marker.

Examples

CALCULATE:MARKER:MODEDELTA selects the delta marker mode.

CALCulate:MARKer:NOISe:MODE

Sets or queries the view/hide status of the dBc/Hz Marker noise reading.

Group

Calculate commands

Syntax

```
CALCulate:MARKer:NOISe:MODE { 0 | 1 }
```

Arguments

0 disables the dBc/Hz reading.

1 enables the dBc/Hz reading.

Returns

0 means the dBc/Hz reading is not available.

1 means the dBc/Hz reading is not available.

Examples

`CALCULATE:MARKER:NOISE:MODE 0` will disable the dBc/Hz marker noise reading.

CALCulate:MARKer:PEAK:EXCursion

Sets or queries the minimum excursion level (how far a signal must be above the surrounding noise to be detected as a peak). The signal is considered to be a peak if it exceeds the minimum excursion level and the threshold level set by the `CALCulate:MARKer:PEAK:THReshold` command.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:MARKer:PEAK:EXCursion <value>`
`CALCulate:MARKer:PEAK:EXCursion?`

Arguments

`<value>::=<NRf>` specifies the excursion level. Range: 0 to 100 dB.

Examples

`CALCULATE:MARKER:PEAK:EXCURSION 10` sets the excursion level to 10 dB.

CALCulate:MARKer:PEAK:THReshold

Sets or queries the threshold level above which a signal is detected as a peak.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:MARKer:PEAK:THReshold <value>`
`CALCulate:MARKer:PEAK:THReshold?`

Arguments

`<value>::=<NRf>` specifies the threshold level for detecting peaks. Range: -170 to +130 dBm.

Examples

`CALCULATE:MARKER:PEAK:THRESHOLD -50` sets the threshold level to -50 dBm.

CALCulate:MCPower:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker in the MCPR measurement.

The parameter `<x>` = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: MCPR

Group

Calculate commands

Syntax

`CALCulate:MCPower:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:MCPower:MARKer<x>:DELTA:Y?](#) (on page 505)

Arguments

None

Returns

`<NRf>` Delta marker frequency for the selected marker.

Examples

`CALCULATE:MCPower:MARKER1:DELTA:X?` might return `1.28E+6`, indicating that the delta marker frequency is 1.28 MHz.

CALCulate:MCPower:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the MCPR measurement.

The parameter `<x>` = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: MCPR

Group

Calculate commands

Syntax

`CALCulate:MCPower:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:MCPower:MARKer<x>:DELTA:X?](#) (on page 504)

Arguments

None

Returns

`<NRf>` Delta marker amplitude for the selected marker.

Examples

`CALCULATE:MCPower:MARKER1:DELTA:Y?` might return `23.45`, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:MCPower:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Calculate commands

Syntax

`CALCulate:MCPower:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:MCPOWER:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:MCPower:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Calculate commands

Syntax

`CALCulate:MCPower:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:MCPower:MARKer<x>:PEAK:RIGHT](#) (on page 506)

Arguments

None

Examples

`CALCULATE:MCPOWER:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:MCPower:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Calculate commands

Syntax

CALCulate:MCPower:MARKer<x>:PEAK:RIGHT

Related Commands

[CALCulate:MCPower:MARKer<x>:PEAK:LEFT](#) (on page 506)

Arguments

None

Examples

CALCULATE:MCPower:MARKER1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:MCPower:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Calculate commands

Syntax

CALCulate:MCPower:MARKer<x>:X <value>

CALCulate:MCPower:MARKer<x>:X?

Related Commands

[CALCulate:MCPower:MARKer<x>:Y?](#) (on page 507)

Arguments

<value>::=<NRf> specifies the horizontal position of the marker.Range: Start to Stop frequency (left to right edge of the horizontal axis).Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

CALCULATE:MCPower:MARKER1:X 800MHz places Marker 1 (M1) at 800 MHz on the trace.

CALCulate:MCPower:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Calculate commands

Syntax

CALCulate:MCPower:MARKer<x>:Y?

Related Commands

[CALCulate:MCPower:MARKer<x>:X](#) (on page 507)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCULATE:MCPower:MARKER1:Y? might return -34.28, indicating Marker 1 (M1) is at -34.28 dBm.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:X? (Query only)

Returns the delta marker time for the selected marker in the Magnitude error versus Time measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:X?

Related Commands

[CALCulate:MERRor\[:MEASview<y>\]:MARKer<x>:DELta:Y?](#) (on page 508)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in percent (%).

Examples

CALCulate:MERRor:MEASview2:MARKer1:DELta:X? might return 3.84, indicating that the delta marker duration is 3.84.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:Y? (Query only)

Returns the delta marker amplitude for the selected marker in the Magnitude error versus Time measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:DELta:Y?`

Related Commands

[CALCulate:MERRor\[:MEASview<y>\]:MARKer<x>:DELta:X?](#) (on page 508)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in percent (%).

Examples

`CALCulate:MERRor:MEASview2:MARKer1:DELta:Y?` might return 3.84, indicating that the delta marker amplitude is 3.84%.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Moves the selected marker to the highest peak on the trace in the Magnitude error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCulate:MERRor:MEASview2:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)

Moves the selected marker to the next peak higher in amplitude on the Magnitude error versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:MERRor\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 511)

Arguments

None

Examples

`CALCulate:MERRor:MEASview2:MARKer1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker to the next peak to the left on the trace in the Magnitude error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:MERRor\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 511)

Arguments

None

Examples

`CALCulate:MERRor:MEASview2:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)

Moves the selected marker to the next peak lower in amplitude on the Magnitude error versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:MERRor\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 510)

Arguments

None

Examples

`CALCulate:MERRor:MEASview2:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker to the next peak to the right on the trace in the Magnitude error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:MERRor\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 510)

Arguments

None

Examples

`CALCulate:MERRor:MEASview2:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Magnitude error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:X <value>`

`CALCulate:MERRor[:MEASview<y>]:MARKer<x>:X?`

Arguments

`<value>::=<NRf>` specifies the horizontal position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)].

The unit can be changed by the `[SENSe]:DDEMod:TIME:UNITs` command.

Examples

`CALCulate:MERRor:MEASview2:MARKer1:X 1.5µs` places Marker 1 (M1) at 1.5 µs on the trace.

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:Y? (Query only)

Queries the marker amplitude of the selected marker in the Magnitude error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Calculate commands

Syntax

CALCulate:MERRor[:MEASview<y>]:MARKer<x>:Y?

Related Commands

[CALCulate:MERRor\[:MEASview<y>\]:MARKer<x>:X](#) (on page 512)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker in percent (%).

Examples

CALCulate:MERRor:MEASview2:MARKer1:Y? might return 5.34, indicating Marker 1 (M1) is at 5.34%.

CALCulate:MARKer:MODE

Sets or queries the marker mode.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

CALCulate:MARKer:MODE { ABSolute | DELTa | POWer }
CALCulate:MARKer:MODE?

Arguments

ABSolute selects the absolute marker mode, in which the marker readout indicates the absolute value.

DELTA selects the delta marker mode, in which the marker readout indicates the relative value to the selected marker.

POWer selects the power marker mode, in which the marker readout indicates the power value of the selected marker.

Examples

`CALCULATE:MARKER:MODE POWER` selects the power marker mode.

`CALCULATE:MARKER:MODE?` might return POW, meaning the Power is the assigned mode for the marker readout.

CALCulate:NOISe:FIGure:MARKer<x>:DELTA:X? (Query Only)

Queries the frequency difference between MR (reference marker) and the selected marker.

Conditions

Measurement view: Noise Figure

The parameter <x> = 1 to 4.

Group

Calculate commands

Syntax

`CALCulate:NOISe:FIGure:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:Y?](#) (on page 519)

Returns

<NRf> is the frequency difference value between MR and the selected marker.

Examples

`CALCULATE:NOISE:FIGURE:MARKER1:DELTA:X?` might return 0.0000, indicating the frequency difference between MR (reference marker) and the selected marker (M1) is 0.0000 dB.

CALCulate:NOISe:FIGure:MARKer<x>:DELTA:Y? (Query only)

Queries the power difference value between MR (reference marker) and the selected marker.

Conditions

Measurement view: Noise Figure

The parameter <x> = 1 to 4.

Group

Calculate commands

Syntax

`CALCulate:NOISe:FIGure:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:X?](#) (on page 518)

Returns

<NRf> is the power difference value between MR and the selected marker.

Examples

`CALCulate:NOISE:FIGure:MARKer1:DELTA:Y?` might return 18.7647705078, indicating the difference between MR (reference marker) and the selected marker (M1) is 18.76 dB.

CALCulate:NOISe:FIGure:MARKer<x>:MAXimum (No Query Form)

Places the selected marker at the maximum value on the peak of the trace.

Conditions

Measurement view: Noise Figure

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:FIGure:MARKer<x>:MAXimum`

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT](#) (on page 517)

Arguments

None

Returns

None

CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer (No Query Form)

Places the selected marker at the next highest peak on the trace.

Conditions

Measurement view: Noise Figure

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:NOISe:GAIN:MARKer<x>:MAXimum?](#) (on page 520)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT](#) (on page 517)

Arguments

None

Returns

None

CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT (No Query Form)

Places the selected marker at the next peak on the trace to the left of the selected marker.

Conditions

Measurement view: Noise Figure

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT
```

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:MAXimum](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT](#) (on page 517)

Arguments

None

Returns

None

CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer (No Query Form)

Places the selected marker at the next lowest peak on the trace.

Conditions

Measurement view: Noise Figure

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer
```

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:MAXimum](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT](#) (on page 517)

Arguments

None

Returns

None

CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT (No Query Form)

This command places the specified marker on a specified trace. The query form returns the trace on which the marker resides.

Conditions

Measurement view: Noise Figure

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:MAXimum](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT](#) (on page 516)

Arguments

None

Returns

None

CALCulate:NOISe:FIGure:MARKer<x>:TRACE

Sets or queries which trace the specified marker is attached to.

Conditions

Measurement view: Noise Figure

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:NOISe:FIGure:MARKer<x>:TRACe {TRACE1|TRACE2|TRACE3}
CALCulate:NOISe:FIGure:MARKer<x>:TRACe?
```

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:MAXimum](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:HIGHer](#) (on page 515)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LOWer](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:LEFT](#) (on page 516)

[CALCulate:NOISe:FIGure:MARKer<x>:PEAK:RIGHT](#) (on page 517)

Arguments

TRACE1 moves the specified marker to trace 1.

TRACE2 moves the specified marker to trace 2.

TRACE3 moves the specified marker to trace 3.

Returns

TRACE1 means the specified marker is on trace 1.

TRACE2 means the specified marker is on trace 2.

TRACE3 means the specified marker is on trace 3.

Examples

CALCULATE:NOISE:FIGURE:MARKER1:TRACE? might return TRACE2, indicating that M1 (marker 1) is on trace 2.

CALCulate:NOISe:FIGure:MARKer<x>:X? (Query Only)

Queries the frequency of the specified marker.

Conditions

Measurement view: Noise Figure

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:NOISe:FIGure:MARKer<x>:X?
```

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:Y?](#) (on page 519)

Returns

<NR3> = a floating point value with an exponent. This is the frequency of the specified marker

Examples

`CALCULATE:NOISE:FIGURE:MARKER1:X?` might return `608.000000000E+6`, indicating the frequency of M1 (marker 1) is 608 MHz.

CALCulate:NOISe:FIGure:MARKer<x>:Y? (Query Only)

Queries the vertical position of the specified marker.

Conditions

Measurement view: Noise Figure

The parameter `<x>` = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:FIGure:MARKer<x>:Y?`

Related Commands

[CALCulate:NOISe:FIGure:MARKer<x>:X?](#) (on page 518)

Returns

`<NR2>` = a floating point value without an exponent. This is the vertical position(dB) of the specified marker.

Examples

`CALCULATE:NOISE:FIGURE:MARKER1:Y?` might return `18.7647705078`, indicating the value of M1 (marker 1) is 18.76 dB.

CALCulate:NOISe:GAIN:MARKer<x>:DELTA:X? (Query Only)

Query returns the frequency difference between MR (reference marker) and the selected marker.

Conditions

Measurement view: Gain

The parameter `<x>` = 1 to 4.

Group

Calculate commands

Syntax

`CALCulate:NOISe:GAIN:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:NOISe:GAIN:MARKer<x>:DELTA:Y?](#) (on page 520)

Returns

`<NR2>` = a floating point value without an exponent. This is the frequency difference value between MR and the selected marker.

Examples

`CALCULATE:NOISE:GAIN:MARKER1:DELTA:X?` might return 100.0000, indicating the frequency difference between MR (reference marker) and the selected marker (M1) is 100 dB.

CALCulate:NOISe:GAIN:MARKer<x>:DELTA:Y? (Query Only)

Query returns the power difference value between MR (reference marker) and the selected marker.

Conditions

Measurement view: Gain

The parameter <x> = 1 to 4.

Group

Calculate commands

Syntax

`CALCulate:NOISe:GAIN:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:NOISe:GAIN:MARKer<x>:DELTA:X?](#) (on page 519)

Returns

<NR2> = a floating point value without an exponent. This is the power difference value between MR and the selected marker.

Examples

`CALCULATE:NOISE:GAIN:MARKER1:DELTA:Y?` might return 18.7647705078, indicating the difference between MR (reference marker) and the selected marker(M1) is 18.76 dB.

CALCulate:NOISe:GAIN:MARKer<x>:MAXimum? (Query Only)

Places the selected marker at the maximum value on the peak of the trace.

Conditions

Measurement view: Gain

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:GAIN:MARKer<x>:MAXimum?`

Related Commands

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:HIGHer?](#) (on page 521)

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LEFT?](#) (on page 521)

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:RIGHT?](#) (on page 522)

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LOWer?](#) (on page 522)

Arguments

None

Returns

None

CALCulate:NOISe:GAIN:MARKer<x>:PEAK:HIGHer? (Query Only)

Places the selected marker at the next highest peak on the trace.

Conditions

Measurement view: Gain

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:GAIN:MARKer<x>:PEAK:HIGHer?

Related Commands

[CALCulate:NOISe:GAIN:MARKer<x>:MAXimum?](#) (on page 520)

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LEFT?](#) (on page 521)

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:RIGHT?](#) (on page 522)

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LOWer?](#) (on page 522)

Arguments

None

Returns

None

CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LEFT? (Query Only)

Places the selected marker at the next peak on the trace to the left of the selected marker.

Conditions

Measurement view: Gain

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:GAIN:MARKer<x>:PEAK:LEFT?

Related Commands

[CALCulate:NOISe:GAIN:MARKer<x>:MAXimum?](#) (on page 520)

[CALCulate:NOISe:GAIN:MARKer<x>:PEAK:HIGHer?](#) (on page 521)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:RIGHT? \(on page 522\)](#)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LOWer? \(on page 522\)](#)

Arguments

None

Returns

None

CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LOWer? (Query Only)

Places the selected marker at the next lowest peak on the trace.

Conditions

Measurement view: Gain

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LOWer?

Related Commands

[CALCulate:NOISE:GAIN:MARKer<x>:MAXimum? \(on page 520\)](#)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:HIGHer? \(on page 521\)](#)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LEFT? \(on page 521\)](#)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:RIGHT? \(on page 522\)](#)

Arguments

None

Returns

None

CALCulate:NOISE:GAIN:MARKer<x>:PEAK:RIGHT? (Query Only)

Places the specified marker on a specified trace. The query form returns the trace on which the marker resides.

Conditions

Measurement view: Gain

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISE:GAIN:MARKer<x>:PEAK:RIGHT?

Related Commands

[CALCulate:NOISE:GAIN:MARKer<x>:MAXimum?](#) (on page 520)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:HIGHer?](#) (on page 521)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LEFT?](#) (on page 521)

[CALCulate:NOISE:GAIN:MARKer<x>:PEAK:LOWer?](#) (on page 522)

Arguments

None

Returns

None

CALCulate:NOISE:GAIN:MARKer<x>:TRACe

Sets or queries which trace the specified marker is attached to.

Conditions

Measurement view: Gain

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:NOISE:GAIN:MARKer<x>:TRACe { TRACE1 | TRACE2 | TRACE3 }  
CALCulate:NOISE:GAIN:MARKer<x>:TRACe?
```

Arguments

TRACE1 moves the specified marker to trace 1.

TRACE2 moves the specified marker to trace 2.

TRACE3 moves the specified marker to trace 3.

Returns

TRACE1 means the specified marker is on trace 1.

TRACE2 means the specified marker is on trace 2.

TRACE3 means the specified marker is on trace 3.

Examples

CALCULATE:NOISE:GAIN:MARKER1:TRACE? might return TRACE2, indicating that M1 (marker 1) is on trace 2.

CALCulate:NOISE:GAIN:MARKer<x>:X? (Query Only)

This command queries the frequency of the specified marker.

Conditions

Measurement view: Gain

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISE:GAIN:MARKer<x>:X?`

Related Commands

[CALCulate:NOISE:GAIN:MARKer<x>:Y?](#) (on page 524)

Returns

`<NR3>` = a floating point value with an exponent. This is the frequency of the specified marker.

Examples

`CALCULATE:NOISE:GAIN:MARKER1:X?` might return `608.0000000000E+6`, indicating the frequency of M1 (marker 1) is 608 MHz.

CALCulate:NOISE:GAIN:MARKer<x>:Y? (Query Only)

Queries the vertical position (dB) of the specified marker.

Conditions

Measurement view: Gain

The parameter `<x>` = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISE:GAIN:MARKer<x>:Y?`

Related Commands

[CALCulate:NOISE:TEMPerature:MARKer<x>:DELTA:X?](#) (on page 524)

Returns

`<NR2>` = a floating point value without an exponent. This is the vertical position(dB) of the specified marker.

Examples

`CALCULATE:NOISE:GAIN:MARKER1:Y?` might return `18.7647705078`, indicating the value of M1 (marker 1) is 18.76 dB.

CALCulate:NOISE:TEMPerature:MARKer<x>:DELTA:X? (Query Only)

eturns the frequency difference between MR (reference marker) and the selected marker.

Conditions

Measurement view: Noise Temperature

The parameter `<x>` = 1 to 4.

Group

Calculate commands

Syntax

`CALCulate:NOISe:TEMPerature:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:DELTA:Y?](#) (on page 525)

Returns

<NR2> = a floating point value without an exponent. This is the frequency difference value between MR and the selected marker.

Examples

`CALC:NOIS:TEMP:MARK1:DELT:X?` might return 100.0000, indicating the frequency difference between MR (reference marker) and the selected marker(M1) is 100 dB.

CALCulate:NOISe:TEMPerature:MARKer<x>:DELTA:Y? (Query Only)

Returns the temperature difference between MR (reference marker) and the selected marker.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 1 to 4.

Group

Calculate commands

Syntax

`CALCulate:NOISe:TEMPerature:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:DELTA:X?](#) (on page 524)

Returns

<NR3> = a floating point value with an exponent. This is the temperature difference value between MR and the selected marker.

Examples

`CALC:NOIS:TEMP:MARK1:DELT:Y?` might return 2.3663560181E+3, indicating the difference between MR (reference marker) and the selected marker(M1) is 2.36 kK.

CALCulate:NOISe:TEMPerature:MARKer<x>:MAXimum? (Query Only)

Places the selected marker at the maximum value on the peak of the trace.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:TEMPerature:MARKer<x>:MAXimum?`

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:HIGHer?](#) (on page 526)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LEFT?](#) (on page 527)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LOWer?](#) (on page 527)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:RIGHT?](#) (on page 528)

Arguments

None

Returns

None

CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:HIGHer? (Query Only)

Places the selected marker at the highest peak on the trace.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:HIGHer?`

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:MAXimum?](#) (on page 525)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LEFT?](#) (on page 527)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LOWer?](#) (on page 527)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:RIGHT?](#) (on page 528)

Arguments

None

Returns

None

CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LEFT? (Query Only)

Places the selected marker at the next peak on the trace to the left of the selected marker.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LEFT?

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:MAXimum?](#) (on page 525)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:HIGHer?](#) (on page 526)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LOWer?](#) (on page 527)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:RIGHT?](#) (on page 528)

Arguments

None

Returns

None

CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LOWer? (Query Only)

Places the selected marker at the next lowest peak on the trace.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LOWer?

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:MAXimum?](#) (on page 525)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:HIGHer?](#) (on page 526)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LEFT?](#) (on page 527)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:RIGHT?](#) (on page 528)

Arguments

None

Returns

None

CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:RIGHT? (Query Only)

This command places the specified marker on a specified trace. The query form returns the trace on which the marker resides.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:RIGHT?

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:MAXimum?](#) (on page 525)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:HIGHer?](#) (on page 526)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LEFT?](#) (on page 527)

[CALCulate:NOISe:TEMPerature:MARKer<x>:PEAK:LOWer?](#) (on page 527)

Arguments

None

Returns

None

CALCulate:NOISe:TEMPerature:MARKer<x>:TRACe

Sets or queries which trace the specified marker is attached to.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:TEMPerature:MARKer<x>:TRACe { TRACE1 | TRACE2 | TRACE3 }
CALCulate:NOISe:TEMPerature:MARKer<x>:TRACe?

Arguments

TRACE1 moves the specified marker to trace 1.

TRACE2 moves the specified marker to trace 2.

TRACE3 moves the specified marker to trace 3.

Returns

TRACE1 means the specified marker is on trace 1.

TRACE2 means the specified marker is on trace 2.

TRACE3 means the specified marker is on trace 3.

Examples

CALC:NOIS:TEMP:MARK1:TRAC? might return TRACE2, indicating that M1(marker 1) is on trace 2.

CALCulate:NOISe:TEMPerature:MARKer<x>:X? (Query Only)

Queries the frequency of the specified marker.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:TEMPerature:MARKer<x>:X?

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:Y?](#) (on page 529)

Returns

<NR2> = a floating point value without an exponent. This is the frequency of the specified marker.

Examples

CALC:NOIS:TEMP:MARK1:X? might return 608.0000000000E+6, indicating the frequency of M1 (marker 1) is 608 MHz.

CALCulate:NOISe:TEMPerature:MARKer<x>:Y? (Query Only)

Queries the temperature (Kelvin) at the specified marker.

Conditions

Measurement view: Noise Temperature

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:TEMPerature:MARKer<x>:Y?

Related Commands

[CALCulate:NOISe:TEMPerature:MARKer<x>:X?](#) (on page 529)

Returns

<NR3> = a floating point value with an exponent. This is the temperature at the specified marker.

Examples

CALC:NOIS:TEMP:MARK1:Y? might return 1.4544410400E+3, indicating the value at M1 (marker 1) is 1.45 kK.

CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:X? (Query Only)

Queries the frequency difference between MR (reference marker) and the selected marker.

Conditions

Measurement view: Y Factor

The parameter <x> = 1 to 4.

Group

Calculate commands

Syntax

CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:X?

Related Commands

[CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:Y?](#) (on page 530)

Returns

<NR2> = a floating point value without an exponent. This is the frequency difference value between MR and the selected marker.

Examples

CALC:NOIS:YFAC:MARK1:DELTA:X? might return 100.0000, indicating the frequency difference between MR (reference marker) and the selected marker(M1) is 100 dB.

CALCulate:NOISe:YFACTOR:MARKer<x>:DELTA:Y? (Query Only)

Queries the power difference value between MR (reference marker) and the selected marker.

Conditions

Measurement view: Y Factor

The parameter <x> = 1 to 4.

Group

Calculate commands

Syntax

CALCulate:NOISe:YFACtor:MARKer<x>:DELta:Y?

Related Commands

[CALCulate:NOISe:YFACtor:MARKer<x>:DELta:X?](#) (on page 530)

Returns

<NR2> = a floating point value without an exponent. This is the power difference value between MR and the selected marker.

Examples

CALC:NOIS:YFAC:MARK1:DELT:Y? might return 18.7647705078, indicating the difference between MR (reference marker) and the selected marker (M1) is 18.76 dB.

CALCulate:NOISe:YFACtor:MARKer<x>:MAXimum (No Query Form)

Places the selected marker at the maximum value on the peak of the trace.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

CALCulate:NOISe:YFACtor:MARKer<x>:MAXimum

Related Commands

[CALCulate:NOISe:YFACtor:MARKer<x>:PEAK:HIGHer?](#) (on page 531)

[CALCulate:NOISe:YFACtor:MARKer<x>:PEAK:LEFT?](#) (on page 532)

[CALCulate:NOISe:YFACtor:MARKer<x>:PEAK:LOWer?](#) (on page 532)

[CALCulate:NOISe:YFACtor:MARKer<x>:PEAK:RIGHT?](#) (on page 533)

Arguments

None

Returns

None

CALCulate:NOISe:YFACtor:MARKer<x>:PEAK:HIGHer? (Query Only)

This command places the selected marker at the next highest peak on the trace.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:HIGHer?`

Related Commands

[CALCulate:NOISe:YFACTOR:MARKer<x>:MAXimum](#) (on page 531)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LEFT?](#) (on page 532)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LOWer?](#) (on page 532)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:RIGHT?](#) (on page 533)

Arguments

None

Returns

None

CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LEFT? (Query Only)

This command places the selected marker at the next peak on the trace to the left of the selected marker.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LEFT?`

Related Commands

[CALCulate:NOISe:YFACTOR:MARKer<x>:MAXimum](#) (on page 531)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:HIGHer?](#) (on page 531)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LOWer?](#) (on page 532)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:RIGHT?](#) (on page 533)

Arguments

None

Returns

None

CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LOWer? (Query Only)

Places the selected marker at the next lowest peak on the trace.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LOWer?`

Related Commands

[CALCulate:NOISe:YFACTOR:MARKer<x>:MAXimum](#) (on page 531)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:HIGHer?](#) (on page 531)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LEFT?](#) (on page 532)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:RIGHT?](#) (on page 533)

Arguments

None

Returns

None

CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:RIGHT? (Query Only)

Places the specified marker on a specified trace. The query form returns the trace on which the marker resides.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:RIGHT?`

Related Commands

[CALCulate:NOISe:YFACTOR:MARKer<x>:MAXimum](#) (on page 531)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:HIGHer?](#) (on page 531)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LEFT?](#) (on page 532)

[CALCulate:NOISe:YFACTOR:MARKer<x>:PEAK:LOWer?](#) (on page 532)

Arguments

None

Returns

None

CALCulate:NOISe:YFACTOR:MARKer<x>:TRACe

Sets or queries which trace the specified marker is attached to.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:NOISe:YFACTOR:MARKer<x>:TRACe {TRACE1|TRACE2|TRACE3}  
CALCulate:NOISe:YFACTOR:MARKer<x>:TRACe?
```

Arguments

TRACE1 moves the specified marker to trace 1.

TRACE2 moves the specified marker to trace 2.

TRACE3 moves the specified marker to trace 3.

Returns

TRACE1 means the specified marker is on trace 1.

TRACE2 means the specified marker is on trace 2.

TRACE3 means the specified marker is on trace 3.

Examples

CALC:NOIS:YFAC:MARK1:TRAC? might return TRACE2, indicating that M1(marker 1) is on trace 2.

CALCulate:NOISe:YFACTOR:MARKer<x>:X? (Query Only)

Queries the frequency of the specified marker.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

```
CALCulate:NOISe:YFACTOR:MARKer<x>:X?
```

Related Commands

[CALCulate:NOISe:YFACTOR:MARKer<x>:Y?](#) (on page 535)

Returns

<NR3> = a floating point value with an exponent. This is the frequency of the specified marker.

Examples

`CALC:NOIS:YFAC:MARK1:X?` might return `608.000000000E+6`, indicating the frequency of M1 (marker 1) is 608 MHz.

CALCulate:NOISe:YFACtor:MARKer<x>:Y? (Query Only)

This command queries the vertical position (dB) of the specified marker.

Conditions

Measurement view: Y Factor

The parameter <x> = 0 to 4

Group

Calculate commands

Syntax

`CALCulate:NOISe:YFACtor:MARKer<x>:Y?`

Related Commands

[CALCulate:NOISe:YFACtor:MARKer<x>:X?](#) (on page 534)

Returns

<NR2> = a floating point value without an exponent. This is the dB of the specified marker.

Examples

`CALCULATE:NOISE:YFACTOR:MARKER1:Y?` might return `18.7647705078`, indicating the value of M1 (marker 1) is 18.76 dB.

CALCulate:OBWidth:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker in the Occupied Bandwidth measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:OBWidth:MARKer<x>:DELTA:Y?](#) (on page 536)

Arguments

None

Returns

<NRf> Delta marker frequency for the selected marker.

Examples

`CALCULATE:OBWIDTH:MARKER1:DELTA:X?` might return 1.28E+6, indicating that the delta marker frequency is 1.28 MHz.

CALCulate:OBWidth:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker in the Occupied Bandwidth measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:OBWidth:MARKer<x>:DELTA:X?](#) (on page 535)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

`CALCULATE:OBWIDTH:MARKER1:DELTA:Y?` might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:OBWidth:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCULATE:OBWIDTH:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:OBWidth:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the Occupied Bandwidth trace.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:OBWidth:MARKer<x>:PEAK:LOWer](#) (on page 537)

Arguments

None

Examples

`CALCULATE:OBWIDTH:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:OBWidth:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:OBWidth:MARKer<x>:PEAK:RIGHT](#) (on page 538)

Arguments

None

Examples

`CALCULATE:OBWIDTH:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:OBWidth:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the Occupied Bandwidth trace.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:OBWidth:MARKer<x>:PEAK:HIGHer](#) (on page 537)

Arguments

None

Examples

`CALCULATE:OBWIDTH:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:OBWidth:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:OBWidth:MARKer<x>:PEAK:LEFT](#) (on page 537)

Arguments

None

Examples

`CALCULATE:OBWIDTH:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:OBWidth:MARKer<x>[:SET]:CENTer (No Query Form)

Sets the center frequency to the value at the marker position in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

[CALCulate:OBWidth:MARKer<x>\[:SET\]:CENTer](#) (on page 538)

Arguments

None

Examples

`CALCULATE:OBWIDTH:MARKER1:SET:CENTER` sets the center frequency to the value at the Marker 1 position.

CALCulate:OBWidth:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:X <value>`
`CALCulate:OBWidth:MARKer<x>:X?`

Related Commands

[CALCulate:OBWidth:MARKer<x>:Y?](#) (on page 539)

Arguments

`<value>::=<NRf>` specifies the horizontal position of the marker. Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

`CALCULATE:OBWIDTH:MARKER1:X 800MHz` places Marker 1 (M1) at 800 MHz on the trace.

CALCulate:OBWidth:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Calculate commands

Syntax

`CALCulate:OBWidth:MARKer<x>:Y?`

Related Commands

[CALCulate:OBWidth:MARKer<x>:X](#) (on page 539)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCULATE:OBWIDTH:MARKER1:Y? might return -34.28 indicating Marker 1(M1) is at -34.28 dBm.

CALCulate:OFDM:CONStE:MARKer<x>:FREQuency

Sets or queries the frequency position of the selected marker in the OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CONStE:MARKer<x>:FREQuency <value>  
CALCulate:OFDM:CONStE:MARKer<x>:FREQuency?
```

Arguments

<value>: :=<NRf> specifies the frequency position of the marker. Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Returns

<NRf> The value type depends on where the marker is placed.

Examples

CALCulate:OFDM:CONStE:MARKer1:FREQuency? might return 800 MHz, indicating that Marker 1 M1 is positioned at the 800 MHz position in the OFDM Constellation view.

CALCulate:OFDM:CONStE:MARKer<x>:MAGNitude? (Query Only)

Queries the marker magnitude of the selected marker in the OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CONStE:MARKer<x>:MAGNitude?
```

Arguments

None

Returns

<NRf> The magnitude for the selected marker in dB.

Examples

CALCulate:OFDM:CONSt:MARKer1:MAGNitude might return 35 indicating readout of Marker 1 (M1) is 35 dB.

CALCulate:OFDM:CONSt:MARKer<x>:PHASe? (Query Only)

Queries the phase readout of the selected marker in the OFDM Constellation measurement view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CONSt:MARKer<x>:PHASe?
```

Arguments

None

Returns

<NRf> The phase readout for the selected marker.

Examples

CALCulate:OFDM:CONSt:MARKer1:PHASe? might return 35.74, indicating the phase readout of Marker 1 (M1) is 35.74°.

CALCulate:OFDM:CONSt:MARKer<x>:TIME

Sets or queries the X position of the selected marker in the OFDM Constellation measurement view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CONSt:MARKer<x>:TIME <value>  
CALCulate:OFDM:CONSt:MARKer<x>:TIME?
```

Arguments

<value::=NRf> specifies the marker time.

Examples

CALCulate:OFDM:CONSt:MARKer1:TIME -234.5us places Marker 1 (M1) at the -234.5 µs on the trace.

CALCulate:OFDM:CONSt:MARKer<x>:TYPE? (Query Only)

Queries the data type of the selected marker in OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

`CALCulate:OFDM:CONSt:MARKer<x>:TYPE?`

Arguments

None

Returns

1.000 if the marker type is a data marker.

0.000 if the marker type is a pilot marker.

Examples

`CALCulate:OFDM:CONSt:MARKer1:TYPE?` might return 1.000 indicating Marker 1 (M1) is a data marker.

CALCulate:OFDM:CONSt:MARKer<x>:VALue? (Query Only)

Queries the value of the specified marker in OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

`CALCulate:OFDM:CONSt:MARKer<x>:VALue?`

Arguments

None

Returns

<NRf> The value readout for the selected marker.

Examples

`CALCulate:OFDM:CONSt:MARKer2:VALue?` might return 2.00, indicating the value readout of Marker 2 (M2) is 2.

CALCulate:OFDM:CRESPonse:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

`CALCulate:OFDM:CRESPonse:MARKer<x>:DELTA:X?`

Arguments

None

Returns

<NRf> Delta Marker frequency for the selected marker.

Examples

`CALCulate:OFDM:CRESPonse:MARKer2:DELTA:X` might return `1.28E+6` indicating that the delta marker frequency for Marker 2 (M2) is 1.28 MHz.

CALCulate:OFDM:CRESPonse:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker frequency for the selected marker in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

`CALCulate:OFDM:CRESPonse:MARKer<x>:DELTA:Y?`

Arguments

None

Returns

<NRf> Delta Marker frequency for the selected marker.

Examples

`CALCulate:OFDM:CRESPonse:MARKer2:DELTA:Y` might return `1.28E+6` indicating that the delta marker frequency for Marker 2 (M2) is 1.28 MHz.

CALCulate:OFDM:CRESPonse:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

`CALCulate:OFDM:CRESPonse:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCulate:OFDM:CRESPonse:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak in the OFDM Channel response view.

CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

`CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:HIGHer`

Arguments

None

Examples

`CALCulate:OFDM:CRESPonse:MARKer1:PEAK:HIGHer` moves Marker 1(M1) to the next peak higher in amplitude in the OFDM Channel response view.

CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Measurement views: OFDM

Calculate commands

Syntax

`CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALCulate:OFDM:CRESPonse:MARKer1:PEAK:LEFT` moves Marker1 (M1) to the next peak to the left in the OFDM Channel response view.

CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:LOWer
```

Arguments

None

Examples

`CALCulate:OFDM:CRESPonse:MARKer2:PEAK:LOWer` moves Marker 2 (M2) to the next peak lower in amplitude in the OFDM Channel response view.

CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CRESPonse:MARKer<x>:PEAK:RIGHT
```

Arguments

None

Examples

`CALCulate:OFDM:CRESPonse:MARKer1:PEAK:RIGHT` moves Marker1 (M1) to the next peak to the right in the OFDM Channel response view.

CALCulate:OFDM:CRESPonse:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CRESPonse:MARKer<x>:X <value>  
CALCulate:OFDM:CRESPonse:MARKer<x>:X?
```

Arguments

<value> := <NRf> specifies the horizontal position of the marker. Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

CALCulate:OFDM:CRESPonse:MARKer1:X 800MHZ places Marker 1 (M1) at 800 MHz on the trace.

CALCulate:OFDM:CRESPonse:MARKer<x>:Y? (Query Only)

Returns the amplitude of the selected marker in the OFDM Channel response view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:CRESPonse:MARKer<x>:Y?
```

Arguments

None

Returns

<NRf> Amplitude of the selected marker in dB.

Examples

CALCulate:OFDM:CRESPonse:MARKer1:Y might return 33.393856E-3 indicating the amplitude of Marker 1 (M1) is 0.033 dB.

CALCulate:OFDM:FLATness:MARKer<x>:MAXimum (No Query Form)

Positions the specified marker at the maximum point on the trace in the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Calculate commands

Syntax

```
CALCulate:OFDM:FLATness:MARKer<x>:MAXimum
```

Arguments

None

Examples

`CALC:OFDM:FLAT:MARK2:MAX` positions the Marker 2 (M2) at the maximum point on the trace.

CALCulate:OFDM:FLATness:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the specified marker to the next peak higher in amplitude on the trace on the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Calculate commands

Syntax

`CALCulate:OFDM:FLATness:MARKer<x>:PEAK:HIGHer`

Arguments

None

Examples

`CALC:OFDM:FLAT:MARK2:PEAK:HIGHer` moves Marker 2 (M2) to the next peak higher in amplitude on the trace.

CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the specified marker to the next peak to the left on the trace in the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Calculate commands

Syntax

`CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALC:OFDM:FLAT:MARK2:PEAK:LEFT` moves Marker 2 (M2) to the next peak to the left on the trace.

CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the marker to the next peak lower in amplitude on the trace on the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Calculate commands

Syntax

CALCulate:OFDM:FLATness:MARKer<x>:PEAK:LOWer

Arguments

None

Examples

CALC:OFDM:FLAT:MARK2:PEAK:LOW moves Marker 2 (M2) to the next peak lower on the trace.

CALCulate:OFDM:FLATness:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the marker to the next peak to the right on the trace on the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Calculate commands

Syntax

CALCulate:OFDM:FLATness:MARKer<x>:PEAK:RIGHT

Arguments

None

Examples

CALC:OFDM:FLAT:MARK2:PEAK:RIGHT moves Marker 2 (M2) to the next peak to the next peak on the right on the trace.

CALCulate:OFDM:FLATness:MARKer<x>:X

Sets or queries the horizontal value at the selected marker position on the points trace in the OFDM Spectral Flatness display. The units are in Frequency or Subcarrier.

To set the units, use the command [SENSe]:OFDM:UNIT:FREQuency.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Calculate commands

Syntax

```
CALCulate:OFDM:FLATness:MARKer<x>:X <Nrf>  
CALCulate:OFDM:FLATness:MARKer<x>:X?
```

Arguments

Floating point number that specifies the horizontal position of the marker. Range:Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

`CALC:OFDM:FLAT:MARK3:X 22` places Marker 3 at 22 Subcarrier on the trace(assuming the units have been set to Subcarrier).

CALCulate:OFDM:FLATness:MARKer<x>:Y? (Query Only)

Returns the value of the amplitude (vertical position) at the selected marker position on the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Calculate commands

Syntax

```
CALCulate:OFDM:FLATness:MARKer<x>:Y?
```

Returns

Floating point number that indicates the amplitude at the selected marker position in dB.

Examples

`CALC:OFDM:FLAT:MARK1:Y?` might return 33.393856E-3 indicating the amplitude at Marker 1 is 0.033 dB.

CALCulate:OFDM:TABLE:MARKer<x>:FREQuency

Sets or queries the frequency position of the selected marker in the OFDM Symbol table view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:TABLE:MARKer<x>:FREQuency <value>  
CALCulate:OFDM:TABLE:MARKer<x>:FREQuency?
```

Arguments

<value>::=<NRf> specifies the marker frequency.

Examples

CALCulate:OFDM:TABLE:MARKer1:FREQuency 800MHZ places Marker 1(M1) at 800 MHz in the symbol table.

CALCulate:OFDM:TABLE:MARKer<x>:TIME

Sets or queries the marker time in the OFDM Symbol table view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:TABLE:MARKer<x>:TIME <value>  
CALCulate:OFDM:TABLE:MARKer<x>:TIME?
```

Arguments

<value>::=<NRf> specifies the marker time.

Examples

CALCulate:OFDM:TABLE:MARKer1:TIME -234.5us places Marker 1 (M1) at -234.5 μ s in the symbol table.

CALCulate:OFDM:TABLE:MARKer<x>:VALue? (Query Only)

Queries the value readout of the selected marker in the OFDM Symbol table view.

Conditions

Measurement views: OFDM

Group

Calculate commands

Syntax

```
CALCulate:OFDM:TABLE:MARKer<x>:VALue?
```

Arguments

None

Returns

<NRf> The value readout of the selected marker.

Examples

`CALCulate:OFDM:TABLE:MARKer2:VALue?` might return 2.00 indicating the value readout of Marker 2 (M2) is 2.

CALCulate:P25:CONStE:MARKer<x>:DELTA:X[:TIME]? (Query Only)

Returns the delta marker time for the selected marker on the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:CONStE:MARKer<x>:DELTA:X[:TIME]?`

Returns

<NR2> = a floating point value without an exponent. This is the time for the selected Delta marker.

NOTE: Use the `[SENSe]:P25:TIME:UNITs` command to select the time unit: symbols (default) or seconds.

Examples

`CALCulate:P25:CONStE:MARKer1:DELTA:X:TIME?` might return 62.75, indicating that the Delta marker time is 62.75 symbols.

CALCulate:P25:CONStE:MARKer<x>:FDEViation? (Query Only)

Queries the frequency deviation of the selected marker in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

The parameter <x> = 0 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:CONStE:MARKer<x>:FDEViation?`

Returns

<NR2> = a floating point value without an exponent. This is the frequency deviation readout for the selected marker.

Examples

`CALC:P25:CONS:MARr1:FDEV?` might return 102.82380000E+3, indicating the frequency deviation readout of Marker 1 (M1) is 102.824 kHz.

CALCulate:P25:CONStE:MARKer<x>:MAGNitude? (Query Only)

Queries the frequency deviation (for Freq Dev trace types) or magnitude (for IQ trace types) of the selected marker in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

Group

Calculate commands

Syntax

CALCulate:P25:CONStE:MARKer<x>:MAGNitude?

Returns

<NRf> is the frequency deviation or magnitude of the selected marker.

Examples

CALC:P25:CONS:MARK1:MAGN? might return 1.6257750459E+3 if the trace type is Freq Dev, indicating that Marker 1 (M1) has a frequency deviation of 1.626 kHz.

CALC:P25:CONS:MARK1:MAGN? might return 1.0048475788 if the trace type is IQ, indicating that Marker1 (M1) has a magnitude of 1.005.

CALCulate:P25:CONStE:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

CALCulate:P25:CONStE:MARKer<x>:MAXimum

Related Commands

[CALCulate:P25:CONStE:MARKer<x>:PEAK:LEFT](#) (on page 552)

[CALCulate:P25:CONStE:MARKer<x>:PEAK:RIGHT](#) (on page 553)

Examples

CALC:P25:CONS:MARK1:MAX positions Marker 1 (M1) at the symbol in the center of the time record.

CALCulate:P25:CONStE:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

Group

Calculate commands

Syntax

`CALCulate:P25:CONStE:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:P25:CONStE:MARKer<x>:PEAK:RIGHT](#) (on page 553)

[CALCulate:P25:CONStE:MARKer<x>:MAXimum](#) (on page 552)

Examples

`CALC:P25:CONS:MARK1:PEAK:LEFT` moves Marker 1 (M1) in the time domain to the next lower symbol number.

CALCulate:P25:CONStE:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:CONStE:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:P25:CONStE:MARKer<x>:MAXimum](#) (on page 552)

[CALCulate:P25:CONStE:MARKer<x>:PEAK:LEFT](#) (on page 552)

Examples

`CALC:P25:CONS:MARK1:PEAK:RIGHT` moves the Marker 1 (M1) in the time domain to the next higher symbol number to the right.

CALCulate:P25:CONStE:MARKer<x>:PHASe? (Query Only)

Queries the phase of the selected marker in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

IQ trace type required.

Group

Calculate commands

Syntax

`CALCulate:P25:CONStE:MARKer<x>:PHASe?`

Returns

<NR2> = a floating point value without an exponent. This is the phase value for the selected marker.

Examples

CALC:P25:CONSt:MARK1:PHAS? might return 41.4721108251, indicating the phase of Marker 1 (M1) is 41.5°.

CALCulate:P25:CONSt:MARKer<x>:SYMBol? (Query Only)

Queries the readout symbol of the selected marker in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

The parameter <x> = 0,1,2,3,4 is the marker.

The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

CALCulate:P25:CONSt:MARKer<x>:SYMBol?

Returns

<NR2> = a floating point value is the readout symbol for the selected marker.

Examples

CALCulate:P25:CONSt:MARKer1:SYMBol? might return 62.0000000000, indicating the readout symbol of Marker 1 (M1) is 62.

CALCulate:P25:CONSt:MARKer<x>:Trace

Places the selected marker on the Demodulated I and Q versus Time trace. The query returns the name of the trace on which the marker resides.

Conditions

Measurement view: P25 Constellation

The parameter <x>= 0 to 4.

The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

CALCulate:P25:CONSt:MARKer<x>:Trace {Trace1 | Trace2}
CALCulate:P25:CONSt:MARKer<x>:Trace?

Arguments

Trace 1: sets the I trace marker on.

Trace 2: sets the Q trace marker on.

Returns

Trace 1 = I trace

Trace 2 = Q trace

Examples

`CALC:P25:CONS:MARK1:TRAC` Trace1 places Marker 1 (M1) on the I trace.

CALCulate:P25:CONSte:MARKer<x>:VALue? (Query Only)

Queries the readout value of the specified marker in P25 Constellation display.

Conditions

Measurement view: P25 Constellation

Group

Calculate commands

Syntax

`CALCulate:P25:CONSte:MARKer<x>:VALue?`

Returns

`<NRf>` is the readout value for the selected marker.

Examples

`CALC:P25:CONS:MARK2:VAL?` might return 2.00, indicating the readout value of Marker 2 (M2) is 2.

CALCulate:P25:CONSte:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

Group

Calculate commands

Syntax

`CALCulate:P25:CONSte:MARKer<x>:X <value>`

`CALCulate:P25:CONSte:MARKer<x>:X?`

Arguments

`<value>: : =<NRf>` specifies the time position of the marker. Range is (analysis offset) to [(analysis offset) + (analysis length)]

Returns

Offset set value(-500Hz to +500Hz).

Examples

`CALCulate:P25:PVTime:MARKer1:X 800MHz` places Marker 1 (M1) at 800 MHz on the trace. When used as a query, the return will show the horizontal position of the trace. For example, 800 MHz.

CALCulate:P25:EDiagram:MARKer<x>:DELTA:X[:TIME]? (Query Only)

Returns the delta marker time for the selected marker on the P25 Eye Diagram trace.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>= 1 to 4. MARKer0 (reference marker) is invalid.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:DELTA:X[:TIME]?`

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:DELTA:Y?](#) (on page 556)

Returns

<NRf> is the Delta marker time for the selected marker. Use the `[SENSe]:P25:TIME:UNITs` command to select the time unit: symbols (default) or seconds.

Examples

`CALCulate:P25:EDiagram:MARKer1:DELTA:X:TIME?` might return 62.750000000, indicating that the delta marker time is 62.75 symbols.

CALCulate:P25:EDiagram:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the P25 Eye Diagram trace.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>= 1 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:DELTA:X\[:TIME\]? \(Query Only\)](#) (on page 556)

Returns

<NRf> is the Delta marker amplitude for the selected marker.

Examples

`CALCulate:P25:EDiagram:MARKer1:DELTA:Y?` might return `-1.04300000`, indicating that the delta marker amplitude is `-1.043`.

CALCulate:P25:EDiagram:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the P25 Eye Diagram trace.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:MAXimum`

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:HIGHer](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LEFT](#) (on page 558)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LOWer](#) (on page 559)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:RIGHT](#) (on page 559)

Arguments

None

Returns

None

Examples

`CALCulate:P25:EDiagram:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:P25:EDiagram:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the P25 Eye Diagram trace.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:MAXimum](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LEFT](#) (on page 558)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LOWer](#) (on page 559)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:RIGHT](#) (on page 559)

Arguments

None

Returns

None

Examples

`CALCulate:P25:EDiagram:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:P25:EDiagram:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the P25 Eye Diagram trace.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:MAXimum](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:HIGHer](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LOWer](#) (on page 559)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:RIGHT](#) (on page 559)

Arguments

None

Returns

None

Examples

`CALCulate:P25:EDiagram:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:P25:EDiagram:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the P25 Eye Diagram trace.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:MAXimum](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:HIGHer](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LEFT](#) (on page 558)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:RIGHT](#) (on page 559)

Arguments

None

Returns

None

Examples

`CALCulate:P25:EDiagram:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:P25:EDiagram:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the P25 Eye Diagram trace.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:MAXimum](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:HIGHer](#) (on page 557)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LEFT](#) (on page 558)

[CALCulate:P25:EDiagram:MARKer<x>:PEAK:LOWer](#) (on page 559)

Arguments

None

Returns

None

Examples

`CALCulate:P25:EDiagram:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:P25:EDiagram:MARKer<x>:TRACe

Sets the selected marker on the I or Q trace, or queries the trace that the specified marker is on, in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:P25:EDiagram:MARKer<x>:TRACe { TRACe1 | TRACe2 }`
`CALCulate:P25:EDiagram:MARKer<x>:TRACe?`

Arguments

`TRACe1` places the specified marker on the I trace.

`TRACe2` places the specified marker on the Q trace.

Returns

`TRACe1` means the specified marker is on the I trace.

`TRACe2` means the specified marker is on the Q trace.

Examples

`CALCulate:P25:EDiagram:MARKer1:TRACe` `TRACe1` places Marker 1 (M1) on the I trace in the P25 Eye Diagram display.

CALCulate:P25:EDiagram:MARKer<x>:X

Sets or queries the horizontal position (time) of the selected marker in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

```
CALCulate:P25:EDiagram:MARKer<x>:X <NRf>
CALCulate:P25:EDiagram:MARKer<x>:X?
```

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:Y](#) (on page 561)

Arguments

<NRf> specifies the horizontal position (time) of the marker.

NOTE: Use the [SENSe]:P25:TIME:UNITs command to select the time unit:Symbols (default) or seconds.

Returns

<NRf> is the horizontal position of the selected marker.

Examples

CALC:P25:EDI:MARK1:X 38.5 places Marker 1 (M1) at 38.5 symbols on the trace.

CALCulate:P25:EDiagram:MARKer<x>:Y

Sets or queries the vertical position of the selected marker in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

The parameter <x>=0 to 4.

The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

```
CALCulate:P25:EDiagram:MARKer<x>:Y <value>
CALCulate:P25:EDiagram:MARKer<x>:Y?
```

Related Commands

[CALCulate:P25:EDiagram:MARKer<x>:X](#) (on page 561)

Arguments

<value>:: =<NRf> specifies the vertical position of the marker.

Returns

<NRf> is the vertical position of the selected marker.

Examples

CALC:P25:EDI:MARK1:Y? might return 571.8E-3, indicating Marker 1 (M1) is at 0.5718.

CALCulate:P25:PVTime:MARKer<x>:DELTA:X[:TIME]? (Query Only)

Returns the delta marker time (seconds) for the selected marker on the Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

The parameter <x> = 1,2,3,4 is the marker.

The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

CALCulate:P25:PVTime:MARKer<x>:DELTA:X[:TIME]?

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:DELTA:Y\[:TIME\]? \(on page 562\)](#)

[SENSe:P25:TIME:UNITs \(on page 2271\)](#)

Returns

<NRf> is the Delta marker time for the selected marker.

NOTE: Use the SENSe:P25:TIME:UNITs command to select the time unit symbols (default) or seconds.

Examples

CALC:P25:PVT:MARK1:DELTA:X? might return -3.99372800000E-3, indicating that the delta marker 1 (M1) time is -3.937 ms.

CALCulate:P25:PVTime:MARKer<x>:DELTA:Y[:TIME]? (Query Only)

Returns the Delta marker amplitude (dB) for the selected marker on the Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

The parameter <x> = 1,2,3,4 is the marker.

The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:DELTA:Y[:TIME]?`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:DELTA:X\[:TIME\]?](#) (on page 562)

Returns

<NR3> is a floating point value with an exponent. This is the Delta marker amplitude.

Examples

`CALC:P25:PVT:MARK1:DELTA:Y?` might return 552.6123046875E-3, indicating that the Delta marker 1 (M1) amplitude is 0.55 dB.

CALCulate:P25:PVTime:MARKer<x>:Maximum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:Maximum`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer](#) (on page 565)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT](#) (on page 564)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT](#) (on page 565)

Arguments

None

Returns

None

Examples

`CALC:P25:PVT:MARK1:PEAK:MAX` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the trace in the Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:Maximum](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer](#) (on page 565)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT](#) (on page 564)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT](#) (on page 565)

Arguments

None

Returns

None

Examples

`CALC:P25:PVT:MARK1:PEAK:HIGH` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer](#) (on page 565)

[CALCulate:P25:PVTime:MARKer<x>:Maximum](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT](#) (on page 565)

Arguments

None

Returns

None

Examples

`CALC:P25:PVT:MARK1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the trace in the Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:Maximum](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT](#) (on page 564)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT](#) (on page 565)

Arguments

None

Returns

None

Examples

`CALC:P25:PVT:MARK1:PEAK:LOW` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Power vs. Time display.

Conditions

Measurement view: Power vs. Time

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LOWer](#) (on page 565)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:HIGHer](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:Maximum](#) (on page 563)

[CALCulate:P25:PVTime:MARKer<x>:PEAK:LEFT](#) (on page 564)

Arguments

None

Returns

None

Examples

`CALC:P25:PVT:MARK1:PEAK:RIGH` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:P25:PVTime:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Power vs.Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:X <value>`

`CALCulate:P25:PVTime:MARKer<x>:X?`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:Y](#) (on page 566)

Arguments

`<value>::=<NRf>` specifies the horizontal position of the marker. Range is Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Returns

`<value>::=<NRf>` specifies the horizontal position of the marker.

Examples

`CALC:P25:PVT:MARK1:X 800MHz` places Marker 1 (M1) at 800 MHz on the trace. When used as a query, the return will show the horizontal position of the trace. For example, 800 MHz.

CALCulate:P25:PVTime:MARKer<x>:Y

Sets or queries the vertical position of the selected marker in the P25 Power vs.Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Calculate commands

Syntax

`CALCulate:P25:PVTime:MARKer<x>:Y <value>`

`CALCulate:P25:PVTime:MARKer<x>:Y?`

Related Commands

[CALCulate:P25:PVTime:MARKer<x>:X](#) (on page 566)

Arguments

<value>::=<NRf> specifies the vertical position of the marker

Returns

<NR2> = floating point value without an exponent.

Examples

CALC:P25:PVT:MARK1:Y? might return -67.1001052856, indicating that the horizontal position of Marker 1 (M1) is -67.10 dBm.

CALC:P25:PVT:MARK1:Y -75.66dBm places Marker 1 (M1) at -75.66 on the trace.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:X? (Query only)

Returns the delta marker time for the selected marker in the Phase error versus Time measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:X?

Related Commands

[CALCulate:PERRor\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 568)

Arguments

None

Returns

<NRf> Delta marker time for the selected marker in percent (%).

Examples

CALCulate:PERRor:MEASview2:MARKer1:DELTA:X? might return 3.84, indicating that the delta marker duration is 3.84 for measurement view 2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query only)

Returns the delta marker phase for the selected marker in the Phase error versus Time measurement.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:DELTA:Y?

Related Commands

[CALCulate:PERRor\[:MEASview<y>\]:MARKer<x>:DELTA:X?](#) (on page 567)

Arguments

None

Returns

<NRf> Delta marker phase for the selected marker in percent (%).

Examples

CALCulate:PERRor:MEASview2:MARKer1:DELTA:Y? might return 3.84, indicating that the delta marker amplitude is 3.84% for measurement view2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Moves the selected marker to the highest peak on the trace in the Phase error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

`CALCulate:PERRor[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALCulate:PERRor:MEASview2:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak on the trace for measurement view2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)

Moves the selected marker to the next peak higher in amplitude on the Phase error versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

`CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:PERRor\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 570)

Arguments

None

Examples

`CALCulate:PERRor:MEASview2:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace for measurement view 2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker to the next peak to the left on the trace in the Phase error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

```
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LEFT
```

Related Commands

[CALCulate:PERRor\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 571)

Arguments

None

Examples

`CALCulate:PERRor:MEASview2:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace for measurement view 2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)

Moves the selected marker to the next peak lower in amplitude on the Phase error versus Time trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

```
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:LOWer
```

Related Commands

[CALCulate:PERRor\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 569)

Arguments

None

Examples

`CALCulate:PERRor:MEASview2:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace for measurement view 2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker to the next peak to the right on the trace in the Phase error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:PEAK:RIGHT

Related Commands

[CALCulate:PERRor\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 569)

Arguments

None

Examples

CALCulate:PERRor:MEASview2:MARKer1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the trace for measurement view 2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Phase error versus Time measurement.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:PERRor[:MEASview<y>]:MARKer<x>:X?

Arguments

`<value>::=<NRf>` specifies the horizontal position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)]. The unit can be changed by `[SENSe]:DDEMod:TIME:UNITs` command.

Examples

`CALCulate:PERRor:MEASview2:MARKer1:X 1.5` μ s places Marker 1 (M1) at 1.5 μ s on the trace for measurement view 2.

CALCulate:PERRor[:MEASview<y>]:MARKer<x>:Y? (Query only)

Queries the marker amplitude of the selected marker in the Phase error versus Time measurement.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Calculate commands

Syntax

`CALCulate:PERRor[:MEASview<y>]:MARKer<x>:Y?`

Related Commands

[CALCulate:PERRor\[:MEASview<y>\]:MARKer<x>:X](#) (on page 571)

Arguments

None

Returns

`<NRf>` Marker amplitude of the selected marker in percent (%).

Examples

`CALCulate:PERRor:MEASview2:MARKer1:Y?` might return 5.34, indicating Marker 1 (M1) is at 5.34% for measurement view2.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker time for the selected marker in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

`CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELTA:X?`

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 573)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Delta marker time for the selected marker.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:DELTA:X? might return 38.0E-9, indicating that the delta marker time is 38.0 ns.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker phase for the selected marker in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:DELTA:Y?

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:DELTA:X?](#) (on page 572)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Delta marker phase for the selected marker in degrees.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:DELTA:Y? might return 162.38, indicating that the delta marker phase is 162.38 °.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

```
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:MAXimum
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:MAXIMUM moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the Phase versus Time trace.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

```
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:HIGHer
```

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 575)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:PEAK:HIGHER moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the trace in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

```
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LEFT
```

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 576)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:PEAK:LEFT moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the Phase versus Time trace.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

```
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:LOWer
```

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 574)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:PEAK:LOWER moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the trace in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:PEAK:RIGHT

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 574)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:PEAK:RIGHT moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:X?

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 577)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

<value>: :=<NRf> specifies the horizontal position of the marker. Range: (analysis offset) to [(analysis offset) + (analysis length)].

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:X 1.5US places Marker 1 (M1) at 1.5 μ s on the trace.

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Calculate commands

Syntax

CALCulate:PHVTime[:MEASview<y>]:MARKer<x>:Y?

Related Commands

[CALCulate:PHVTime\[:MEASview<y>\]:MARKer<x>:X](#) (on page 576)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

Returns

<NRf> Marker amplitude of the selected marker in degrees.

Examples

CALCULATE:PHVTIME:MEASview1:MARKER1:Y? might return -18.435, indicating Marker 1(M1) is at -18.435 °.

CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:X

Sets or queries the horizontal position of the indicator on the trace in the Cumulative Histogram display. Where <x> parameters: 0 to 4

Conditions

Measurement views: Pulse Cumulative Histogram with specified Measurement view number

Group

Calculate commands

Syntax

CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:X <value>
CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:X?

Arguments

<value>::=<NRf> specifies the horizontal position of the marker.

The parameter <x> = 0 to 4.

Returns

<NRf>

Examples

CALCulate:PULSe:CUMulative:HISTogram:MEASview1:INDicator:X 9.5409090173E-6 places the indicator at the nearest bins mid value at 9.540E-6 on the trace.

CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:Y (Query Only)

Queries the vertical position value of the indicator on the trace in the Cumulative Histogram display.

Conditions

Measurement views: Pulse Cumulative Histogram with specified Measurement view number

Group

Calculate commands

Syntax

CALCulate:PULSe:CUMulative:HISTogram[:MEASview<y>]:INDicator:Y?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<value>

Where <value>::<NRf> is the vertical position value of the marker.

Examples

CALCulate:PULSe:CUMulative:HISTogram:MEASview1:INDicator:Y might return 1.000000 for the vertical position of the marker in cumulative histogram Measurement View 1.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:DELTA:X (Query Only)

Returns the delta marker time for the selected marker in the Frequency vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:DELTA:X?

Arguments

<x> = 1, 2, 3, 4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Delta marker time for the selected marker.

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:FVTime:DELTA:X? might return 38.0E-6, indicating that the delta marker time for M1 is 38.0 μ s.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:DELTA:Y (Query Only)

Returns the delta marker amplitude for the selected marker in the Frequency vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:DELTA:Y?

Arguments

<x> = 1, 2, 3, 4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Delta marker Amplitude for the selected marker

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:FVTime:DELTA:Y? might return 45.82, indicating that the delta marker amplitude for Marker 1 (M1) is 45.82.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in Frequency vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:MAXimum

Arguments

<x> = 0,1,2,3,4 is the marker.. MARKer0 (reference marker) is invalid. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:FVTime:MAXimum moves Marker 1(M1) to the highest peak on the trace.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:X

Sets or Queries the horizontal position of the selected marker in Frequency vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

```
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:X <value>
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:X?
```

Arguments

<x> = 0, 1, 2, 3, 4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>=<NRf> specifies the horizontal position of the marker.

Returns

<NRf>

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:FVTime:X 2E-6 places Marker 1 (M1) at 2 μ s on the Frequency vs Time trace.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:Y (Query Only)

Returns the marker amplitude of the selected marker in Frequency vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:FVTime:Y?

Arguments

<x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:FVTime:Y? might return -34.28, indicating Marker 1 (M1) is at the amplitude of -34.28 dBm.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:DELTA:X (Query Only)

Returns the delta marker time for the selected marker in the Time vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:DELTA:X ?

Arguments

<x> = 1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Delta marker time for the selected marker

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:TVTime:DELTA:X? might return -197.57E-6, indicating that the delta marker time for Marker 1 (M1) is 197.57 μ s.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:DELTA:Y (Query Only)

Queries the delta marker amplitude for the selected marker in the Time vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

`CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:DELta:Y ?`

Arguments

`<x>` = 1, 2, 3, 4 is the marker. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

`<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default `y` is 1.

Returns

`<NRf>` Delta marker amplitude for the selected marker

Examples

`CALCulate:PULSe:OGRAM:MEASview1:MARKer1:TVTime:DELta:Y?` might return `-813.10E-3`, indicating that the delta marker amplitude for Marker 1 (M1) is `-813.10E-3`.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in Time vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

`CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:MAXimum`

Arguments

`<x>` = 0,1,2,3,4 is the marker. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

`<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default `y` is 1.

Returns

None

Examples

`CALCulate:PULSe:OGRAM:MEASview1:MARKer1:TVTime:MAXimum` moves Marker 1(M1) to the highest peak on the trace of PulseOgram Measurement View 1.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:X

Sets or Queries the horizontal position of the selected marker in Time vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

```
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:X <value>
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:X ?
```

Arguments

<x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>=<NRf> specifies the horizontal position of the marker

Returns

<NRf>

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:TVTime:X 2E-6 places Marker 1 (M1) at 2 μ s on the Time vs Time trace of PulseOgram Measurement View 1.

CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:Y (Query Only)

Returns the marker amplitude of the selected marker in Time vs Time display of Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Calculate commands

Syntax

```
CALCulate:PULSe:OGRAM[:MEASview<y>]:MARKer<x>:TVTime:Y?
```

Arguments

<x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Marker amplitude of the selected marker

Examples

CALCulate:PULSe:OGRAM:MEASview1:MARKer1:TVTime:Y? might return -44.85, indicating Marker 1 (M1) is at the amplitude of -44.85 dBm.

CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:X

Sets or queries the current bin number where the indicator is positioned from the histogram display. Sets or queries the frequency in Hz for the X indicator. This command is valid when `DISPlay:PULSe:STATistics:PLOT` is set to FFT.

Conditions

Measurement views: Pulse statistics

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:X <value>
CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:X?
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:FFT:INDicator:Y?](#) (on page 584)

Arguments

<value>::=<NRf> specifies the indicator X value in Hz.

Examples

`CALCulate:PULSe:STATistics:MEASview2:FFT:INDicator:X 1000` sets the FFT indicator X value to 1 kHz.

CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:Y? (Query) Only

Returns the frequency level in dB for the Y indicator. This command is valid when `DISPlay:PULSe:STATistics:PLOT` is set to FFT.

Conditions

Measurement views: Pulse statistics

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:FFT:INDicator:Y?
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:FFT:INDicator:X](#) (on page 584)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

<NRf> the indicator Y value in dB.

Examples

CALCulate:PULSe:STATistics:MEASview2:FFT:INDicator:Y? might return -34.5 indicating that the FFT indicator is at -34.5 dB.

CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:X

Sets or queries the histogram indicator X value. This command is valid when DISPLAY:PULSe:STATistics:PLOT is set to histogram.

Conditions

Measurement views: Pulse statistics

Group

Calculate commands

Syntax

CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:X <value>
CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:X?

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:HISTogram:INDicator:Y?](#) (on page 585)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<value>.: =<NRf> specifies the indicator X value.

Examples

CALCulate:PULSe:STATistics:MEASview2:HISTogram:INDicator:X 0.3 sets the histogram indicator X value to 0.3.

CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:Y? (Query Only)

Queries the Histogram indicator Y value. This command is valid when DISPLAY:PULSe:STATistics:PLOT is set to Histogram.

Conditions

Measurement views: Pulse statistics

Group

Calculate commands

Syntax

CALCulate:PULSe:STATistics[:MEASview<y>]:HISTogram:INDicator:Y?

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:HISTogram:INDicator:X](#) (on page 585)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> indicates the indicator Y value.

Examples

CALCulate:PULSe:STATistics:MEASview2:HISTogram:INDicator:Y? might return 20 to indicate 20 counts in the histogram bin in dB.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELTA:X?

Returns the delta marker time for the selected marker on the pulse trace. This command is valid when DISPLAY:PULSe:STATistics:PLOT is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELTA:X?

Related Commands

[DISPLAY:PULSe:STATistics\[:MEASview<y>\]:PLOT](#) (on page 978)

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 586)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Delta marker time in seconds for the selected marker.

Examples

CALCulate:PULSe:STATistics:MEASview1:MARKer1:DELTA:X? might return 3.01e-3, indicating that the delta marker time is 3.01 ms on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELTA:Y?

Returns the delta marker amplitude for the selected marker on the pulse trace. This command is valid when DISPLAY:PULSe:STATistics:PLOT is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:DELTA:Y?`

Related Commands

[DISPlay:PULSe:STATistics\[:MEASview<y>\]:PLOT](#) (on page 978)

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:DELTA:X?](#) (on page 586)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Delta marker amplitude for the selected marker, in the unit of the current measurement.

Examples

`CALCulate:PULSe:STATistics:MEASview1:MARKer1:DELTA:Y?` might return 2.345, indicating that the delta marker amplitude is 2.345 dB on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:MAXimum

Moves the selected marker to the highest peak on the pulse statistics trace. This command is valid when DISPlay:PULSe:STATistics:PLOT is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCulate:PULSe:STATistics:MEASview1:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:HIGHer

Moves the selected marker to the next peak higher in amplitude on the pulse statistics trace. This command is valid when DISPlay:PULSe:STATistics:PLOT is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:HIGHer
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 589)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCulate:PULSe:STATistics:MEASview1:MARKer1:PEAK:HIGHer moves Marker 1 (M1) to the next peak higher in amplitude on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:LEFT

Moves the selected marker to the next peak to the left on the pulse statistics trace. This command is valid when DISPLAY:PULSe:STATistics:PLOT is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:LEFT
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 589)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCulate:PULSe:STATistics:MEASview1:MARKer1:PEAK:LEFT moves Marker 1 (M1) to the next peak to the left on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:LOWer

Moves the selected marker to the next peak lower in amplitude on the pulse statistics trace. This command is valid when DISPLAY:PULSe:STATistics:PLOT is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:LOWer
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 587)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

CALCulate:PULSe:STATistics:MEASview1:MARKer1:PEAK:LOWer moves Marker 1 (M1) to the next peak lower in amplitude on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:RIGHT

Moves the selected marker to the next peak to the right on the pulse statistics trace. This command is valid when DISPLAY:PULSe:STATistics:PLOT is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:PEAK:RIGHT
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 588)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCulate:PULSe:STATistics[:MEASview1:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the pulse statistics view. This command is valid when `DISPlay:PULSe:STATistics:PLOT` is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:X?
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:Y](#) (on page 590)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Returns

<NRf> specifies the horizontal position of the marker.

Examples

`CALCulate:PULSe:STATistics:MEASvie1:MARKer1:X 3.01e-3` places Marker 1 (M1) at 3.01 ms on the trace of Pulse Statistics Measurement View 1.

CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:Y?

Queries the marker amplitude of the selected marker in the pulse statistics view. This command is valid when `DISPlay:PULSe:STATistics:PLOT` is set to Time Trend.

Conditions

Measurement views: Pulse statistics with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:STATistics[:MEASview<y>]:MARKer<x>:Y?
```

Related Commands

[CALCulate:PULSe:STATistics\[:MEASview<y>\]:MARKer<x>:X](#) (on page 590)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Amplitude of the specified marker in the unit of the current measurement.

Examples

CALCulate:PULSe:STATistics:MEASview1:MARKer1:Y? might return -28.173, indicating Marker 1 (M1) is at -28.173 dB on the trace of pulse statistics measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:X

Returns the delta marker time for the selected marker on the pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:X?

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 591)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Delta marker time for the selected marker.

Examples

CALCulate:PULSe:TRACe:MEASview1:MARKer1:DELTA:X? might return 38.0E-9, indicating that the delta marker time is 38.0 ns on the trace of pulse trace measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:Y

Returns the delta marker amplitude for the selected marker on the pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:DELTA:Y?`

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:DELTA:X?](#) (on page 591)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

`<x>` = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

`<NRf>` Delta marker amplitude for the selected marker.

Examples

`CALCulate:PULSe:TRACe:MEASview1:MARKer1:DELTA:Y?` might return 23.45, indicating that the delta marker amplitude is 23.45 dB on the trace of pulse trace measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:MAXimum

Moves the selected marker to the highest peak on the pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

`<x>` = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCulate:PULSe:TRACe:MEASview1:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak on the trace of pulse trace measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:HIGHer

Moves the selected marker to the next peak higher in amplitude on the pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 593)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCulate:PULSe:TRACe:MEASview1:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace of pulse trace measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LEFT

Moves the selected marker to the next peak to the left on the pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 594)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCulate:PULSe:TRACe:MEASview1:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace of pulse trace measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LOWer

Moves the selected marker to the next peak lower in amplitude on the pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 592)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCulate:PULSe:TRACe:MEASview1:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace of pulse trace measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:RIGHT

Moves the selected marker to the next peak to the right on the pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 593)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Examples

`CALCulate:PULSe:TRACe:MEASview1:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the left on the trace of pulse trace measurement view 1.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:X?
```

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 595)

Arguments

<value>::=<NRf> specifies the horizontal position of the marker.

NOTE: To set the horizontal position, the marker must be on the trace of the pulse selected using the DISPLAY:PULSe:SElect:NUMBer command. You cannot put the marker out of the horizontal range of the pulse.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf>

Examples

CALCulate:PULSe:TRACe:MEASview1:MARKer1:X 1.5 μ s places Marker 1 (M1) at 1.5 μ s on the trace.

CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:Y

Queries the marker amplitude of the selected marker in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:PULSe:TRACe[:MEASview<y>]:MARKer<x>:Y?
```

Related Commands

[CALCulate:PULSe:TRACe\[:MEASview<y>\]:MARKer<x>:X?](#) (on page 594)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCulate:PULSe:TRACe:MEASview1:MARKer1:Y? might return -28.86, indicating Marker 1 (M1) is at -28.86 dBm on the trace of pulse trace measurement view 1.

CALCulate:SEARch:LIMit:FAIL? (Query Only)

Queries whether the waveform cuts across the limit in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:FAIL?
```

Arguments

None

Returns

{ 0 | 1 }

0 represents Pass, indicating that the waveform does not cut across the limit.

1 represents Fail, indicating that the waveform cuts across the limit.

Examples

CALCULATE:SEARCH:LIMIT:FAIL? might return 1, indicating that the waveform cuts across the limit (Fail).

CALCulate:SEARch:LIMit:MATCh:BEEP[:STATe]

Determines whether or not to beep on match during run or replay in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:MATCh:BEEP[:STATe] { OFF | ON | 0 | 1 }  
CALCulate:SEARch:LIMit:MATCh:BEEP[:STATe]?
```

Arguments

OFF or 0 disables to beep on match.

ON or 1 enables to beep on match.

Examples

CALCULATE:SEARCH:LIMIT:MATCH:BEEP:STATE ON enables to beep on match.

CALCulate:SEARch:LIMit:MATCh:SACQuire[:STATe]

Determines whether or not to stop acquiring data on match during run or replay in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:MATCh:SACQuire[:STATe] { OFF | ON | 0 | 1 }
CALCulate:SEARCh:LIMit:MATCh:SACQuire[:STATe]?
```

Arguments

OFF or 0 disables to stop acquiring data on match.

ON or 1 enables to stop acquiring data on match.

Examples

CALCULATE:SEARCH:LIMIT:MATCH:SACQUIRE:STATE ON enables to stop acquiring data on match.

CALCulate:SEARCh:LIMit:MATCh:SDATa[:STATe]

Determines whether or not to save automatically (AutoSave) acquisition data on match during run in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:MATCh:SDATa[:STATe] { OFF | ON | 0 | 1 }
CALCulate:SEARCh:LIMit:MATCh:SDATa[:STATe]?
```

Arguments

OFF or 0 disables the AutoSave.

ON or 1 enables to save acquisition data automatically on match.

The data is saved to a file with the name:

name-yyyy.mm.dd.hh.mm.ss.sss.tiq

Where

name is the file name that was last specified.

yyyy.mm.dd and hh.mm.ss.sss represent date and 24 hour time.

The file extension is .tiq.

Example: SAVED-2007.03.20.12.34.567.tiq

For the directory of file, refer to [Specifying the File](#) (on page 239) in the MMEMory command section.

Examples

CALCULATE:SEARCH:LIMIT:MATCH:SDATA:STATE ON enables to save acquisition data automatically on match.

CALCulate:SEARCh:LIMit:MATCh:SPICTure[:STATe]

Determines whether or not to save automatically (AutoSave) the whole screen

on match during run in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:MATCh:SPICture[:STATe] { OFF | ON | 0 | 1 }
CALCulate:SEARCh:LIMit:MATCh:SPICture[:STATe]?
```

Arguments

OFF or 0 disables the AutoSave.

ON or 1 enables to save the whole screen automatically on match.

The picture is saved to a file with the name:

name-yyyy.mm.dd.hh.mm.ss.sss.png

Where

name is the file name that was last specified.

yyyy.mm.dd and hh.mm.ss.sss represent date and 24 hour time.

The file extension is .png.

Example: SAVED-2007.03.20.12.34.567.png

For the directory of file, refer to [Specifying the File](#) (on page 239) in the MMEMory command section.

Examples

CALCULATE:SEARCH:LIMIT:MATCH:SPICTURE:STATE ON enables to save the whole screen automatically on match.

CALCulate:SEARCh:LIMit:MATCh:STRace[:STATe]

Determines whether or not to save automatically (AutoSave) the spectrum trace on match during run in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:MATCh:STRace[:STATe] { OFF | ON | 0 | 1 }
CALCulate:SEARCh:LIMit:MATCh:STRace[:STATe]?
```

Arguments

OFF or 0 disables the AutoSave.

ON or 1 enables to save the spectrum trace automatically on match.

The trace is saved to a file with the name:

name-yyyy.mm.dd.hh.mm.ss.sss.Specan

Where

name is the file name that was last specified.

yyyy.mm.dd and hh.mm.ss.sss represent date and 24 hour time.

The file extension is .Specan.

Example: SAVED-2007.03.20.12.34.567.Specan

For the directory of file, refer to [Specifying the File](#) (on page 239) in the MMEMory command section.

Examples

CALCULATE:SEARCH:LIMIT:MATCH:STRACE:STATE ON enables to save the spectrum trace automatically on match.

CALCulate:SEARCh:LIMit:OPERation

Sets or queries the search condition.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:OPERation { LT | GT | IMASk | OMASk }
CALCulate:SEARCh:LIMit:OPERation?
```

Related Commands

[CALCulate\[:SEARCh\]:TEST\[:LIMit\[:STATe\]:MATCH:FILE:LOCation](#) (on page 385)

Arguments

The following table lists the arguments.

Argument	Meaning
LT	The data is less than the limit value.
GT	The data is greater than the limit value.
IMASk	The data is inside the limit mask.
OMASk	The data is outside the limit mask.

You can select the data using the CALCulate:SEARCh:LIMit:OPERation:FEED command.

You can set the limit value using the CALCulate[:SEARCh]:TEST[:LIMit[:STATe]:MATCH:FILE:LOCation command.

You can store and load the limit mask using the CALCulate:SEARCh:LIMit:OPERation:MASK:STORE and CALCulate:SEARCh:LIMit:OPERation:MASK:LOAD commands.

Examples

CALCULATE:SEARCH:LIMIT:OPERATION GT selects "the data is greater than the limit value" for the search condition.

CALCulate:SEARch:LIMit:OPERation:FEED

Sets or queries the data flow to be fed in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

CALCulate:SEARch:LIMit:OPERation:FEED <view>,<trace>

CALCulate:SEARch:LIMit:OPERation:FEED?

Arguments

<view>::=<string> and <trace>::=<string> are listed in the following table.

Source data of the search operation

<view>	<trace>	Meaning
"Spectrum"	"Trace 1" ¹	Trace 1 in the Spectrum view.
	"Trace 2" ¹	Trace 2 in the Spectrum view.
	"Trace 3" ¹	Trace 3 in the Spectrum view.
	"Math Trace"	Math trace in the Spectrum view.
	"Spectrogram Trace"	Spectrogram trace in the Spectrum view.

¹ There is a space character between Trace and the number.

Examples

CALCULATE:SEARCH:LIMIT:OPERATION:FEED "Spectrum","Trace 1" selects the Trace 1 in the Spectrum measurement view for the search operation.

CALCULATE:SEARCH:LIMIT:OPERATION:FEED? might return "Spectrum","Math Trace", indicating that the math trace is used as the source data in the search operation.

CALCulate:SEARch:LIMit:OPERation:MASK:LOAD (No Query Form)

Loads the specified limit mask file for the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

CALCulate:SEARch:LIMit:OPERation:MASK:LOAD <file_name>

Arguments

`<file_name>::=<string>` specifies the file to load the limit mask from. The file extension is .lmt. You can omit the extension.

For the directory of file, refer to [Specifying the File](#) (on page 239) in the MMEMory command section.

Examples

`CALCULATE:SEARCH:LIMIT:OPERATION:MASK:LOAD"Limit1"` loads the limit mask from the `Limit1.lmt` file.

CALCulate:SEARch:LIMit:OPERation:MASK:STORE (No Query Form)

Stores the limit mask to a specified file in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:SEARch:LIMit:OPERation:MASK:STORE <file_name>`

Arguments

`<file_name>::=<string>` specifies the file to store the limit mask to. The file extension is .lmt. You can omit the extension.

For the directory of file, refer to [Specifying the File](#) (on page 239) in the MMEMory command section.

Examples

`CALCULATE:SEARCH:LIMIT:OPERATION:MASK:STORE "Limit1"` stores the limit mask to the `Limit1.lmt` file.

CALCulate:SEARch:LIMit:OPERation:SLIMit

Sets or queries the limit value (in dB) in the search operation.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

`CALCulate:SEARch:LIMit:OPERation:SLIMit <value>`
`CALCulate:SEARch:LIMit:OPERation:SLIMit?`

Related Commands

[CALCulate:SEARch:LIMit:OPERation](#) (on page 599)

Arguments

`<value>::=<NRf>` specifies the limit value in the search operation. Range: -100 to +100 dBm.

Examples

`CALCULATE:SEARCH:LIMIT:OPERATION:SLIMIT -20` sets the limit value to -20 dBm.

CALCulate:SEARch:LIMit:REPort:DATA? (Query Only)

Returns the frequency range(s) that satisfy the search condition.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

CALCulate:SEARch:LIMit:REPort:DATA?

Arguments

None

Returns

<num_range>,<range(1)>,<range(2)>,...,<range(n)>

Where

<num_range>::=<NR1> is the number of ranges that satisfy the condition.

<range(n)>::="<lower_freq(n)>,<upper_freq(n)>" (string) represents the nth frequency range that satisfy the search condition in ascending order.

<lower_freq(n)> and <upper_freq(n)> are the lower and upper frequencies of the range #n, respectively.

Examples

CALCULATE:SEARCH:LIMIT:REPORT:DATA? might return 2,"1.4800E+9,1.5001E+9","1.5002E+9, 1.5200E+9", indicating that the search condition is satisfied in these two ranges 1.48 to 1.5001 GHz and 1.5002 to 1.52 GHz.

CALCulate:SEARch:LIMit:REPort:POINTs? (Query Only)

Returns the number of frequency range(s) that satisfy the search condition.

Conditions

Measurement views: All

Group

Calculate commands

Syntax

CALCulate:SEARch:LIMit:REPort:POINTs?

Arguments

None

Returns

<number>::=<NR1> represents the number of frequency range(s) that satisfy the search condition.

Examples

CALCULATE:SEARCH:LIMIT:REPORT:POINTS? might return 5, indicating that five ranges satisfy the search condition.

CALCulate:SEARch:LIMit:STATe

Sets or queries the search function (enabled or disabled).

Conditions

Measurement views: All

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe { OFF | ON | 0 | 1 }  
CALCulate:SEARch:LIMit:STATe?
```

Arguments

OFF or 0 disables the search function.

ON or 1 enables the search function.

Examples

CALCULATE:SEARCH:LIMIT:STATE ON enables the search function.

CALCulate:SEARch:LIMit:STATe:MATCh:ACQuisition:FORMat

Sets and queries the format in which the acquisition data to be saved in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe:MATCh:ACQuisition:FORMat {TIQ | CSV | MAT}  
CALCulate:SEARch:LIMit:STATe:MATCh:ACQuisition:FORMat?
```

Arguments

TIQ saves acquisition data in .Tiq file format.

CSV saves acquisition data in .csv file format.

MAT saves acquisition data in .Mat file format.

Returns

<String> Either TIQ , CSV or MAT

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:ACQUISITION:FORMAT might return CSV, indicating that the acquisition data is saved in .csv file format.

CALCulate:SEARch:LIMit:STATe:MATCh:BEEP:STATe

Determines the enabling and disabling of Beep check box in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:STATe:MATCH:BEEP:STATe {0 | OFF | 1 | ON}  
CALCulate:SEARCh:LIMit:STATe:MATCH:BEEP:STATe?
```

Arguments

0 or OFF disables the Beep check box

1 or ON enables the Beep check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:BEEP:STATE might return 0, indicating that the Beep check box is disabled.

CALCulate:SEARCh:LIMit:STATe:MATCH:COUNT:STATe

Determines the enabling and disabling of Max files check box in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:STATe:MATCH:COUNt:STATe {0 | OFF | 1 | ON}  
CALCulate:SEARCh:LIMit:STATe:MATCH:COUNt:STATe?
```

Arguments

0 or OFF disables the Max files check box

1 or ON enables the Max files check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:COUNT:STATE might return 0 indicating that the Max files check box is disabled.

CALCulate:SEARCh:LIMit:STATe:MATCH:COUNt:STATe:MAXimum

Sets or queries the Max files value in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:STATe:MATCh:COUNT:STATe:MAXimum<value>  
CALCulate:SEARCh:LIMit:STATe:MATCh:COUNT:STATe:MAXimum?
```

Arguments

<value> = <NR1> Range is 1 to 10000

Returns

<NR1>

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:COUNT:STATE:MAXIMUM might return 250 indicating the value of max files given is 250.

CALCulate:SEARCh:LIMit:STATe:MATCh:FILE:LOCation

Sets or queries the location of the file in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:STATe:MATCh:FILE:LOCation <file_name>  
CALCulate:SEARCh:LIMit:STATe:MATCh:FILE:LOCation?
```

Arguments

<file_name> = <String> Specifies the location of the file

Returns

<String>

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:FILE:LOCATION might return "C:\SignalVu-PC Files", indicating the location of the file is "C:\SignalVu-PC Files".

CALCulate:SEARCh:LIMit:STATe:MATCh:FILE:NAME:BASE

Sets and queries the file name in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe:MATCh:FILE:NAME:BASE <file_name>  
CALCulate:SEARch:LIMit:STATe:MATCh:FILE:NAME:BASE?
```

Arguments

<file_name> = <String> Specifies the name of the file

Returns

<String>

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:FILE:NAME:BASE might return "Sample1", indicating the name of the file is "Sample1".

CALCulate:SEARch:LIMit:STATe:MATCh:PICTure:FORMat

Sets and queries the format in which the picture to be saved in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe:MATCh:PICTure:FORMat {PNG | JPG | BMP}  
CALCulate:SEARch:LIMit:STATe:MATCh:PICTure:FORMat?
```

Arguments

PNG saves picture in png format.

JPG saves picture in jpg format.

BMP saves picture in bmp format.

Returns

<String> Either PNG, JPG or BMP

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:PICTURE:FORMAT might return JPG, indicating that the Picture is saved in jpg format.

CALCulate:SEARch:LIMit:STATe:MATCh:SACQuire:STATe

Determines the enabling and disabling of Stop check box in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:STATe:MATCh:SACQuire:STATe {0 | OFF | 1 | ON}  
CALCulate:SEARCh:LIMit:STATe:MATCh:SACQuire:STATe?
```

Arguments

0 or OFF disables the stop check box

1 or ON enables the stop check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:SACQUIRE:STATE might return 1, indicating that the stop check box is enabled.

CALCulate:SEARCh:LIMit:STATe:MATCh:SDATa:STATe

Determines the enabling and disabling of Save acquisition data check box in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARCh:LIMit:STATe:MATCh:SDATa:STATe {0 | OFF | 1 | ON}  
CALCulate:SEARCh:LIMit:STATe:MATCh:SDATa:STATe?
```

Arguments

0 or OFF disables the Save acquisition data check box

1 or ON enables the Save acquisition data check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:SDATA:STATE might return 1, indicating that the Save acquisition data check box is enabled.

CALCulate:SEARCh:LIMit:STATe:MATCh:SPICture:STATe

Determines the enabling and disabling of Save picture check box in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STAtE:MATCh:SPICture:STAtE {0 | OFF | 1 | ON}  
CALCulate:SEARch:LIMit:STAtE:MATCh:SPICture:STAtE?
```

Arguments

0 or OFF disables the Save picture check box

1 or ON enables the Save picture check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:SPICTURE:STATE might return 1, indicating that the Save picture check box is enabled.

CALCulate:SEARch:LIMit:STAtE:MATCh:STRace:STAtE

Determines the enabling and disabling of Save trace check box in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STAtE:MATCh:STRace:STAtE {0 | OFF | 1 | ON}  
CALCulate:SEARch:LIMit:STAtE:MATCh:STRace:STAtE?
```

Arguments

0 or OFF disables the Save trace check box

1 or ON enables the Save trace check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:MATCH:STRACE:STATE might return 0, indicating that the Save trace check box is disabled.

CALCulate:SEARch:LIMit:STAtE:OPERation

Sets or queries the region in which the test should be performed in mask test xcontrol settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe:OPERation {GT | LT | OMAS | IMAS}
CALCulate:SEARch:LIMit:STATe:OPERation ?
```

Arguments

GT selects “Is greater than” as the region for the test to be performed

LT selects “Is less than” as the region for the test to be performed

OMAS selects “Is Outside mask” as the region for the test to be performed

IMAS selects “Is inside mask” as the region for the test to be performed

Returns

<String> Either GT , LT , OMAS or IMAS

Examples

CALCULATE:SEARCH:LIMIT:STATE:OPERATION might return LT, indicating “Is less than” is selected as the region for the test to be performed.

CALCulate:SEARch:LIMit:STATe:OPERation:FEED

Sets and queries the trace to which the test should be performed in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe:OPERation:FEED <Arg>
CALCulate:SEARch:LIMit:STATe:OPERation:FEED?
```

Arguments

<Arg> =

"Spectrum", "Trace 1" selects Trace 1 in spectrum

"Spectrum", "Trace 2" selects Trace 2 in spectrum

"Spectrum", "Trace 3" selects Trace 3 in spectrum

"Spectrum", "Math Trace" selects math trace in spectrum

"Spectrum", "Spectrogram Trace" selects Spectrogram trace in spectrum

Returns

<String> See Arguments

Examples

`CALCULATE:SEARCH:LIMIT:STATE:OPERATION:FEED` might return "Spectrum","Trace 1", indicating that the test should be performed on "Spectrum","Trace 1".

CALCulate:SEARch:LIMit:STATe:OPERation:MASK:LOAD (No Query Form)

Sets the location of the file which has to be loaded in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

`CALCulate:SEARch:LIMit:STATe:OPERation:MASK:LOAD <file_name>`

Arguments

`<file_name> = <String>` Specifies the location of the file

Returns

None

Examples

`CALCULATE:SEARCH:LIMIT:STATE:OPERATION:MASK:LOAD "C:\SignalVu-PC Files"` loads the data from the file "C:\SignalVu-PC Files".

CALCulate:SEARch:LIMit:STATe:OPERation:MASK:LOWer:STATe

Determines the enabling and disabling of Lower mask check box in mask test editor tab of mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

`CALCulate:SEARch:LIMit:STATe:OPERation:MASK:LOWer:STATe {0 | OFF | 1 | ON}`
`CALCulate:SEARch:LIMit:STATe:OPERation:MASK:LOWer:STATe?`

Arguments

0 or OFF disables the Lower mask check box

1 or ON enables the Lower mask check box

Returns

`<Boolean>` 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:OPERATION:MASK:LOWER:STATE might return 0, indicating that the Lower mask check box is disabled.

CALCulate:SEARch:LIMit:STATe:OPERation:MASK:NEW:AUTO (No Query Form)

Draws a new frequency mask automatically based on a reference trace.

Conditions

Measurement view: Spectrum, DPX, Spectrum

Group

Calculate commands

Syntax

CALCulate:SEARch:LIMit:STATe:OPERation:MASK:NEW:AUTO

Arguments

<x_margin>::<NRf> specifies the X margin (horizontal offset from the reference trace) in Hz.

<y_margin>::<NRf> specifies the Y margin (vertical offset from the reference trace) in dB.

<meas_ID>::<string> specifies the measurement view.

<trace_ID> specifies the reference trace.

The values for the above arguments are listed in the following table for each possible measurement view.

Measurement view	<meas_ID>	<trace_ID>
Spectrum	"specan"	TRACE1 (Trace 1)
		TRACE2 (Trace 2)
		TRACE3 (Trace 3)
		TRACE4 (Math trace
		TRACE5 (Spectrogram trace)
DPX, Spectrum	DPX	TRACE1 (+Peak trace)
		TRACE2 (–Peak trace)
		TRACE3 (Avg trace)
		TRACE4 (Math trace)

Examples

CALCULATE:SEARCH:LIMIT:STATE:OPERATION:MASK:NEW:AUTO "specan",TRACE1 ,7E+6,5 automatically draws a new frequency mask in the Spectrum view based on Trace 1 with a horizontal margin of 7 MHz and a vertical margin of 5 dB.

CALCulate:SEARch:LIMit:STATe:OPERation:MASK:STORE (No Query Form)

Sets the location of the file to which data has to be saved in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe:OPERation:MASK:STORE <file_name>
```

Arguments

<file_name> = <String> Specifies the location of the file

Returns

None

Examples

CALCULATE:SEARCH:LIMIT:STATE:OPERATION:MASK:STORE "C:\SignalVu-PC Files" saves the data to the file "C:\SignalVu-PC Files".

CALCulate:SEARch:LIMit:STATe:OPERation:MASK:UPPer:STATe

Determines the enabling and disabling of Upper mask check box in mask test editor tab of mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe:OPERation:MASK:UPPer:STATe {0 | OFF | 1 | ON}  
CALCulate:SEARch:LIMit:STATe:OPERation:MASK:UPPer:STATe?
```

Arguments

0 or OFF disables the Upper mask check box

1 or ON enables the Upper mask check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE:OPERATION:MASK:UPPER:STATE might return 0, indicating that the Upper mask check box is disabled.

CALCulate:SEARch:LIMit:STATe

Determines the enabling and disabling of Enable test check box in mask test control settings.

Conditions

Measurement view: Spectrum

Group

Calculate commands

Syntax

```
CALCulate:SEARch:LIMit:STATe {0 | OFF | 1 | ON}  
CALCulate:SEARch:LIMit:STATe?
```

Arguments

0 or OFF disables the Enable test check box

1 or ON enables the Enable test check box

Returns

<Boolean> 0,1

Examples

CALCULATE:SEARCH:LIMIT:STATE might return 1, indicating that the Enable test check box is enabled.

CALCulate:SEM:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker on the Spectral Emissions Mask trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:DELTA:X?
```

Arguments

None

Returns

<NRf> Delta marker frequency for the selected marker.

Examples

CALCulate:SEM:MARKer1:DELTA:X? might return 1.28E+6, indicating that the delta marker frequency is 1.28 MHz.

CALCulate:SEM:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the Spectral Emissions Mask trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:DELTA:Y?
```

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

CALCulate:SEM:MARKer1:DELTA:Y? might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:SEM:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the Spectral Emissions Mask trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:MAXimum
```

Arguments

None

Examples

CALCulate:SEM:MARKer1:MAXimum moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:SEM:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the Spectral Emissions Mask trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:PEAK:HIGHer
```

Arguments

None

Examples

`CALCulate:SEM:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:SEM:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the Spectral Emissions Mask trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:PEAK:LEFT
```

Arguments

None

Examples

`CALCulate:SEM:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:SEM:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the Spectral Emissions Mask trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:PEAK:LOWer
```

Arguments

None

Examples

`CALCulate:SEM:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:SEM:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the Spectral Emissions Mask trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:PEAK:RIGHT
```

Arguments

None

Examples

`CALCulate:SEM:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:SEM:MARKer<x>[:SET]:CENTER (No Query Form)

Moves the specified marker to the center frequency.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>[:SET]:CENTER
```

Arguments

None

Examples

`CALCulate:SEM:MARKer1[:SET]:CENTER` moves Marker 1 (M1) to the center frequency.

CALCulate:SEM:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the Spectral Emissions Mask trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

```
CALCulate:SEM:MARKer<x>:X <value>
```


Arguments

<value>: :=<NRf> specifies the horizontal position of the marker.

Examples

CALCULATE:SEM:MARKER1:X 800MHz places Marker 1 (M1) at 800 MHz on the spectrum trace.

CALCulate:SEM:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker on the Spectral Emissions Mask trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Calculate commands

Syntax

CALCulate:SEM:MARKer<x>:Y?

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCULATE:SEM:MARKER1:Y? might return -34.28, indicating Marker 1 (M1) is at -34.28 dBm.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:X:FREQuency

Returns the delta marker frequency for the selected marker in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:X:FREQuency?

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 618)

Arguments

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Delta marker frequency for the selected marker.

Examples

CALCulate:SGRam:MEASview1:MARKer1:DELTA:X:FREQuency? might return 5.95E+6, indicating that the delta marker frequency is 5.95 MHz.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME] (Query Only)

Returns the delta marker time for the selected marker in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]?

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 618)

Arguments

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Delta marker time for the selected marker.

Examples

CALCulate:SGRam:MEASview1:MARKer1:DELTA:X:TIME? might return -1.84E-3, indicating that the delta marker time is -1.84 ms.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:Y (Query Only)

Returns the delta marker amplitude for the selected marker in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:DELTA:Y?

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:DELTA:X\[:TIME\]](#) (on page 618)

Arguments

<x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

CALCulate:SGRam:MEASview1:MARKer1:DELTA:Y? might return -8.45, indicating that the delta marker amplitude is -8.45 dB.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on a line in the spectrogram. The line is selected using the TRACe:SGRam:SElect:LINE command.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:MAXimum

Arguments

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

CALCulate:SGRam:MEASview1:MARKer1:MAXimum moves Marker 1 (M1) to the highest peak on the line.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on a line in the spectrogram. The line is selected using the TRACe:SGRam:SElect:LINE command.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

`CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 620)

Arguments

<x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default y is 1.

Examples

`CALCulate:SGRam:MEASview1:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the line.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on a line in the spectrogram. The line is selected using the `TRACe:SGRam:SElect:LINE` command.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

`CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 621)

Arguments

<x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default y is 1.

Examples

`CALCulate:SGRam:MEASview1:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace of Spectrum Measurement View 1.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on a line in the spectrogram. The line is selected using the `TRACe:SGRam:SElect:LINE` command.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

`CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 619)

Arguments

<x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default y is 1.

Examples

`CALCulate:SGRam:MEASview1:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the line.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on a line in the spectrogram. The line is selected using the `TRACe:SGRam:SElect:LINE` command.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

`CALCulate:SGRam[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 620)

Arguments

<x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default y is 1.

Examples

`CALCulate:SGRam:MEASview1:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace of Spectrogram Measurement View 1.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>[:SET]:CENTer (No Query Form)

Sets the center frequency to the marker frequency in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

```
CALCulate:SGRam[:MEASview<y>]:MARKer<x>[:SET]:CENTer
```

Arguments

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

CALCulate:SGRam:MEASview1:MARKer1:SET:CENTer sets the center frequency to the Marker 1 frequency in the spectrogram.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X:FREQuency

Sets or queries the marker frequency in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

```
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X:FREQuency <value>
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X:FREQuency?
```

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:Y](#) (on page 623)

Arguments

<x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>::=<NRf> specifies the marker frequency.Range: (center frequency) $\pm$ (span)/2.

Returns

<NRf> specifies the marker frequency.

Examples

`CALCulate:SGRam:MEASview1:MARKer1:X:FREQuency 800MHz` places Marker 1 (M1) at 800 MHz on the trace.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X[:TIME]

Sets or queries the marker time in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

```
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X[:TIME] <value>
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:X[:TIME]?
```

Related Commands

[CALCulate:SGRam\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 623)

Arguments

<x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default y is 1.

<value>: :=<NRf> specifies the marker time.

Returns

<NRf> specifies the marker time.

Examples

`CALCulate:SGRam:MEASview1:MARKer1:X:TIME -234.5us` places Marker 1 (M1) at -234.5 µs on the trace.

CALCulate:SGRam[:MEASview<y>]:MARKer<x>:Y (Query Only)

Queries the marker amplitude in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Calculate commands

Syntax

```
CALCulate:SGRam[:MEASview<y>]:MARKer<x>:Y?
```

Related Commands

[CALCulate:SGRam\[:MEASview<x>\]:MARKer<y>:X:TIME](#) (on page 623)

Arguments

<x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCulate:SGRam:MEASview1:MARKer1:Y? might return -34.28, indicating Marker 1 (M1) is at -34.28 dBm.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker on the spectrum trace.

Conditions

Measurement views: Spectrum with the specified Measurement View Number.

The parameter <x> = 1 to 4.

Group

Calculate commands

Syntax

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELTA:X? (QUERY)

Arguments

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> Delta marker frequency for the selected marker.

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:DELTA:X? might return 1.28E+6, indicating that the delta marker frequency is 1.28 MHz.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the spectrum trace.

Conditions

Measurement views: Spectrum with the specified Measurement View Number

Group

Calculate commands

Syntax

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELTA:Y? (QUERY)

Arguments

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:DELta:Y? might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:MAXimum

Moves the selected marker to the highest peak on the spectrum trace.

Conditions

Measurement view: Spectrum with the specified Measurement View Number

Group

Calculate commands

Syntax

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:MAXimum

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:MAXimum moves Marker 1 (M1) to the highest peak on the trace of Spectrum Measurement View 1.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the spectrum trace.

Conditions

Measurement views: Spectrum with the specified Measurement View Number.

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:HIGHer
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:PEAK:HIGHer moves Marker 1 (M1) to the next higher peak in amplitude on the trace of Spectrum Measurement View 1

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the spectrum trace.

Conditions

Measurement views: Spectrum with the specified Measurement View Number.

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LEFT
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:PEAK:LEFT moves Marker 1 (M1) to the next peak to the right on the trace of Spectrum Measurement View 1.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the spectrum trace.

Conditions

Measurement views: Spectrum with the specified Measurement View Number.

Group

Calculate commands.

Syntax

`CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

`CALCulate:SPECTrum:MEASview1:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next lower peak in amplitude on the trace of Spectrum Measurement View 1.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the spectrum trace.

Conditions

Measurement views: Spectrum with the specified Measurement View Number

Group

Calculate commands

Syntax

`CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

`CALCulate:SPECTrum:MEASview1:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace of Spectrum Measurement View 1.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWER:DENSITY? (Query Only)

Returns the power density of the specified marker in the Spectrum measurement.

Conditions

Measurement view: Spectrum with the specified Measurement View Number

The parameter <x> = 0 to 4.

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWer:DENSity? (QUERY)
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NR2> = a floating point value without exponents. It is the power density of the selected marker in dBm/Hz.

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:POWer:DENSity? might return -80.2412563552, indicating that the power density is -80.24 dBm/Hz.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWer:IDENSity?

Returns the integrated power density reading between the MR (reference marker) and the selected marker in the Spectrum measurement.

Conditions

Measurement view: Spectrum with the specified Measurement View Number.

The parameter <x> = 0 to 4.

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWer:IDENSity? <QUERY>
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NR2> = a floating point value without exponents. It is the integrated power density reading between MR (reference marker) and the selected marker in dBm/Hz.

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:POWer:IDENSity? might return -78.5625446112, indicating that the integrated power density is -78.56 dBm/Hz.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWer:INTEgrated? (Query Only)

Returns the integrated power reading between the MR (reference marker) and the selected marker in the Spectrum measurement.

Conditions

Measurement view: Spectrum with the specified Measurement View Number.

The parameter <x> = 0 to 4.

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:POWer:INTEgrated? (QUERY)
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NR2> = a floating point value without exponents. It is the integrated power reading between MR (reference marker) and the selected marker in dBm.

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:POWer:INTEgrated? might return -12.4462022781, indicating the integrated power is -12.45 dBm.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>[:SET]:CENTer (No Query Form)

Sets the center frequency to the marker frequency in the spectrum measurement.

Conditions

Measurement views: Spectrum with the specified Measurement View Number

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>[:SET]:CENTer
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

`CALCulate:SPECTrum:MEASview1:MARKer1:SET:CENTER` sets the center frequency to the marker frequency in the Spectrum Measurement View 1

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:TRACe

Sets or queries the trace on which the specified marker is placed in the spectrum measurement.

Conditions

Measurement views: Spectrum with specified Measurement View

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:TRACe { TRACE1 | TRACE2 | TRACE3 | TRACE4 | TRACE5 }
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:TRACe? (QUERY)
```

Arguments

TRACE1 places the specified marker on Trace 1.

TRACE2 places the specified marker on Trace 2.

TRACE3 places the specified marker on n Trace 3.

TRACE4 places the specified marker on Trace 4 (math trace).

TRACE5 places the specified marker on Trace 5 (spectrogram).

Trace 1 to 3 can be defined as Normal, Average, Max Hold or Min Hold using the command.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

`CALCulate:SPECTrum:MEASview1:MARKer1:TRACe TRACE1` places Marker 1 (M1) on Trace 1 of Spectrum Measurement View.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the spectrum trace.

Conditions

Measurement views: Spectrum with the specified Measurement View Number.

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:X? <QUERY>
```

Arguments

<value>

Range : Start to Stop frequency (left to right edge of the horizontal axis).

Using an out-of-range value causes an execution error (-222, "Data out of range").

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:X 1GHz places Marker 1 (M1) at 1 GHz on the trace of Spectrum Measurement View 1.

CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the spectrum trace

Conditions

Measurement views: Spectrum with the specified Measurement View Number

Group

Calculate commands

Syntax

```
CALCulate:SPECTrum[:MEASview<y>]:MARKer<x>:DELta:Y? (QUERY)
```

Related Commands

[CALCulate:SPECTrum:MARKer<x>:X](#) (on page 630)

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

CALCulate:SPECTrum:MEASview1:MARKer1:DELta:Y? might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:SPURious:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the selected marker on the spectrum trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

CALCulate:SPURious:MARKer<x>:DELTA:X?

Arguments

None

Returns

<NRf> Delta marker frequency for the selected marker.

Examples

CALCULATE:SPURIOUS:MARKER1:DELTA:X? might return 1.28E+6, indicating that the delta marker frequency is 1.28 MHz.

CALCulate:SPURious:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the spectrum trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

CALCulate:SPURious:MARKer<x>:DELTA:Y?

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

CALCULATE:SPURIOUS:MARKER1:DELTA:Y? might return 23.45, indicating that the delta marker amplitude is 23.45 dB.

CALCulate:SPURious:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the spectrum trace.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

```
CALCulate:SPURious:MARKer<x>:MAXimum
```

Arguments

None

Examples

`CALCULATE:SPURIOUS:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:SPURious:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the spectrum trace.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

```
CALCulate:SPURious:MARKer<x>:PEAK:HIGHer
```

Arguments

None

Examples

`CALCULATE:SPURIOUS:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:SPURious:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the spectrum trace.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

```
CALCulate:SPURious:MARKer<x>:PEAK:LEFT
```

Arguments

None

Examples

`CALCULATE:SPURIOUS:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:SPURious:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the spectrum trace.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

`CALCulate:SPURious:MARKer<x>:PEAK:LOWer`

Arguments

None

Examples

`CALCULATE:SPURIOUS:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:SPURious:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the spectrum trace.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

`CALCulate:SPURious:MARKer<x>:PEAK:RIGHT`

Arguments

None

Examples

`CALCULATE:SPURIOUS:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:SPURious:MARKer<x>[:SET]:CENTer (No Query Form)

Sets the center frequency to the marker frequency in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

```
CALCulate:SPURious:MARKer<x>[:SET]:CENTer
```

Arguments

None

Examples

`CALCULATE:SPURIOUS:MARKER1:SET:CENTER` sets the center frequency to the value at Marker 1.

CALCulate:SPURious:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the spectrum trace.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

```
CALCulate:SPURious:MARKer<x>:X <value>  
CALCulate:SPURious:MARKer<x>:X?
```

Arguments

`<value>::=<Nrf>` specifies the horizontal position of the marker.

Range: Start to Stop frequency (left to right edge of the horizontal axis).

The start and stop frequencies are set using the `DISPlay:SPURious:X[:SCALE]:START` and `DISPlay:SPURious:X[:SCALE]:STOP` commands.

Examples

`CALCULATE:SPURIOUS:MARKER1:X 800MHZ` places Marker 1 (M1) at 800 MHz on the spectrum trace.

CALCulate:SPURious:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker on the spectrum trace.

Conditions

Measurement views: Spurious

Group

Calculate commands

Syntax

```
CALCulate:SPURious:MARKer<x>:Y?
```

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker.

Examples

CALCULATE:SPURIOUS:MARKER1:Y? might return -34.28, indicating Marker 1 (M1) is at -34.28 dBm.

CALCulate:SYNC:MARKer<x>:MEASurement

Sets or queries the selected measurement to which the specified marker will be snapped to the peak of the measurement trace.

Conditions

Measurement views: General signal viewing

Group

Calculate commands

Syntax

```
CALCulate:SYNC:MARKer<x>:MEASurement <value>
CALCulate:SYNC:MARKer<x>:MEASurement?
```

Arguments

<x> parameter : 0 to 4; The specified marker must be activated using the CALCulate:MARKer:ADD command.

where

<value> :: {Spectrum : Source 1 : Meas1 | Time Overview : Source 1 : Meas1} etc.

Examples

CALCulate:SYNC:MARKer0:MEASurement? queries the Selected measurement for Auto Sync MR.

CALCulate:SYNC:MARKer1:MEASurement "Time Overview : Source 1 : Meas1" sets the M1 to snap to peak of Time Overview Source 1 Measurement.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:DELTA:X[:TIME]? (Query only)

Returns the delta marker time for the selected marker on the Trellis diagram trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

`CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:DELta:X[:TIME]?`

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:DELta:Y?](#) (on page 637)

Arguments

None

Returns

<NRf> Delta marker time for the selected marker.

Use the `[SENSe]:DDEMod:TIME:UNITs` command to select the time unit: symbols (default) or seconds.

Examples

`CALCulate:TDIagram:MEASview2:MARKer1:DELta:X:TIME?` might return 62.75, indicating that the delta marker time is 62.75 symbols.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:DELta:Y? (Query only)

Returns the delta marker amplitude for the selected marker on the Trellis diagram trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

`CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:DELta:Y?`

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:DELta:X\[:TIME\]?](#) (on page 636)

Arguments

None

Returns

<NRf> Delta marker amplitude for the selected marker in degrees.

Examples

`CALCulate:TDIagram:MEASview2:MARKer1:DELta:Y?` might return -48.26, indicating that the delta marker amplitude is -48.26°.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:MAXimum (No query form)

Moves the selected marker to the highest peak on the Trellis diagram trace.

The parameter <x> = 0 to 4. The specified marker must be activated using CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

```
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:MAXimum
```

Arguments

None

Examples

CALCulate:TDIagram:MEASview1:MARKer1:MAXimum moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No query form)

Moves the selected marker to the next peak higher in amplitude on the Trellis diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram)

Group

Calculate commands

Syntax

```
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:HIGHer
```

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 639)

Arguments

None

Examples

`CALCulate:TDIagram:MEASview2:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No query form)

Moves the selected marker to the next peak to the left on the Trellis diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

`CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 640)

Arguments

None

Examples

`CALCulate:TDIagram:MEASview2:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No query form)

Moves the selected marker to the next peak lower in amplitude on the Trellis diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

`CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 638)

Arguments

None

Examples

`CALCulate:TDIagram:MEASview2:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No query form)

Moves the selected marker to the next peak to the right on the Trellis diagram trace.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

`CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 639)

Arguments

None

Examples

`CALCulate:TDIagram:MEASview2:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:X[:TIME]

Sets or queries the horizontal position (time) of the selected marker in the Trellis diagram measurement.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

```
CALCulate:TDIagram [:MEASview<y>]:MARKer<x>:X[:TIME] <value>
CALCulate:TDIagram:MARKer<x>:X[:TIME]?
```

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 641)

Arguments

<value>: :=<NRf> specifies the horizontal position (time) of the marker. Use the `[SENSe]:DDEMod:TIME:UNITs` command to select the time unit as symbols (default) or seconds.

Examples

`CALCulate:TDIagram:MEASview2:MARKer1:X:TIME 38.5` places Marker 1 (M1) at 38.5 symbols on the trace.

CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:Y? (Query only)

Queries the vertical position of the selected marker in the Trellis diagram measurement.

The parameter <x> = Marker 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Calculate commands

Syntax

```
CALCulate:TDIagram[:MEASview<y>]:MARKer<x>:Y?
```

Related Commands

[CALCulate:TDIagram\[:MEASview<y>\]:MARKer<x>:X\[:TIME\]](#) (on page 640)

Arguments

None

Returns

<NRf> Marker amplitude of the selected marker in degrees.

Examples

CALCulate:TDIagram:MEASview2:MARKer1:Y? might return 212.3, indicating Marker 1 (M1) is at 212.3 °.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker time for the selected marker on the time overview trace.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELTA:X?

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:DELTA:Y?](#) (on page 642)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 1 to 4.

Returns

<NRf> Delta marker time for the selected marker.

Examples

CALCulate:TOVerview:MEASVIEW1:MARKER1:DELTA:X? might return 38.0E-9, indicating that the delta marker time is 38.0 ns.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the time overview trace.

The parameter <x> = 1 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:DELta:Y?`

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:DELta:X?](#) (on page 642)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 1 to 4.

Returns

<NRf> Delta marker amplitude for the selected marker.

Examples

`CALCULATE:TOVERVIEW:MEASVIEW1:MARKER1:DELTA:Y?` might return 23.45, indicating that the delta marker amplitude is 23.45 dB on the trace of Time overview Measurement View 1.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the time overview trace.

Conditions

Measurement views: Time overview displays with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:MAXimum`

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Examples

`CALCULATE:TOVERVIEW:MEASview1:MARKer1:MARKER1:MAXIMUM` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the time overview trace.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:HIGHer`

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:PEAK:LOWer](#) (on page 644)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Examples

`CALCULATE:TOVERVIEW:MEASVIEW1:MARKER1:PEAK:HIGHER` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next peak to the left on the time overview trace.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LEFT`

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:PEAK:RIGHT](#) (on page 645)

Arguments

None

Examples

`CALCULATE:TOVERVIEW:MEASVIEW1:MARKER1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the time overview trace.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:LOWer`

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:PEAK:HIGHer](#) (on page 643)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Examples

`CALCULATE:TOVERVIEW:MEASVIEW1:MARKER1:PEAK:LOWER` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next peak to the right on the time overview trace.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

`CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:PEAK:RIGHT`

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:PEAK:LEFT](#) (on page 644)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Examples

`CALCULATE:TOVERVIEW:MEASVIEW1:MARKER1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:X

Sets or queries the horizontal position of the selected marker on the time overview trace.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:X <value>
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:X?
```

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:Y?](#) (on page 646)

Arguments

<value>::=<NRf> specifies the horizontal position of the specified marker.

Range: (analysis offset) to [(analysis offset) + (analysis length)].

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Returns

<NRf> is a floating point number that is the horizontal position of the specified marker.

Examples

CALCULATE:TOVERVIEW:MEASVIEW1:MARKER1:X 1.5us places Marker 1 (M1) at 1.5 μ s on the trace.

CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the selected marker in the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Calculate commands

Syntax

```
CALCulate:TOVerview[:MEASview<y>]:MARKer<x>:Y?
```

Related Commands

[CALCulate:TOVerview\[:MEASview<y>\]:MARKer<x>:X](#) (on page 645)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Returns

<NRf> Marker amplitude of the selected marker.

Examples

`CALCULATE:TOVERVIEW:MEASVIEW1:MARKER1:Y?` might return `-34.28`, indicating Marker 1 (M1) is at `-34.28 dBm`.

CALculate:TXGain:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker frequency for the specified marker on the trace.

Conditions

Measurement view: Transmission Gain

The parameter `<x>` = 1, 2, 3, 4 is the marker. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALculate:TXGain:MARKer<x>:DELTA:X?`

Returns

`<Nrf>` is the delta marker frequency for the specified marker.

Examples

`CALculate:TXGain:MARKer1:DELTA:X?` might return `1.28E+6`, indicating that the delta marker frequency is `1.28 MHz`.

CALculate:TXGain:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the specified marker on the trace.

Conditions

Measurement view: Transmission Gain

The parameter `<x>` = 1 to 4 is the marker. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALculate:TXGain:MARKer<x>:DELTA:Y?`

Returns

`<Nrf>` is the delta marker amplitude for the specified marker.

Examples

`CALculate:TXGain:MARKer1:DELTA:Y?` might return `23.45`, indicating that the delta marker amplitude for Marker 1 (M1) is `23.45 dB`.

CALculate:TXGain:MARKer<x>:MAXimum (No Query Form)

Moves the specified marker to the highest peak on the trace.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

CALCulate:TXGain:MARKer<x>:MAXimum

Arguments

None

Examples

CALCulate:TXGain:MARKer1:MAXimum moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:TXGain:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the specified marker to the next peak higher in amplitude on the trace.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

CALCulate:TXGain:MARKer<x>:PEAK:HIGHer

Arguments

None

Examples

CALCulate:TXGain:MARKer1:HIGHer moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:TXGain:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the specified marker to the next peak to the left on the trace.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

`CALCulate:TXGain:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALCulate:TXGain:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak to the left on the trace.

CALCulate:TXGain:MARKer<x>:PEAK:LOWer (No Query Form)

-Moves the specified marker to the next peak lower in amplitude on the trace.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:TXGain:MARKer<x>:PEAK:LOWer`

Arguments

None

Examples

`CALCulate:TXGain:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:TXGain:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the specified marker to the next peak to the right on the trace.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the `CALCulate:MARKer:ADD` command.

Group

Calculate commands

Syntax

`CALCulate:TXGain:MARKer<x>:PEAK:RIGHT`

Arguments

None

Examples

`CALCulate:TXGain:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak to the right on the trace.

CALculate:TXGain:MARKer<x>:TRACe

Sets or queries the trace on which the specified marker is placed in the Transmission Gain display.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

```
CALCulate:TXGain:MARKer<x>:TRACe { TRACE1 | TRACE2 | TRACE3 }
CALCulate:TXGain:MARKer<x>:TRACe?
```

Arguments

TRACE1 places the specified marker on Trace 1.

TRACE2 places the specified marker on Trace 2.

TRACE3 places the specified marker on Trace 3.

Returns

See Arguments.

Examples

CALCulate:TXGain:MARKer1:TRACe TRACE1 places Marker 1 (M1) on Trace 1.

CALculate:TXGain:MARKer<x>:X

Sets or queries the horizontal position for the specified marker on the trace.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

```
CALCulate:TXGain:MARKer<x>:X <value>
CALCulate:TXGain:MARKer<x>:X ?
```

Arguments

<value>::=<NRf> specifies the horizontal position of the specified marker.

Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Returns

<NRf> is the horizontal position of the specified marker.

Examples

CALCulate:TXGain:MARKer1:X 800E+6 places Marker 1 (M1) at 800 MHz on the trace.

CALCulate:TXGain:MARKer<x>:Y? (Query Only)

Queries the marker amplitude of the specified marker on the trace.

Conditions

Measurement view: Transmission Gain

The parameter <x> = 0,1,2,3,4 is the marker. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Group

Calculate commands

Syntax

CALCulate:TXGain:MARKer<x>:Y?

Returns

<NRf> is the amplitude at the specified marker position in dB.

Examples

CALCulate:TXGain:MARKer1:Y might return -23.45, indicating that the marker amplitude is -23.45 dB.

CALCulate:WLAN:AD:CONSte:MARKer<x>:DELTA:X[:TIME]? (Query Only)

Returns the time of the specified delta marker on the trace in the Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Calculate commands

Syntax

CALCulate:WLAN:AD:CONSte:MARKer<x>:DELTA:X[:TIME]?

Arguments

<x> = 1,2,3,4 is the marker.

Returns

<NR3>

Examples

CALCulate:WLAN:AD:CONSte:MARKer1:DELTA:X:TIME? might return 3.1494-6, indicating that the frequency of the specified delta between Marker (M1) and MR is 3.1494-6.

CALCulate:WLAN:AD:CONStE:MARKer<x>:MAGNitude? (Query Only)

Queries the marker magnitude of the specified marker in the Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Calculate commands

Syntax

CALCulate:WLAN:AD:CONStE:MARKer<x>:MAGNitude?

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

<NRf> The magnitude for the selected marker

Examples

CALCulate:WLAN:AD:CONStE:MARKer1:MAGNitude? might return 6.261E-3, indicating the magnitude of Marker 1 (M1) is 6.261E-3.

CALCulate:WLAN:AD:CONStE:MARKer<x>:PHASe? (Query Only)

Queries the phase readout of the specified marker in the Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Calculate commands

Syntax

CALCulate:WLAN:AD:CONStE:MARKer<x>:PHASe?

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

<NRf> The phase readout for the selected marker

Examples

CALCulate:WLAN:AD:CONStE:MARKer1:PHASe? might return 9.690, indicating the phase readout of Marker 1 (M1) is 9.7°.

CALCulate:WLAN:AD:CONStE:MARKer<x>:SYMBol? (Query Only)

Queries the symbol of the specified marker in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AD:CONStE:MARKer<x>:SYMBol?
```

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

<NR3> = the symbol of the selected marker

Examples

CALCulate:WLAN:AD:CONStE:MARKer1:SYMBol? might return 3.369E+3, indicating the symbol value of the Marker 1 (M1) is 3.369E+3.

CALCulate:WLAN:AD:CONStE:MARKer<x>:TYPE? (Query Only)

Queries the data type of the specified marker in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AD:CONStE:MARKer<x>:TYPE?
```

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

<String>

Either (Preamble | Header | Data | Guard)

Examples

CALCulate:WLAN:AD:CONStE:MARKer1:TYPE? might return "Preamble", indicating the data type of the selected marker is "Preamble".

CALCulate:WLAN:AD:CONStE:MARKer<x>:VALue? (Query Only)

Queries the value of the selected marker in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:CONSt:MARKer<x>:VALue?`

Arguments

`<x>` = 0,1,2,3,4 is the marker.

Returns

`<NR1>` = the value of the selected marker

Examples

`CALCulate:WLAN:AD:CONSt:MARKer1:VALue?` might return "+1", indicating the value of the Marker 1 (M1) is "+1".

CALCulate:WLAN:AD:CONSt:MARKer<x>:X

Sets or queries the horizontal position of the specified marker on the trace in the 802.11ad Constellation display.

Conditions

Measurement view: 802.11ad Constellation

`<x>` = 0,1,2,3,4 is the marker.

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:CONSt:MARKer<x>:X <value>`

`CALCulate:WLAN:AD:CONSt:MARKer<x>:X?`

Arguments

`<value>= <NRf>` specifies the horizontal position of the marker

Returns

`<NRf>`

Examples

`CALCulate:WLAN:AD:CONSt:MARKer1:X 9.5409090173E-6` places Marker 1 (M1) at 9.540E-6 on the trace.

CALCulate:WLAN:AD:EVM:MARKer<x>:DELTA:X? (Query Only)

Returns the delta marker time for the selected marker on the EVM trace.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:EVM:MARKer<x>:DELTA:X?`

Arguments

<x> = 1,2,3,4 is the marker.

Returns

<NRf> Delta marker time

Examples

`CALCulate:WLAN:AD:EVM:MARKer1:DELTA:X?` might return `1.28E-9`, indicating that the delta marker time for Marker 1 (M1) is 1.28E-9 s.

CALCulate:WLAN:AD:EVM:MARKer<x>:DELTA:Y? (Query Only)

Returns the delta marker amplitude for the selected marker on the EVM trace.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:EVM:MARKer<x>:DELTA:Y?`

Arguments

<x> = 1,2,3,4 is the marker.

Returns

<NRf> = Delta marker amplitude

Examples

`CALCulate:WLAN:AD:EVM:MARKer<x>:DELTA:Y?` might return `23.45`, indicating that the delta marker amplitude for Marker 1 (M1) is 23.45 dB.

CALCulate:WLAN:AD:EVM:MARKer<x>:MAXimum (No Query Form)

Moves the selected marker to the highest peak on the trace in the EVM measurement.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:EVM:MARKer<x>:MAXimum`

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

None

Examples

`CALCulate:WLAN:AD:EVM:MARKer1:MAXimum` moves Marker 1 (M1) to the highest peak on the trace.

CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the selected marker to the next peak higher in amplitude on the EVM trace.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:HIGHer`

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

None

Examples

`CALCulate:WLAN:AD:EVM:MARKer1:PEAK:HIGHer` moves Marker 1 (M1) to the next peak higher in amplitude on the trace.

CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the selected marker to the next significant peak found to the left of the current marker position.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:LEFT`

Arguments

<x>= 0, 1,2,3,4 is the marker

Returns

None

Examples

`CALCulate:WLAN:AD:EVM:MARKer1:PEAK:LEFT` moves Marker 1 (M1) to the next peak found on the left side of the trace.

CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the selected marker to the next peak lower in amplitude on the EVM trace.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:LOWer`

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

None

Examples

`CALCulate:WLAN:AD:EVM:MARKer1:PEAK:LOWer` moves Marker 1 (M1) to the next peak lower in amplitude on the trace.

CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the selected marker to the next significant peak found to the right of the current marker position.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

`CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:RIGHT`

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

None

Examples

`CALCulate:WLAN:AD:EVM:MARKer1:PEAK:RIGHT` moves Marker 1 (M1) to the next peak found on the right side of the trace.

CALCulate:WLAN:AD:EVM:MARKer<x>:X

Sets or queries the horizontal (time) stamp of the selected marker on the EVM trace.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AD:EVM:MARKer<x>:X <value>
CALCulate:WLAN:AD:EVM:MARKer<x>:X?
```

Arguments

where

<x> = 0,1,2,3,4 is the marker.

<value>= <NRf>

Returns

<NRf>

Examples

`CALCulate:WLAN:AD:EVM:MARKer<x>:PEAK:LOWer 5.36` places Marker 1 (M1) at 5.36 μ s on the EVM trace.

CALCulate:WLAN:AD:EVM:MARKer<x>:Y? (Query Only)

Queries the vertical position of the selected marker on the EVM trace.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AD:EVM:MARKer<x>:Y?
```

Arguments

<x> = 0,1,2,3,4 is the marker.

Returns

<NRf> Vertical position of marker

Examples

`CALCulate:WLAN:AD:EVM:MARKer1:Y?` might return `-34.28`, indicating the vertical position of Marker 1 (M1) is -34.28 dBm on the EVM trace.

CALCulate:WLAN:AY:CONSte:MARKer<x>:DELTA:X:[:TIME]? (Query Only)

Query the value of the specified delta marker on the trace in the Constellation display.

You must activate the specified marker by using `CALCulate:MARKer:ADD`.

Conditions

Measurement view: 802.11ay Analysis Constellation

<x> = 1 to 4.

Group

Calculate commands

Syntax

`CALCulate:WLAN:AY:CONSte:MARKer<x>:DELTA:X:[ :TIME]?`

Returns

<NRf>

Units: s (seconds)

Examples

`CALC:WLAN:AY:CONS:MARK1:DELT:X:TIME?` may return `-1.772e-6`, indicating that -1.772e-6 seconds is value of the specified delta marker between Marker 1 and the Reference Marker.

CALCulate:WLAN:AY:CONSte:MARKer<x>:MAGNitude? (Query Only)

Query the marker magnitude of the specified marker in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

<x> = 0 to 4.

Group

Calculate commands

Syntax

`CALCulate:WLAN:AY:CONSte:MARKer<x>:MAGNitude?`

Returns

<NRf> is the magnitude for the specified delta marker.

Examples

`CALC:WLAN:AY:CONS:MARK2:MAGN?` may return `6.261e-3`, indicating that the magnitude for Marker 2 is 6.261e-3.

CALCulate:WLAN:AY:CONStE:MARKer<x>:PHASe? (Query Only)

Query the phase readout of the specified marker in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

<x> = 0 to 4.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:CONStE:MARKer<x>:PHASe?

Returns

<NRf> is the phase readout for the specified marker. Units: degrees

Examples

CALC:WLAN:AY:CONS:MARK3:PHAS? may return 9.690, indicating that the phase readout for Marker 3 is 9.7° degrees.

CALCulate:WLAN:AY:CONStE:MARKer<x>:SYMBol? (Query Only)

Query the Symbol value at which the specified marker is placed.

Conditions

Measurement view: 802.11ay Analysis Constellation

<x> = 0 to 4.

Group

Calculate commands.

Syntax

CALCulate:WLAN:AY:CONStE:MARKer<x>:SYMBol?

Returns

<NR1>

Examples

CALC:WLAN:AY:CONS:MARK1:SYMB? may return 3.369e+3, indicating that the symbol value at which Marker 1 is placed is 3.369e+3.

CALCulate:WLAN:AY:CONStE:MARKer<x>:TYPE? (Query Only)

Query the data type of the specified marker in the Constellation display.

The data type can be Preamble, Header, Data, or Guard, based on the marker position selection in the region.

Conditions

Measurement view: 802.11ay Analysis Constellation

<x> = 0 to 4.

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AY:CONStE:MARKer<x>:TYPE?
```

Returns

<string>

Examples

CALC:WLAN:AY:CONS:MARK1:TYPE? may return Preamble, indicating that the data type for Marker 1 is Preamble.

CALCulate:WLAN:AY:CONStE:MARKer<x>:VALue? (Query Only)

Query the symbol value at which the marker is placed.

Conditions

Measurement view: 802.11ay Analysis Constellation

<x> = 0 to 4.

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AY:CONStE:MARKer<x>:VALue?
```

Returns

<string>

Examples

CALC:WLAN:AY:CONS:MARK1:VAL? may return +1, which indicates the symbol value at which Marker 1 is placed.

CALCulate:WLAN:AY:CONStE:MARKer<x>:X

Set or query the horizontal position of the specified marker on the trace in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

<x> = 0 to 4.

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AY:CONStE:MARKer<x>:X <value>  
CALCulate:WLAN:AY:CONStE:MARKer<x>:X?
```

Arguments

<value>::=<Nrf> specifies the horizontal position of the specified marker.

Range: 0.1 to 10 s (seconds)

Returns

<NRf>

Examples

CALC:WLAN:AY:CONS:MARK1:X 9.5409090173e-6 places the horizontal position of Marker 1 at 9.540e-6 on the trace.

CALC:WLAN:AY:CONS:MARK2:X? may return 9.540e-6, which is the horizontal position of Marker 2 on the trace.

CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:X

Set or query the delta marker value for the specified marker on the EVM trace.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 1 to 4.

You must activate the specified marker by using CALCulate:MARKer:ADD.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:X <NRf>
CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:X?

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

<NRf> is the delta marker value for the specified marker.

Units: s (seconds)

Returns

<NRf>

Examples

CALC:WLAN:AY:EVM:MARK1:DELTA:X 1.28e-9 sets the delta marker value for Marker 1 to 1.28e-9 s.

CALC:WLAN:AY:EVM:MARK2:DELTA:X? may return 1.28e-9, indicating that the delta marker value for Marker 2 is 1.28e-9 s.

CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:Y

Set or query the delta marker amplitude for the specified marker on the EVM trace.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 1 to 4.

You must activate the specified marker by using `CALCulate:MARKer:ADD`.

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:Y <NRf>  
CALCulate:WLAN:AY:EVM:MARKer<x>:DELTA:Y?
```

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

<NRf> is the delta marker amplitude for the specified marker.

Units: dB

Returns

<NRf>

Examples

`CALC:WLAN:AY:EVM:MARK1:DELT:Y 23.45` sets the delta marker amplitude of Marker 1 to 23.45 dB.

`CALC:WLAN:AY:EVM:MARK2:DELT:Y?` may return 23.45, which means the marker amplitude of Marker 2 is 23.45 dB.

CALCulate:WLAN:AY:EVM:MARKer<x>:MAXimum (No Query Form)

Move the specified marker to the highest peak on the trace in the EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 0 to 4.

You must activate the specified marker by using `CALCulate:MARKer:ADD`.

Group

Calculate commands

Syntax

```
CALCulate:WLAN:AY:EVM:MARKer<x>:MAXimum
```

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

None

Examples

`CALC:WLAN:AY:EVM:MARK1:MAX` moves Marker 1 to the highest peak on the trace.

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:HIGHer (No Query Form)

Move the specified marker to the next peak higher in amplitude on the EVM trace.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 0 to 4.

You must activate the specified marker by using CALCulate:MARKer:ADD.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:HIGHer

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

None

Examples

CALC:WLAN:AY:EVM:MARK1:PEAK:HIGH moves Marker 1 to the next peak higher in amplitude on the trace.

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:LEFT (No Query Form)

-Move the specified marker to the next significant peak found to the left of the current marker position.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 0 to 4.

You must activate the specified marker by using CALCulate:MARKer:ADD.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:LEFT

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

None

Examples

CALC:WLAN:AY:EVM:MARK4:PEAK:LEFT moves Marker 4 to the next peak to the left on the trace.

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:LOWer (No Query Form)

Move the specified marker to the next peak lower in amplitude on the EVM trace.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 0 to 4.

You must activate the specified marker by using CALCulate:MARKer:ADD.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:LOWer

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

None

Examples

CALC:WLAN:AY:EVM:MARK2:PEAK:LOW moves Marker 2 to the next peak lower in amplitude on the trace.

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:RIGHT (No Query Form)

Move the specified marker to the next significant peak found to the right of the current marker position.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 0 to 4.

You must activate the specified marker by using CALCulate:MARKer:ADD.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:EVM:MARKer<x>:PEAK:RIGHT

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

None

Examples

CALC:WLAN:AY:EVM:MARK1:PEAK:RIGH moves Marker 1 to the next peak to the right on the trace.

CALCulate:WLAN:AY:EVM:MARKer<x>:X

Set or query the horizontal (time) stamp of the specified marker on the EVM trace.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 0 to 4.

You must activate the specified marker by using CALCulate:MARKer:ADD.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:EVM:MARKer<x>:X <value>

CALCulate:WLAN:AY:EVM:MARKer<x>:X?

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

<value>: :=<NRf> is the specified marker.

Units: μ s

Returns

<NRf>

Examples

CALC:WLAN:AY:EVM:MARK1:X 5e-6 places Marker 1 at 5 μ s on the EVM trace.

CALC:WLAN:AY:EVM:MARK2:X? may return 5e-6, which means Marker 2 is placed at 5 μ s on the EVM trace.

CALCulate:WLAN:AY:EVM:MARKer<x>:Y

Set or query the vertical (EVM) position of the specified marker on the EVM trace.

Conditions

Measurement views: 802.11ay Analysis EVM

<x> = 0 to 4.

You must activate the specified marker by using CALCulate:MARKer:ADD.

Group

Calculate commands

Syntax

CALCulate:WLAN:AY:EVM:MARKer<x>:Y <NRf>

CALCulate:WLAN:AY:EVM:MARKer<x>:Y?

Related Commands

[CALCulate:MARKer:ADD](#) (on page 499)

Arguments

<NRf> is the marker amplitude of the specified marker.

Units: dB

Returns

<NRf>

Examples

`CALC:WLAN:AY:EVM:MARK1:Y -34.28` sets the position of Marker 1 at -34.28 dB on the EVM trace.

`CALC:WLAN:AY:EVM:MARK2:Y?` may return `-34.28`, indicating that Marker 2 is at -34.28 dB on the EVM trace.

CALCulate:WLAN:CONSte:MARKer<x>:FREQuency

Sets or queries the frequency value of the marker on the WLAN Constellation display. The units are either Frequency in Hz or Subcarrier number. To set the units, use the command `[SENSe]:WLAN:UNIT:FREQuency`.

Note that FREQuency is not an actual measurement of frequency, but is the subcarrier offset within the analyzed packet burst.

<x>, which is optional, is the desired marker to use. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CONSte:MARKer<x>:FREQuency <NRf>`

`CALCulate:WLAN:CONSte:MARKer<x>:FREQuency?`

Arguments

Floating point number that indicates the desired subcarrier to which the marker should be moved. Subcarriers are traditionally numbered with both positive and negative offsets from the CF for the modulation scheme. Valid integral values range from `-maxsubcarrier` to `maxsubcarrier`, where the actual values depend on the modulation standard. Specifying a value of <NRf> outside of the range of subcarriers present in the burst selects the nearest valid subcarrier. Subcarriers can also be specified by frequency (also determined by modulation standard).

Returns

Returns a unitless number representing the subcarrier number.

Examples

`CALC:WLAN:CONST:MARK2:FREQ 2.0000` sets the position of Marker 2 (M2) to Subcarrier 2 (assuming the units have been set to Subcarrier).

`CALC:WLAN:CONST:MARK2:FREQ?` might return `2.41575E+9`, indicating that Marker 2 (M2) is positioned at 2.41575 MHz.

CALCulate:WLAN:CONSte:MARKer<x>:MAGNitude? (Query Only)

Returns the magnitude value at the indicated marker position on the WLAN Constellation display.

<x> is optional. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CONSte:MARKer<x>:MAGNitude?`

Returns

Returns a unitless floating point number indicating the magnitude at the selected marker position on the WLAN Constellation display.

Examples

`CALC:WLAN:CONS:MARK1:MAGN?` might return 35 indicating the magnitude at Marker 1 (M1) is 35.

CALCulate:WLAN:CONSte:MARKer<x>:PHASe? (Query Only)

Returns the phase value at the indicated marker position on the WLAN Constellation display, in degrees.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CONSte:MARKer<x>:PHASe?`

Returns

Phase value of the signal in degrees between -180 and +180 as an **ASCII** encoded floating point number in standard engineering notation.

Examples

CALC:WLAN:CONS:MARK1:PHAS? might return 35.74, indicating the phase readout of Marker 1 (M1) is 35.74°.

CALCulate:WLAN:CONSte:MARKer<x>:TIME

Sets the time offset value at the selected marker position on the points trace on the WLAN Constellation display. The units are either Symbols or Seconds. To set/query the units, use the command [SENSe]:WLAN:UNIT:TIME.

Note that TIME is a measurement of neither absolute nor elapsed time, but symbol offset within the analyzed packet burst.

<x>, which is optional, is the desired marker. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

CALCulate:WLAN:CONSte:MARKer<x>:TIME <NRf>

CALCulate:WLAN:CONSte:MARKer<x>:TIME?

Arguments

Floating point number that indicates the 0 based symbol or time offset from the start of packet burst. Valid integral values range from 0 to the number of symbols in the burst. Specifying a value outside of the range of symbols present in the burst selects the nearest valid symbol.

Returns

Returns a unitless integer value in floating point format that represents the symbol associated with the position of the indicated marker, or the time offset.

Examples

CALC:WLAN:CONST:MARK3:TIME -234.5 moves Marker 3 (M3) to the 362.42 μ s position on the trace (assuming the units have been set to Seconds).

CALC:WLAN:CONST:MARK3:TIME? might return 5.0000 indicating that Marker 3 is located at symbol 5 (assuming units have been set to Symbols).

CALCulate:WLAN:CONSte:MARKer<x>:TYPE? (Query Only)

Returns the data type of the subcarrier for data at the indicated marker position - either pilot or data.

<x>, which is optional, is the desired marker. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CONSt:MARKer<x>:TYPE?`

Returns

Returns the decoded value of the subcarrier type to which the marker is attached as an **ASCII** encoded floating point number in standard engineering notation.

Values are:

1.000 if the marker type is a pilot marker.

2.000 if the marker type is a data marker.

Examples

`CALC:WLAN:CONS:MARK2:TYPE?` might return `1.000` indicating Marker 2 (M2) is a pilot marker.

CALCulate:WLAN:CONSt:MARKer<x>:VALue? (Query Only)

Queries the value readout at the selected marker position on the points trace of the WLAN Constellation display.

`<x>`, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CONSt:MARKer<x>:VALue?`

Returns

Floating point number that represents the value readout at the selected marker position.

Examples

`CALC:WLAN:CONS:MARK1:VAL?` might return `2.00`, indicating the value readout at Marker 1 (M1) is 2.

CALCulate:WLAN:CRESPonse:MARKer<x>:DELTA:X? (Query Only)

Queries the delta Subcarrier or frequency value (depending on which units have been set) at the selected marker position on the WLAN Channel Response display.

Use the command `[SENSe]:WLAN:UNIT:FREQuency` to set the units.

`<x>` is the desired marker to query. Marker 0 is not valid for the DELTA queries. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESPonse:MARKer<x>:DELTA:X?`

Returns

Floating point number that represents the delta frequency value at the selected marker position.

Examples

`CALC:WLAN:CRES:MARK2:DELT:X?` might return 1.28E+6 indicating that the delta frequency value for Marker 2 (M2) is 1.28 MHz.

CALCulate:WLAN:CRESPonse:MARKer<x>:DELTA:Y? (Query Only)

Queries the vertical delta value for the points trace at the selected marker position on the WLAN Channel Response display, in dB or degree.

<x> is the desired marker to query. Marker 0 is not valid for the DELTA queries. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Marker 0 and the selected marker must be on the same plot (magnitude or phase); otherwise, it will result in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESPonse:MARKer<x>:DELTA:Y?`

Returns

Returns the vertical delta value for the points trace in dB or degree at the selected marker position.

Examples

`CALC:WLAN:CRES:MARK3:DELT:Y?` might return -30, indicating a vertical delta value of -30 dB at the Marker 3 (M3) position.

CALCulate:WLAN:CRESPonse:MARKer<x>:MAXimum (No Query Form)

Moves the marker to the highest peak on the trace on the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESPonse:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALC:WLAN:CRES:MARK2:MAX` moves the marker to the highest peak on the trace on the WLAN Channel Response display.

CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the marker to the next peak higher in amplitude on the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:HIGHer`

Arguments

None

Examples

`CALC:WLAN:CRES:MARK2:PEAK:HIGHer` moves Marker 2 (M2) to the next peak higher in amplitude on the trace.

CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the marker to the next peak on the left on the trace in the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALC:WLAN:CRES:MARK2:PEAK:LEFT` moves Marker 2 (M2) to the next peak on the left on the trace in the WLAN Channel Response display.

CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the marker to the next peak lower in amplitude on the trace on the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:LOWer`

Arguments

None

Examples

`CALC:WLAN:CRES:MARK2:PEAK:LOW` moves Marker 2 (M2) to the next peak lower on the trace.

CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the marker to the next peak to the right on the trace on the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESPonse:MARKer<x>:PEAK:RIGHT`

Arguments

None

Examples

`CALC:WLAN:CRES:MARK2:PEAK:RIGH` moves Marker 2 (M2) to the next peak to the next peak on the right on the trace.

CALCulate:WLAN:CRESponse:MARKer<x>:X

Sets or queries the value of the horizontal position (units in Frequency or Subcarrier) for the selected marker on the points trace in the WLAN Channel Response display.

To set the units, use the command `[SENSe]:WLAN:UNIT:FREQuency`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESponse:MARKer<x>:X <NRf>`

`CALCulate:WLAN:CRESponse:MARKer<x>:X?`

Arguments

Floating point number that specifies the value of the horizontal position of the marker. Range: Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

`CALC:WLAN:CRES:MARK3:X 22` places Marker 3 at 22 Subcarrier on the trace (assuming the units have been set to Subcarrier).

CALCulate:WLAN:CRESponse:MARKer<x>:Y? (Query Only)

Returns the value of the amplitude at the selected marker position in the WLAN Channel Response measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:CRESponse:MARKer<x>:Y?`

Returns

Floating point number that indicates the amplitude value at the selected marker position in dB or degrees.

Examples

`CALC:WLAN:CRES:MARK1:Y?` might return `33.393856E-3` indicating the amplitude of Marker 1 is 0.033 dB.

CALCulate:WLAN:EVM:MARKer<x>:AVERage:SUBCarrier? (Query Only)

Queries the EVM value at the selected marker position on the average trace on the WLAN EVM display subcarrier graph.

To query the marker value of the points trace, use the query.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:EVM:MARKer<x>:AVERage:SUBCarrier?
```

Returns

Returns a floating point number that represents the EVM value at the selected marker position on the average trace on the WLAN EVM display subcarrier graph.

Examples

CALC:WLAN:EVM:MARK3:AVER:SUBC? might return 16.4, indicating an EVM value of 16.4 percent at the Marker 3 (M3) position on the average trace on the WLAN EVM display subcarrier graph.

CALCulate:WLAN:EVM:MARKer<x>:AVERage:SYMBol? (Query Only)

Queries the EVM value at the selected marker position on the average trace on the WLAN EVM display symbol graph.

To query the marker value of the points trace, use the query.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:EVM:MARKer<x>:AVERage:SYMBol?
```

Returns

Returns a floating point number that represents the EVM value at the selected marker position on the average trace on the WLAN EVM display symbol graph.

Examples

`CALC:WLAN:EVM:MARK3:AVER:SYMB?` might return `14.5`, indicating an EVM value of 14.5 percent at the Marker 3 (M3) position on the average trace on the WLAN EVM display symbol graph.

CALCulate:WLAN:EVM:MARKer<x>:DELTa:SUBCarrier? (Query Only)

Queries the delta Subcarrier or frequency value (depending on which units have been set) at the selected marker position on the WLAN EVM display.

Use the command `[SENSe]:WLAN:UNIT:FREQuency` to set the units.

`<x>`, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTa queries. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:EVM:MARKer<x>:DELTa:SUBCarrier?`

Returns

Returns a floating point number that represents the delta subcarrier or frequency value at the selected marker position on the WLAN EVM display.

Examples

`CALC:WLAN:EVM:MARK3:DELTa:SUBCarrier?` might return `9.375 MHz`, indicating a delta frequency value of 9.375 MHz at the Marker 3 (M3) position.

CALCulate:WLAN:EVM:MARKer<x>:DELTa:SYMBol? (Query Only)

Queries the delta time value in seconds or symbols (depending on which units have been set) at the selected marker position on the WLAN EVM display.

Use the command `[SENSe]:WLAN:UNIT:TIME` to set the units.

`<x>`, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTa queries. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:EVM:MARKer<x>:DELTA:SYMBOL?`

Returns

Returns the delta time value at the selected marker position on the WLAN EVM display.

Examples

`CALC:WLAN:EVM:MARK3:DELTA:SYMB?` might return `4.0E-6` μ s, indicating a delta time value of 4 μ s at the Marker 3 (M3) position (assuming the units have been set to Seconds).

CALCulate:WLAN:EVM:MARKer<x>:DELTA:Y? (Query Only)

Queries the vertical delta value for the points trace at the selected marker position on the WLAN EVM display.

<x>, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTA queries. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:EVM:MARKer<x>:DELTA:Y?`

Returns

Returns the vertical delta value for the points trace at the selected marker position.

Examples

`CALC:WLAN:EVM:MARK3:DELTA:Y?` might return `-212.91`, indicating a vertical delta value of -212.91 percent at the Marker 3 (M3) position.

CALCulate:WLAN:EVM:MARKer<x>:FREQUENCY

Sets or queries the frequency value of the marker on the WLAN EVM display. The units are either Frequency in Hz or Subcarrier number. To set the units, use the command `[SENSe]:WLAN:UNIT:FREQUENCY`.

Note that FREQUENCY is not an actual measurement of frequency, but is the subcarrier offset within the analyzed packet burst.

<x>, which is optional, is the desired marker to use. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:EVM:MARKer<x>:FREQuency <NRf>
CALCulate:WLAN:EVM:MARKer<x>:FREQuency?
```

Arguments

Floating point number that indicates the desired subcarrier or frequency to which the marker should be moved. Subcarriers are traditionally numbered with both positive and negative offsets from the CF for the modulation scheme. Valid integral values range from $-\text{maxsubcarrier}$ to maxsubcarrier , where the actual values depend on the modulation standard. Specifying a value of <NRf> outside of the range of subcarriers present in the burst selects the nearest valid subcarrier. Subcarriers can also be specified by frequency (also determined by modulation standard).

Returns

Returns a unitless number representing the subcarrier number or frequency in Hz.

Examples

`CALC:WLAN:EVM:MARK2:FREQ 2.0000` sets the position of Marker 2 (M2) to Subcarrier 2 (assuming the units have been set to Subcarrier).

`CALC:WLAN:EVM:MARK2:FREQ?` might return `2.41575E+9`, indicating that Marker 2 (M2) is positioned at 2.41575 MHz.

CALCulate:WLAN:EVM:MARKer<x>:TIME

Sets the vertical marker value of the points trace on the WLAN EVM display. The units are either Symbols or Seconds. To set/query the units, use the command `[SENSe]:WLAN:UNIT:TIME`.

Note that TIME is a measurement of neither absolute nor elapsed time, but symbol offset within the analyzed packet burst.

<x> , which is optional, is the desired marker to use. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:EVM:MARKer<x>:TIME <NRf>
CALCulate:WLAN:EVM:MARKer<x>:TIME?
```

Arguments

Floating point number that indicates the 0 based symbol or time offset from the start of packet burst. Valid integral values range from 0 to the number of symbols in the burst. Specifying a value outside of the range of symbols present in the burst selects the nearest valid symbol.

Returns

Returns a unitless integer value in floating point format that represents the symbol associated with the position of the indicated marker, or the time offset.

Examples

`CALC:WLAN:EVM:MARK3:TIME 362.42E-6` moves Marker 3 (M3) to the 362.42 μ s position on the trace (assuming the units have been set to Seconds).

`CALC:WLAN:EVM:MARK3:TIME?` might return 5.0000 indicating that Marker 3 is located at symbol 5 (assuming units have been set to Symbols).

CALCulate:WLAN:EVM:MARKer<x>:VALue? (Query Only)

Queries the EVM value at the selected marker position on the points trace of the WLAN EVM display.

The EVM value of a marker on the average trace is queried by using the and `CALCulate:WLAN:EVM:MARKer<x>:AVERage:SYMBol?` queries.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:EVM:MARKer<x>:VALue?`

Returns

Returns the EVM value at the selected marker position on the WLAN EVM display.

Examples

`CALC:WLAN:EVM:MARK3:VAL?` might return 11.9, indicating an EVM value of 11.9 percent for Marker 3 (M3).

CALCulate:WLAN:FLATness:MARKer<x>:MAXimum (No Query Form)

Positions the specified marker at the maximum point on the trace in the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:FLATness:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALC:WLAN:FLAT:MARK2:MAX` positions the Marker 2 (M2) at the maximum point on the trace.

CALCulate:WLAN:FLATness:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the specified marker to the next peak higher in amplitude on the trace on the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:FLATness:MARKer<x>:PEAK:HIGHer`

Arguments

None

Examples

`CALC:WLAN:FLAT:MARK2:PEAK:HIGH` moves Marker 2 (M2) to the next peak higher in amplitude on the trace.

CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the specified marker to the next peak to the left on the trace in the WLAN Spectral Flatness display.

NOTE: *WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.*

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax


```
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LEFT
```

Arguments

None

Examples

`CALC:WLAN:FLAT:MARK2:PEAK:LEFT` moves Marker 2 (M2) to the next peak to the left on the trace.

CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the marker to the next peak lower in amplitude on the trace on the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:LOWer
```

Arguments

None

Examples

`CALC:WLAN:FLAT:MARK2:PEAK:LOW` moves Marker 2 (M2) to the next peak lower on the trace.

CALCulate:WLAN:FLATness:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the marker to the next peak to the right on the trace on the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:FLATness:MARKer<x>:PEAK:RIGHT
```

Arguments

None

Examples

`CALC:WLAN:FLAT:MARK2:PEAK:RIGH` moves Marker 2 (M2) to the next peak to the next peak on the right on the trace.

CALCulate:WLAN:FLATness:MARKer<x>:X

Sets or queries the horizontal position (units in Frequency or Subcarrier) for the selected marker on the points trace in the WLAN Spectral Flatness display.

To set the units, use the command `[SENSe]:WLAN:UNIT:FREQuency`.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:FLATness:MARKer<x>:X <Nrf>`
`CALCulate:WLAN:FLATness:MARKer<x>:X?`

Arguments

Floating point number that specifies the horizontal position of the marker. Range:

Start to Stop frequency (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

`CALC:WLAN:FLAT:MARK3:X 22` places Marker 3 at 22 Subcarrier on the trace (assuming the units have been set to Subcarrier).

CALCulate:WLAN:FLATness:MARKer<x>:Y? (Query Only)

Returns the value of the amplitude (vertical position) at the selected marker position in the WLAN Spectral Flatness measurement.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:FLATness:MARKer<x>:Y?`

Returns

Floating point number that indicates the amplitude at the selected marker position in dB.

Examples

`CALC:WLAN:FLAT:MARK1:Y?` might return `33.393856E-3` indicating the amplitude of Marker 1 is 0.033 dB.

CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SUBCarrier? (Query Only)

Queries the value readout at the selected marker position on the average trace on the WLAN Magnitude Error display.

To query the value readout on the symbol graph, use `CALCulate:WLAN: MERRor:MARKer<x>:AVERage:SYMBOL?`

`<x>`, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SUBCarrier?`

Returns

Returns a floating point number that represents the value readout at the selected marker position on the average trace on the WLAN Magnitude Error display subcarrier graph.

Examples

`CALC:WLAN:MERR:MARK2:AVERAGE:SUBC?` might return 16.4, indicating a value readout of 16.4 percent at the Marker 3 (M3) position on the average trace on the WLAN Magnitude Error display subcarrier graph.

CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SYMBOL? (Query Only)

Queries the value readout at the selected marker position on the average trace on the WLAN Magnitude Error display.

To query the value readout on the subcarrier graph, use

`CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SUBCarrier?`

`<x>`, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SYMBol?`

Returns

Returns a floating point number that represents the value readout at the selected marker position on the average trace on the WLAN Magnitude Error display symbol graph.

Examples

`CALC:WLAN:MERR:MARK2:AVERAGE:SUBC?` might return `14.5`, indicating a Magnitude Error value of 14.5 percent at the Marker 3 (M3) position on the average trace on the WLAN Magnitude Error display.

CALCulate:WLAN:MERRor:MARKer<x>:DELTA:SUBCarrier? (Query Only)

Queries the delta Subcarrier or frequency value (depending on which units have been set) at the selected marker position on the WLAN Magnitude Error display.

Use the command `[SENSe]:WLAN:UNIT:FREQuency` to set the units.

`<x>`, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTA queries. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:MERRor:MARKer<x>:DELTA:SUBCarrier?`

Returns

Returns a floating point number that represents the delta subcarrier or frequency value at the selected marker position on the WLAN Magnitude Error display.

Examples

`CAL:WLAN:MERR:MARK2:DELTA:SUBC?` might return `9.375` MHz, indicating a delta frequency value of 9.375 MHz at the Marker 3 (M3) position.

CALCulate:WLAN:MERRor:MARKer<x>:DELTA:SYMBol? (Query Only)

Queries the delta time value in seconds or symbols (depending on which units have been set) at the selected marker position on the WLAN Magnitude Error display.

Use the command `[SENSe]:WLAN:UNIT:TIME` to set the units.

<x>, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTa queries. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:MERRor:MARKer<x>:DELTA:SYMBOL?
```

Returns

Returns the delta time value at the selected marker position on the WLAN Magnitude Error display.

Examples

CALC:WLAN:MERR:MARK3:DELTA:SYMB? might return 4.0E-6 μ s, indicating a delta time value of 4 μ s at the Marker 3 (M3) position (assuming the units have been set to Seconds).

CALCulate:WLAN:MERRor:MARKer<x>:DELTA:Y? (Query Only)

Queries the vertical delta value for the points trace at the selected marker position on the WLAN Magnitude Error display.

<x>, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTa queries. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:MERRor:MARKer<x>:DELTA:Y?
```

Returns

Returns the vertical delta value for the points trace at the selected marker position.

Examples

CALC:WLAN:MERR:MARK3:DELTA:Y? might return -212.91, indicating a vertical delta value of -212.91 percent at the Marker 3 (M3) position.

CALCulate:WLAN:MERRor:MARKer<x>:FREQuency

Sets or queries the frequency value of the marker on the WLAN Magnitude Error display. The units are either Frequency in Hz or Subcarrier number. To set the units, use the command [SENSe]:WLAN:UNIT:FREQuency.

Note that FREQuency is not an actual measurement of frequency, but is the subcarrier offset within the analyzed packet burst.

<x>, which is optional, is the desired marker to use. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:MERRor:MARKer<x>:FREQuency <NRf>
CALCulate:WLAN:MERRor:MARKer<x>:FREQuency?
```

Arguments

Floating point number that indicates the desired subcarrier or frequency to which the marker should be moved. Subcarriers are traditionally numbered with both positive and negative offsets from the CF for the modulation scheme. Valid integral values range from –maxsubcarrier to maxsubcarrier, where the actual values depend on the modulation standard. Specifying a value of <NRf> outside of the range of subcarriers present in the burst selects the nearest valid subcarrier. Subcarriers can also be specified by frequency (also determined by modulation standard).

Returns

Returns a unitless number representing the subcarrier number or frequency value in Hz.

Examples

CALC:WLAN:MERR:MARK2:FREQ 2.0000 sets the position of Marker 2 (M2) to Subcarrier 2 (assuming the units have been set to Subcarrier).

CALC:WLAN:MERR:MARK2:FREQ? might return 2.41575E+9, indicating that Marker 2 (M2) is positioned at 2.41575 MHz.

CALCulate:WLAN:MERRor:MARKer<x>:TIME

Sets the time offset value at the selected marker position on the points trace on the WLAN Magnitude Error display. The units are either Symbols or Seconds. To set/query the units, use the command [SENSe]:WLAN:UNIT:TIME.

Note that TIME is a measurement of neither absolute nor elapsed time, but symbol offset within the analyzed packet burst.

<x>, which is optional, is the desired marker. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:MERRor:MARKer<x>:TIME <NRf>`

`CALCulate:WLAN:MERRor:MARKer<x>:TIME?`

Arguments

Floating point number that indicates the 0 based symbol or time offset from the start of packet burst. Valid integral values range from 0 to the number of symbols in the burst. Specifying a value outside of the range of symbols present in the burst selects the nearest valid symbol.

Returns

Returns a unitless integer value in floating point format that represents the time associated with the position of the indicated marker, or the time offset.

Examples

`CALC:WLAN:MERR:MARK3:TIME 362.42E-6` moves Marker 3 (M3) to the 362 42 μ s position on the trace (assuming the units have been set to Seconds).

`CALC:WLAN:MERR:MARK3:TIME?` might return 5.0000 indicating that Marker 3 is located at symbol 5 (assuming units have been set to Symbols).

CALCulate:WLAN:MERRor:MARKer<x>:VALue? (Query Only)

Queries the value readout at the selected marker position on the points trace of the WLAN Magnitude Error display.

The value readout of a marker on the average trace is queried by using the and `CALCulate:WLAN:MERRor:MARKer<x>:AVERage:SYMBol?` queries.

`<x>`, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:MERRor:MARKer<x>:VALue?`

Returns

Returns the decoded symbol value at the selected marker position on the WLAN Magnitude Error display.

Examples

`CALC:WLAN:MERR:MARK3:VAL?` might return 11.9, indicating a value readout of 11.9 for Marker 3 (M3).

CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SUBCarrier? (Query Only)

Queries the Phase Error value at the selected marker position on the average trace on the WLAN Phase Error display subcarrier graph.

To query the marker value of the points trace, use the query.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SUBCarrier?

Returns

Returns a floating point number that represents the Phase Error value at the selected marker position on the average trace on the WLAN Phase Error display subcarrier graph.

Examples

CALC:WLAN:PERR:MARK2:AVERAGE:SUBC? might return 16.4, indicating a Phase Error value of 16.4 percent at the Marker 3 (M3) position on the average trace on the WLAN Phase Error display subcarrier graph.

CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SYMBol? (Query Only)

Queries the Phase Error value at the selected marker position on the average trace on the WLAN Phase Error display symbol graph.

To query the marker value of the points trace, use the query.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Group

Calculate commands

Syntax

CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SYMBol?

Returns

Returns a floating point number that represents the Phase Error value at the selected marker position on the average trace on the WLAN Phase Error display symbol graph.

Examples

`CALC:WLAN:PERR:MARK2:AVERAGE:SUBC?` might return 14.5, indicating a Phase Error value of 14.5 percent at the Marker 3 (M3) position on the average trace on the WLAN Phase Error display symbol graph.

CALCulate:WLAN:PERRor:MARKer<x>:DELTa:SUBCarrier? (Query Only)

Queries the delta Subcarrier or frequency value (depending on which units have been set) at the selected marker position on the WLAN Phase Error display.

Use the command `[SENSe]:WLAN:UNIT:FREQuency` to set the units.

<x>, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTa queries. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PERRor:MARKer<x>:DELTa:SUBCarrier?`

Returns

Returns a floating point number that represents the delta subcarrier or frequency value at the selected marker position on the WLAN Phase Error display.

Examples

`CAL:WLAN:PERR:MARK2:DELTA:SUBC?` might return 9.375 MHz, indicating a delta frequency value of 9.375 MHz at the Marker 3 (M3) position.

CALCulate:WLAN:PERRor:MARKer<x>:DELTa:SYMBOL? (Query Only)

Queries the delta time value in seconds or symbols (depending on which units have been set) at the selected marker position on the WLAN Phase Error display.

Use the command `[SENSe]:WLAN:UNIT:TIME` to set the units.

<x>, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTa queries. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PERRor:MARKer<x>:DELTA:SYMBOL?`

Returns

Returns the delta time value at the selected marker position on the WLAN Phase Error display.

Examples

`CALC:WLAN:PERR:MARK3:DELTA:SYMB?` might return `4.0E-6` μ s, indicating a delta time value of 4 μ s at the Marker 3 (M3) position (assuming the units have been set to Seconds).

CALCulate:WLAN:PERRor:MARKer<x>:DELTA:Y? (Query Only)

Queries the vertical delta value for the points trace at the selected marker position on the WLAN Phase Error display.

`<x>`, which is optional, is the desired marker to query. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Marker 0 is not valid for the DELTA queries. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PERRor:MARKer<x>:DELTA:Y?`

Returns

Returns the vertical delta value for the points trace at the selected marker position.

Examples

`CALC:WLAN:PERR:MARK3:DELTA:Y?` might return `-212.91`, indicating a vertical delta value of -212.91 percent at the Marker 3 (M3) position.

CALCulate:WLAN:PERRor:MARKer<x>:FREQuency

Sets or queries the frequency value at the selected marker position on the WLAN Phase Error display. The units are either Frequency in Hz or Subcarrier number. To set the units, use the command `[SENSe]:WLAN:UNIT:FREQuency`.

Note that FREQuency is not an actual measurement of frequency, but is the subcarrier offset within the analyzed packet burst.

`<x>`, which is optional, is the desired marker to use. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:PERRor:MARKer<x>:FREQuency <NRf>
CALCulate:WLAN:PERRor:MARKer<x>:FREQuency?
```

Arguments

Floating point number that indicates the desired subcarrier or frequency to which the marker should be moved. Subcarriers are traditionally numbered with both positive and negative offsets from the CF for the modulation scheme. Valid integral values range from $-\text{maxsubcarrier}$ to maxsubcarrier , where the actual values depend on the modulation standard. Specifying a value of <NRf> outside of the range of subcarriers present in the burst selects the nearest valid subcarrier. Subcarriers can also be specified by frequency (also determined by modulation standard).

Returns

Returns a unitless number representing the subcarrier number or frequency value in Hz.

Examples

`CALC:WLAN:PERR:MARK2:FREQ 2.0000` sets the position of Marker 2 (M2) to Subcarrier 2 (assuming the units have been set to Subcarrier).

`CALC:WLAN:PERR:MARK2:FREQ?` might return `2.41575E+9`, indicating that Marker 2 (M2) is positioned at 2.41575 MHz.

CALCulate:WLAN:PERRor:MARKer<x>:TIME

Sets the time value (offset) at the selected marker position on the points trace on the WLAN Phase Error display. The units are either Symbols or Seconds. To set/query the units, use the command `[SENSe]:WLAN:UNIT:TIME`.

Note that TIME is a measurement of neither absolute nor elapsed time, but symbol offset within the analyzed packet burst.

<x> , which is optional, is the desired marker to use. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Commanding a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:PERRor:MARKer<x>:TIME <NRf>
CALCulate:WLAN:PERRor:MARKer<x>:TIME?
```

Arguments

Floating point number that indicates the 0 based symbol or time offset from the start of packet burst. Valid integral values range from 0 to the number of symbols in the burst. Specifying a value outside of the range of symbols present in the burst selects the nearest valid symbol.

Returns

Returns a unitless integer value in floating point format that represents the symbol associated with the position of the indicated marker, or the time offset.

Examples

`CALC:WLAN:PERR:MARK3:TIME 362.42E-6` moves Marker 3 (M3) to the 362.42 μ s position on the trace (assuming the units have been set to Seconds).

`CALC:WLAN:PERR:MARK3:TIME?` might return 5.0000 indicating that Marker 3 is located at symbol 5 (assuming units have been set to Symbols).

CALCulate:WLAN:PERRor:MARKer<x>:VALue? (Query Only)

Queries the Phase Error value at the selected marker position on the points trace of the WLAN Phase Error display.

The Phase Error value of a marker on the average trace is queried by using the and

`CALCulate:WLAN:PERRor:MARKer<x>:AVERage:SYMBol?` queries.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PERRor:MARKer<x>:VALue?`

Returns

Returns the Phase Error value at the selected marker position on the WLAN Phase Error display.

Examples

`CALC:WLAN:PERR:MARK3:VAL?` might return 11.9, indicating a Phase Error value of 11.9 percent for Marker 3 (M3).

CALCulate:WLAN:PVTime:MARKer<x>:DELTA:X? (Query Only)

Returns the delta time value at the selected marker position in the WLAN Power vs. Time display.

<x> is the desired marker to query. Marker 0 is not valid for the DELTA queries. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PVTime:MARKer<x>:DELTA:X?`

Returns

Floating point number that represents the delta time value at the selected marker position.

Examples

`CALC:WLAN:PVT:MARK2:DELTA:X?` might return `1.28E-6` indicating that the delta time value for Marker 2 (M2) is 1.28 μ s.

CALCulate:WLAN:PVTime:MARKer<x>:DELTA:Y? (Query Only)

Queries the vertical delta value for the points trace at the selected marker position on the WLAN Power vs. Time display, using the currently selected Amplitude unit. Set/query the amplitude unit with the command `SENSe:POWer:UNITs`.

`<x>` is the desired marker to query. Marker 0 is not valid for the DELTA queries. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. Valid integral values range from 1 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PVTime:MARKer<x>:DELTA:Y?`

Returns

Returns the vertical delta value for the points trace in the current Amplitude units at the selected marker position

.

Examples

`CALC:WLAN:PVT:MARK3:DELTA:Y?` might return `-12.91`, indicating a vertical delta value of -12.91 dB at the Marker 3 (M3) position.

CALCulate:WLAN:PVTime:MARKer<x>:MAXimum (No Query Form)

Positions the specified marker at the maximum point on the trace in the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PVTime:MARKer<x>:MAXimum`

Arguments

None

Examples

`CALC:WLAN:PVT:MARK2:MAX` positions the Marker 2 (M2) at the maximum point on the trace.

CALCulate:WLAN:PVTime:MARKer<x>:PEAK:HIGHer (No Query Form)

Moves the specified marker to the next peak higher in amplitude on the trace on the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PVTime:MARKer<x>:PEAK:HIGHer`

Arguments

None

Examples

`CALC:WLAN:PVT:MARK2:PEAK:HIGHer` moves Marker 2 (M2) to the next peak higher in amplitude on the trace.

CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LEFT (No Query Form)

Moves the specified marker to the next peak on the left on the trace in the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LEFT`

Arguments

None

Examples

`CALC:WLAN:PVT:MARK2:PEAK:LEFT` moves Marker 2 (M2) to the next peak on the left on the trace in the WLAN Power vs. Time display.

CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LOWer (No Query Form)

Moves the marker to the next peak lower in amplitude on the trace on the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

CALCulate:WLAN:PVTime:MARKer<x>:PEAK:LOWer

Arguments

None

Examples

CALC:WLAN:PVT:MARK2:PEAK:LOW moves Marker 2 (M2) to the next peak lower on the trace.

CALCulate:WLAN:PVTime:MARKer<x>:PEAK:RIGHT (No Query Form)

Moves the marker to the next peak to the right on the trace on the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

CALCulate:WLAN:PVTime:MARKer<x>:PEAK:RIGHT

Arguments

None

Examples

CALC:WLAN:PVT:MARK2:PEAK:RIGHT moves Marker 2 (M2) to the next peak on the right on the trace.

CALCulate:WLAN:PVTime:MARKer<x>:X

Sets or queries the value of the horizontal position (in seconds) for the selected marker on the points trace in the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PVTime:MARKer<x>:X <Nrf>`

`CALCulate:WLAN:PVTime:MARKer<x>:X?`

Arguments

Floating point number that specifies the value of the horizontal position of the marker. Range: Start to Stop time (left to right edge of the horizontal axis). Using an out-of-range value causes an execution error (-222, "Data out of range").

Examples

`CALC:WLAN:PVT:MARK3:X 1E-6` places Marker 3 at 1 μ s on the trace.

CALCulate:WLAN:PVTime:MARKer<x>:Y? (Query Only)

Returns the amplitude (vertical position) at the selected marker position in the WLAN Power vs. Time display, using the currently selected Amplitude units. You can set/query the Amplitude units with the command `SENSe:POWer:UNITs`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:PVTime:MARKer<x>:Y?`

Returns

Floating point number that indicates the amplitude at the selected marker position in the currently selected Amplitude units.

Examples

`CALC:WLAN:PVT:MARK1:Y?` might return `33.393856E-3` indicating the amplitude at the Marker 1 position is 0.033 dBm.

CALCulate:WLAN:TABLE:MARKer<x>:FREQuency

Assigns or queries the frequency value of the marker in the WLAN Symbol Table. The units are either Frequency in Hz or Subcarrier number. To set the units, use the command `[SENSe]:WLAN:UNIT:FREQuency`.

Note that FREQuency is not an actual measurement of frequency, but is the subcarrier offset within the analyzed packet burst.

`<x>`, which is optional, is the desired marker to assign. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If `<x>` is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands `CALCulate:WLAN:AY:CONSt:MARKer<x>:DELTA:X[:TIME]? (Query Only)`

Syntax

```
CALCulate:WLAN:TABLE:MARKer<x>:FREQuency <NRf>
CALCulate:WLAN:TABLE:MARKer<x>:FREQuency?
```

Arguments

Floating point number that indicates the desired subcarrier or frequency to which the marker should be assigned. Subcarriers are traditionally numbered with both positive and negative offsets from the CF for the modulation scheme. Valid integral values range from `–maxsubcarrier` to `maxsubcarrier`, where the actual values depend on the modulation standard. Specifying a value of `<NRf>` outside of the range of subcarriers present in the burst selects the nearest valid subcarrier. Subcarriers can also be specified by frequency (also determined by modulation standard).

Returns

Returns a unitless number representing the subcarrier number or frequency in Hz.

Examples

`CALC:WLAN:TABLE:MARK3:FREQ 2.0000` assigns Subcarrier 2 to Marker 3 (M3) (assuming the units have been set to Subcarrier).

`CALC:WLAN:TABLEM:MARK2:FREQ?` might return `2.00000E+9`, indicating that Marker 2 (M2) is assigned 2.00 MHz.

CALCulate:WLAN:TABLE:MARKer<x>:TIME

Sets or queries the vertical value at the selected marker position on the WLAN Symbol Table. The units are either Symbols or Seconds. To set/query the units, use the command `[SENSe]:WLAN:UNIT:TIME`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

```
CALCulate:WLAN:TABLE:MARKer<x>:TIME <NRf>
CALCulate:WLAN:TABLE:MARKer<x>:TIME?
```

Arguments

Floating point number that indicates the 0 based symbol or time offset from the start of packet burst. Valid integral values range from 0 to the number of symbols in the burst. Specifying a value outside of the range of symbols present in the burst selects the nearest valid symbol.

Returns

Returns a unitless integer value in floating point format that represents the symbol associated with the indicated marker, or the time offset.

Examples

`CALC:WLAN:TABLE:MARK3:TIME 362.42E-6` assigns 362.42 μ s to Marker 3 (M3) (assuming the units have been set to Seconds).

`CALC:WLAN:TABLE:MARK3:TIME?` might return 5.0000 indicating that symbol 5 is assigned to Marker 3.

CALCulate:WLAN:TABLE:MARKer<x>:VALue? (Query Only)

Queries the decoded symbol value at the selected marker position on the WLAN Symbol Table display.

<x>, which is optional, is the desired marker to query. 0 indicates MR, the reference marker. 1, 2, 3, etc. indicate markers M1, M2, M3, etc. If <x> is not supplied, the command works on the currently selected marker. Valid integral values range from 0 to the number of markers active for the display. Querying a marker which does not exist results in an execution error.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Calculate commands

Syntax

`CALCulate:WLAN:TABLE:MARKer<x>:VALue?`

Returns

Returns the decoded symbol value at the selected marker position on the WLAN Symbol Table display.

Examples

`CALC:WLAN:MERR:MARK3:VAL?` might return 11.9, indicating a decoded symbol value of 11.9 for Marker 3 (M3).

Calibration commands

CALibration:ABORt (No query form)

Aborts any actions related to the alignments in progress.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

`CALibration:ABORt`

Arguments

None

Examples

`CALibration:ABORt` aborts any actions related to the alignments in progress.

CALibration:AUTO

Sets or queries whether or not to run alignments automatically.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

```
CALibration:AUTO { OFF | ON | 0 | 1 }
CALibration:AUTO?
```

Arguments

OFF or 0 runs alignments on user request.

Use the *CAL command to perform alignments.

ON or 1 runs alignments as needed without user intervention.

You have to restart measurement if interrupted.

Examples

CALibration:AUTO ON runs alignments automatically as needed.

CALibration:CORRection:EXTernal:EDIT<x>:LABel

Sets or queries the name of the external loss table.

The parameter <x> = 1 to 3 represent the External Loss Table 1 to 3, respectively.

NOTE: This command has been replaced with `INPut:CORRection:EXTernal:EDIT<x>:LABel`.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

```
CALibration:CORRection:EXTernal:EDIT<x>:LABel name
CALibration:CORRection:EXTernal:EDIT<x>:LABel?
```

Arguments

name::=<string> specifies the name of the external loss table.

Examples

CALibration:CORRection:EXTernal:EDIT<x>:LABel? 'Sample Table 1' names the External Loss Table 1 "Sample Table 1".

CALibration:CORRection:EXTernal:EDIT<x>:NEW (No query form)

Creates a new external loss table.

The parameter <x> = 1 to 3 represent the External Loss Table 1 to 3, respectively.

NOTE: This command has been replaced with `INPut:CORRection:EXTErnal:EDIT<x>:NEW`.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

```
CALibration:CORRection:EXTErnal:EDIT<x>:NEW
<freq(1)>,<loss(1)>,<freq(2)>,<loss(2)>,...,<freq(n)>,<loss(n)>
```

Arguments

<freq(n)>,<loss(n)> specifies a pair of frequency (<NR3> in Hz) and loss (<NR3> in dB) in the external loss table.

The setting range is:

- RSA5103B – 0 to 3 GHz
- RSA5115B – 0 to 15 GHz
- RSA5126B – 0 to 26.5 GHz

Loss: -50 to +80 dB. (A negative value means a gain.)

Examples

`CALibration:CORRection:EXTErnal:EDIT<x>:NEW 1.0E+9,2.2, 1.5E+9,2.3` creates the External Loss Table 1 specifying the loss of 2.2 dB and 2.3 dB at the frequency of 1 GHz and 1.5 GHz, respectively.

CALibration:CORRection:EXTErnal:EDIT<x>:STATE

Determines whether to enable or disable the external loss table.

The parameter <x> = 1 to 3 represent the External Loss Table 1 to 3, respectively.

NOTE: This command has been replaced with `INPut:CORRection:EXTErnal:EDIT<x>:STATE`.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

```
CALibration:CORRection:EXTErnal:EDIT<x>:STATE { OFF | ON | 0 | 1 }
CALibration:CORRection:EXTErnal:EDIT<x>:STATE?
```

Arguments

OFF or 0 disables the external loss table.

ON or 1 enables the external loss table.

NOTE: You can enable one or more tables at the same time.

Examples

`CALibration:CORRection:EXTErnal:EDIT<x>:STATe? ON` enables the External Loss Table 3.

CALibration:CORRection:EXTErnal:GAIN[:MAGNitude]

Sets or queries the external gain value. It can be enabled or disabled using the `INPut:CORRection:EXTErnal:GAIN:STATe` command.

NOTE: This command has been replaced with `INPut:CORRection:EXTErnal:GAIN[:MAGNitude]`.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

`CALibration:CORRection:EXTErnal:GAIN[:MAGNitude] <value>`
`CALibration:CORRection:EXTErnal:GAIN[:MAGNitude]?`

Arguments

`<value>: :=<NRf>` specifies the external gain value.

Range: -50 to +30 dB.

Examples

`CALibration:CORRection:EXTErnal:GAIN[:MAGNitude]? -10` sets the external gain to -10 dB.

CALibration:CORRection:EXTErnal:GAIN:STATe

Determines whether to enable or disable the external gain value.

NOTE: This command has been replaced with `INPut:CORRection:EXTErnal:GAIN[:MAGNitude]`.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

`CALibration:CORRection:EXTErnal:GAIN:STATe { OFF | ON | 0 | 1 }`
`CALibration:CORRection:EXTErnal:GAIN:STATe?`

Related Commands

[INPut:CORRection:EXTErnal:GAIN\[:MAGNitude\]](#) (on page 701)

Arguments

`OFF` or `0` disables the external gain value.

`ON` or `1` enables the external gain value.

Examples

`CALibration:CORRection:EXTeRnal:GAIN:STATe ON` enables the external gain value.

CALibration:CORRection:EXTeRnal:PROBe:CONNect? (Query only)

Queries whether the external probe is connected to the analyzer or not.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

`CALibration:CORRection:EXTeRnal:PROBe:CONNect?`

Arguments

None

Returns

{ 0 | 1 }

0 indicates that the external probe is not connected to the analyzer.

1 indicates that the external probe is connected to the analyzer.

Examples

`CALibration:CORRection:EXTeRnal:PROBe:CONNect?` might return ON, indicating that the external probe is connected to the analyzer.

CALibration:CORRection:EXTeRnal:PROBe[:MAGNitude]? (Query only)

Queries the external probe attenuation.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

`CALibration:CORRection:EXTeRnal:PROBe[:MAGNitude]?`

Arguments

None

Returns

`<attenuation>::=<NRf>` The probe attenuation value in dB.

Examples

`CALibration:CORRection:EXTErnal:PROBe[:MAGNitude]?` might return 10, indicating that the probe attenuation is 10 dB.

CALibration:CORRection:EXTErnal:PROBe:STATe

Determines whether or not to correct data for the external probe attenuation.

Conditions

Measurement views: All

Group

Calibration commands

Syntax

```
CALibration:CORRection:EXTErnal:PROBe:STATe { OFF | ON | 0 | 1 }  
CALibration:CORRection:EXTErnal:PROBe:STATe?
```

Arguments

`OFF` or `0` does not correct data for the external probe attenuation.

`ON` or `1` corrects data for the external probe attenuation.

Examples

`CALibration:CORRection:EXTErnal:PROBe:STATe ON` corrects data for the external probe attenuation.

CALibration:CORRection:EXTErnal:TYPE

Sets or queries the data type to apply the external loss table corrections.

NOTE: This command has replaced with `INPut:CORRection:EXTErnal:TYPE`

Conditions

Measurement views: All

Group

Calibration commands

Syntax

```
CALibration:CORRection:EXTErnal:TYPE { TRACe | DATA }  
CALibration:CORRection:EXTErnal:TYPE
```

Related Commands

[INPut:CORRection:EXTErnal:GAIN:STATe](#) (on page 1520)

Arguments

`TRACe` selects traces in the Spectrum, Spectrogram, Spurious, and Amplitude versus Time views. Selecting `TRACe` disables the `CALibration:CORRection:EXTErnal:GAIN:STATe` command.

`DATA` selects all acquired data. Selecting `DATA` enables the `CALibration:CORRection:EXTErnal:GAIN:STATe` command.

Examples

`CALibration:CORRection:EXTeRnal:TYPE TRACe` selects traces to apply the external loss table corrections.

CALibration:TXGain:ABORt (No query form)

Cancels a calibration.

Conditions

Measurement view: Transmission Gain, Perform Calibration window

Group

Calibration commands

Syntax

`CALibration:TXGain:ABORt`

Arguments

None

Examples

`CALibration:TXGain:ABORt` cancels a calibration that is in process.

CALibration:TXGain[:ALL] (No query form)

Performs a calibration using the current settings.

Conditions

Measurement view: Transmission Gain, Perform Calibration window

Group

Calibration commands

Syntax

`CALibration:TXGain[:ALL]`

Arguments

None

Examples

`CALibration:TXGain[:ALL]` performs a calibration using the current settings.

CALibration:TXGain:FINish? (Query only)

Queries whether or not the calibration is completed.

Conditions

Measurement view: Transmission Gain, Perform Calibration window

Group

Calibration commands

Syntax

`CALibration:TXGain:FINish?`

Returns

0 indicates calibration is in progress.

1 indicates calibration is completed.

Examples

`CALibration:TXGain:FINish?` might return 1, indicating that the calibration is completed.

CALibration:TXGain:STAt? (Query only)

Queries the calibration state for the Transmission Gain measurement.

Conditions

Measurement view: Transmission Gain

Group

Calibration commands

Syntax

`CALibration:TXGain:STAt?`

Returns

CALIBRATED means that the unit has been calibrated and is making measurements at the same frequencies at which it was calibrated.

CALIBRATED? means that the unit has been calibrated, but one or more of the operating conditions has changed. Operating conditions are Tracking Generator Output Power, Reference Level, Preamp On/Off, RF Attenuation, or Temperature (>5 °C from the calibrated temperature).

INTERPOLATED means that the unit has been calibrated, but is making measurements at frequencies other than the calibration points and is interpolating the calibration between points.

Examples

`CALibration:TXGain:STAt?` might return **CALIBRATED**, indicating that the measurement has been calibrated with the current settings.

*CLS (No Query Form)

Clears the analyzer status data structures. Refer to Section 3, *Status and Events*, for the register information.

The *CLS command clears the following

- the Event Queue
- the Standard Event Status Register (SESR)
- the Status Byte Register (except the MAV bit; see below)

If the *CLS command immediately follows an <EOI>, the Output Queue and MAV bit (Status Byte Register bit 4) are also cleared. MAV indicates information is in the output queue. The device clear (DCL) GPIB control message will clear the output queue and thus MAV. *CLS does not clear the output queue or MAV. (A complete discussion of these registers and bits, and of event handling in general is described in the *Status and Events* section)

*CLS can suppress a Service Request that is to be generated by an *OPC. This will happen if a hardcopy output or single sequence acquisition operation is still being processed when the *CLS command is executed.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*CLS

Related Commands

[*ESE](#) (on page 1097)

[*ESR?](#) (on page 1098)

[*SRE](#) (on page 2496)

[*STB?](#) (on page 2496)

Arguments

None

Examples

*CLS clears the analyzer status data structures.

Display commands

DISPlay:ACPower:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the Channel power and ACPR view.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

```
DISPlay:ACPower:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:ACPower:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker in the graph.

ON or 1 shows the readout for the selected marker in the graph.

Examples

DISPlay:ACPower:MARKer:SHOW:STATe ON shows the readout for the selected marker in the graph.

DISPlay:ACPower:PLEVel:SHOW:STATe

Determines whether to show or hide the power levels in the Channel power and ACPR view.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

```
DISPlay:ACPower:PLEVel:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:ACPower:PLEVel:SHOW:STATe?
```

Arguments

OFF or 0 hides the power levels in the graph.

ON or 1 shows the power levels in the graph.

Examples

DISPlay:ACPower:PLEVel:SHOW:STATe ON shows the power levels in the graph.

DISPlay:ACPower:RESet:SCALE (No Query Form)

Resets the horizontal and vertical scale to the default values described below in the Channel power and ACPR view.

Vertical offset = Reference level, Vertical scale = 100 dB,

Horizontal offset = Center frequency, and Horizontal scale = Default span

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

```
DISPlay:ACPower:RESet:SCALE
```

Arguments

None

Examples

DISPlay:ACPower:RESet:SCALE resets the horizontal and vertical scale to the default values.

DISPlay:ACPower:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Channel power and ACPR

Group

Programmer Manual

Display commands

Syntax

```
DISPlay:ACPower:WINDow:TRACe:GRATICule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:ACPower:WINDow:TRACe:GRATICule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Examples

DISPLAY:ACPOWER:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the screen.

DISPlay:ACPower:X[:SCALE]

Sets or queries the horizontal range of the Channel power and ACPR graph.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

```
DISPlay:ACPower:X[:SCALE] <value>
DISPlay:ACPower:X[:SCALE]?
```

Related Commands

[DISPlay:ACPower:X\[:SCALE\]:OFFSET](#) (on page 709)

Arguments

<value>::=<NRf> specifies the horizontal range.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

DISPLAY:ACPOWER:X:SCALE 10MHz sets the horizontal range to 10 MHz.

DISPlay:ACPower:X[:SCALE]:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the Channel power and ACPR view.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

```
DISPlay:ACPower:X[:SCALe]:AUTO
```

Arguments

None

Examples

DISPLAY:ACPOWER:X:SCALE:AUTO rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:ACPower:X[:SCALe]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the Channel power and ACPR graph.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

```
DISPlay:ACPower:X[:SCALe]:OFFSet <value>
```

```
DISPlay:ACPower:X[:SCALe]:OFFSet?
```

Related Commands

[DISPlay:ACPower:X\[:SCALe\]](#) (on page 708)

Arguments

<value>::=<Nrf> specifies the minimum horizontal value.

Range: [(center frequency) - (X scale) × 0.9] to [(center frequency) + (X scale) × 0.9]

Examples

DISPlay:ACPower:X:SCALE:OFFSet 1.45GHz sets the minimum horizontal value to 1.45 GHz in the Channel power and ACPR graph.

DISPlay:ACPower:Y[:SCALe]

Sets or queries the vertical range of the channel power and ACPR graph.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

```
DISPlay:ACPower:Y[:SCALe] <value>
```

```
DISPlay:ACPower:Y[:SCALe]?
```

Related Commands

[DISPlay:ACPower:Y\[:SCALE\]:OFFSet](#) (on page 710)

Arguments

<value>::=<NRf> specifies the vertical range. Range: 0.1 to 200 dB.

Examples

DISPLAY:ACPOWER:Y:SCALE 100 sets the vertical range to 100 dB in the Channel power and ACPR graph.

DISPlay:ACPower:Y[:SCALE]:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the Channel power and ACPR view.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

DISPlay:ACPower:Y[:SCALE]:AUTO

Arguments

None

Examples

DISPLAY:ACPOWER:Y:SCALE:AUTO rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:ACPower:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) in the Channel power and ACPR graph.

Conditions

Measurement views: Channel power and ACPR

Group

Display commands

Syntax

DISPlay:ACPower:Y[:SCALE]:OFFSet <value>
DISPlay:ACPower:Y[:SCALE]:OFFSet?

Related Commands

[DISPlay:ACPower:Y\[:SCALE\]](#) (on page 709)

Arguments

<value>::=<NRf> specifies the vertical offset. Range: -170 to +50 dBm.

Examples

DISPLAY:ACPOWER:Y:SCALE:OFFSET -12.5 sets the vertical offset to -12.5 dBm in the Channel power and ACPR graph.

DISPlay:ADEMod:MEASview:DElete (No Query Form)

Deletes the measurement view in the general purpose analog demodulation measurements.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:ADEMod:MEASview:DElete { AM | FM | PM }
```

Arguments

The following table lists the arguments.

Analog demodulation measurement views

Argument	View
AM	AM measurement (modulation factor versus time)
FM	FM measurement (frequency deviation versus time)
PM	PM measurement (phase deviation versus time)

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement is not running") will be returned.

Examples

DISPlay:ADEMOD:MEASVIEW:DELETEAM deletes the AM measurement view.

DISPlay:ADEMod:MEASview:NEW (No Query Form)

Displays a new measurement view in the general purpose analog demodulation measurements.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:ADEMod:MEASview:NEW { AM | FM | PM }
```

Arguments

The following table lists the arguments.

Analog demodulation measurement views

Argument	View
AM	AM measurement (modulation factor versus time)

Argument	View
FM	FM measurement (frequency deviation versus time)
PM	PM measurement (phase deviation versus time)

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

`DISPLAY:ADEMOD:MEASVIEW:NEWAM` creates the AM measurement view.

DISPlay:ADEMod:MEASview:SElect

Selects a measurement view on the screen in the general purpose analog demodulation measurements. The query command returns the currently selected view.

Selecting a measurement optimizes it. Other measurements may be optimized as a side effect. Refer to the `DISPlay:WINDow:OPTimized:MEASurement?` query.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:ADEMod:MEASview:SElect { AM | FM | PM }
DISPlay:ADEMod:MEASview:SElect?
```

Arguments

The following table lists the arguments.

Analog demodulation measurement views

Argument	View
AM	AM measurement (modulation factor versus time)
FM	FM measurement (frequency deviation versus time)
PM	PM measurement (phase deviation versus time)

If you attempt to select a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Examples

`DISPLAY:ADEMOD:MEASVIEW:SELECT AM` selects the AM measurement view.

DISPlay:{AM|FM|PM}:MARKer:SHOW:STATe

Determines whether to show or hide the marker readout in the AM/FM/PM measurement view.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:{AM|FM|PM}:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:{AM|FM|PM}:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the marker readout on the screen.

ON or 1 shows the marker readout on the screen.

Examples

DISPlay:AM:MARKer:SHOW:STATe ON shows the marker readout in the AM measurement view.

DISPlay:{AM|FM|PM}:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:{AM|FM|PM}:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:{AM|FM|PM}:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Examples

DISPlay:AM:WINDow:TRACe:GRATICULE:GRID:STATe ON shows the graticule grid on the AM measurement view.

DISPlay:{AM|FM|PM}:X:RSCale (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the AM/FM/PM measurement display.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:{AM|FM|PM}:X:RSCale
```

Arguments

None

Examples

`DISPLAY:AM:X:RSCL` rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:{AM|FM|PM}:X[:SCALE]:AUTO (No Query Form)

Sets the horizontal scale automatically to fit the waveform to the screen in the AM/FM/PM measurement display.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

`DISPlay:{AM|FM|PM}:X[:SCALE]:AUTO`

Arguments

None

Examples

`DISPLAY:AM:X:SCALE:AUTO` sets the horizontal scale automatically to fit the waveform to the screen in the AM/FM/PM measurement display.

DISPlay:{AM|FM|PM}:X[:SCALE]:FULL

Sets or queries the horizontal scale (full-scale time) of the AM/FM/PM measurement graph.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

`DISPlay:{AM|FM|PM}:X[:SCALE]:FULL <value>`

`DISPlay:{AM|FM|PM}:X[:SCALE]:FULL?`

Arguments

`<value>::=<NRf>` specifies the horizontal scale in full-scale time.

Range: 0 to 1027 s.

Examples

`DISPlay:AM:X:SCALE:FULL 35us` sets the horizontal scale to 35 μ s in the AM measurement.

DISPlay:{AM|FM|PM}:X[:SCALE]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the AM/FM/PM measurement graph.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:{AM|FM|PM}:X[:SCALe]:OFFSet <value>
DISPlay:{AM|FM|PM}:X[:SCALe]:OFFSet?
```

Arguments

<value>::=<Nrf> specifies the minimum horizontal value.

Range: $-0.9 \times (\text{horizontal scale})$ to $+0.9 \times (\text{horizontal scale})$

Examples

DISPLAY:AM:X:SCALE:OFFSET 20.075us sets the minimum horizontal value to 20.075 μ s.

DISPlay:{AM|FM|PM}:Y:RSCale (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the AM/FM/PM measurement display.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:{AM|FM|PM}:Y:RSCale
```

Arguments

None

Examples

DISPLAY:AM:Y:RSCALE rescales the vertical scale automatically to fit the waveform to the screen in the AM measurement.

DISPlay:{AM|FM|PM}:Y[:SCALe]

Sets or queries the vertical range of the AM/FM/PM measurement graph.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

```
DISPlay:{AM|FM|PM}:Y[:SCALe] <value>
DISPlay:{AM|FM|PM}:Y[:SCALe]?
```

Arguments

<value>::=<NRf> specifies the vertical range.

The setting range depends on measurements as shown in the following table.

Setting range

Measurement	Setting range
AM	1% to 500%
FM	10 Hz to 120 MHz
PM	10° to 400°

Examples

DISPLAY:AM:Y:SCALE 75 sets the vertical range to 75% in the AM measurement graph.

DISPlay:{AM|FM|PM}:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (center point of the vertical axis) in the AM/FM/PM measurement graph.

Conditions

Measurement views: General purpose analog demodulation

Group

Display commands

Syntax

DISPlay:{AM|FM|PM}:Y[:SCALE]:OFFSet <value>

DISPlay:{AM|FM|PM}:Y[:SCALE]:OFFSet?

Arguments

<value>::=<NRf> specifies the vertical offset.

The setting range depends on measurements as shown in the following table.

Setting range

Measurement	Setting range
AM	−500% to +500%
FM	−(maxVertScale * (1 + 1.1) * 0.5) to +(maxVertScale * (1 + 1.1) * 0.5)
PM	−180° to +180°

Examples

DISPLAY:AM:Y:SCALE:OFFSET −12.5 sets the vertical offset to −12.5% in the AM measurement graph.

DISPlay:ANTenna:AZIMuth:SHOW:STATe

The command checks the Show Compass box in the UI to display the compass. The query form returns whether or not the Show Compass box is checked.

Group

Display commands

Syntax

```
DISPlay:ANTenna:AZIMuth:SHOW:STATe { 1 | 0 | ON | OFF }  
DISPlay:ANTenna:AZIMuth:SHOW:STATe?
```

Arguments

1 or ON sets compass to show.

0 or OFF sets compass to hide.

Returns

1 or ON means compass is set to show.

0 or OFF means compass is set to hide.

DISPlay:AUDio:MEASview:DELeTe (No Query Form)

Deletes the specified audio analysis view.

Conditions

Measurement views: Audio Spectrum, Audio Summary

Group

Display commands

Syntax

```
DISPlay:AUDio:MEASview:DELeTe { SPECTrum | SUMMary }
```

Arguments

SPECTrum deletes the Audio Spectrum view.

SUMMary deletes the Audio Summary view.

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Examples

```
DISPLAY:AUDIO:MEASVIEW:DELETE SUMMary deletes the Audio Summary view.
```

DISPlay:AUDio:MEASview:NEW (No Query Form)

Displays a new audio analysis view.

Conditions

Measurement views: Audio Spectrum, Audio Summary

Group

Display commands

Syntax

```
DISPlay:AUDio:MEASview:NEW { SPECTrum | SUMMary }
```

Arguments

SPECTrum creates a new Audio Spectrum view.

SUMMary creates a new Audio Summary view.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

```
DISPlay:AUDio:MEASVIEW:NEW SUMMary creates a new Audio Summary view.
```

DISPlay:AUDio:MEASview:SElect

Selects an audio analysis view on the screen. The query returns the currently selected view.

Selecting a measurement optimizes it. Other measurements may be optimized as a side effect. Refer to the `DISPlay:WINDow:OPTimized:MEASurement? query`.

Conditions

Measurement views: Audio Spectrum, Audio Summary

Group

Display commands

Syntax

```
DISPlay:AUDio:MEASview:SElect { SPECTrum | SUMMary }  
DISPlay:AUDio:MEASview:SElect?
```

Arguments

SPECTrum creates a new Audio Spectrum view.

SUMMary creates a new Audio Summary view.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

```
DISPlay:AUDio:MEASVIEW:SELECT SPECTrum selects the Audio Spectrum  
display.
```

DISPlay:AUDio:SPECTrum:FREQuency:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

DISPlay:AUDio:SPECTrum:FREQuency:AUTO

Arguments

None

Examples

DISPlay:AUDio:SPECTrum:FREQuency:AUTO rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:AUDio:SPECTrum:FREQuency:[SCALE]:START

Sets or queries the start frequency (left edge) of the audio spectrum graph.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

DISPlay:AUDio:SPECTrum:FREQuency:[SCALE]:START <value>
DISPlay:AUDio:SPECTrum:FREQuency:[SCALE]:START?

Related Commands

[DISPlay:AUDio:SPECTrum:FREQuency:\[SCALE\]:STOP](#) (on page 719)

Arguments

<value> ::= <NRf> specifies the start frequency.

Examples

DISPlay:AUDio:SPECTrum:FREQuency:[SCALE]:START 0 sets the start frequency to 0 Hz.

DISPlay:AUDio:SPECTrum:FREQuency:[SCALE]:STOP

Sets or queries the stop frequency (right edge) of the audio spectrum graph.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

DISPlay:AUDio:SPECTrum:FREQuency:[SCALE]:STOP <value>
DISPlay:AUDio:SPECTrum:FREQuency:[SCALE]:STOP?

Related Commands

[DISPlay:AUDio:SPECTrum:FREQuency:\[SCALE\]:START](#) (on page 719)

Arguments

<value> ::= <NRf> specifies the stop frequency.

Examples

DISPLAY:AUDIO:SPECTRUM:FREQUENCY:[SCALE]:STOP 20E+3 sets the stop frequency to 20 kHz.

DISPlay:AUDio:SPECtrum:MARKer:SHOW:STATe

Determines whether to show or hide the readouts for the selected marker in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

```
DISPlay:AUDio:SPECtrum:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:AUDio:SPECtrum:MARKer:SHOW:STATe
```

Arguments

OFF or 0 hides the readout for the selected marker in the view.

ON or 1 shows the readout for the selected marker in the view.

Examples

DISPlay:AUDio:SPECtrum:MARKer:SHOW:STATe ON shows the readout for the selected marker in the audio spectrum view.

DISPlay:AUDio:SPECtrum:RESet:SCALE (No Query Form)

Resets the horizontal and vertical scales in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

```
DISPlay:AUDio:SPECtrum:RESet:SCALE
```

Arguments

None

Examples

DISPlay:AUDio:SPECTRUM:RESET:SCALE resets the horizontal and vertical scales.

DISPlay:AUDio:SPECtrum:SCALE:LOG:STATe

Determines whether or not to set the horizontal axis logarithmic in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

```
DISPlay:AUDio:SPECTrum:SCALe:LOG:STATe { OFF | ON | 0 | 1 }  
DISPlay:AUDio:SPECTrum:SCALe:LOG:STATe?
```

Arguments

OFF or 0 sets the horizontal axis linear.

ON or 1 sets the horizontal axis logarithmic.

Examples

DISPlay:AUDio:SPECTrum:SCALe:LOG:STATe ON sets the horizontal axis logarithmic in the audio spectrum view.

DISPlay:AUDio:SPECTrum:SHOW:NHARmonic:THReshold

Sets or queries the appearance of the non-harmonic threshold in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

```
DISPlay:AUDio:SPECTrum:SHOW:NHARmonic:THReshold { SHADEd | LINE | OFF }  
DISPlay:AUDio:SPECTrum:SHOW:NHARmonic:THReshold?
```

Arguments

SHADEd uses shading for the non-harmonic threshold area in the display.

LINE uses a line for the non-harmonic threshold area.

OFF turns off the non-harmonic threshold in the display.

Examples

DISPlay:AUDio:SPECTrum:SHOW:NHARMONIC:THRESHOLD SHADEd uses shading to identify the non-harmonic threshold area in the audio spectrum view.

DISPlay:AUDio:SPECTrum:TABLE:SHOW:STATe

Determines whether to show or hide the results table in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

```
DISPlay:AUDio:SPECTrum:TABLE:SHOW:STATe { OFF | ON | 0 | 1 }
DISPlay:AUDio:SPECTrum:TABLE:SHOW:STATe?
```

Arguments

OFF or 0 disables (hides) the results table in the audio spectrum view.

ON or 1 shows the results table in the audio spectrum view.

Examples

DISPLAY:AUDIO:SPECTRUM:TABLE:SHOW:STATE OFF hides the results table in the audio spectrum view.

DISPlay:AUDio:SPECTrum:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

```
DISPlay:AUDio:SPECTrum:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:AUDio:SPECTrum:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Examples

DISPLAY:AUDIO:SPECTRUM:WINDOW:TRACE:GRATICULE:GRID:STATE OFF hides the graticule grid on the screen.

DISPlay:AUDio:SPECTrum:Y:[SCALE]

Sets or queries the vertical scale in the audio spectrum view. The range of the scale is from 0.1 dB to 200 dB.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

```
DISPlay:AUDio:SPECTrum:Y:[SCALE] <value>
DISPlay:AUDio:SPECTrum:Y:[SCALE]?
```

Arguments

<value> ::= <NRf> specifies the vertical scale value in dB.

Examples

`DISPLAY:AUDIO:SPECTRUM:Y:[SCALE] 100` sets the vertical scale to 100 dB.

DISPlay:AUDio:SPECTrum:Y:[SCALE]:AUTO (No Query Form)

Rescales the vertical axis automatically in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

`DISPlay:AUDio:SPECTrum:Y:[SCALE]:AUTO`

Arguments

None

Examples

`DISPLAY:AUDIO:SPECTRUM:Y:[SCALE]:AUTO` rescales the vertical axis automatically.

DISPlay:AUDio:SPECTrum:Y:[SCALE]:OFFSet

Sets or queries the vertical position (offset) in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Display commands

Syntax

`DISPlay:AUDio:SPECTrum:Y:[SCALE]:OFFSet <value>`
`DISPlay:AUDio:SPECTrum:Y:[SCALE]:OFFSet?`

Arguments

`<value> ::= <NRf>` specifies the vertical offset in dBm.

Examples

`DISPLAY:AUDIO:SPECTRUM:Y:[SCALE]:OFFSET 150` sets the vertical offset to 150 dBm.

DISPlay:AVTime[:MEASview<y>]:LEGend:STATe

Determines whether to show or hide the trace legend in the amplitude versus time view. The legend indicates the trace detection and function on the screen for each displayed trace.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:LEGend:STATe { OFF | ON | 0 | 1 }
DISPlay:AVTime[:MEASview<y>]:LEGend:STATe?
```

Arguments

OFF or 0 hides the trace legend.

ON or 1 shows the trace legend.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPLAY:AVTIME:MEASVIEW1:LEGEND:STATE ON shows the trace legend on the screen.

DISPlay:AVTime[:MEASview<y>]:SElect:FIRSt

Queries the trace whose measurement results are being displayed in the readout on the top and bottom of the view.

All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
:DISPlay:AVTime[:MEASview<y>]:SElect:FIRSt
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
{ 0 | 1 }
```

0 indicates that the results are not being displayed in the readout for the first trace.

1 indicates that the results are being displayed in the readout for the first trace.

Examples

DISPLAY:AVTIME:MEASVIEW1:SELECT:FIRST? might return 1, indicating that the results are being displayed in the readout for Trace 1 in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:SElect:SECond

Sets or queries the trace whose measurement results are being displayed in the readout on the top and bottom of the view.

All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
:DISPlay:AVTime[:MEASview<y>]:SElect:SECond
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
{ 0 | 1 }
```

0 indicates that the results are not being displayed in the readout for the first trace.

1 indicates that the results are being displayed in the readout for the first trace.

Examples

DISPLAY:AVTIME:MEASVIEW1:SELECT:FIRST? might return 1, indicating that the results are being displayed in the readout for Trace 2 in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:SElect:THIRd

Queries the trace whose measurement results are being displayed in the readout on the top and bottom of the view.

All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
:DISPlay:AVTime[:MEASview<y>]:SElect:THIRd
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
{ 0 | 1 }
```

0 indicates that the results are not being displayed in the readout for the first trace.

1 indicates that the results are being displayed in the readout for the first trace.

Examples

DISPLAY:AVTIME:MEASVIEW1:SELECT:FIRST? might return 1, indicating that the results are being displayed in the readout for Trace 3 in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:SElect:FOURth

Queries the trace whose measurement results are being displayed in the readout on the top and bottom of the view.

All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
:DISPlay:AVTime[:MEASview<y>]:SElect:FOURth
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
{ 0 | 1 }
```

0 indicates that the results are not being displayed in the readout for the first trace.

1 indicates that the results are being displayed in the readout for the first trace.

Examples

DISPlay:AVTIME:MEASVIEW1:SELECT:FOUR? might return 1, indicating that the results are being displayed in the readout for Trace 4 in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker on the screen in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }
DISPlay:AVTime[:MEASview<y>]:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker on screen.

ON or 1 shows the readout for the selected marker on screen.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`DISPLAY:AVTIME:MEASVIEW1:MARKER:SHOW:STATE ON` shows the readout for the selected marker on screen in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:RESet (No Query Form)

Resets the horizontal and vertical scale to the default values described below in the Amplitude versus Time view.

Vertical offset = Reference level, Vertical scale = 100 dB,

Horizontal offset = Analysis offset, and Horizontal scale = Analysis length

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

`DISPlay:AVTime[:MEASview<y>]:RESet`

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`DISPLAY:AVTIME:MEASVIEW1:RESET` resets the horizontal and vertical scale to the default values in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:TRIGger:LEVel:STATe

Determines whether to show or hide the power trigger level line on the screen in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

`DISPlay:AVTime[:MEASview<y>]:TRIGger:LEVel:STATe { OFF | ON | 0 | 1 }`
`DISPlay:AVTime[:MEASview<y>]:TRIGger:LEVel:STATe?`

Arguments

OFF or 0 hides the power trigger level line.

ON or 1 shows the power trigger level line.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

See Arguments.

Examples

`DISPLAY:AVTIME:MEASVIEW1:TRIGGER:LEVEL:STATE ON` shows the power trigger level line on the screen in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:AVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

`OFF` or `0` hides the graticule grid.

`ON` or `1` shows the graticule grid.

The parameter `<y>=1` to `8` represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is `1`

Returns

See Arguments.

Examples

`DISPLAY:AVTIME:MEASVIEW1:WINDOW:TRACE:GRATICULE:GRID:STATE ON` shows the graticule grid on the screen in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:X:RSCale (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the Amplitude versus Time display.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:X:RSCale
```

Arguments

The parameter `<y>=1` to `8` represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is `1`

Examples

`DISPLAY:AVTIME:MEASVIEW1:X:RSCALE` rescales the horizontal scale automatically to fit the waveform to the screen in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:AUTO (No Query Form)

Sets the horizontal scale automatically to fit the waveform to the screen in the Amplitude versus Time view. Executing this command sets `DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATE` ON.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

`DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:AUTO`

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATE](#) (on page 729)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`DISPlay:AVTime:MEASview<y>:X:SCALE:AUTO` sets the horizontal scale automatically to fit the waveform to the screen in the Amplitude versus Time Measurement View 1 graph.

DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATE

Determines whether to set the horizontal scale automatically or manually.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

`DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATE { OFF | ON | 0 | 1 }`
`DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATE?`

Arguments

OFF or 0 specifies that the horizontal scale is set manually. To set it, use the [DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:FULL](#) (on page 730) and [DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 731) commands.

ON or 1 specifies that the horizontal scale is set automatically.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

See Arguments.

Examples

`DISPLAY:AVTIME:MEASVIEW1:X:SCALE:AUTO:STATE ON` specifies that the horizontal scale is set automatically in the Amplitude versus Time Measurement View 1 graph.

DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:FULL

Sets or queries the horizontal scale (full-scale time) of the Amplitude versus Time graph. Programming a specified scale sets `DISPlay:AVTime[:MEASview<y>]:X[:SCALE] AUTO:STATE OFF`.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

`DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:FULL <value>`
`DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:FULL?`

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATE](#) (on page 729)

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 731)

Arguments

`<value>::=<NRf>` specifies the horizontal scale in full-scale time. Use the [DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:MAXimum?](#) (on page 730) and [DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:MINimum?](#) (on page 731) queries to get the upper and lower limits of the setting range.

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

`<NRf>`

Examples

`DISPLAY:AVTIME:MEASVIEW1:X:SCALE:FULL 25.6us` sets the horizontal scale to 25.6 μ s in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:MAXimum? (Query Only)

Queries the upper limit of the horizontal scale setting range.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:MAXimum?

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALe\]:FULL](#) (on page 730)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> The upper limit of the horizontal scale setting range.

Examples

DISPlay:AVTIME:MEASVIEW1:X:SCALE:MAXIMUM? might return 18.135E-3, indicating that the upper limit of the horizontal scale setting range is 18.135 ms in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:MINimum? (Query Only)

Queries the lower limit of the horizontal scale setting range.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:MINimum?

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALe\]:FULL](#) (on page 730)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> The lower limit of the horizontal scale setting range.

Examples

DISPlay:AVTIME:MEASVIEW1:X:SCALE:MINIMUM? might return 10.0E-9, indicating that the lower limit of the horizontal scale setting range is 10.0 ns in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the Amplitude versus Time graph. Programming a specified offset sets DISPlay:AVTime[:MEASview<y>]:X[:SCALe] AUTO:STATe OFF.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet <value>
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet?
```

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALe\]:AUTO:STATe](#) (on page 729)

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALe\]:FULL](#) (on page 730)

Arguments

<value>::=<NRf> specifies the minimum horizontal value. Use the

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALe\]:OFFSet:MAXimum?](#) (on page 732) and

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALe\]:OFFSet:MINimum?](#) (on page 733) queries to get the upper and lower limits of the setting range.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

DISPLAY:AVTIME:MEASVIEW1:X:SCALE:OFFSET 800ns sets the minimum horizontal value to 800 ns in the Amplitude versus Time Measurement View 1 graph.

DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum? (Query Only)

Queries the upper limit of the horizontal offset setting range.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:X[:SCALe]:OFFSet:MAXimum?
```

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALe\]:OFFSet](#) (on page 731)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> The upper limit of the horizontal offset setting range.

Examples

DISPLAY:AVTIME:MEASVIEW1:X:SCALE:OFFSET:MAXIMUM? might return $-1.812\text{E}-3$, indicating that the upper limit of the horizontal offset setting range is -1.812 ms in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum? (Query Only)

Queries the lower limit of the horizontal offset setting range.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

DISPlay:AVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum?

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 731)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> The lower limit of the horizontal offset setting range.

Examples

DISPLAY:AVTIME:MEASVIEW1:X:SCALE:OFFSET:MINIMUM? might return $-16.28\text{E}-3$, indicating that the lower limit of the horizontal offset setting range is -16.28 ms in the Amplitude versus Time Measurement View 1.

DISPlay:AVTime[:MEASview<y>]:Y:RSCale (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the Amplitude versus Time display.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

DISPlay:AVTime[:MEASview<y>]:Y:RSCale

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPLAY:AVTIME:MEASVIEW1:Y:RSCALE rescales the vertical scale automatically to fit the waveform to the screen in the Amplitude versus Time Measurement View 1 graph.

DISPlay:AVTime[:MEASview<y>]:Y[:SCALE]:FULL

Sets or queries the vertical range of the Amplitude versus Time graph.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:Y[:SCALE]:FULL <value>
DISPlay:AVTime[:MEASview<y>]:Y[:SCALE]:FULL?
```

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 734)

Arguments

<value>::=<NRf> specifies the vertical range. Range: 0.1 to 200 dB.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

DISPLAY:AVTIME:MEASVIEW1:Y:SCALE:FULL 100 sets the vertical range to 100 dB in the Amplitude versus Time Measurement View 1 graph.

DISPlay:AVTime[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) in the Amplitude versus Time graph.

Conditions

Measurement views: Amplitude versus Time

Group

Display commands

Syntax

```
DISPlay:AVTime[:MEASview<y>]:Y[:SCALE]:OFFSet <value>
DISPlay:AVTime[:MEASview<y>]:Y[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:AVTime\[:MEASview<y>\]:Y\[:SCALE\]:FULL](#) (on page 734)

Arguments

<value>: :<NRf> specifies the vertical offset. Range: -170 to +50 dBm.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf>

Examples

DISPlay:AVTIME:MEASVIEW1:Y:SCALE:OFFSET -12.5 sets the vertical offset to -12.5 dBm in the Amplitude versus Time Measurement View 1 graph.

DISPlay:BIBEmissions:MARKer<x>:SHOW:STATe

Sets or queries to show or hide the readout for the selected marker Bluetooth InBand Emission view.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmissions:MARKer<x>:SHOW:STATe { OFF | ON | 0 | 1 }
DISPlay:BIBEmissions:MARKer<x>:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker in the graph.

ON or 1 shows the readout for the selected marker in the graph.

Returns

See Arguments.

Examples

DISPlay:BIBEMISSIONS:MARKER1:SHOW:STATE ON shows the readout for the Marker1 (M1) in the graph.

DISPlay:BIBEmissions:PLEVel:SHOW:STATe

Determines whether to show or hide the power levels in the Bluetooth InBand Emission view.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmISSIONS:PLEVel:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:BIBEmISSIONS:PLEVel:SHOW:STATe?
```

Arguments

OFF or 0 hides the power levels in the graph.

ON or 1 shows the power levels in the graph.

Returns

See Arguments.

Examples

DISPlay:BIBEmISSIONS:PLEVEL:SHOW:STATE ON shows the power levels in the graph.

DISPlay:BIBEmISSIONS:RESet:SCALE (No Query Form)

Resets the horizontal and vertical scale to the default values in the Bluetooth InBand Emission view.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmISSIONS:RESet:SCALE
```

Arguments

None

Examples

DISPlay:BIBEmISSIONS:RESET:SCALE resets the horizontal and vertical scale to the default values.

DISPlay:BIBEmISSIONS:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule hidden or showing state.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmISSIONS:WINDow:TRACe:GRATicule:GRID:STATe { OFF| ON | 0 | }  
DISPlay:BIBEmISSIONS:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

`DISPLAY:BIBEMISSIONS:WINDOW:TRACE:GRATICULE:GRID:STATE ON` shows the graticule grid on the screen.

DISPlay:BIBEmissions:X[:SCALe]

Sets or queries the horizontal range of the Bluetooth InBand Emission graph.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmissions:X[:SCALe] <value>  
DISPlay:BIBEmissions:X[:SCALe]?
```

Related Commands

[DISPlay:BIBEmissions:Y\[:SCALe\]:OFFSet](#) (on page 739)

Arguments

`<value>::=<NRf>` specifies the horizontal range.

Returns

`<NRf>`

Examples

`DISPLAY:BIBEMISSIONS:X:SCALE 10MHZ` sets the horizontal range to 10 MHz.

DISPlay:BIBEmissions:X[:SCALe]:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the Bluetooth InBand Emission view.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmissions:X[:SCALe]:AUTO
```

Arguments

None

Examples

`DISPLAY:BIBEMISSIONS:X:SCALE:AUTO` rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:BIBEmISSIONS:X[:SCALe]:OFFSet

Sets or queries the center frequency of the Bluetooth InBand Emission graph.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmISSIONS:X[:SCALe]:OFFSet <value>  
DISPlay:BIBEmISSIONS:X[:SCALe]:OFFSet?
```

Related Commands

[DISPlay:BIBEmISSIONS:X\[:SCALe\]](#) (on page 737)

Arguments

<value> ::= <NRf> specifies the minimum horizontal value.

Returns

<NRf>

Examples

`DISPLAY:BIBEMISSIONS:X:SCALE:OFFSET 1.45GHZ` sets the center frequency to 1.45 GHz.

DISPlay:BIBEmISSIONS:Y[:SCALe]

Sets or queries the vertical range of the Bluetooth InBand Emission graph.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

```
DISPlay:BIBEmISSIONS:Y[:SCALe] <value>  
DISPlay:BIBEmISSIONS:Y[:SCALe]?
```

Related Commands

[DISPlay:BIBEmISSIONS:Y\[:SCALe\]:OFFSet](#) (on page 739)

Arguments

<value> ::= <NRf> specifies the vertical range. Range: 0.1 to 200 dB.

Returns

<NRf>

Examples

`DISPLAY:BIBEMISSIONS:Y:SCALE 100` sets the vertical range to 100 dB.

DISPlay:BIBEmisions:Y[:SCALE]:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the Bluetooth InBand Emission view.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

`DISPlay:BIBEmisions:Y[:SCALE]:AUTO`

Arguments

None

Examples

`DISPLAY:BIBEMISSIONS:Y:SCALE:AUTO` rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:BIBEmisions:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) in the Bluetooth InBand Emission graph.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Display commands

Syntax

`DISPlay:BIBEmisions:Y[:SCALE]:OFFSet <value>`

`DISPlay:BIBEmisions:Y[:SCALE]:OFFSet?`

Related Commands

[DISPlay:BIBEmisions:Y\[:SCALE\]](#) (on page 738)

Arguments

`<value> ::= <NRf>` specifies the vertical offset. Range: -170 to +50 dBm.

Returns

`<NRf>`

Examples

`DISPLAY:BIBEMISSIONS:Y:SCALE:OFFSET -12.5` sets the vertical offset to -12.5 dBm.

DISPlay:BLUEtooth:CONSte:TRACe:GRATicule:GRID:STATe

Sets or queries the display state of Constellation graticule grid.

Conditions

Measurement views: Bluetooth Constellation

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:CONSte:TRACe:GRATicule:GRID:STATe { 0 | 1 | OFF | ON }  
DISPlay:BLUEtooth:CONSte:TRACe:GRATicule:GRID:STATe?
```

Arguments

ON or 1 turns on the grid.

OFF or 0 turns off the grid.

Returns

See Arguments.

Examples

DISPlay:BLUEtooth:CONSte:TRACe:GRATicule:GRID:STATe 1 turns on the grid in the Constellation plot.

DISPlay:BLUEtooth:CONSte:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries whether to show or hide the graticule grid on the screen in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:CONSte:WINDow:TRACe:GRATicule:GRID:STATe STATE { OFF | ON | 0 | 1 }  
DISPlay:BLUEtooth:CONSte:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

DISPlay:BLUEtooth:CONSte:WINDow:TRACe:GRATicule:GRID:STATe ON shows the graticule grid on the screen.

DISPlay:BLUEtooth:EDIagram:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries graticule grid hidden or showing state in the Bluetooth eye diagram display.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:EDIagram:WINDow:TRACe:GRATicule:GRID:STATe { 0 | 1 | OFF | ON }
DISPlay:BLUEtooth:EDIagram:WINDow:TRACe:GRATicule:GRID: STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

DISPlay:BLUEtooth:EDIagram:WINDow:TRACe:GRATicule:GRID:STATe ON shows the graticule grid in the eye diagram.

DISPlay:BLUEtooth:EDIagram:Y[:SCALE]

Sets or queries the vertical range of the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:EDIagram:Y[:SCALE] <value>
DISPlay:BLUEtooth:EDIagram:Y[:SCALE]?
```

Arguments

<value> ::= <NRf> the vertical range (1 to 100)

Returns

<NRf>

Examples

DISPlay:BLUEtooth:EDIagram:Y:SCALE 2.5 sets the vertical range to 2.5 in the eye diagram.

DISPlay:BLUEtooth:EDiagram:Y[:SCALe]:AUTO (No Query Form)

Sets the vertical scale automatically to fit the waveform in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:EDiagram:Y[:SCALe]:AUTO
```

Arguments

None

Returns

DISPlay:BLUEtooth:EDiagram:Y:SCALE:AUTO sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:BLUEtooth:EDiagram:Y[:SCALe]:OFFSet

Sets or queries the vertical offset (center point of the vertical axis) of the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:EDiagram:Y[:SCALe]:OFFSet <value>  
DISPlay:BLUEtooth:EDiagram:Y[:SCALe]:OFFSet?
```

Arguments

<value> ::= <NRf> the minimum vertical scale offset, range (-50 to +50).

Returns

<NRf>

Examples

DISPlay:BLUEtooth:EDiagram:Y:SCALE:OFFSet -0.5 sets the vertical offset to -0.5.

DISPlay:BLUEtooth:FDVTime:WINDow:TRACe:GRATicule:GRID:STATE

Shows or hides the graticule grid in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Programmer Manual

Display commands

Syntax

```
DISPlay:BLUEtooth:FDVTime:WINDow:TRACe:GRATicule:GRID:STATe{OFF | ON | 0 | 1}  
DISPlay:BLUEtooth:FDVTime:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

DISPlay:BLUEtooth:FDVTime:WINDow:TRACe:GRATicule:GRID:STATe ON specifies to show the graticule grid.

DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform to the screen in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:AUTO
```

Arguments

None

Examples

DISPlay:BLUEtooth:FDVTime:Y:SCALE:AUTO rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (center point of the vertical axis) in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:OFFSet <value>  
DISPlay:BLUEtooth:FDVTime:Y[:SCALE]:OFFSet?
```

Arguments

<value> ::= <NRf> the vertical offset. Range: -60 MHz to +60 MHz.

Returns

<NRf>

Examples

DISPlay:BLUEtooth:FDVTime:Y:SCALe:OFFSet -14.5E+3 sets the vertical offset to -14.5 kHz.

DISPlay:BLUEtooth:MEASview:DELeTe (No Query Form)

Deletes the specified Bluetooth analysis view.

Conditions

Measurement views: All.

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:MEASview:DELeTe  
{CONS|SUMM|FDVT|EDI|BOBW|STAB|BIBE|DRIF}
```

Related Commands

[DISPlay:BLUEtooth:MEASview:NEW](#) (on page 744)

[DISPlay:BLUEtooth:MEASview:SELeT](#) (on page 745)

Arguments

CONS deletes the BT Constellation view.

SUMM deletes the BT Summary view.

FDVT deletes the BT Freq Dev vs. Time view. EDI deletes the BT Eye Diagram view.

BOBW deletes the BT 20dB BW view. STAB deletes the BT Symbol Table view. BIBE deletes the BT InBand Emission view. DRIF deletes the BT Drift Table view.

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running" will be returned.

Examples

DISPLAY:BLUETOOTH:MEASVIEW:DELETE CONS deletes the BT Constellation view.

DISPlay:BLUEtooth:MEASview:NEW (No Query Form)

Displays a new measurement view for Bluetooth measurements.

Conditions

Measurement views: Bluetooth measurements.

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:MEASview:NEW
{CONS|SUMM|FDVT|EDI|BOBW|STAB|BIBE|DRIF}
```

Arguments

CONS creates a new BT Constellation view.

SUMM creates a new BT Summary view.

FDVT creates a new BT Freq Dev vs. Time view.

EDI creates a new BT Eye Diagram view.

BOBW creates a new BT 20dB BW view.

STAB creates a new BT Symbol Table view.

BIBE creates a new BT InBand Emission view.

DRIF creates a new BT Drift Table view.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

DISPlay:BLUETOOTH:MEASVIEW:NEW CONS creates a new Bluetooth Constellation view.

DISPlay:BLUEtooth:MEASview:SElect

Selects a measurement view on the screen in the Bluetooth measurements. The query command returns the currently selected view.

Conditions

Measurement views: Bluetooth measurements.

Group

Display commands

Syntax

```
DISPlay:BLUEtooth:MEASview:SElect
{CONS|SUMM|FDVT|EDI|BOBW|STAB|BIBE|DRIF}
DISPlay:BLUEtooth:MEASview:SElect?
```

Arguments

CONS selects the BT Constellation view.

SUMM selects the BT Summary view.

FDVT selects the BT Freq Dev vs. Time view.

EDI selects the BT Eye Diagram view.

BOBW selects the BT 20dB BW view.

STAB selects the BT Symbol Table view.

BIBE selects the BT InBand Emission view.

DRIF selects the BT Drift Table view.

If you attempt to selects a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Returns

See Arguments.

Examples

`DISPLAY:BLUETOOTH:MEASVIEW:SELECT EDI` selects the Bluetooth Eye Diagram view.

DISPlay:BOBW:SElected:BANDwidth

Sets or queries the bandwidth to measure in the Bluetooth 20 dB BW view.

Conditions

Measurement views: Bluetooth 20 dB BW

Group

Display commands

Syntax

```
DISPlay:BOBW:SElected:BANDwidth { XDBM | XDB }  
DISPlay:BOBW:SElected:BANDwidth?
```

Arguments

`XDBM` selects the x dB bandwidth to measure.

`XDB` selects the x dB bandwidth to measure.

Returns

See Arguments.

Examples

`DISPlay:BOBW:SElected:BANDwidth XDB` selects the x dB bandwidth to measure.

DISPlay:CCDF:LEGend:STATe

Determines whether to show or hide the trace legend in the CCDF view. The legend indicates the trace detection and function on the screen for each displayed CCDF trace.

Conditions

Measurement views: CCDF

Group

Display commands

Syntax

```
DISPlay:CCDF:LEGend:STATe { OFF | ON | 0 | 1 }  
DISPlay:CCDF:LEGend:STATe?
```

Arguments

`OFF` or `0` hides the trace legend.

`ON` or `1` shows the trace legend.

Returns

See Arguments.

Examples

`DISPlay:CCDF:LEGend:STATe ON` shows the trace legend on the screen.

DISPlay:CCDF:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: CCDF

Group

Display commands

Syntax

```
DISPlay:CCDF:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:CCDF:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

`OFF` or `0` hides the graticule grid.

`ON` or `1` shows the graticule grid.

Returns

See Arguments.

Examples

`DISPlay:CCDF:WINDow:TRACe:GRATicule:GRID:STATe ON` shows the graticule grid on the screen in the CCDF view.

DISPlay:CONSte[:MEASview<y>]:MPHase

Sets or queries the multiplication constant of the phase multiplication constellation display for a CPM signal. This command is valid when `[SENSe]:DDEMod:MODulation:TYPE` is set to CPM.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Display commands

Syntax

```
DISPlay:CONSte[:MEASview<y>]:MPHase { P1 | P2 | P4 | P8 | P16 | P32 }
DISPlay:CONSte[:MEASview<y>]:MPHase?
```

Arguments

The following table shows the arguments and phase multiplier.

Phase multiplication

Argument	Phase multiplier
P1	1
P2	2
P4	4
P8	8
P16	16
P32	32

Returns

See Arguments.

Examples

`DISPlay:CONSte[:MEASview<y>]:MPHase P8` sets the phase multiplier to 8 for measview 2 of constellation.

DISPlay:CONSte[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Display commands

Syntax

```
DISPlay:CONSte[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:CONSte[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

`DISPlay:CONSte:MEASview2:WINDow:TRACe:GRATicule:GRID:STATE ON` shows the graticule grid on the screen for measview 2 of constellation.

DISPlay:DDEMod[:MEASview<y>]:DELeTe (No query form)

Deletes the measurement view in the general purpose digital modulation measurements.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: General purpose digital modulation

Group

Display commands

Syntax

```
DISPlay:DDEMod[:MEASview<y>]:DELeTe { CONSte | DIQVtime | EDIagram | EVM | FDVTime | MERRor |
    PERRor | SIGNalqual | STABle | TDIagram }
```

Arguments

The following table lists the arguments. The arguments are the string type.

Modulation measurement views

Argument	View
CONSte	Constellation
DIQVtime	Demodulated I&Q versus Time
EDIagram	Eye diagram
EVM	EVM (Error Vector Magnitude) versus Time
FDVTime	Frequency deviation versus Time
MERRor	Magnitude error versus Time
PERRor	Phase error versus Time
SIGNalqual	Signal quality
STABle	Symbol table
TDIagram	Trellis diagram

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Examples

`DISPlay:DDEMod:MEASview1:DELeTe CONSte` deletes the constellation view with measurement view 1.

DISPlay:DDEMod:MEASview<y>[:SOURce<x>]:NEW (No query form)

Displays a new measurement view in the general purpose digital modulation measurements.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: General purpose digital modulation

Group

Display commands

Syntax

```
DISPlay:DDEMod:MEASview<y>[:SOURce<x>]:NEW { CONSTe | DIQVtime | EDIagram | EVM | FDVTime | MERRor
| PERRor | SIGNalqual | STABle | TDIagram }
```

Arguments

<x> = 1 to 8, representing Range of Source.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

DISPlay:DDEMod:MEASview:SOURce1:NEW CONSTe creates the constellation view with measurement view 1 for source1.

DISPlay:DDEMod[:MEASview<y>]:SELEct

Selects a measurement view in the general purpose digital modulation measurements on the screen. The query command returns the currently selected view.

Selecting a measurement optimizes it. Other measurements may be optimized as a side effect. Refer to

DISPlay:WINDow:OPTimized:MEASurement? query.

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Conditions

Measurement views: General purpose digital modulation

Group

Display commands

Syntax

```
DISPlay:DDEMod[:MEASview<y>]:SELEct { CONSTe | DIQVtime | EDIagram | EVM | FDVTime | MERRor |
PERRor | SIGNalqual | STABle | TDIagram }
DISPlay:DDEMod[:MEASview<y>]:SELEct?
```

Arguments

If you attempt to select a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Examples

DISPlay:DDEModMEASview1:SELEct CONSTe selects the constellation view with measurement view 1.

DISPlay:DDEMod[:SOURce<x>]:RADix

Sets or queries the base of symbols of the measurement source. This command is effective in the symbol table.

Conditions

Measurement views: Symbol table

Source keyword is optional, if not present Source 1 will be default source.

Group

Display commands

Syntax

```
DISPlay:DDEMod[:SOURce<x>]:RADix { BINary | HEXadecimal }
DISPlay:DDEMod[:SOURce<x>]:RADix?
```

Arguments

<x> = 1 to 8, representing Range of Source.

BINary selects binary notation.

HEXadecimal selects hexadecimal notation.

Examples

DISPlay:DDEMod:SOURce1:RADix BINary selects the binary notation of the measurement source symbol table.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]

Sets or queries the measurement source horizontal scale (full-scale time) for the time measurements in the general purpose digital modulation analysis. Programming a specified scale sets

```
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:AUTO:STATe OFF.
```

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

```
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]<value>
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]?
```

Related Commands

[DISPlay:DDEMod\[:SOURce<x>\]:X\[:SCALE\]:AUTO:STATe](#) (on page 752)

[DISPlay:DDEMod\[:SOURce<x>\]:X\[:SCALE\]:OFFSet](#) (on page 754)

Arguments

<x> = 1 to 8, representing Range of Source.

<value>::=<NRf> specifies the horizontal scale in full-scale time.

Use the `DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:MAXimum` and `DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:MINimum?` queries to get the upper and lower limits of the setting range. The unit can be changed by the `[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs` command.

Returns

<NRf>

Examples

`DISPlay:DDEMod:SOURce1:X:SCALe 1.5 μs`, sets the horizontal scale of the measurement source to 1.5 μs.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO (No query form)

Sets the horizontal scale of the measurement source automatically to fit the waveform to the screen in the general purpose digital modulation analysis. Executing this command sets `DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO:STATeON`.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

`DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO`

Related Commands

[DISPlay:DDEMod\[:SOURce<x>\]:X\[:SCALe\]:AUTO:STATe](#) (on page 752)

Arguments

<x> = 1 to 8, representing Range of Source.

Examples

`DISPlay:DDEMod:SOURce1:X:SCALe:AUTO` sets the horizontal scale of the measurement source1 automatically to fit the waveform to the screen.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO:STATe

Determines whether to set the horizontal scale of the measurement source automatically or manually.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

`DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO:STATe { OFF | ON | 0 | 1 }`
`DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO:STATe?`

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 specifies that the horizontal scale is set manually. To set it, use the `DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]` and `DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:OFFSet` commands.

ON or 1 specifies that the horizontal scale is set automatically.

Returns

ON or 1.

OFF or 0.

Examples

`DISPlay:DDEMod:SOURce1:X:SCALE:AUTO:STATeON` specifies that the horizontal scale of the measurement source1 is set automatically.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:MAXimum? (Query only)

Queries the upper limit of the measurement source horizontal scale setting range.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

`DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:MAXimum?`

Returns

<NRf> The upper limit of the horizontal scale setting range.

The unit can be changed by the `[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs` command.

Examples

`DISPlay:DDEMod:SOURce1:X:SCALE:MAXimum?` might return 18.135E-3, indicating that the upper limit of the measurement source1 horizontal scale setting range is 18.135 ms.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:MINimum? (Query only)

Queries the lower limit of the measurement source horizontal scale setting range.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

`DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:MINimum?`

Returns

<NRf> The lower limit of the horizontal scale setting range.

The unit can be changed by the `[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs` command.

Examples

`DISPlay:DDEMod:SOURce1:X:SCALe:MINimum?` might return `10.0E-9`, indicating that the lower limit of the measurement source1 horizontal scale setting range is 10.0 ns.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]: OFFSet

Sets or queries the minimum horizontal value of the measurement source (left edge) for the time measurements in the general purpose digital modulation analysis.

Programming a specified offset sets `DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:AUTO:STATe OFF`.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Group

Display commands

Syntax

`DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:OFFSet<value>`

`DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:OFFSet?`

Related Commands

[DISPlay:DDEMod\[:SOURce<x>\]:X\[:SCALe\]:AUTO:STATe](#) (on page 752)

[DISPlay:DDEMod\[:SOURce<x>\]:X\[:SCALe\]](#) (on page 751)

Arguments

<x> = 1 to 8, representing Range of Source.

<value>::=<NRf> specifies the minimum horizontal value.

Use the `DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:OFFSet:MAXimum?` and

`DISPlay:DDEMod[:SOURce<x>]:X[:SCALe]:OFFSet:MINimum?` queries to get the upper and lower limits of the setting range.

The unit can be changed by the `[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs` command.

Returns

<NRf>

Examples

`DISPlay:DDEMod:SOURce1:X:SCALe:OFFSet 20.075 μs`, sets the minimum horizontal value of the measurement source to 20.075 μs.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:OFFSet:MAXimum? (Query only)

Queries the measurement source upper limit of the horizontal offset setting range.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

```
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:OFFSet:MAXimum?
```

Returns

<NRf> The upper limit of the horizontal offset setting range. The unit can be changed by the [SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs command.

Examples

DISPlay:DDEMod:SOURce1:X:SCALE:OFFSet:MAXimum? might return -1.812E-3, indicating that the measurement source 1 upper limit of the horizontal offset setting range is -1.812 ms.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:OFFSet:MINimum? (Query only)

Queries the measurement source lower limit of the horizontal offset setting range.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

```
DISPlay:DDEMod:X[:SCALE]:OFFSet:MINimum?
```

Returns

<NRf> The lower limit of the horizontal offset setting range. The unit can be changed by the [SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs command.

Examples

DISPlay:DDEMod:SOURce1:X:SCALE:OFFSet:MINimum? might return -16.28E-3, indicating that the measurement source1 lower limit of the horizontal offset setting range is -16.28 ms.

DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:RESet (No query form)

Presets the horizontal scale of the measurement source to the default value for the time measurements in the general purpose digital modulation analysis.

Conditions

Measurement views: EVM versus Time, Magnitude error versus Time, Phase error versus Time

Source keyword is optional, if not present Source1 will be default source.

Group

Display commands

Syntax

```
DISPlay:DDEMod[:SOURce<x>]:X[:SCALE]:RESet
```

Arguments

<x> = 1 to 8, representing Range of Source.

Examples

DISPlay:DDEMod:SOURce1:X:SCALE:RESet presets the horizontal scale of the measurement source1 to the default value.

DISPlay:DIAGram:X[:SCALE]

Sets or queries the horizontal range for the eye and trellis diagrams in the general purpose digital modulation analysis.

Conditions

Measurement views: Eye diagram, Trellis diagram

Group

Display commands

Syntax

```
DISPlay:DIAGram:X[:SCALE] <value>  
DISPlay:DIAGram:X[:SCALE] ?
```

Arguments

<value>::=<NR1> specifies the horizontal range.

Range: 1 to 16 symbols.

Returns

<NR1>

Examples

DISPlay:DIAGram:X:SCALE 3 sets the horizontal range to 3 symbols in the eye and trellis diagrams.

DISPlay:DIAGram:X[:SCALE]:RESet (No Query Form)

Presets the horizontal scale to the default value for the eye and trellis diagrams in the general purpose digital modulation analysis.

Conditions

Measurement views: Eye diagram, Trellis diagram

Group

Programmer Manual

Display commands

Syntax

`DISPlay:DIAGram:X[:SCALE]:RESet`

Arguments

None

Examples

`DISPLAY:DIAGRAM:X:SCALE:RESET` presets the horizontal scale to the default value for the eye and trellis diagrams.

DISPlay:DIQVtime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Display commands

Syntax

`DISPlay:DIQVtime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }`
`DISPlay:DIQVtime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?`

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

`DISPlay:DIQVtime:MEASview1:WINDow:TRACe:GRATicule:GRID:STATe ON` shows the graticule grid on the screen in the Demodulated I&Q versus Time view 1.

DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the Demodulated I&Q versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Display commands

Syntax

```
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe] <value>
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe]?
```

Arguments

<value>::=<NRf> specifies the vertical range. Range: 1 μ V to 10 V.

Returns

<NRf>

Examples

DISPlay:DIQVtime1:MEASview1:Y:SCALe 2.5 sets the vertical range to 2.5 V in the Demodulated I&Q versus Time measurement view 1.

DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe]:AUTO (No query form)

Sets the vertical scale automatically to fit the waveform to the screen in the Demodulated I & Q versus Time display.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Display commands

Syntax

```
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe]:AUTO
```

Arguments

None

Examples

DISPlay:DIQVtime:MEASview1:Y:SCALe:AUTO sets the vertical scale automatically to fit the waveform to the screen measurement view 1.

DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALe]:OFFSet

Sets or queries the vertical offset (center point of the vertical axis) of the Demodulated I&Q versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demodulated I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Display commands

Syntax

```
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALE]:OFFSet <value>
DISPlay:DIQVtime[:MEASview<y>]:Y[:SCALE]:OFFSet?
```

Arguments

<value> ::= <NRf> specifies the vertical offset. Range: -5 to +5 V.

Returns

<NRf>

Examples

DISPlay:DIQVtime:MEASview1:Y:SCALE:OFFSet -0.5 sets the vertical offset to -0.5 V in the Demodulated I&Q versus Time measurement view 1.

DISPlay:DPX:DGRam:TIME[:SCALE]:OFFSet:DIVision

Sets or queries the DPXogram vertical time offset in divisions.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

```
DISPlay:DPX:DGRam:TIME[:SCALE]:OFFSet:DIVision <value>
DISPlay:DPX:DGRam:TIME[:SCALE]:OFFSet:DIVision?
```

Arguments

<value> ::= <NRf> vertical offset value in divisions.

Returns

<NRf>

Examples

DISPlay:DPX:DGRAM:TIME:SCALE:OFFSET:DIVISION 10 sets the vertical time off set to 10 divisions.

DISPlay:DPX:DGRam:TIME[:SCALE]:PDIVision

Sets or queries the DPXogram vertical time scale per division.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

```
DISPlay:DPX:DGRam:TIME[:SCALe]:PDIVision <value>  
DISPlay:DPX:DGRam:TIME[:SCALe]:PDIVision?
```

Arguments

<value>: : <NRf> vertical value in divisions.

Returns

<NRf>

Examples

DISPLAY:DPX:DGRAM:TIME:SCALE:PDIVISION 10 sets the vertical time scale to 10 seconds per division.

DISPlay:DPX:DGRam:TIME[:SCALe]:RESet (No Query Form)

Presets the time scale and offset to the default value for the DPXogram measurement.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

```
DISPlay:DPX:DGRam:TIME[:SCALe]:RESet
```

Arguments

None

Examples

DISPLAY:DPX:DGRAM:TIME:SCALE:RESET presets the time scale and offset to the default value.

DISPlay:DPX:DGRam:TSTamp:STATe

Determines whether to display the time stamp readout in the DPXogram display.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

```
DISPlay:DPX:DGRam:TSTamp:STATe { OFF | ON | 0 | 1 }  
DISPlay:DPX:DGRam:TSTamp:STATe?
```


Arguments

OFF or 0 hides the time stamp readout.

ON or 1 shows the time stamp readout.

Returns

See Arguments.

Examples

DISPLAY:DPX:DGRAM:TSTAMP:STATE 0 hides the time stamp readout in the DPXogram display.

DISPlay:DPX:DGRam:Y[:SCALE]:AUTO (No Query Form)

Rescales the height axis automatically to fit the waveform to the screen in the DPXogram display.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

DISPlay:DPX:DGRam:Y[:SCALE]:AUTO

Arguments

None

Examples

DISPLAY:DPX:DGRAM:Y:AUTO rescales the height scale automatically to fit the waveform to the DPXogram display.

DISPlay:DPX:DGRam:Y[:SCALE]:RESet (No Query Form)

Resets the height scale of the DPXogram display to the default values: Height position = 0 dB and Height scale = 100 dB.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

DISPlay:DPX:DGRam:Y[:SCALE]:RESet

Arguments

None

Examples

DISPLAY:DPX:DGRAM:Y:RESET resets the height scale of the DPXogram display.

DISPlay:DPX:LEGend:STATe

Determines whether to show or hide the trace legend on the display. The legend indicates the trace detection and function on the screen for each displayed trace.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

```
DISPlay:DPX:LEGend:STATe { OFF | ON | 0 | 1 }  
DISPlay:DPX:LEGend:STATe?
```

Arguments

OFF or 0 hides the trace legend.

ON or 1 shows the trace legend.

Returns

See Arguments.

Examples

DISPLAY:DPX:LEGEND:STATE ON shows the trace legend on the screen.

DISPlay:DPX:PHASe:Y[:SCALE]:AXIS

Sets or queries the vertical axis representation.

Conditions

Measurement views: DPX Phase

Group

Display commands

Syntax

```
DISPlay:DPX:PHASe:Y[:SCALE]:AXIS { MODulo $\pi$  | CONTinuous }  
DISPlay:DPX:PHASe:Y[:SCALE]:AXIS?
```

Arguments

MODulo π (modulo π) shows the phase constrained within $\pm 180^\circ$ along the vertical axis.

CONTinuous shows the phase as continuous quantity along the vertical axis.

Returns

See Arguments.

Examples

DISPLAY:DPX:PHASE:Y[:SCALE]:AXIS MODulo π selects modulo π representation for the vertical axis.

DISPlay:DPX:PHASe:Y[:SCALe]:AXIS:OFFSet

Sets or queries the vertical offset in the DPX Phase view.

Conditions

Measurement views: DPX Phase

Group

Display commands

Syntax

```
DISPlay:DPX:PHASe:Y[:SCALe]:AXIS:OFFSet <value>  
DISPlay:DPX:PHASe:Y[:SCALe]:AXIS:OFFSet?
```

Arguments

<value>::<NRf> specifies the vertical offset. Range: -180° to $+180^{\circ}$.

Returns

<NRf>

Examples

DISPLAY:DPX:PHASE:Y[:SCALE]:AXIS:OFFSET -158.5 sets the vertical offset to -158.5° in the view.

DISPlay:DPX:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

```
DISPlay:DPX:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:DPX:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

DISPLAY:DPX:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the screen in the DPX spectrum view.

DISPlay:DPX:Y[:SCALe]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) of the DPX spectrum view.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

DISPlay:DPX:Y[:SCALe]:OFFSet <value> DISPlay:DPX:Y[:SCALe]:OFFSet?

Arguments

<value>::<NRf> specifies the vertical offset. Range: -270 to +150 dBm.

The amplitude unit is set by the [SENSe]:POWer:UNITs command (default: dBm).

You can omit the unit in the argument. When you include the unit in the argument, only dBm is allowed. For the other amplitude units, omit the unit in the argument.

Returns

<NRf>

Examples

DISPLAY:DPX:Y[:SCALE]:OFFSET -12.5dBm sets the vertical offset to -12.5 dBm.

DISPlay:DPX:Y[:SCALe]:PDIVision

Sets or queries the vertical scale (per division) in the DPX spectrum view.

Conditions

Measurement views: DPX spectrum

Group

Display commands

Syntax

DISPlay:DPX:Y[:SCALe]:PDIVision <value>
DISPlay:DPX:Y[:SCALe]:PDIVision?

Related Commands

[\[SENSe\]:POWer:UNITs](#) (on page 2287)

Arguments

<value>::<NRf> specifies the vertical scale (per division).

Range: 2 to 20 dB/div.

Returns

<NRf>

Examples

`DISP:DPX:Y:SCAL:PDIV 0.5` sets the vertical scale to 0.5 dB/div.

DISPlay:EDiagram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen in the eye diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Display commands

Syntax

```
DISPlay:EDiagram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:EDiagram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

`DISPlay:EDiagram:MEASview2:WINDow:TRACe:GRATicule:GRID:STATe ON` shows the graticule grid on the screen in the eye diagram for measview2.

DISPlay:EDiagram[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the Eye diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Display commands

Syntax

```
DISPlay:EDiagram[:MEASview<y>]:Y[:SCALE]<value>
```

DISPlay:EDiagram[:MEASview<y>]:Y[:SCALE]?

Arguments

<value>::<NRf> specifies the vertical range. Range: 1 μ to 100 (unitless).

Returns

<NRf>

Examples

DISPlay:EDiagram:MEASview2:Y:SCALE 2.5 sets the vertical range to 2.5 in the eye diagram for measview2.

DISPlay:EDiagram[:MEASview<y>]:Y[:SCALE]:AUTO (No query form)

Sets the vertical scale automatically to fit the waveform to the screen in the eye diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Display commands

Syntax

DISPlay:EDiagram[:MEASview<y>]:Y[:SCALE]:AUTO

Arguments

None

Examples

DISPlay:EDiagram:MEASview2:Y:SCALE:AUTO sets the vertical scale automatically to fit the waveform to the screen for measview2 of the Eye diagram.

DISPlay:EDiagram[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (center point of the vertical axis) of the eye diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Display commands

Syntax

```
DISPlay:EDiagram[:MEASview<y>]:Y[:SCALE]:OFFSet<value>  
DISPlay:EDiagram[:MEASview<y>]Y[:SCALE]:OFFSet?
```

Arguments

<value>: : <NRf> specifies the minimum vertical value.

Range: -50 to +50 (unitless).

Returns

<NRf>

Examples

DISPlay:EDiagram:MEASview2:Y:SCALE:OFFSet -0.5 sets the vertical offset to -0.5 in the eye diagram measview2.

DISPlay:EMC:INCLude:MARGin

Sets or queries to display or hide the Margin by enabling or disabling the check box in the Prefs tab of the EMC Settings control panel.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:INCLude:MARGin { 0 | OFF | 1 | ON}  
DISPlay:EMC:INCLude:MARGin?
```

Arguments

0 or OFF hides the Margin

1 or ON displays the margin

Returns

<Boolean> 0, 1

Examples

DISPlay:EMC:INCLude:MARGin returns 1, indicating that the Margin is displayed.

DISPlay:EMC:MARKer:SHOW:STATe

Sets or queries to show or hide the marker readout in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:MARKer:SHOW:STATe { 0 | 1 | ON | OFF }  
DISPlay:EMC:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the marker readout

1 or ON shows the marker readout

Returns

<Boolean> 0, 1

Examples

DISPLAY:EMC:MARKER:SHOW:STATE ON shows the readout for the marker on the display.

DISPlay:EMC:RESet:SCALe (No Query Form)

Resets the horizontal and vertical scale to the default values in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:RESet:SCALe
```

Arguments

None

Returns

None

Examples

DISPLAY:EMC:RESET:SCALE resets the horizontal and vertical scale to the default values.

DISPlay:EMC:SCALE:LOG:STATe

Determines whether or not to set the horizontal axis logarithmic in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:SCALE:LOG:STATe { 0 | OFF | 1 | ON }  
DISPlay:EMC:SCALE:LOG:STATe?
```


Arguments

OFF or 0 sets the horizontal axis linear (default).

ON or 1 sets the horizontal axis logarithmic.

Returns

<Boolean> 0, 1

Examples

DISPLAY:EMC:SCALE:LOG:STATE ON sets the horizontal axis logarithmic in the EMC view.

DISPlay:EMC:SElect:SPOT:NUMBer

Sets or queries the status of current spot number in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:SElect:SPOT:NUMBer <value>  
DISPlay:EMC:SElect:SPOT:NUMBer?
```

Arguments

<value> = <NR1>

Returns

<NR1>

Examples

DISPLAY:EMC:SELECT:SPOT:NUMBER might return +2, indicating that spot 2 is made current spot and it is enabled. (+ represents enabling and – represents disabling.)

DISPlay:EMC:SHOW:LIMit

Sets or queries the displayed limit format in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:SHOW:LIMit {LINE|SHAD|OFF}  
DISPlay:EMC:SHOW:LIMit?
```

Arguments

LINE – Sets the limit in Line format

SHAD – Sets the limit in Shaded format

OFF – Hides the Limit

Returns

<String> Either LINE or SHAD or OFF

Examples

DISPLAY:EMC:SHOW:LIMIT might return LINE, indicating that the limit is displayed in line format.

DISPlay:EMC:SHOW:LIMit:LEGend

Sets or queries to display or hide the limit legends and label on the plot by enabling or disabling the check box in the Prefs tab of the EMC Settings control panel.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:SHOW:LIMit:LEGend { 0 | OFF | 1 | ON}  
DISPlay:EMC:SHOW:LIMit:LEGend?
```

Arguments

OFF or 0 hides the limit legends and label.

ON or 1 display the limit legends and label.

Returns

<Boolean> 0,1

Examples

DISPLAY:EMC:SHOW:LIMIT:LEGEND might return 0, indicating that the limit legends and label are hidden on the plot.

DISPlay:EMC:SHOW:SPOT:INDicator

Sets or queries to display or hide the spots on the plot in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:SHOW:SPOT:INDicator {0 | OFF | 1 | ON}  
DISPlay:EMC:SHOW:SPOT:INDicator?
```

Arguments

OFF or 0 hides the spots

ON or 1 display the spots

Returns

<Boolean> 0,1

Examples

DISPlay:EMC:SHOW:SPOT:INDICATOR 1 displays the spots on the plot in EMC View.

DISPlay:EMC:SHOW:WIZArD

Sets or queries to display or hide the EMC wizard when EMCVu is launched by enabling or disabling the check box in the Prefs tab of the EMC Settings control panel.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:SHOW:WIZArD {0 | OFF | 1 | ON}  
DISPlay:EMC:SHOW:WIZArD?
```

Arguments

OFF or 0 hides the EMC wizard

ON or 1 displays the EMC wizard

Returns

<Boolean> 0,1

Examples

DISPlay:EMC:SHOW:WIZARD ON displays the EMC wizard when EMCVu is launched.

DISPlay:EMC:SPOT<x>:SElect

Sets or queries to enable or disable the selected spot in emission results of EMC view.

<x> = <NR1> Indicates the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:SPOT<x>:SElect { 0 | 1 | ON | OFF }  
DISPlay:EMC:SPOT<x>:SElect ?
```

Arguments

OFF or 0 disables the spot

1 or ON enables the spot

Returns

<Boolean> 0,1

Examples

DISPlay:EMC:SPOT:SElect? might return 1, indicating that spot 2 is enabled.

DISPlay:EMC:TRACe:LEGEnd

Sets or queries to display or hide the trace legend by enabling or disabling the check box in the Prefs tab of the EMC Settings control panel.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:TRACe:LEGEnd { 0 | OFF | 1 | ON }  
DISPlay:EMC:TRACe:LEGEnd?
```

Arguments

0 or OFF hides the Trace Legend

1 or ON display the Trace Legend

Returns

<Boolean> 0, 1

Examples

DISPLAY:EMC:TRACE:LEGEND returns 0, indicating that the trace legend is hidden.

DISPlay:EMC:WINDow:TRACe:GRATicule:GRID:STATE

Sets or queries to display or hide the Graticule grid in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:WINDow:TRACe:GRATicule:GRID:STATE { 0 | 1 | ON | OFF }  
DISPlay:EMC:WINDow:TRACe:GRATicule:GRID:STATE?
```

Arguments

OFF or 0 hides the Graticule grid in the graph 1 or

ON display the Graticule grid in the graph

Returns

<Boolean> 0, 1

Examples

`DISPLAY:EMC:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` hides the graticule grid in the EMC view.

DISPlay:EMC:X[:SCALE]:AUTO (No Query Form)

Sets the horizontal scale automatically to fit the waveform to the complete screen in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

`DISPlay:EMC:X[:SCALE]:AUTO`

Arguments

None

Returns

None

Examples

`DISPLAY:EMC:X[:SCALE]:AUTO` sets the horizontal scale automatically to fit the waveform to the complete screen.

DISPlay:EMC:X[:SCALE]:START

Sets and queries the Zoom Start frequency in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

`DISPlay:EMC:X[:SCALE]:START <value>`
`DISPlay:EMC:X[:SCALE]:START?`

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

DISPLAY:EMC:X[:SCALE]:START might return 64.29, indicating that the zoom start frequency is 64.2 kHz.

DISPlay:EMC:X[:SCALE]:STOP

Sets and queries the Zoom stop frequency in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:X[:SCALE]:STOP <value>  
DISPlay:EMC:X[:SCALE]:STOP?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

DISPLAY:EMC:X[:SCALE]:STOP might return 732.29, indicating that the zoom stop frequency is 732.2 kHz.

DISPlay:EMC:Y[:SCALE]

Sets or queries the vertical scale value in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:Y[:SCALE] <value>  
DISPlay:EMC:Y[:SCALE]?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

DISPLAY:EMC:Y[:SCALE] 100 sets the vertical scale to 100 dB.

DISPlay:EMC:Y[:SCALE]:AUTO (No Query Form)

Sets the vertical scale automatically to fit the waveform to the complete screen in the EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:Y[:SCALe]:AUTO
```

Arguments

None

Returns

None

Examples

DISPLAY:EMC:Y[:SCALE]:AUTO sets the vertical scale automatically to fit the waveform to the complete screen.

DISPlay:EMC:Y[:SCALe]:OFFSet

Sets or queries the vertical Position (offset) value in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Display commands

Syntax

```
DISPlay:EMC:Y[:SCALe]:OFFSet <value>  
DISPlay:EMC:Y[:SCALe]:OFFSet?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

DISPLAY:EMC:Y[:SCALE]:OFFSET might return 45.74, indicating the vertical Position (offset) value is 45.7 dBuV.

DISPlay:EVM[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule grid view state for the EVM view.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Display commands

Syntax

```
DISPlay:EVM:MEASview<y>:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:EVM:MEASview<y>:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

OFF or 0

ON or 1

Examples

DISPlay:EVM:MEASview2:WINDow:TRACe:GRATicule:GRID:STATe ON shows the graticule grid on the EVM Measview 2.

DISPlay:EVM[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the EVM versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Display commands

Syntax

```
DISPlay:EVM[:MEASview<y>]:Y[:SCALE]<value>
DISPlay:EVM[:MEASview<y>]:Y[:SCALE]?
```

Related Commands

[DISPlay:EVM:\[MEASview1\]:Y\[:SCALE\]:OFFSet](#) (on page 777)

Arguments

<value>::<NRf> specifies the vertical range.

Range: 1 to 100%.

Returns

<NRf>

Examples

`DISPlay:EVM:MEASview1:Y:SCALe 50` sets the vertical range to 50% in the EVM versus Time display Measurement view 1.

DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:AUTO (No query form)

Sets the vertical scale automatically to fit the waveform to the screen in the EVM versus Time display.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Display commands

Syntax

`DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:AUTO`

Arguments

None

Examples

`DISPlay:EVM:MEASview2:Y:SCALe:AUTO` sets the vertical scale automatically to fit the waveform to the screen of EVM versus Time Measurement view 2.

DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:OFFSet

Sets or queries the minimum vertical value (bottom edge) of the EVM versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Display commands

Syntax

`DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:OFFSet <value>`

`DISPlay:EVM[:MEASview<y>]:Y[:SCALe]:OFFSet?`

Related Commands

[DISPlay:EVM\[:MEASview<y>\]:Y\[:SCALe\]](#) (on page 776)

Arguments

<value>::<NRf> specifies the minimum vertical value.

Range: -100 to 100%.

Returns

<NRf>

Examples

DISPlay:EVM:MEASview2:Y:SCALE:OFFSet -9.5 sets the minimum vertical value to -9.5% in the EVM versus Time graph Measurement View 2.

DISPlay:FDVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule grid view state for the FDV view.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Display commands

Syntax

```
DISPlay:FDVTime:MEASview<y>:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:FDVTime:MEASview<y>:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

OFF

ON

Examples

DISPlay:FDVTime:MEASview2:WINDow:TRACe:GRATicule:GRID:STATe ON shows the graticule grid on the Frequency deviation versus Time Measview 2.

DISPlay:FDVTime[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the Frequency deviation versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Display commands

Syntax

```
DISPlay:FDVTime:[MEASview<y>]:Y[:SCALE]<value>
DISPlay:FDVTime:[MEASview<y>]:Y[:SCALE]?
```

Related Commands

[DISPlay:FDVTime\[:MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 780)

Arguments

<value>::<NRf> specifies the vertical range.

Range: 10 Hz to 120 MHz.

Returns

<NRf>

Examples

DISPlay:FDVTime:MEASview1:Y:SCALE 30 MHz sets the vertical range to 30 MHz in the Frequency deviation versus Time display Measurement view 1.

DISPlay:FDVTime[:MEASview<y>]:Y[:SCALE]:AUTO (No query form)

Sets the vertical scale automatically to fit the waveform to the screen in the Frequency deviation versus Time display.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Display commands

Syntax

```
DISPlay:FDVTime:MEASview<y>:Y[:SCALE]:AUTO
```

Arguments

None

Examples

DISPlay:FDVTime:MEASview2:Y:SCALE:AUTO sets the vertical scale automatically to fit the waveform to the screen of Frequency deviation versus Time Measurement view 2.

DISPlay:FDVTime[:MEASview<y>]:Y[:SCALe]:OFFSet

Sets or queries the minimum vertical value (bottom edge) of the Frequency deviation versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Display commands

Syntax

```
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALe]:OFFSet<value>
DISPlay:FDVTime[:MEASview<y>]:Y[:SCALe]:OFFSet?
```

Related Commands

[DISPlay:FDVTime\[:MEASview<y>\]:Y\[:SCALe\]](#) (on page 778)

Arguments

<value>::<NRf> specifies the vertical offset.

Range: -60 MHz to +60 MHz.

Returns

<NRf>

Examples

DISPlay:FDVTime:MEASview2:Y:SCALe:OFFSet -14.5 MHz sets the minimum vertical value to -14.5 MHz in the Frequency deviation versus Time graph Measurement View 2.

DISPlay:{FSETtling|PSETtling}:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the Frequency or Phase settling views.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

```
DISPlay:{FSETtling|PSETtling}:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }
DISPlay:{FSETtling|PSETtling}:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker in the view.

ON or 1 shows the readout for the selected marker in the view.

Returns

See Arguments.

Examples

`DISPLAY:FSETTLING:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the view.

DISPlay:{FSETtling|PSETtling}:TIME:DECimal

Sets or queries the number of values to the right of the decimal point to include in the Settling Time and Settling Time from Trigger results.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Display commands

Syntax

```
DISPlay:{FSETtling|PSETtling}:TIME:DECimal <value>
DISPlay:{FSETtling|PSETtling}:TIME:DECimal?
```

Arguments

`<value>: : <NR1>` specifies the number digits to the right of the decimal point to include in Settling Time and Settling Time from Trigger results. Range: 0 to 6.

Returns

`<NR1>`

Examples

`DISPLAY:PSETTLING:TIME:DECIMAL 3` sets the number of values to the right of the decimal point to 3 for the Phase Settling time measurement.

DISPlay:{FSETtling|PSETtling}:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

```
DISPlay:{FSETtling|PSETtling}:WINDow:TRACe:GRATicule:GRID: STATe { OFF | ON | 0 | 1 }
DISPlay:{FSETtling|PSETtling}:WINDow:TRACe:GRATicule:GRID: STATe?
```

Arguments

`OFF` or `0` hides the graticule grid.

`ON` or `1` shows the graticule grid.

Returns

See Arguments.

Examples

`DISPLAY:FSETTLING:WINDOW:TRACE:GRATICULE:GRID:STATE ON` shows the graticule grid on the screen for the Frequency Settling display.

DISPlay:{FSETtling|PSETtling}:X[:SCALE]

Sets or queries the horizontal scale (full-scale time) of the Settling Time graph. Programming a specified scale sets `DISPlay:{FSETtling|PSETtling}:X[:SCALE] AUTO:STATE OFF`.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

`DISPlay:{FSETtling|PSETtling}:X[:SCALE] <value>`
`DISPlay:{FSETtling|PSETtling}:X[:SCALE]?`

Related Commands

[DISPlay:{FSETtling|PSETtling}:X\[:SCALE\]:AUTO:STATE](#) (on page 783)

[DISPlay:{FSETtling|PSETtling}:X\[:SCALE\]:OFFSet](#) (on page 784)

Arguments

`<value>::={ <NRf> | MAXimum | MINimum }` specifies the horizontal scale in full-scale time. MAXimum and MINimum represent the upper and lower limits of the setting range, respectively.

Use the [DISPlay:{FSETtling|PSETtling}:X\[:SCALE\]:MAXimum?](#) (on page 783) and [DISPlay:{FSETtling|PSETtling}:X\[:SCALE\]:MINimum?](#) (on page 784) queries to get the upper and lower limit values of the setting range.

Returns

See Arguments.

Examples

`DISPLAY:FSETTLING:X:SCALE 25.6us` sets the horizontal scale to 25.6 μ s.

DISPlay:{FSETtling|PSETtling}:X[:SCALE]:AUTO (No Query Form)

Sets the horizontal scale automatically to fit the waveform to the screen in the Frequency and Phase Settling views. Executing this command sets `DISPlay:{FSETtling|PSETtling}:X[:SCALE]:AUTO:STATE ON`.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

`DISPlay:{FSETtling|PSETtling}:X[:SCALe]:AUTO`

Related Commands

[DISPlay:{FSETtling|PSETtling}:X\[:SCALe\]:AUTO:STATe](#) (on page 783)

Arguments

None

Examples

`DISPLAY:FSETTLING:X:SCALE:AUTO` sets the horizontal scale automatically to fit the waveform to the screen.

DISPlay:{FSETtling|PSETtling}:X[:SCALe]:AUTO:STATe

Determines whether to set the horizontal scale automatically or manually.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

`DISPlay:{FSETtling|PSETtling}:X[:SCALe]:AUTO:STATe { OFF | ON | 0 | 1 }`
`DISPlay:{FSETtling|PSETtling}:X[:SCALe]:AUTO:STATe?`

Arguments

`OFF` or `0` specifies that the horizontal scale is set manually. To set it, use the [DISPlay:{FSETtling|PSETtling}:X\[:SCALe\]](#) (on page 782) and [DISPlay:{FSETtling|PSETtling}:X\[:SCALe\]:OFFSet](#) (on page 784) commands.

`ON` or `1` specifies that the horizontal scale is set automatically.

Returns

See Arguments.

Examples

`DISPLAY:FSETTLING:X:SCALE:AUTO:STATE ON` specifies that the horizontal scale is set automatically.

DISPlay:{FSETtling|PSETtling}:X[:SCALe]:MAXimum? (Query Only)

Queries the upper limit of the horizontal scale setting range.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

`DISPlay:{FSETtling|PSETtling}:X[:SCALe]:MAXimum?`

Related Commands

[DISPlay:{FSETtling|PSETtling}:X\[:SCALe\] \(on page 782\)](#)

Returns

<NRf> The upper limit of the horizontal scale setting range.

Examples

DISPLAY:FSETTLING:X:SCALE:MAXIMUM? might return 18.135E-3, indicating that the upper limit of the horizontal scale setting range is 18.135 ms.

DISPlay:{FSETtling|PSETtling}:X[:SCALe]:MINimum? (Query Only)

Queries the lower limit of the horizontal scale setting range.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

DISPlay:{FSETtling|PSETtling}:X[:SCALe]:MINimum?

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALe\] \(on page 788\)](#)

Returns

<NRf> The lower limit of the horizontal scale setting range.

Examples

DISPLAY:FSETTLING:X:SCALE:MINIMUM? might return 10.0E-9, indicating that the lower limit of the horizontal scale setting range is 10.0 ns.

DISPlay:{FSETtling|PSETtling}:X[:SCALe]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the Frequency versus Time graph. Programming a specified offset sets DISPlay:{FSETtling|PSETtling}:X[:SCALe] AUTO:STATE OFF.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

DISPlay:{FSETtling|PSETtling}:X[:SCALe]:OFFSet <value>
DISPlay:{FSETtling|PSETtling}:X[:SCALe]:OFFSet?

Related Commands

[DISPlay:{FSETtling|PSETtling}:X\[:SCALe\]:AUTO:STATE \(on page 783\)](#)

[DISPlay:{FSETtling|PSETtling}:X\[:SCALE\] \(on page 782\)](#)

Arguments

<value>::={ <NRf> | MAXimum | MINimum } specifies the horizontal offset. MAXimum and MINimum represent the upper and lower limits of the setting range, respectively.

Use the [DISPlay:{FSETtling|PSETtling}:X\[:SCALE\]:OFFSet:MAXimum?](#) (on page 783) and [DISPlay:{FSETtling|PSETtling}:X\[:SCALE\]:OFFSet:MINimum?](#) (on page 784) queries to get the upper and lower limit values of the setting range.

Returns

See Arguments.

Examples

DISPLAY:FSETTLING:X:SCALE:OFFSET 800ns sets the minimum horizontal value to 800 ns in the Frequency Settling graph.

DISPlay:{FSETtling|PSETtling}:X[:SCALE]:OFFSet:MAXimum? (Query Only)

Queries the upper limit of the horizontal offset setting range.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

DISPlay:{FSETtling|PSETtling}:X[:SCALE]:OFFSet:MAXimum?

Related Commands

[DISPlay:{FSETtling|PSETtling}:X\[:SCALE\]:OFFSet \(on page 784\)](#)

Returns

<NRf> The upper limit of the horizontal offset setting range.

Examples

DISPLAY:FSETTLING:X:SCALE:OFFSET:MAXIMUM? might return 338.186000E-6, indicating that the upper limit of the horizontal offset setting range is 338.186 μ s.

DISPlay:{FSETtling|PSETtling}:X[:SCALE]:OFFSet:MINimum? (Query Only)

Queries the lower limit of the horizontal offset setting range.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

DISPlay:{FSETtling|PSETtling}:X[:SCALe]:OFFSet:MINimum?

Related Commands

[DISPlay:FVTime:X\[:SCALe\]:OFFSet](#) (on page 791)

Returns

<NRf> The lower limit of the horizontal offset setting range.

Examples

DISPLAY:FSETTLING:X:SCALE:OFFSET:MINIMUM? might return -338.186000E-6, indicating that the lower limit of the horizontal offset setting range is -338.186 μ s.

DISPlay:{FSETtling|PSETtling}:Y[:SCALe]

Sets or queries the vertical range of the Frequency versus Time graph.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

DISPlay:{FSETtling|PSETtling}:Y[:SCALe] <value>
DISPlay:{FSETtling|PSETtling}:Y[:SCALe]?

Related Commands

[DISPlay:{FSETtling|PSETtling}:Y\[:SCALe\]:OFFSet](#) (on page 787)

Arguments

<value>::<NRf> specifies the vertical range. Range: 10 Hz to 120 MHz.

Returns

<NRf>

Examples

DISPlay:FSETTLING:Y:SCALE 30E6 sets the vertical range to 30 MHz in the Frequency Settling graph.

DISPlay:{FSETtling|PSETtling}:Y[:SCALe]:AUTO (No Query Form)

Sets the vertical scale automatically to fit the waveform to the screen in the Frequency and Phase Settling views.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

```
DISPlay:{FSETtling|PSETtling}:Y[:SCALE]:AUTO
```

Arguments

None

Examples

DISPLAY:FSETTLING:Y:SCALE:AUTO sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:{FSETtling|PSETtling}:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the center of the vertical axis) in the Frequency and Phase Settling graphs.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

```
DISPlay:{FSETtling|PSETtling}:Y[:SCALE]:OFFSet <value>
```

```
DISPlay:{FSETtling|PSETtling}:Y[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:{FSETtling|PSETtling}:Y\[:SCALE\]](#) (on page 786)

Arguments

<value>::<NRf> specifies the vertical offset. Range: -60 MHz to +60 MHz.

Returns

<NRf>

Examples

DISPLAY:FVTIME:Y:SCALE:OFFSET -14.5E6 sets the vertical offset to -14.5 MHz in the Frequency Settling graph.

DISPlay:{FSETtling|PSETtling}:Y[:SCALE]:PDIVision

Sets or queries the vertical scale (per division) of the Frequency and Phase Settling graphs.

Conditions

Measurement views: Frequency and Phase Settling

Group

Display commands

Syntax

```
DISPlay:{FSETtling|PSETtling}:Y[:SCALE]:PDIVision <value>
```

```
DISPlay:{FSETtling|PSETtling}:Y[:SCALE]:PDIVision?
```

Arguments

<value>::<NRf> specifies the vertical scale (per division).

Range:

- Frequency Settling (Hz/div) : 500 to the Maximum bandwidth of instrument
- Phase Settling (degrees/div): 0.10 to X.

Returns

<NRf>

Examples

DISPLAY:PSETTLING:Y:SCALE:PDIVISION 2.7 sets the vertical scale to 27 degrees.

DISPlay:FVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

```
DISPlay:FVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:FVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

DISPLAY:FVTIME:MEASview1:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the Frequency versus Time view.

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]

Sets or queries the horizontal scale (full-scale time) of the Frequency versus Time graph. Programming a specified scale sets DISPlay:FVTime[:MEASview<y>]:X[:SCALE]AUTO:STATe OFF.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

```
DISPlay:FVTime[:MEASview<y>]:X[:SCALe] <value>
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]?
```

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALe\]:AUTO:STATe](#) (on page 790)

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALe\]:OFFSet](#) (on page 791)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::={ <NRf> | MAXimum | MINimum } specifies the horizontal scale in full-scale time. MAXimum and MINimum represent the upper and lower limits of the setting range, respectively.

Use the [DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALe\]:MAXimum?](#) (on page 790) and [DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALe\]:MINimum?](#) (on page 791) queries to get the upper and lower limit values of the setting range.

Returns

See Arguments.

Examples

DISPLAY:FVTIME:MEASview1:X:SCALE 25.6us sets the horizontal scale to 25.6 μ s.

DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:AUTO (No Query Form)

Sets the horizontal scale automatically to fit the waveform to the screen in the Frequency versus Time view. Executing this command sets DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe ON.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

```
DISPlay:FVTime[:MEASview<y>]:X[:SCALe]:AUTO
```

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALe\]:AUTO:STATe](#) (on page 790)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

DISPLAY:FVTIME:MEASview1:X:SCALE:AUTO sets the horizontal scale automatically to fit the waveform to the screen.

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe

Determines whether to set the horizontal scale automatically or manually.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

```
DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe { OFF | ON | 0 | 1 }  
DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 specifies that the horizontal scale is set manually. To set it, use the [DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 788) and [DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 791) commands.

ON or 1 specifies that the horizontal scale is set automatically.

Returns

See Arguments.

Examples

DISPLAY:FVTIME:MEASview1:X:SCALE:AUTO:STATE ON specifies that the horizontal scale is set automatically.

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:MAXimum? (Query Only)

Queries the upper limit of the horizontal scale setting range.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

```
DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:MAXimum?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 788)

Returns

<NRf> The upper limit of the horizontal scale setting range.

Examples

DISPLAY:FVTIME:MEASview1:X:SCALE:MAXIMUM? might return 18.135E-3, indicating that the upper limit of the horizontal scale setting range is 18.135 ms.

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:MINimum? (Query Only)

Queries the lower limit of the horizontal scale setting range.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:MINimum?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 788)

Returns

<NRf> The lower limit of the horizontal scale setting range.

Examples

DISPLAY:FVTIME:MEASview1:X:SCALE:MINIMUM? might return 10.0E-9, indicating that the lower limit of the horizontal scale setting range is 10.0 ns.

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the Frequency versus Time graph. Programming a specified offset sets DISPlay:FVTime[:MEASview<y>]:X[:SCALE]AUTO:STATE OFF.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:OFFSet <value>
DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:OFFSet?

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATe](#) (on page 790)

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 788)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::={ <NRf> | MAXimum | MINimum } specifies the horizontal offset. MAXimum and MINimum represent the upper and lower limits of the setting range, respectively.

Use the [DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet:MAXimum?](#) (on page 792) and [DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet:MINimum?](#) (on page 793) queries to get the upper and lower limit values of the setting range.

Returns

See Arguments.

Examples

DISPLAY:FVTIME:MEASview1:X:SCALE:OFFSET 800ns sets the minimum horizontal value to 800 ns in the Frequency versus Time graph.

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MAXimum? (Query Only)

Queries the upper limit of the horizontal offset setting range.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MAXimum?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 791)

Returns

<NRf> The upper limit of the horizontal offset setting range.

Examples

DISPLAY:FVTIME:MEASview1:X:SCALE:OFFSET:MAXIMUM? might return -1.812E-3, indicating that the upper limit of the horizontal offset setting range is -1.812 ms.

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum? (Query Only)

Queries the lower limit of the horizontal offset setting range.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

DISPlay:FVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 794)

Returns

<NRf> The lower limit of the horizontal offset setting range.

Examples

DISPlay:FVTIME:MEASview1:X:SCALE:OFFSET:MINIMUM? might return $-16.28\text{E}-3$, indicating that the lower limit of the horizontal offset setting range is -16.28 ms.

DISPlay:FVTime[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the Frequency versus Time graph.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

DISPlay:FVTime[:MEASview<y>]:Y[:SCALE] <value>
DISPlay:FVTime[:MEASview<y>]:Y[:SCALE]?

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 794)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> specifies the vertical range. Range: 10 Hz to 120 MHz.

Returns

<NRf>

Examples

`DISPlay:FVTime:MEASview1:Y:SCALE 30MHz` sets the vertical range to 30 MHz in the Frequency versus Time graph.

DISPlay:FVTime[:MEASview<y>]:Y[:SCALE]:AUTO (No Query Form)

Sets the vertical scale automatically to fit the waveform to the screen in the Frequency versus Time view.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

`DISPlay:FVTime[:MEASview<y>]:Y[:SCALE]:AUTO`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

`DISPLAY:FVTIME:MEASview1:Y:SCALE:AUTO` sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:FVTime[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the center of the vertical axis) in the Frequency versus Time graph.

Conditions

Measurement views: Frequency versus Time

Group

Display commands

Syntax

`DISPlay:FVTime[:MEASview<y>]:Y[:SCALE]:OFFSet <value>`
`DISPlay:FVTime[:MEASview<y>]:Y[:SCALE]:OFFSet?`

Related Commands

[DISPlay:FVTime\[:MEASview<y>\]:Y\[:SCALE\]](#) (on page 793)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> specifies the vertical offset. Range: -60 MHz to +60 MHz.

Returns

<NRf>

Examples

`DISPLAY:FVTIME:MEASview1:Y:SCALE:OFFSET -14.5MHz` sets the vertical offset to -14.5 MHz in the Frequency versus Time graph.

DISPlay:GENeral:MEASview<y>:DElete (No Query Form)

Deletes a measurement view in the general signal viewing.

Conditions

Measurement views: General signal viewing

Group

Display commands

Syntax

`DISPlay:GENeral:MEASview<y>:DElete { SPECTrum | DPX | AVTime | FVTime | PHVTime | IQVTime | SGRam | TOVerview }`

Arguments

The following table shows the view arguments. The arguments are the string type.

General signal viewing views

Argument	View
SPECTrum	Spectrum
DPX	DPX (Digital Phosphor) spectrum
AVTime	Amplitude versus Time
FVTime	Frequency versus Time
PHVTime	Phase versus Time
IQVTime	IQ versus Time
SGRam	Spectrogram
TOVerview	Time overview

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

`DISPLAY:GENERAL:MEASVIEW1:DELETE DPX` deletes the DPX spectrum view with Measurement View 1.

DISPlay:GENeral:MEASview<y>[:SOURce<x>]:NEW (No Query Form)

Displays a new measurement view in the general signal viewing.

Conditions

Measurement views: General signal viewing with specified Measurement view number.

Group

Display commands

Syntax

```
DISPlay:GENeral:MEASview<y>[:SOURce<x>]:NEW { SPECTrum | DPX | AVTime | FVTime | PHVTime | IQVTime | SGRam | TOVerview }
```

Arguments

The following table shows the view arguments. The arguments are the string type.

General signal viewing views

Argument	View
SPECTrum	Spectrum
DPX	DPX (Digital Phosphor) spectrum
AVTime	Amplitude versus Time
FVTime	Frequency versus Time
PHVTime	Phase versus Time
IQVTime	IQ versus Time
SGRam	Spectrogram
TOVerview	Time overview

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

<x> = 1 to 8, representing Range of Source.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPlay:GENeral:MEASview1:SOURce1:NEW DPX creates the DPX spectrum view for source1.

DISPlay:GENeral:MEASview<y>:SElect

Selects a measurement view in the general signal viewing on the screen. The query command returns the currently selected view.

Selecting a measurement optimizes it. Other measurements may be optimized as a side effect. Refer to the DISPlay:WINDow:OPTimized:MEASurement? query.

Conditions

Measurement views: General signal viewing

Group

Display commands

Syntax

```
DISPlay:GENeral:MEASview<y>:SElect { SPECTrum | DPX | AVTime | FVTime | PHVTime | IQVTime | SGRam | TOVeriew }
DISPlay:GENeral:MEASview<y>:SElect?
```

Arguments

The following table shows the view arguments. The arguments are the string type.

General signal viewing views

Argument	View
SPECTrum	Spectrum
DPX	DPX (Digital Phosphor) spectrum
AVTime	Amplitude versus Time
FVTime	Frequency versus Time
PHVTime	Phase versus Time
IQVTime	IQ versus Time
SGRam	Spectrogram
TOVeriew	Time overview

If you attempt to select a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

The time overview (TOVeriew) cannot be selected as the primary measurement. If you select it, the error (-200, "Execution error; Time Overview cannot be Primary measurement") will be returned. If you use the DISPlay:GENeral MEASview:SElect? query with the time overview as the only measurement active, the error (-200, "Execution error; Analysis selected is not running") will be returned.

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

See Arguments.

Examples

DISPlay:GENERAL:MEASVIEW1:SELECT DPX selects the DPX spectrum view with Measurement view 1.

DISPlay:GPRF:MEASview:DElete (No Query Form)

Deletes a selected measurement view in the RF measurements.

Conditions

Measurement views: RF measurements

Group

Display commands

Syntax

```
DISPlay:GPRF:MEASview:DElete { AM | FM | PM | CCDF | ACPower | FSETtling | MCPower | OBW | PNOise |
    PSETtling | SPURious | SEM }
```

Arguments

AM deletes the AM view.

FM deletes the FM view.

PM deletes the PM view.

CCDF deletes the CCDF view.

ACPower deletes the Channel power and ACPR view.

FSETtling deletes the Frequency Settling view.

MCPower deletes the MCPR view.

OBW deletes the Occupied Bandwidth view.

PNOise deletes the Phase Noise view (Option 11 only).

PSETtling deletes the Phase Settling view.

SPURious deletes the Spurious view.

SEM deletes the Spectral Emissions Mask view.

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Examples

`DISPlay:GPRF:MEASview:DElete ACPower` deletes the Channel power and ACPR view.

DISPlay:GPRF:MEASview:NEW (No Query Form)

Displays a new measurement view in the RF measurements.

Conditions

Measurement views: RF measurements

Group

Display commands

Syntax

```
DISPlay:GPRF:MEASview:NEW { AM | FM | PM | CCDF | ACPower | FSETtling MCPower | OBW | PNOise |
    PSETtling | SPURious | SEM }
```

Arguments

AM opens the AM view.

FM opens the AM view.

PM opens the AM view.

CCDF opens the CCDF view.

ACPower opens the Channel power and ACPR view.

FSETtling opens the Frequency Settling view.

MCPower opens the MCPR view.

OBW opens the Occupied Bandwidth view.

PNOise opens the Phase Noise view (Option 11 only).

PSETtling opens the Phase Settling view.

SPURious opens the Spurious view.

SEM opens the Spectral Emissions Mask view.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

DISPlay:GPRF:MEASview:NEW ACPower creates the Channel power and ACPR view.

DISPlay:GPRF:MEASview:SElect

Selects a measurement view in the RF measurements on the screen. The query command returns the currently selected view.

Selecting a measurement optimizes it. Other measurements may be optimized as a side effect. Refer to the DISPlay:WINDow:OPTimized:MEASurement? query.

Conditions

Measurement views: RF measurements

Group

Display commands

Syntax

```
DISPlay:GPRF:MEASview:SElect { AM | FM | PM | CCDF | ACPower | FSETtling | MCPower | OBW | PNOise |  
    PSETtling | SPURious | SEM }  
DISPlay:GPRF:MEASview:SElect?
```

Arguments

AM selects the AM view.

FM selects the FM view.

PM selects the PM view.

CCDF selects the CCDF view.

ACPower selects the Channel power and ACPR view.

FSETtling selects the Frequency Settling view.

MCPower selects the MCPR view.

OBW selects the Occupied Bandwidth view.

PNOise selects the Phase Noise view (Option 11 only).

PSEtTling selects the Phase Settling view.

SPURious selects the Spurious view.

SEM selects the Spectral Emissions Mask view.

If you attempt to select a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Returns

See Arguments.

Examples

DISPlay:GPRF:MEASview:SElect ACPower selects the Channel power and ACPR view.

DISPlay:IQVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

```
DISPlay:IQVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:IQVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value 1.

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

See Arguments.

Examples

DISPLAY:IQVTIME:MEASview1:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the RF I&Q versus Time view.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]

Sets or queries the horizontal scale (full-scale time) of the RF I&Q versus Time graph. Programming a specified scale sets **DISPlay:IQVTime[:MEASview<y>]:X[:SCALE] AUTO:STATe OFF**.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

```
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE] <value>
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]?
```

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATE](#) (on page 802)

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSET](#) (on page 803)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::={ <NRf> | MAXimum | MINimum } specifies the horizontal scale in full-scale time. MAXimum and MINimum represent the upper and lower limits of the setting range, respectively. Use the [DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:MAXimum?](#) (on page 802) and [DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:MINimum?](#) (on page 803) queries to get the upper and lower limit values of the setting range.

Returns

See Arguments.

Examples

DISPLAY:IQVTIME:MEASview<y>:X:SCALE 100us sets the horizontal scale to 100 μ s.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO (No Query Form)

Sets the horizontal scale automatically to fit the waveform to the screen in the RF I&Q versus Time view. Executing this command sets DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATE ON.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

```
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO
```

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 800)

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATE](#) (on page 802)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

`DISPLAY:IQVTIME:MEASview1:X:SCALE:AUTO` sets the horizontal scale automatically to fit the waveform to the screen.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe

Determines whether to set the horizontal scale automatically or manually.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

```
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe { OFF | ON | 0 | 1 }
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe?
```

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`OFF` or 0 specifies that the horizontal scale is set manually. To set it, use the [DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 800) and [DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 803) command.

`ON` or 1 specifies that the horizontal scale is set automatically.

Returns

See Arguments.

Examples

`DISPLAY:IQVTIME:MEASview1:X:SCALE:AUTO:STATE ON` specifies that the horizontal scale is set automatically.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:MAXimum? (Query Only)

Queries the upper limit of the horizontal scale setting range.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

```
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:MAXimum?
```

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 800)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

Returns

<NRf> The upper limit of the horizontal scale setting range.

Examples

DISPLAY:IQVTime[:MEASview1]:X:SCALE:MAXIMUM? might return 18.135E-3, indicating that the upper limit of the horizontal scale setting range is 18.135 ms.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:MINimum? (Query Only)

Queries the lower limit of the horizontal scale setting range.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:MINimum?

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 800)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<NRf> The lower limit of the horizontal scale setting range.

Examples

DISPLAY:IQVTime[:MEASview1]:X:SCALE:MINIMUM? might return 10.0E-9, indicating that the lower limit of the horizontal scale setting range is 10.0 ns.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the RF I&Q versus Time graph. Programming a specified offset sets DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]AUTO:STATe OFF.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet <value>
DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet?

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATe](#) (on page 802)

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 800)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::={ <Nrf> | MAXimum | MINimum } specifies the horizontal offset. MAXimum and MINimum represent the upper and lower limits of the setting range, respectively.

Use the [DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet:MAXimum?](#) (on page 804) and [DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet:MINimum?](#) (on page 805) queries to get the upper and lower limit values of the setting range.

Returns

See Arguments.

Examples

DISPLAY:IQVTIME:MEASview1:X:SCALE:OFFSET 800ns sets the minimum horizontal value to 800 ns in the RF I&Q versus Time graph.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MAXimum? (Query Only)

Queries the upper limit of the horizontal offset setting range.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MAXimum?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 803)

Returns

<Nrf> The upper limit of the horizontal offset setting range.

Examples

DISPLAY:IQVTIME:MEASview1:X:SCALE:OFFSET:MAXIMUM? might return -1.812×10^{-3} , indicating that the upper limit of the horizontal offset setting range is -1.812 ms.

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum? (Query Only)

Queries the lower limit of the horizontal offset setting range.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

DISPlay:IQVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum?

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 803)

Returns

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<NRf> The lower limit of the horizontal offset setting range.

Examples

DISPLAY:IQVTIME:MEASview1:X:SCALE:OFFSET:MINIMUM? might return $-16.28\text{E}-3$, indicating that the lower limit of the horizontal offset setting range is -16.28 ms.

DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the RF I&Q versus Time graph.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE] <value>
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]?

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 806)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> specifies the vertical range. Range: 1μ to 10 V.

Returns

<NRf>

Examples

DISPLAY:IQVTime:MEASview1:Y:SCALE 1.5 sets the vertical range to 1.5 V in the RF I&Q versus Time graph.

DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:AUTO (No Query Form)

Sets the vertical scale automatically to fit the waveform to the screen in the RF I&Q versus Time view.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

```
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:AUTO
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

DISPLAY:IQVTime:MEASview1:Y:SCALE:AUTO sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the center of the vertical axis) in the RF I&Q versus Time graph.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

```
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:OFFSet <value>  
DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:IQVTime\[:MEASview<y>\]:Y\[:SCALE\]](#) (on page 805)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> specifies the vertical offset. Range: -5 to +5 V.

Returns

<NRf>

Examples

`DISPLAY:IQVTIME:MEASview1:Y:SCALE:OFFSET -82.75mV` sets the vertical offset to -82.75 mV in the RF I&Q versus Time graph.

DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:RESCale (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen.

Conditions

Measurement views: RF I&Q versus Time

Group

Display commands

Syntax

`DISPlay:IQVTime[:MEASview<y>]:Y[:SCALE]:RESCale`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

`DISPLAY:IQVTIME:MEASview1:Y:SCALE:RESCALE` rescales the vertical axis automatically to fit the waveform to the screen.

DISPlay:LTE:ACLR:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the LTE ACLR display. It will enable or disable the checkbox in the Prefs tab of the LTE ACLR settings control panel. This command will not add the marker itself. It will only decide if the enabled marker readout is shown or hidden.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

`DISPlay:LTE:ACLR:MARKer:SHOW:STATe {OFF | ON | 1 | 0}`
`DISPlay:LTE:ACLR:MARKer:SHOW:STATe?`

Arguments

OFF or 0 hides the readout for the selected marker in the LTE ACLR display.

ON or 1 shows the readout for the selected marker in the LTE ACLR display.

Returns

OFF or 0 means the readout for the selected marker in the LTE ACLR display is hidden.

ON or 1 means the readout for the selected marker in the LTE ACLR display is showing.

Examples

`DISPLAY:LTE:ACLR:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the display if the marker is enabled.

DISPlay:LTE:ACLR:RESet:SCALe (No Query Form)

Resets the horizontal and vertical scale of the LTE ACLR display graph to the default values.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

`DISPlay:LTE:ACLR:RESet:SCALe`

Arguments

None

Examples

`DISPLAY:LTE:ACLR:RESET:SCALE` resets the horizontal and vertical scale of the graph to the default values.

DISPlay:LTE:ACLR:SHOW:LIMit

Sets or queries the appearance of the limits in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

`DISPlay:LTE:ACLR:SHOW:LIMit { SHADEd | LINE | OFF }`
`DISPlay:LTE:ACLR:SHOW:LIMit?`

Arguments

`SHADEd`: denotes the limit area with shading.

`LINE`: delineates the limit area with a line.

`OFF`: turns off limits in the display.

Returns

`SHADEd`: means that the limit area is denoted with shading.

`LINE`: means that the limit area is delineated with a line.

`OFF`: means that the display of limits is off.

Examples

`DISPLAY:LTE:ACLR:SHOW:LIMIT SHAD` sets the instrument to use shading to identify the limits of the graph in the display.

DISPlay:LTE:ACLR:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticules in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPlay:LTE:ACLR:WINDow:TRACe:GRATicule:GRID:STATe {OFF | ON | 1 | 0}  
DISPlay:LTE:ACLR:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticules in the graph.

ON or 1 shows the graticules in the graph.

Returns

0 indicates that the graticules in the graph is hidden.

1 indicates that the graticules in the graph is showing.

Examples

`DISPLAY:LTE:ACLR:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` hides the graticules in the graph.

DISPlay:LTE:ACLR:WINDow:TRACe:POWer:LEVEl:STATe

Determines whether to show or hide the power readout in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPlay:LTE:ACLR:WINDow:TRACe:POWer:LEVEl:STATe {OFF | ON | 1 | 0}  
DISPlay:LTE:ACLR:WINDow:TRACe:POWer:LEVEl:STATe?
```

Arguments

OFF or 0 hides the power readout in the display.

ON or 1 shows the power readout in the display.

Returns

0 indicates that the power readout in the display is hidden.

1 indicates that the power readout in the display is showing.

Examples

DISPLAY:LTE:ACLR:WINDOW:TRACE:POWER:LEVEL:STATE? might return 1, indicating that the power readout in the display is showing.

DISPlay:LTE:ACLR:X:SCALE

Sets or queries the horizontal range of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPlay:LTE:ACLR:X:SCALE <value>  
DISPlay:LTE:ACLR:X:SCALE?
```

Arguments

<value>: : <NRf> specifies the horizontal range

Returns

<NR3>

Examples

DISPLAY:LTE:ACLR:X:SCALE 10.000000000E+6 sets the horizontal range to 10 MHz.

DISPLay:LTE:ACLR:X:SCALE:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPLay:LTE:ACLR:X:SCALE:AUTO
```

Arguments

None

Examples

DISPLAY:LTE:ACLR:X:SCALE:AUTO rescales the horizontal axis to fit the display screen.

DISPlay:LTE:ACLR:X:SCALE:OFFSet

Sets or queries the center frequency of the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPlay:LTE:ACLR:X:SCALe:OFFSet <value>  
DISPlay:LTE:ACLR:X:SCALe:OFFSet?
```

Arguments

<value>::=<Nrf> specifies the center frequency.

Returns

<NR3>

Examples

DISPLAY:LTE:ACLR:X:SCAEL:OFFSET 1.450000000E+9 sets the center frequency to 1.45 GHz.

DISPlay:LTE:ACLR:Y:SCALE:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform on the screen in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPlay:LTE:ACLR:Y:SCALE:AUTO
```

Arguments

None

Examples

DISPLAY:LTE:ACLR:Y:SCALE:AUTO rescales the vertical scale to fit the waveform on the screen.

DISPlay:LTE:ACLR:Y:SCALE:OFFSet

Sets or queries the vertical offset of the trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPlay:LTE:ACLR:Y:SCALE:OFFSet <value>
```

```
DISPlay:LTE:ACLR:Y:SCALE:OFFSet?
```

Arguments

<value>::=<NRf> specifies the vertical offset.

Returns

<NRf>

Examples

DISPlay:LTE:ACLR:Y:SCALE:OFFSET 40 sets the vertical position of the trace to 40 dBm.

DISPlay:LTE:ACLR:Y:SCALE

Sets or queries the vertical range of the graph in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Display commands

Syntax

```
DISPlay:LTE:ACLR:Y:SCALE <value>  
DISPlay:LTE:ACLR:Y:SCALE?
```

Arguments

<value>::=<NRf> specifies the vertical range.

Returns

<NRf>

Examples

DISPlay:LTE:ACLR:Y:SCALE 100 sets the vertical range to 100 dB.

DISPlay:LTE:CHSPectrum:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the LTE Channel Spectrum display. It will enable or disable the checkbox in the Prefs tab of the LTE Channel Spectrum settings control panel. This command will not add the marker itself. It will only decide if the enabled marker readout is shown or hidden.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

```
DISPlay:LTE:CHSPectrum:MARKer:SHOW:STATe {OFF | ON | 1 | 0}  
DISPlay:LTE:CHSPectrum:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker in the LTE Channel Spectrum display.

ON or 1 shows the readout for the selected marker in the LTE Channel Spectrum display.

Returns

OFF or 0 means the readout for the selected marker in the LTE Channel Spectrum display is hidden.

ON or 1 means the readout for the selected marker in the LTE Channel Spectrum display is showing.

Examples

DISPLAY:LTE:CHSPECTRUM:MARKER:SHOW:STATE ON shows the readout for the selected marker in the display if the marker is enabled.

DISPlay:LTE:CHSPepectrum:RESet:SCALE (No Query Form)

Resets the horizontal and vertical scale of the LTE Channel Spectrum display graph to the default values.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

DISPlay:LTE:CHSPepectrum:RESet:SCALE

Arguments

None

Examples

DISPlay:LTE:CHSPECTRUM:RESET:SCALE resets the horizontal and vertical scale of the graph to the default values.

DISPlay:LTE:CHSPepectrum:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

DISPlay:LTE:CHSPepectrum:WINDow:TRACe:GRATicule:GRID:STATe {OFF | ON | 1 | 0}
DISPlay:LTE:CHSPepectrum:WINDow:TRACe:GRATicule:GRID:STATe?

Arguments

OFF or 0 hides the graticule in the LTE Channel Spectrum display.

ON or 1 shows the graticule in the LTE Channel Spectrum display.

Returns

OFF or 0 means the graticule in the LTE Channel Spectrum display is hidden.

ON or 1 means the graticule in the LTE Channel Spectrum display is showing.

Examples

`DISPLAY:LTE:CHSPECTRUM:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` hides the graticules in the LTE Channel Spectrum display.

DISPlay:LTE:CHSPepectrum:X:SCALE

Sets or queries the horizontal range of the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

`DISPlay:LTE:CHSPepectrum:X:SCALE <value>`
`DISPlay:LTE:CHSPepectrum:X:SCALE?`

Arguments

`<value>::<NRf>` specifies the horizontal range

Returns

`<NR3>`

Examples

`DISPLAY:LTE:CHSPECTRUM:X:SCALE 10.000000000E+6` sets the horizontal range to 10 MHz.

DISPLay:LTE:CHSPepectrum:X:SCALE:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

`DISPLay:LTE:CHSPepectrum:X:SCALE:AUTO`

Arguments

None

Examples

`DISPLAY:LTE:CHSPECTRUM:X:SCALE:AUTO` rescales the horizontal axis to fit the display screen.

DISPlay:LTE:CHSPectrum:X:SCALe:OFFSet

Sets or queries the center frequency of the trace in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

```
DISPlay:LTE:CHSPectrum:X:SCALe:OFFSet <value>  
DISPlay:LTE:CHSPectrum:X:SCALe:OFFSet?
```

Arguments

<value>::=<NRf> specifies the center frequency.

Returns

<NR3>

Examples

DISPLAY:LTE:ACLR:X:SCAEL:OFFSET 1.450000000E+9 sets the center frequency to 1.45 GHz.

DISPlay:LTE:CHSPectrum:Y:SCALe

Sets or queries the vertical range of the graph in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

```
DISPlay:LTE:CHSPectrum:Y:SCALe <value>  
DISPlay:LTE:CHSPectrum:Y:SCALe?
```

Arguments

<value>::=<NRf> specifies the vertical range.

Returns

<NRf>

Examples

DISPLAY:LTE:CHSPECTRUM:Y:SCALE 100 sets the vertical range to 100 dB.

DISPlay:LTE:CHSPectrum:Y:SCALe:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform on the screen in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

```
DISPlay:LTE:CHSPepectrum:Y:SCALe:AUTO  
DISPlay:LTE:CHSPepectrum:Y:SCALe:AUTO?
```

Arguments

None

Examples

`DISPlay:LTE:CHSPepectrum:Y:SCALe:AUTO` rescales the vertical scale to fit the waveform on the screen.

DISPlay:LTE:CHSPepectrum:Y:SCALe:OFFSet

Sets or queries the vertical offset of the trace in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Display commands

Syntax

```
DISPlay:LTE:CHSPepectrum:Y:SCALe:OFFSet <value>  
DISPlay:LTE:CHSPepectrum:Y:SCALe:OFFSet?
```

Arguments

`<value>::=<Nrf>` specifies the vertical offset.

Returns

`<Nrf>`

Examples

`DISPlay:LTE:CHSPepectrum:Y:SCALe:OFFSET 40` sets the vertical position of the trace to 40 dBm.

DISPlay:LTE:CONSte:SCALe

Sets or queries the scale (zoom) in the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Display commands

Syntax

```
DISPlay:LTE:CONSte:SCALe <value>  
DISPlay:LTE:CONSte:SCALe?
```


Arguments

<value>::<NRf> specifies the scale (zoom)

Returns

<NRf>

Examples

DISPLAY:LTE:CONStE:SCALE 5 zooms the display out by 5.

DISPlay:LTE:CONStE:X:OFFSet

Sets or queries the horizontal offset in the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Display commands

Syntax

```
DISPlay:LTE:CONStE:X:OFFSet <value>  
DISPlay:LTE:CONStE:X:OFFSet?
```

Arguments

<value>::<NRf> specifies the horizontal offset range.

Returns

<NRf>

Examples

DISPLAY:LTE:CONStE:X:OFFSet 2.7 sets the horizontal offset to 2.7 units to the left.

DISPlay:LTE:CONStE:Y:OFFSet

Sets or queries the vertical offset in the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Display commands

Syntax

```
DISPlay:LTE:CONStE:Y:OFFSet <value>  
DISPlay:LTE:CONStE:Y:OFFSet?
```

Arguments

<value>::<NRf> specifies the vertical offset range. A positive value moves the offset up. A negative value moves the offset down and the display moves in the other direction.

Returns

<NRf>

Examples

`DISPLAY:LTE:CONSTE:Y:OFFSET 2` sets the vertical offset to 2 units.

DISPlay:LTE:MEASview:DELeTe (No Query Form)

Closes the selected LTE measurement display in the application.

Conditions

Measurement view: Any LTE display

Group

Display commands

Syntax

`DISPlay:LTE:MEASview:DELeTe { CONS | ACLR | CHSP | PVT }`

Arguments

`CONS` closes the LTE Constellation display.

`ACLR` closes the LTE ACLR display.

`CHSP` closes the LTE Channel Spectrum display.

`PVT` closes the LTE Power vs Time display.

Examples

`DISPLAY:LTE:MEASVIEW:DELETE ACLR` closes the LTE ACLR display.

DISPlay:LTE:MEASview:NEW (No Query Form)

Opens a new LTE measurement display.

Conditions

Measurement view: Any LTE display

Group

Display commands

Syntax

`DISPlay:LTE:MEASview:NEW { CONS | ACLR | CHSP | PVT }`

Arguments

`CONS` opens the LTE Constellation display.

`ACLR` opens the LTE ACLR display.

`CHSP` opens the LTE Channel Spectrum display.

`PVT` opens the LTE Power vs Time display.

Examples

`DISPLAY:LTE:MEASVIEW:NEW` ACLR opens a new LTE ACLR display.

DISPlay:LTE:MEASview:SElect

Selects an LTE measurement display in the application. The query returns the currently selected display.

Conditions

Measurement view: Any LTE display

Group

Display commands

Syntax

```
DISPlay:LTE:MEASview:SElect { CONS | ACLR | CHSP | PVT }  
DISPlay:LTE:MEASview:SElect?
```

Arguments

`CONS` selects the LTE Constellation display.

`ACLR` selects the LTE ACLR display.

`CHSP` selects the LTE Channel Spectrum display.

`PVT` selects the LTE Power vs Time display.

Returns

`CONS` means the LTE Constellation display is selected.

`ACLR` means the LTE ACLR display is selected.

`CHSP` means the LTE Channel Spectrum display is selected.

`PVT` means the LTE Power vs Time display is selected.

Examples

`DISPLAY:LTE:MEASVIEW:SELECT` ACLR selects the LTE ACLR display.

DISPlay:LTE:PVTime:MARKer:SHOW:STATe

Shows or hides the marker readout on the LTE Power vs. Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

```
DISPlay:LTE:PVTime:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:LTE:PVTime:MARKer:SHOW:STATe?
```

Arguments

`OFF` or `0` hides the marker readout in the LTE Power vs Time display.

`ON` or `1` shows the marker readout in the LTE Power vs Time display.

Returns

OFF or 0 means the marker readout in the LTE Power vs Time display is hidden.

ON or 1 means the marker readout in the LTE Power vs Time display is showing.

Examples

DISPLAY:LTE:PVTIME:MARKER:SHOW:STATE ON turns on the marker readout.

DISPlay:LTE:PVTime:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

```
DISPlay:LTE:PVTime:WINDow:TRACe:GRATicule:GRID:STATe {OFF | ON | 0 | 1 }  
DISPlay:LTE:PVTime:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the LTE Power vs Time display.

ON or 1 shows the graticule in the LTE Power vs Time display.

Returns

OFF or 0 means the graticule in the LTE Power vs Time display is hidden.

ON or 1 means the graticule in the LTE Power vs Time display is showing.

Examples

DISPLAY:LTE:PVTIME:WINDOW:TRACE:GRATICULE:GRID:STATE OFF hides the graticules in the LTE Power vs Time display.

DISPlay:LTE:PVTime:X:SCALE

Sets or queries the vertical range of the LTE Power vs Time graph.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

```
DISPlay:LTE:PVTime:X:SCALE <NRf>  
DISPlay:LTE:PVTime:X:SCALE?
```

Arguments

<NRf> specifies the vertical range.

Returns

<NRf>

Examples

`DISPLAY:LTE:PVTIME:X:SCALE 10` sets the horizontal range to 10 dB.

DISPLay:LTE:PVTime:X:SCALE:AUtO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

`DISPLay:LTE:PVTime:X:SCALE:AUtO`

Arguments

None

Examples

`DISPLAY:LTE:PVTIME:X:SCALE:AUtO` rescales the horizontal axis to fit the display screen.

DISPLay:LTE:PVTime:X:SCALE:RESet (No Query Form)

Resets the horizontal scale to the default value for the time measurements for the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

`DISPLay:LTE:PVTime:X:SCALE:RESet`

Arguments

None

Examples

`DISPLAY:LTE:PVTIME:X:SCALE:RESet` resets the horizontal scale to the default value.

DISPLay:LTE:PVTime:Y:SCALE

Sets or queries the horizontal range of the LTE Power vs Time graph.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

```
DISPlay:LTE:PVTime:Y:SCALe <value>  
DISPlay:LTE:PVTime:Y:SCALe?
```

Arguments

<value>::<NRf> specifies the horizontal range.

Returns

<NRf>

Examples

DISPLAY:LTE:PVTIME:Y:SCALE 100 sets the horizontal range to 100 ms.

DISPlay:LTE:PVTime:Y:SCALe:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform on the screen in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

```
DISPlay:LTE:PVTime:Y:SCALe:AUTO
```

Arguments

None

Examples

DISPLAY:LTE:PVTIME:Y:SCALE:AUTO rescales the vertical scale to fit the waveform on the screen.

DISPlay:LTE:PVTime:Y:SCALe:OFFSet

Sets or queries the vertical offset (top edge of the vertical axis) of the trace in the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

```
DISPlay:LTE:PVTime:Y:SCALe:OFFSet <NRf>  
DISPlay:LTE:PVTime:Y:SCALe:OFFSet?
```

Arguments

<NRf> specifies the vertical offset.

Returns

<NRf>

Examples

DISPLAY:LTE:PVTIME:Y:SCALE:OFFSET -10 sets the vertical position of the trace to -10 dBm.

DISPlay:LTE:PVTime:Y:SCALe:PDIVision

Sets or queries the value of the vertical scale for the LTE Power vs. Time display in dB/division. This is only a visual control for panning the graph.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

DISPlay:LTE:PVTime:Y:SCALe:PDIVision <NRf>

DISPlay:LTE:PVTime:Y:SCALe:PDIVision?

Arguments

<NRf> specifies the vertical scale in dB/div.

Returns

<NRf>

Examples

DISPLAY:LTE:PVTIME:Y:SCALE:PDIVISION 20 sets the vertical scale to 20.0 dB/div.

DISPlay:LTE:PVTime:Y:SCALe:RESet (No Query Form)

Resets the vertical scale and position (offset) to the default value for the time measurements for the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Display commands

Syntax

DISPlay:LTE:PVTime:Y:SCALe:RESet

Arguments

None

Examples

`DISPLAY:LTE:PVTIME:Y:SCALE:RESET` resets the vertical scale and position (offset) to the default value.

DISPlay:MCPower:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the MCPR view.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

```
DISPlay:MCPower:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:MCPower:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker in the graph.

ON or 1 shows the readout for the selected marker in the graph.

Examples

`DISPLAY:MCPOWER:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the graph.

DISPlay:MCPower:PLEVel:SHOW:STATe

Determines whether to show or hide the power levels in the MCPR view.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

```
DISPlay:MCPower:PLEVel:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:MCPower:PLEVel:SHOW:STATe?
```

Arguments

OFF or 0 hides the power levels in the graph.

ON or 1 shows the power levels in the graph.

Examples

`DISPLAY:MCPOWER:PLEVEL:SHOW:STATE ON` shows the power levels in the graph.

DISPlay:MCPower:RESet:SCALE (No Query Form)

Resets the horizontal and vertical scale to the default values described below in the MCPR view.

Vertical offset = Reference level, Vertical scale = 100 dB,

Horizontal offset = Center frequency, and Horizontal scale = Default span

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

```
DISPlay:MCPower:RESet:SCALE
```

Arguments

None

Examples

DISPLAY:MCPOWER:RESET:SCALE resets the horizontal and vertical scale to the default values.

DISPlay:MCPower:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

```
DISPlay:MCPower:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:MCPower:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Examples

DISPLAY:MCPOWER:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the screen.

DISPlay:MCPower:X[:SCALE]

Sets or queries the horizontal range of the MCPR graph.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

```
DISPlay:MCPower:X[:SCALE] <value>  
DISPlay:MCPower:X[:SCALE]?
```

Related Commands

[DISPlay:MCPower:X\[:SCALE\]:OFFSet](#) (on page 826)

Arguments

<value>::<NRf> specifies the horizontal range.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

DISPLAY:MCPOWER:X:SCALE 10MHz sets the horizontal range to 10 MHz.

DISPlay:MCPower:X[:SCALE]:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the MCPR view.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

DISPlay:MCPower:X[:SCALE]:AUTO

Arguments

None

Examples

DISPLAY:MCPOWER:X:SCALE:AUTO rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:MCPower:X[:SCALE]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the MCPR graph.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

DISPlay:MCPower:X[:SCALE]:OFFSet <value>
DISPlay:MCPower:X[:SCALE]:OFFSet?

Related Commands

[DISPlay:MCPower:X\[:SCALE\]](#) (on page 825)

Arguments

<value>: : <NRf> specifies the minimum horizontal value.

Range: [(center frequency) - (X scale) × 0.9] to [(center frequency) + (X scale) × 0.9]

Examples

DISPLAY:MCPOWER:X:SCALE:OFFSET 1.45GHz sets the minimum horizontal value to 1.45 GHz in the MCPR graph.

DISPlay:MCPower:Y[:SCALE]

Sets or queries the vertical range of the MCPR graph.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

DISPlay:MCPower:Y[:SCALE] <value>

DISPlay:MCPower:Y[:SCALE]?

Related Commands

[DISPlay:MCPower:Y\[:SCALE\]:OFFSet](#) (on page 828)

Arguments

<value>: : <NRf> specifies the vertical range. Range: 0.1 to 200 dB.

Examples

DISPLAY:MCPOWER:Y:SCALE 100 sets the vertical range to 100 dB in the MCPR graph.

DISPlay:MCPower:Y[:SCALE]:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the MCPR view.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

DISPlay:MCPower:Y[:SCALE]:AUTO

Arguments

None

Examples

DISPLAY:MCPOWER:Y:SCALE:AUTO rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:MCPower:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) in the MCPR graph.

Conditions

Measurement views: MCPR

Group

Display commands

Syntax

```
DISPlay:MCPower:Y[:SCALE]:OFFSet <value>  
DISPlay:MCPower:Y[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:MCPower:Y\[:SCALE\]](#) (on page 827)

Arguments

<value>::<Nrf> specifies the vertical offset. Range: -170 to +50 dBm.

Examples

DISPLAY:MCPOWER:Y:SCALE:OFFSET -12.5 sets the vertical offset to -12.5 dBm in the MCPR graph.

DISPlay:MERRor[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule grid view state for the Magnitude error versus Time view.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Display commands

Syntax

```
DISPlay:MERRor[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:MERRor[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

OFF or 0

ON or 1

Examples

`DISPlay:MERRor:MEASview2:WINDow:TRACe:GRATicule:GRID:STATe ON` shows the graticule grid on the Magnitude error versus Time Measview 2.

DISPlay:MERRor[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the Magnitude error versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Display commands

Syntax

```
DISPlay:MERRor[:MEASview<y>]:Y[:SCALE] <value>
DISPlay:MERRor[:MEASview<y>]:Y[:SCALE]?
```

Related Commands

[DISPlay:MERRor:\[MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 830)

Arguments

<value>::<NRF> specifies the vertical range.

Range: 1 to 100%.

Returns

<NRF>

Examples

`DISPlay:MERRor:MEASview1:Y:SCALE 50` sets the vertical range to 50% in the Magnitude error versus Time display Measurement view 1.

DISPlay:MERRor[:MEASview<y>]:Y[:SCALE]:AUTO (No query form)

Sets the vertical scale automatically to fit the waveform to the screen in the Magnitude error versus Time display.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Display commands

Syntax

DISPlay:MERRor[:MEASview<y>]:Y[:SCALe]:AUTO

Arguments

None

Examples

DISPlay:MERRor:MEASview2:Y:SCALe:AUTO sets the vertical scale automatically to fit the waveform to the screen of Magnitude error versus Time Measurement view 2.

DISPlay:MERRor[:MEASview<y>]:Y[:SCALe]:OFFSet

Sets or queries the minimum vertical value (bottom edge) of the Magnitude error versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Display commands

Syntax

DISPlay:MERRor[:MEASview<y>]:Y[:SCALe]:OFFSet <value>
DISPlay:MERRor[:MEASview<y>]:Y[:SCALe]:OFFSet?

Related Commands

[DISPlay:MERRor\[:MEASview<y>\]:Y\[:SCALe\]](#) (on page 829)

Arguments

<value>::<NRF> specifies the minimum vertical value.

Range: -100 to +100%.

Returns

<NRF>

Examples

DISPlay:MERRor:MEASview2:Y:SCALe:OFFSet? -9.5 sets the minimum vertical value to -9.5% in the Magnitude error versus Time graph Measurement View 2.

DISPlay:NOISe:FIGure[:SCALe]:AUTO (No Query Form)

Automatically scales the Noise Figure graph.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure[:SCALe]:AUTO
```

Arguments

None

Examples

DISP:NOIS:FIG:SCAL:AUTO will automatically scale the Noise Figure graph.

DISPlay:NOISe:FIGure:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule state in the Noise Figure display to on (showing) or off (hidden).

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:FIGure:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the Noise Figure display.

ON or 1 shows the graticule in the Noise Figure display.

Returns

0 means the graticule in the Noise Figure display is hidden (off).

1 means the graticule in the Noise Figure display is showing (on).

Examples

DISPLAY:NOISE:FIGURE:WINDOW:TRACE:GRATICULE:GRID:STATE ON will turn on the graticule in the Noise Figure display.

DISPLAY:NOISE:FIGURE:WINDOW:TRACE:GRATICULE:GRID:STATE? return of 1 indicates that the graticule in the Noise Figure display is showing (on).

DISPlay:NOISe:FIGure:WINDow:TRACe:LEGend:STATe

Sets or queries the trace legend state in the Noise Figure display to on (showing) or off (hidden).

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:WINDow:TRACe:LEGend:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:FIGure:WINDow:TRACe:LEGend:STATe?
```

Arguments

OFF or 0 hides the trace legend in the Noise Figure display.

ON or 1 shows the trace legend in the Noise Figure display.

Returns

0 means the trace legend in the Noise Figure display is hidden (off).

1 means the trace legend in the Noise Figure display is showing (on).

Examples

DISPlay:NOISe:FIGure:WINDow:TRACe:LEGend:STATe ON will turn on the trace legend in the Noise Figure display.

DISPlay:NOISe:FIGure:WINDow:TRACe:LEGend:STATe? return of 1 indicates that the trace legend in the Noise Figure display is showing (on).

DISPlay:NOISe:FIGure:WINDow:TRACe:MEASpoints:STATe

Sets or queries the measurement points state in the Noise Figure display to on (showing) or off (hidden).

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:WINDow:TRACe:MEASpoints:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:FIGure:WINDow:TRACe:MEASpoints:STATe?
```

Arguments

OFF or 0 hides the measurement points in the Noise Figure display.

ON or 1 shows the measurement points in the Noise Figure display.

Returns

0 means the measurement points in the Noise Figure display is hidden (off).

1 means the measurement points in the Noise Figure display is showing (on).

Examples

DISPlay:NOISe:FIGure:WINDow:TRACe:MEASPOINTS:STATe ON will turn on the measurement points in the Noise Figure display.

DISPlay:NOISe:FIGure:WINDow:TRACe:MEASPOINTS:STATe? might return 1, indicating that the measurement points in the Noise Figure display are showing (on).

DISPlay:NOISe:FIGure:X:AUTO (No Query Form)

Automatically sets the horizontal scale of the Noise Figure graph.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:X:AUTO
```

Arguments

None

DISPlay:NOISe:FIGure:X:OFFSet

Sets or queries the center frequency (offset) in the Noise Figure display.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:X:OFFSet <NRf>  
DISPlay:NOISe:FIGure:X:OFFSet?
```

Arguments

<NRf> is the center frequency (offset) in the Noise Figure display.

Range: -1.9900 GHz to +5.0000 GHz

Returns

<NR3> is a floating point value with an exponent. This is the center frequency (offset) value.

Examples

DISPlay:NOISe:FIGure:X:OFFSet? might return 2.0000000009E+9, indicating that the center frequency (offset) value is 2.0000 GHz.

DISPlay:NOISe:FIGure:X[:SCALE]

Sets or queries the horizontal scale of the Noise Figure display.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:X[:SCALE] <NRf>  
DISPlay:NOISe:FIGure:X[:SCALE]
```

Arguments

<NRf> is the horizontal scale value of the display.

Range: 100 Hz to 6.2 GHz

Returns

<NR3> = a floating point value with an exponent. This is the horizontal scale value.

Examples

DISPLAY:NOISE:FIGURE:X:SCALE? might return 2.990000000E+9, indicating that the horizontal scale value is 3.0 GHz.

DISPlay:NOISe:FIGure:Y:AUTO (No Query Form)

Automatically sets the vertical scale of the Noise Figure graph.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

DISPlay:NOISe:FIGure:Y:AUTO

Arguments

None

DISPlay:NOISe:FIGure:Y:AUTO:STATe

Sets the state of the automatic vertical scale and position of the graph to on or off. The query form of the command returns the current state.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

DISPlay:NOISe:FIGure:Y:AUTO:STATe { OFF | ON | 0 | 1 }
DISPlay:NOISe:FIGure:Y:AUTO:STATe?

Arguments

OFF or 0 sets the analyzer to manual setting of the vertical scale and position of the graph.

ON or 1 sets the analyzer to automatically set the vertical scale and position of the graph.

Returns

OFF or 0 means the analyzer is in manual mode for setting of the vertical scale and position of the graph.

ON or 1 means the analyzer is in automatic mode for setting of the vertical scale and position of the graph.

Examples

`DISPLAY:NOISE:FIGURE:Y:AUTO:STATE ON` sets the analyzer to automatically set the vertical scale and position of the graph.

DISPlay:NOISe:FIGure:Y:PDIVision

Sets or queries the distance between graticule lines on the display in dB.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:Y:PDIVision <NRf>  
DISPlay:NOISe:FIGure:Y:PDIVision?
```

Arguments

<NRf> is the distance between graticule lines on the display.

Range: 100 mdB to 5.00 dB

Returns

<NR2> = a floating point value without an exponent, which is the distance between graticule lines on the display in dB.

Examples

`DISPlay:NOISE:FIGURE:Y:PDIVISION?` might return 1.5000000000, indicating that the distance between graticule lines on the display is 1.50 dB.

DISPlay:NOISe:FIGure:Y:POSition

Sets or queries the vertical position of the Noise Figure display.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:Y:POSition <NRf>  
DISPlay:NOISe:FIGure:Y:POSition?
```

Arguments

<NRf> is the vertical position of the Noise Figure display.

Range: 5.12 to 26.5

Returns

<NR2> =a floating point value without an exponent, which is the vertical position value.

The vertical position value

Examples

`DISPLAY:NOISE:FIGURE:Y:POSITION?` might return 26.5000000000, indicating that the vertical position is 26.5.

DISPlay:NOISe:FIGure:Y:SCALe

Sets or queries the vertical scale of the Noise Figure display.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:Y:SCALe <NRf>  
DISPlay:NOISe:FIGure:Y:SCALe?
```

Arguments

<NRf> is the vertical scale of the Noise Figure display Range: 10.2 to 31.6

Returns

<NR2> = a floating point value without an exponent, which is the vertical scale value.

Examples

`DISPLAY:NOISE:FIGURE:Y:SCALE?` might return 10.0000000000, indicating that the vertical scale is 10.0 dB.

DISPlay:NOISe:FIGure:Y:SCALe:LINear:STATe

Sets or queries whether the linear units are shown (on) or not shown (off) on the display.

Conditions

Measurement view: Noise Figure

Group

Display commands

Syntax

```
DISPlay:NOISe:FIGure:Y:SCALe:LINear:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:FIGure:Y:SCALe:LINear:STATe?
```

Arguments

OFF or 0 sets the analyzer to show the linear units on the display.

ON or 1 sets the analyzer to not show the linear units on the display.

Returns

OFF or 0 indicates that the analyzer is set to show the linear units on the display.

ON or 1 indicates that the analyzer is set to not show the linear units on the display.

Examples

`DISPLAY:NOISE:FIGURE:Y:SCALE:LINEAR:STATE?` might return 1, indicating that linear units are not showing on the display.

DISPlay:NOISe:GAIN[:SCALE]:AUTO (No Query Form)

Automatically scales the Gain graph.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

`DISPlay:NOISe:GAIN[:SCALE]:AUTO`

Arguments

None

DISPlay:NOISe:GAIN:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule state in the Gain display to on (showing) or off (hidden).

Conditions

Measurement view: Gain

Group

Display commands

Syntax

`DISPlay:NOISe:GAIN:WINDow:TRACe:GRATicule:GRID:STATe {OFF|ON|0|1}`
`DISPlay:NOISe:GAIN:WINDow:TRACe:GRATicule:GRID:STATe?`

Arguments

`OFF` or 0 hides the graticule in the Gain display.

`ON` or 1 shows the graticule in the Gain display.

Returns

0 means the graticule in the Gain display is hidden (off).

1 means the graticule in the Gain display is showing (on).

Examples

`DISPLAY:NOISE:GAIN:WINDOW:TRACE:GRATICULE:GRID:STATE ON` will turn on the graticule in the Gain display.

`DISPLAY:NOISE:GAIN:WINDOW:TRACE:GRATICULE:GRID:STATE?` might return 1, indicating that the graticule in the Gain display is showing (on).

DISPlay:NOISe:GAIN:WINDow:TRACe:LEGend:STATe

Sets or queries the trace legend state in the Gain display to on (showing) or off (hidden).

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:WINDow:TRACe:LEGend:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:GAIN:WINDow:TRACe:LEGend:STATe?
```

Arguments

OFF or 0 hides the trace legend in the Gain display.

ON or 1 shows the trace legend in the Gain display.

Returns

0 means the trace legend in the Gain display is hidden (off).

1 means the trace legend in the Gain display is showing (on).

Examples

DISPLAY:NOISE:GAIN:WINDOW:TRACE:LEGEND:STATE ON will turn on the trace legend in the Gain display.

DISPLAY:NOISE:GAIN:WINDOW:TRACE:LEGEND:STATE? 1 indicates that the trace legend in the Gain display is showing (on).

DISPlay:NOISe:GAIN:WINDow:TRACe:MEASPoints:STATe

Sets or queries the measurement points state in the Gain display to on (showing) or off (hidden).

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:WINDow:TRACe:MEASPoints:STATe { OFF|ON|0|1 }  
DISPlay:NOISe:GAIN:WINDow:TRACe:MEASPoints:STATe?
```

Arguments

OFF or 0 hides the measurement points in the Gain display.

ON or 1 shows the measurement points in the Gain display.

Returns

0 means the measurement points in the Gain display is hidden (off).

1 means the measurement points in the Gain display is showing (on).

Examples

`DISPLAY:NOISE:GAIN:WINDOW:TRACE:MEASPOINTS:STATE ON` will turn on the measurement points in the Gain display.

`DISPLAY:NOISE:GAIN:WINDOW:TRACE:MEASPOINTS:STATE?` might return 1, indicating that the measurement points in the Gain display are showing (on).

DISPlay:NOISe:GAIN:X:AUTO (No Query Form)

Automatically sets the horizontal scale of the Gain graph.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

`DISPlay:NOISe:GAIN:X:AUTO`

Arguments

None

DISPlay:NOISe:GAIN:X:OFFSet

Sets or queries the center frequency (offset) in the Gain display.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

`DISPlay:NOISe:GAIN:X:OFFSet <NRf>`
`DISPlay:NOISe:GAIN:X:OFFSet?`

Arguments

`<NRf>` is the center frequency (offset) in the Gain display.

Range: -1.9900 GHz to +5.0000 GHz

Returns

`<NR3>` = a floating point value with an exponent, which is the center frequency (offset) value.

Examples

`DISPLAY:NOISE:GAIN:X:OFFSET?` might return `2.0000000009E+9`, indicating that the center frequency (offset) value is 2.0000 GHz.

DISPlay:NOISe:GAIN:X:SCALE

Sets or queries the horizontal scale of the Gain display.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:X:SCALe <NRf>  
DISPlay:NOISe:GAIN:X:SCALe
```

Related Commands

[DISPlay:NOISe:GAIN:Y:SCALe](#) (on page 842)

Arguments

<NRf> is the horizontal scale of the Gain display.

Range: 100 Hz to 6.2 GHz

Returns

<NR3> = a floating point value with an exponent, which is the horizontal scale value.

Examples

DISP:NOIS:GAIN:X:SCAL? might return 2.9900000000E+9, indicating that the horizontal scale value is 3.0 GHz.

DISPlay:NOISe:GAIN:Y:AUTO (No Query Form)

Automatically sets the vertical scale of the Gain graph.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:Y:AUTO
```

Related Commands

[DISPlay:NOISe:GAIN:Y:AUTO:STATe](#) (on page 840)

[DISPlay:NOISe:GAIN:X:AUTO](#) (on page 839)

Arguments

None

DISPlay:NOISe:GAIN:Y:AUTO:STATe

Sets or queries the state of the automatic vertical scale and position of the Gain graph to on or off.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:Y:AUTO:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:GAIN:Y:AUTO:STATe?
```

Related Commands

[DISPlay:NOISe:GAIN:Y:AUTO](#) (on page 840)

Arguments

OFF or 0 sets the analyzer to manual setting of the vertical scale and position of the graph.

ON or 1 sets the analyzer to automatically set the vertical scale and position of the graph.

Returns

OFF or 0 means the analyzer is in manual mode for setting of the vertical scale and position of the graph.

ON or 1 means the analyzer is in automatic mode for setting of the vertical scale and position of the graph.

Examples

DISPlay:NOISe:GAIN:Y:AUTO:STATe ON sets the analyzer to automatically set the vertical scale and position of the graph.

DISPlay:NOISe:GAIN:Y:PDIVision

Sets or queries the distance between graticule lines on the Gain display in dB.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:Y:PDIVision <NRf>  
DISPlay:NOISe:GAIN:Y:PDIVision?
```

Related Commands

Arguments

<NRf> is the distance between graticule lines on the Gain display.

Returns

<NR2> = a floating point value without exponents, which is the distance between graticule lines on the display in dB.

Examples

DISPlay:NOISe:GAIN:Y:PDIVISION? might return 1.5000000000, indicating that the distance between graticule lines on the display is 1.50 dB.

DISPlay:NOISe:GAIN:Y:POSition

Sets or queries the vertical position of the Gain display.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:Y:POSition <NRf>  
DISPlay:NOISe:GAIN:Y:POSition?
```

Related Commands

Arguments

<NRf> is the vertical position of the Gain display.

Range: 5.12 to 26.5

Returns

<NR2> = a floating point value without exponents, which is the vertical position value.

Examples

DISPLAY:NOISE:GAIN:Y:POSITION? might return 26.5000000000, indicating that the vertical position is 26.5.

DISPlay:NOISe:GAIN:Y:SCALE

Sets or queries the vertical scale of the Gain display.

Conditions

Measurement view: Gain

Group

Display commands

Syntax

```
DISPlay:NOISe:GAIN:Y:SCALE <NRf>  
DISPlay:NOISe:GAIN:Y:SCALE?
```

Related Commands

Arguments

<NRf> is the vertical scale of the Gain display.

Range: 10.2 to 31.6

Returns

<NR2> = a floating point value without an exponent, which is the vertical scale value.

Examples

DISPLAY:NOISE:GAIN:Y:SCALE? might return 10.0000000000, indicating that the vertical scale is 10.0 dB

DISPlay:NOISe:MEASview:DELeTe (No Query Form)

Deletes the selected Noise and Gain measurement view.

Conditions

Measurement views: All Noise and Gain displays

Group

Display commands

Syntax

```
DISPlay:NOISe:MEASview:DELeTe { GAIN | YFACTOR | FIGure | TEMPerature | TABLE | UNCertainty }
```

Related Commands

[DISPlay:NOISe:MEASview:SELeT](#) (on page 844)

[DISPlay:NOISe:MEASview:NEW](#) (on page 843)

Arguments

GAIN: Deletes the Gain display from the view.

YFACTOR: Deletes the Y Factor display from the view.

FIGure: Deletes the Noise Figure display from the view.

TEMPerature: Deletes the Noise Temperature display from the view.

TABLE: Deletes the Noise Table display from the view.

UNCertainty: Deletes the Uncertainty Calculator display from the view.

Examples

DISPLAY:NOISE:MEASVIEW:DELETE TABL will delete the Noise Table display view from the screen.

DISPlay:NOISe:MEASview:NEW (No Query Form)

Displays a new Noise and Gain measurement view.

Conditions

Measurement views: All Noise and Gain displays

Group

Display commands

Syntax

```
DISPlay:NOISe:MEASview:NEW { GAIN | YFACTOR | FIGure | TEMPerature | TABLE | UNCertainty }
```

Related Commands

[DISPlay:NOISe:MEASview:SELeT](#) (on page 844)

[DISPlay:NOISe:MEASview:DELeTe](#) (on page 843)

Arguments

GAIN: Displays the Gain display.

YFACTOR: Displays the Y Factor display.

FIGURE: Displays the Noise Figure display.

TEMPERATURE: Displays the Noise Temperature display.

TABLE: Displays the Noise Table display.

UNCERTAINTY: Displays the Uncertainty Calculator display.

Examples

`DISPLAY:NOISE:MEASVIEW:NEW YFAC` will bring the Y Factor display up on the screen.

DISPlay:NOISe:MEASview:SElect

Selects a noise measurement view. The query command returns the currently selected view.

Selecting a measurement optimizes it. Other measurements may be optimized as a side effect. Refer to the `DISPlay:WINDow:OPTImized:MEASurement` query.

Conditions

Measurement views: All Noise and Gain displays The measurement view must be displayed.

Group

Display commands

Syntax

```
DISPlay:NOISe:MEASview:SElect { GAIN | YFACTOR | FIGure | TEMPerature | TABLE | UNCertainty }  
DISPlay:NOISe:MEASview:SElect?
```

Related Commands

[DISPlay:NOISe:MEASview:DELeTe](#) (on page 843)

[DISPlay:NOISe:MEASview:NEW](#) (on page 843)

Arguments

GAIN: Selects the Gain display.

YFACTOR: Selects the Y Factor display.

FIGure: Selects the Noise Figure display.

TEMPerature: Selects the Noise Temperature display.

TABLE: Selects the Noise Table display.

UNCertainty: Selects the Uncertainty Calculator display.

Returns

GAIN: Means that the Gain display is selected.

YFAC: Means that the Y Factor display is selected.

FIG: Means that the Noise Figure display is selected.

TEMP: Means that the Noise Temperature display is selected.

TABL: Means that the Noise Table display is selected.

UNC: Means that the Uncertainty Calculator display is selected.

Examples

DISPLAY:NOISE:MEASVIEW:SELECT GAIN will select the Gain display.

DISPlay:NOISe:POWer:LINear:STATe

Sets or queries whether the linear units are shown (on) or not shown (off) on the Noise Table display.

Conditions

Measurement view: Noise Table

Group

Display commands

Syntax

```
DISPlay:NOISe:POWer:LINear:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:POWer:LINear:STATe?
```

Arguments

OFF or 0 sets the analyzer to show the linear units on the display.

ON or 1 sets the analyzer to not show the linear units on the display.

Returns

OFF or 0 indicates that the analyzer is set to show the linear units on the display.

ON or 1 indicates that the analyzer is set to not show the linear units on the display.

Examples

DISPLAY:NOISE:POWER:LINEAR:STATE? might return 1, indicating that linear units are not showing on the Noise Table display.

DISPlay:NOISe:TEMPerature[:SCALE]:AUTO (No Query Form)

Automatically scales the Noise Temperature graph.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature[:SCALE]:AUTO
```

Arguments

None

DISPlay:NOISe:TEMPerature:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule state in the Noise Temperature display to on (showing) or off (hidden).

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:TEMPerature:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the Noise Temperature display.

ON or 1 shows the graticule in the Noise Temperature display.

Returns

0 means the graticule in the Noise Temperature display is hidden (off).

1 means the graticule in the Noise Temperature display is showing (on).

Examples

DISPLAY:NOISE:TEMPERATURE:WINDOW:TRACE:GRATICULE:GRID:STATE ON will turn on the graticule in the Noise Temperature display.

DISPLAY:NOISE:TEMPERATURE:WINDOW:TRACE:GRATICULE:GRID:STATE? might return 1, indicating that the graticule in the Noise Temperature display is showing (on).

DISPlay:NOISe:TEMPerature:WINDow:TRACe:LEGend:STATe

Sets or queries the trace legend state in the Noise Temperature display to on (showing) or off (hidden).

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:WINDow:TRACe:LEGend:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:TEMPerature:WINDow:TRACe:LEGend:STATe?
```

Arguments

OFF or 0 hides the trace legend in the Noise Temperature display.

ON or 1 shows the trace legend in the Noise Temperature display.

Returns

0 means the trace legend in the Noise Temperature display is hidden (off).

1 means the trace legend in the Noise Temperature display is showing (on).

Examples

`DISPLAY:NOISE:TEMPERATURE:WINDOW:TRACE:LEGEND:STATE ON` will turn on the trace legend in the Noise Temperature display.

`DISPLAY:NOISE:TEMPERATURE:WINDOW:TRACE:LEGEND:STATE? 1` indicates that the trace legend in the Noise Temperature display is showing (on).

DISPlay:NOISe:TEMPeRature:WINDow:TRACe:MEASPoints:STATe

Sets or queries the measurement points state in the Noise Temperature display to on (showing) or off (hidden).

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPeRature:WINDow:TRACe:MEASPoints:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:TEMPeRature:WINDow:TRACe:MEASPoints:STATe?
```

Arguments

`OFF` or `0` hides the measurement points in the Noise Temperature display.

`ON` or `1` shows the measurement points in the Noise Temperature display.

Returns

`0` means the measurement points in the Noise Temperature display is hidden (off).

`1` means the measurement points in the Noise Temperature display is showing (on).

Examples

`DISPLAY:NOISE:TEMPERATURE:WINDOW:TRACE:MEASPOINTS:STATE ON` will turn on the measurement points in the Noise Temperature display.

`DISPLAY:NOISE:TEMPERATURE:WINDOW:TRACE:MEASPOINTS:STATE?` might return `1`, indicating that the measurement points in the Noise Temperature display are showing (on).

DISPlay:NOISe:TEMPeRature:X:AUTO (No Query Form)

Automatically sets the horizontal scale of the Noise Temperature graph.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPeRature:X:AUTO
```

Arguments

None

DISPlay:NOISe:TEMPerature:X:OFFSet

Sets or queries the center frequency (offset) value for the Noise Temperature display.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:X:OFFSet <NRf>  
DISPlay:NOISe:TEMPerature:X:OFFSet?
```

Arguments

<NRf> is the center frequency (offset) value.

Range: -1.9900 GHz to +5.0000 GHz

Returns

<NR3> = a floating point value with an exponent, which is the center frequency (offset) value.

Examples

DISPlay:NOISe:TEMPerature:X:OFFSet? might return 2.0000000009E+9, indicating that the center frequency (offset) value is 2.0000 GHz.

DISPlay:NOISe:TEMPerature:X[:SCALe]

Sets or queries the horizontal scale of the Noise Temperature display.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:X[:SCALe] <NRf>  
DISPlay:NOISe:TEMPerature:X[:SCALe]
```

Related Commands

[DISPlay:NOISe:GAIN:Y:SCALe](#) (on page 842)

Arguments

<NRf> is the horizontal scale of the Noise Temperature display.

Range: 100 Hz to 6.2 GHz

Returns

<NR3> = a floating point value with an exponent, which is the horizontal scale value.

Examples

DISP:NOIS:TEMP:X:SCAL? might return 2.9900000000E+9, indicating that the horizontal scale value is 3.0 GHz.

DISPlay:NOISe:TEMPerature:X:STARt

Sets or queries the Start Frequency value in the Noise Temperature display.

Conditions

Measurement views: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:X:STARt <NRf>  
DISPlay:NOISe:TEMPerature:X:STARt?
```

Arguments

<NRf> is the Start Frequency value.

Returns

<NR3> = floating point value with an exponent, which is the Start Frequency value.

Examples

DISPLAY:NOISE:TEMPERATURE:X:START 1.5GHz sets the Start Frequency in the Noise Temperature display to 1.5000 GHz.

DISPLAY:NOISE:TEMPERATURE:X:START? might return 1.5000000000E+9, indicating that the Start Frequency in the Noise Temperature display is 1.5000 GHz.

DISPlay:NOISe:TEMPerature:X:STOP

Sets or queries the Stop Frequency value in the Noise Temperature display.

Conditions

Measurement views: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:X:STOP <NRf>  
DISPlay:NOISe:TEMPerature:X:STOP?
```

Arguments

<NRf> is the Stop Frequency value.

Returns

<NR3> = floating point value with an exponent, which is the Stop Frequency value.

Examples

`DISPLAY:NOISE:TEMPERATURE:X:STOP 1.5GHz` sets the Stop Frequency in the Noise Temperature display to 1.5000 GHz.

`DISPLAY:NOISE:TEMPERATURE:X:STOP?` might return `1.5000000000E+9`, indicating that the Stop Frequency in the Noise Temperature display is 1.5000 GHz.

DISPlay:NOISe:TEMPerature:Y:AUTO (No Query Form)

Automatically sets the vertical scale of the Noise Temperature graph.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

`DISPlay:NOISe:TEMPerature:Y:AUTO`

Arguments

None

DISPlay:NOISe:TEMPerature:Y:AUTO:STATe

Sets or queries the state of the automatic vertical scale and position of the graph to on or off.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

`DISPlay:NOISe:TEMPerature:Y:AUTO:STATe { OFF | ON | 0 | 1 }`
`DISPlay:NOISe:TEMPerature:Y:AUTO:STATe?`

Arguments

`OFF` or `0` sets the analyzer to manual setting of the vertical scale and position of the graph.

`ON` or `1` sets the analyzer to automatically set the vertical scale and position of the graph.

Returns

`OFF` or `0` means the analyzer is in manual mode for setting of the vertical scale and position of the graph.

`ON` or `1` means the analyzer is in automatic mode for setting of the vertical scale and position of the graph.

Examples

`DISPLAY:NOISE:TEMPERATURE:Y:AUTO:STATE ON` sets the analyzer to automatically set the vertical scale and position of the graph.

DISPlay:NOISe:TEMPerature:Y:PDIVision

Sets or queries the distance between graticule lines on the display in dB.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:Y:PDIVision <NRf>  
DISPlay:NOISe:TEMPerature:Y:PDIVision?
```

Arguments

<NRf> is the distance between graticule lines on the display.

Range: 100 mdB to 5.00 dB

Returns

<NR2> = a floating point value without an exponent, which is the distance between graticule lines on the display in dB.

Examples

DISPlay:NOISe:TEMPerature:Y:PDIVISION? might return 1.5000000000, indicating that the distance between graticule lines on the display is 1.50 dB.

DISPlay:NOISe:TEMPerature:Y:POSition

Sets or queries the vertical position of the Noise Temperature display.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:Y:POSition <NRf>  
DISPlay:NOISe:TEMPerature:Y:POSition?
```

Arguments

<NRf> is the vertical position of the Noise Temperature display.

Range: 5.12 to 26.5

Returns

<NR2> = a floating point value without an exponent, which is the vertical position value.

The vertical position value

Examples

DISPlay:NOISe:TEMPerature:Y:POSITION? might return 26.5000000000, indicating that the vertical position is 26.5.

DISPlay:NOISe:TEMPerature:Y:SCALe

Sets or queries the vertical scale of the Noise Temperature display.

Conditions

Measurement view: Noise Temperature

Group

Display commands

Syntax

```
DISPlay:NOISe:TEMPerature:Y:SCALe <NRf>  
DISPlay:NOISe:TEMPerature:Y:SCALe?
```

Arguments

<NRf> is the vertical scale of the Noise Temperature display.

Range: 10.2 to 31.6

Returns

<NR2> = a floating point value without an exponent, which is the vertical scale value.

Examples

DISPlay:NOISe:TEMPerature:Y:SCALe? might return 10.0000000000, indicating that the vertical scale is 10.0 dB.

DISPlay:NOISe:UNCERTainty:RESult:GAIN? (Query Only)

Queries the gain computed uncertainty value (dB).

Conditions

Measurement view: Uncertainty Calculator

Group

Display commands

Syntax

```
DISPlay:NOISe:UNCERTainty:RESult:GAIN?
```

Related Commands

[DISPlay:NOISe:UNCERTainty:RESult:NFIGure?](#) (on page 852)

Returns

<NR3> = a floating point value with an exponent, which is the gain computed uncertainty value (dB).

Examples

DISPlay:NOISe:UNCERTAINTY:RESULT:GAIN? might return 783.0000000000E-3, indicating that the computed uncertainty value for gain is 0.783 dB.

DISPlay:NOISe:UNCERTainty:RESult:NFIGure? (Query Only)

Queries the noise figure computed uncertainty value (dB).

Conditions

Measurement view: Uncertainty Calculator

Group

Display commands

Syntax

`DISPlay:NOISe:UNCERTainty:RESult:NFIGure?`

Related Commands

[DISPlay:NOISe:UNCERTainty:RESult:GAIN?](#) (on page 852)

Returns

<NR3> = a floating point value with an exponent, which is the noise figure computed uncertainty value (dB).

Examples

`DISPlay:NOISe:UNCERTainty:RESult:NFIGure?` might return `783.0000000000E-3`, indicating that the computed uncertainty value for noise figure is 0.783 dB.

DISPlay:NOISe:YFACTOR[:SCALE]:AUTO (No Query Form)

Automatically scales the Y Factor graph.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

`DISPlay:NOISe:YFACTOR[:SCALE]:AUTO`

Arguments

None

DISPlay:NOISe:YFACTOR:WINDOW:TRACE:GRATICULE:GRID:STATE

Sets or queries the graticule state in the Y Factor display to on (showing) or off (hidden).

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

`DISPlay:NOISe:YFACTOR:WINDOW:TRACE:GRATICULE:GRID:STATE { OFF | ON | 0 | 1 }`
`DISPlay:NOISe:YFACTOR:WINDOW:TRACE:GRATICULE:GRID:STATE?`

Arguments

OFF or 0 hides the graticule in the Y Factor display.

ON or 1 shows the graticule in the Y Factor display.

Returns

0 means the graticule in the Y Factor display is hidden (off).

1 means the graticule in the Y Factor display is showing (on).

Examples

DISPLAY:NOISE:YFACTOR:WINDOW:TRACE:GRATICULE:GRID:STATE ON will turn on the graticule in the Y Factor display.

DISPLAY:NOISE:YFACTOR:WINDOW:TRACE:GRATICULE:GRID:STATE? might return 1, indicating that the graticule in the Y Factor display is showing (on).

DISPlay:NOISe:YFACTOR:WINDow:TRACe:LEGend:STATe

Sets or queries the trace legend state in the Y Factor display to on (showing) or off (hidden).

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

DISPlay:NOISe:YFACTOR:WINDow:TRACe:LEGend:STATe { OFF | ON | 0 | 1 }
DISPlay:NOISe:YFACTOR:WINDow:TRACe:LEGend:STATe?

Arguments

OFF or 0 hides the trace legend in the Y Factor display.

ON or 1 shows the trace legend in the Y Factor display.

Returns

0 means the trace legend in the Y Factor display is hidden (off).

1 means the trace legend in the Y Factor display is showing (on).

Examples

DISPLAY:NOISE:YFACTOR:WINDOW:TRACE:LEGEND:STATE ON will turn on the trace legend in the Y Factor display.

DISPLAY:NOISE:YFACTOR:WINDOW:TRACE:LEGEND:STATE? might return 1 indicates that the trace legend in the Y Factor display is showing (on).

DISPlay:NOISe:YFACTOR:WINDow:TRACe:MEASPoints:STATe

Sets or queries the measurement points state in the Y Factor display to on (showing) or off (hidden).

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:WINDow:TRACe:MEASPoints:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:YFACTOR:WINDow:TRACe:MEASPoints:STATe?
```

Arguments

OFF or 0 hides the measurement points in the Y Factor display.

ON or 1 shows the measurement points in the Y Factor display.

Returns

0 means the measurement points in the Y Factor display is hidden (off).

1 means the measurement points in the Y Factor display is showing (on).

Examples

DISPlay:NOISe:YFACTOR:WINDow:TRACe:MEASPOINTS:STATE ON will turn on the measurement points in the Y Factor display.

DISPlay:NOISe:YFACTOR:WINDow:TRACe:MEASPOINTS:STATE? might return 1, indicating that the measurement points in the Y Factor display are showing (on).

DISPlay:NOISe:YFACTOR:X:AUTO (No Query Form)

Automatically sets the horizontal scale of the Y Factor graph.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:X:AUTO
```

Arguments

None

DISPlay:NOISe:YFACTOR:X:OFFSet

Sets or queries the center frequency (offset) in the Y Factor display.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:X:OFFSet <NRf>  
DISPlay:NOISe:YFACTOR:X:OFFSet?
```

Arguments

<NRf> is the center frequency (offset) in the Y Factor display.

Range: -1.9900 GHz to +5.0000 GHz

Returns

<NR3> = a floating point value with an exponent, which is the center frequency (offset) value.

Examples

DISPLAY:NOISE:YFACTOR:X:OFFSET? might return 2.0000000009E+9, indicating that the center frequency (offset) value is 2.0000 GHz.

DISPlay:NOISe:YFACTOR:X[:SCALE]

Sets or queries the horizontal scale of the Y Factor display.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:X[:SCALE] <NRf>  
DISPlay:NOISe:YFACTOR:X[:SCALE]
```

Related Commands

[DISPlay:NOISe:GAIN:Y:SCALE](#) (on page 842)

Arguments

<NRf> is the horizontal scale of the Y Factor display.

Range: 100 Hz to 6.2 GHz

Returns

<NR3> = a floating point value with an exponent, which is the horizontal scale value.

Examples

DISP:NOIS:YFAC:X:SCAL? might return 2.9900000000E+9, indicating that the horizontal scale value is 3.0 GHz.

DISPlay:NOISe:YFACTOR:X:START

Sets or queries the Start Frequency value in the Y Factor display.

Conditions

Measurement views: Y Factor

Group

Display commands

Syntax


```
DISPlay:NOISe:YFACTOR:X:START <NRf>  
DISPlay:NOISe:YFACTOR:X:START?
```

Arguments

<NRf> is the Start Frequency value in the Y Factor display.

Returns

<NR3> = floating point value with an exponent, which is the Start Frequency value.

Examples

DISPLAY:NOISE:YFACTOR:X:START 1.5GHz sets the Start Frequency in the Y Factor display to 1.5000 GHz.

DISPLAY:NOISE:YFACTOR:X:START? might return 1.5000000000E+9, indicating that the Start Frequency in the Y Factor display is 1.5000 GHz.

DISPlay:NOISe:YFACTOR:X:STOP

Sets or queries the Stop Frequency value Y Factor display.

Conditions

Measurement views: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:X:STOP <NRf>  
DISPlay:NOISe:YFACTOR:X:STOP?
```

Arguments

<NRf> is the Stop Frequency value in the Y Factor display.

Returns

<NR3> = floating point value with an exponent, which is the Stop Frequency value.

Examples

DISPLAY:NOISE:YFACTOR:X:STOP 1.5GHz sets the Stop Frequency in the Y Factor display to 1.5000 GHz.

DISPLAY:NOISE:YFACTOR:X:STOP? might return 1.5000000000E+9, indicating that the Stop Frequency in the Y Factor display is 1.5000 GHz.

DISPlay:NOISe:YFACTOR:Y:AUTO (No Query Form)

Automatically sets the vertical scale of the Y Factor graph.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:Y:AUTO
```

Arguments

None

DISPlay:NOISe:YFACTOR:Y:AUTO:STATe

Sets or queries the state of the automatic vertical scale and position of the Y Factor graph to on or off.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:Y:AUTO:STATe { OFF | ON | 0 | 1 }  
DISPlay:NOISe:YFACTOR:Y:AUTO:STATe?
```

Arguments

OFF or 0 sets the analyzer to manual setting of the vertical scale and position of the graph.

ON or 1 sets the analyzer to automatically set the vertical scale and position of the graph.

Returns

OFF or 0 means the analyzer is in manual mode for setting of the vertical scale and position of the graph.

ON or 1 means the analyzer is in automatic mode for setting of the vertical scale and position of the graph.

Examples

DISPLAY:NOISE:YFACTOR:Y:AUTO:STATE ON sets the analyzer to automatically set the vertical scale and position of the graph.

DISPlay:NOISe:YFACTOR:Y:PDIVision

Sets or queries the distance between graticule lines on the display in dB.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:Y:PDIVision <NRf>  
DISPlay:NOISe:YFACTOR:Y:PDIVision?
```

Arguments

<NRf> is the distance between graticule lines on the display in dB. Range: 100 mdB to 5.00 dB

Returns

<NR2> = a floating point value without an exponent, which is the distance between graticule lines on the display in dB.

Examples

`DISPLAY:NOISE:YFACTOR:Y:PDIVISION?` might return `1.5000000000`, indicating that the distance between graticule lines on the display is 1.50 dB.

DISPlay:NOISe:YFACTOR:Y:POSition

Sets or queries the vertical position of the Y Factor display.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:Y:POSition <NRf>
DISPlay:NOISe:YFACTOR:Y:POSition?
```

Arguments

<NRf> is the vertical position of the Y Factor display.

Range: 5.12 to 26.5

Returns

<NR2> = a floating point value without an exponent, which is the vertical position value.

Examples

`DISPLAY:NOISE:YFACTOR:Y:POSITION?` might return `26.5000000000`, indicating that the vertical position is 26.5.

DISPlay:NOISe:YFACTOR:Y:SCALE

Sets or queries the vertical scale of the Y Factor display.

Conditions

Measurement view: Y Factor

Group

Display commands

Syntax

```
DISPlay:NOISe:YFACTOR:Y:SCALE <NRf>
DISPlay:NOISe:YFACTOR:Y:SCALE?
```

Related Commands

Arguments

<NRf> is the vertical scale of the Y Factor display.

Range: 10.2 to 31.6 dB

Returns

<NR2> = a floating point value without an exponent, which is the vertical scale

value.

Examples

`DISPLAY:NOISE:YFACTOR:Y:SCALE?` might return `10.0000000000`, indicating that the vertical scale is 10.0 dB.

DISPlay:OBWidth:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:OBWidth:MARKer:SHOW:STATe?
```

Arguments

`OFF` or `0` hides the readout for the selected marker in the view.

`ON` or `1` shows the readout for the selected marker in the view.

Examples

`DISPLAY:OBWIDTH:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the view.

DISPlay:OBWidth:RESet:SCALe (No Query Form)

Resets the horizontal and vertical scale to the default values described below in the Occupied Bandwidth view.

Vertical offset = Reference level, Vertical scale = 100 dB,

Horizontal offset = Center frequency, and Horizontal scale = Default span

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:RESet:SCALe
```

Arguments

None

Examples

`DISPLAY:OBWIDTH:RESET:SCALE` resets the horizontal and vertical scale to the default values.

DISPlay:OBWidth:SElected:BANDwidth

Sets or queries the bandwidth (OBW or x dB BW) to measure in the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:SElected:BANDwidth { OBWidth | XDBbandwidth }  
DISPlay:OBWidth:SElected:BANDwidth?
```

Arguments

OBWidth selects the occupied bandwidth to measure.

XDBbandwidth selects the x dB bandwidth to measure.

Examples

DISPLAY:OBWIDTH:SELECTED:BANDWIDTH OBWidth selects the occupied bandwidth to measure.

DISPlay:OBWidth:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:OBWidth:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or **0** hides the graticule grid.

ON or **1** shows the graticule grid.

Examples

DISPLAY:OBWIDTH:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the screen.

DISPlay:OBWidth:X[:SCALE]

Sets or queries the horizontal range of the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:X[:SCALe] <value>  
DISPlay:OBWidth:X[:SCALe]?
```

Related Commands

[DISPlay:OBWidth:X\[:SCALe\]:OFFSet](#) (on page 862)

Arguments

<value>::<NRf> specifies the horizontal range.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

DISPLAY:OBWIDTH:X:SCALE 10MHz sets the horizontal range to 10 MHz.

DISPlay:OBWidth:X[:SCALe]:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:X[:SCALe]:AUTO
```

Arguments

None

Examples

DISPLAY:OBWIDTH:X:SCALE:AUTO rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:OBWidth:X[:SCALe]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:X[:SCALE]:OFFSet <value>  
DISPlay:OBWidth:X[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:OBWidth:X\[:SCALE\]](#) (on page 861)

Arguments

<value>::<NRf> specifies the minimum horizontal value.

Range: [(center frequency) - (X scale) × 0.9] to [(center frequency) + (X scale) × 0.9]

Examples

DISPLAY:OBWIDTH:X:SCALE:OFFSET 1.45GHz sets the minimum horizontal value to 1.45 GHz in the Occupied Bandwidth view.

DISPlay:OBWidth:Y[:SCALE]

Sets or queries the vertical range of the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:Y[:SCALE] <value>  
DISPlay:OBWidth:Y[:SCALE]?
```

Related Commands

[DISPlay:OBWidth:Y\[:SCALE\]:OFFSet](#) (on page 864)

Arguments

<value>::<NRf> specifies the vertical range. Range: 0.1 to 200 dB.

Examples

DISPLAY:OBWIDTH:Y:SCALE 100 sets the vertical range to 100 dB in the Occupied Bandwidth view.

DISPlay:OBWidth:Y[:SCALE]:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

```
DISPlay:OBWidth:Y[:SCALE]:AUTO
```

Arguments

None

Examples

`DISPLAY:OBWIDTH:Y:SCALE:AUTO` rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:OBWidth:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) in the Occupied Bandwidth view.

Conditions

Measurement views: Occupied Bandwidth

Group

Display commands

Syntax

`DISPlay:OBWidth:Y[:SCALE]:OFFSet <value>`
`DISPlay:OBWidth:Y[:SCALE]:OFFSet?`

Related Commands

[DISPlay:OBWidth:Y\[:SCALE\]](#) (on page 863)

Arguments

`<value>::<NRf>` specifies the vertical offset. Range: -170 to +50 dBm.

Examples

`DISPLAY:OBWIDTH:Y:SCALE:OFFSET -12.5` sets the vertical offset to -12.5 dBm in the Occupied Bandwidth view.

DISPlay:OFDM:CONStE[:SCALE]

Sets or queries the scale (zoom) in the OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

`DISPlay:OFDM:CONStE[:SCALE] <value>`
`DISPlay:OFDM:CONStE[:SCALE]?`

Arguments

`<value>::<NRf>` specifies the zoom setting in the OFDM Constellation view.

A positive value zooms out and a negative value zooms in.

Examples

`DISPLAY:OFDM:CONSTE[:SCALE] 5` zooms the display out by 5

DISPlay:OFDM:CONStE:X:OFFSet

Sets or queries the horizontal offset in the OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CONStE:X:OFFSet <value>  
DISPlay:OFDM:CONStE:X:OFFSet?
```

Arguments

<value>::<NRf> specifies the offset range.

Examples

DISPLAY:OFDM:CONSTE:X:OFFSET 2.7 sets the horizontal offset to 2.7 units to the left.

DISPlay:OFDM:CONStE:Y:OFFSet

Sets or queries the vertical offset in the OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CONStE:Y:OFFSet <value>  
DISPlay:OFDM:CONStE:Y:OFFSet?
```

Arguments

<value>::<NRf> specifies the offset range.

A positive value moves the offset up; and negative value moves the offset down.

Examples

DISPLAY:OFDM:CONSTE:Y:OFFSET 2 sets the vertical offset to up 2 units.

DISPlay:OFDM:CRESPonse:FREQuency:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:CRESPonse:FREQuency:AUTO

Arguments

None

Examples

DISPlay:OFDM:CRESPONSE:FREQUENCY:AUTO rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:OFDM:CRESPonse:FREQuency:OFFSet

Sets or queries the frequency offset in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:CRESPonse:FREQuency:OFFSet <value>
DISPlay:OFDM:CRESPonse:FREQuency:OFFSet?

Arguments

<value>::<NRf> specifies the frequency offset.

Examples

DISPlay:OFDM:CRESPONSE:FREQUENCY:OFFSET 1.45E+9 sets the frequency offset to 1.45 GHz.

DISPlay:OFDM:CRESPonse:FREQuency[:SCALE]

Sets or queries the horizontal range of the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:CRESPonse:FREQuency[:SCALE] <value>
DISPlay:OFDM:CRESPonse:FREQuency[:SCALE]?

Arguments

<value>:::= <NRf> specifies the horizontal range.

Examples

DISPlay:OFDM:CRESPONSE:FREQUENCY[:SCALE] 10E+6 sets the horizontal range to 10 MHz.

DISPlay:OFDM:CRESPonse:MAGNitude:AUTO (No Query Form)

Rescales the magnitude automatically to fit the waveform to the screen in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CRESPonse:MAGNitude:AUTO
```

Arguments

None

Examples

DISPlay:OFDM:CRESPonse:MAGNitude:AUTO rescales the magnitude scale automatically to fit the waveform to the screen.

DISPlay:OFDM:CRESPonse:MAGNitude:OFFSet

Sets or queries the magnitude offset in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CRESPonse:MAGNitude:OFFSet <value>  
DISPlay:OFDM:CRESPonse:MAGNitude:OFFSet?
```

Arguments

<value> ::= <NRf> specifies the magnitude offset.

Examples

DISPlay:OFDM:CRESPonse:MAGNitude:OFFSET 5 sets the magnitude offset to 5 dB.

DISPlay:OFDM:CRESPonse:MAGNitude:PDIVision

Sets or queries the scale (per division) of the magnitude in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

Programmer Manual

```
DISPlay:OFDM:CRESPonse:MAGNitude:PDIVision <value>  
DISPlay:OFDM:CRESPonse:MAGNitude:PDIVision?
```

Arguments

<value>::<NRf> specifies the vertical scale (per division).

Examples

DISPLAY:OFDM:CRESPONSE:MAGNITUDE:PDIVISION 2.7 sets the vertical scale to 2.70 dB/div.

DISPlay:OFDM:CRESPonse:PHASe:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CRESPonse:PHASe:AUTO
```

Arguments

None

Examples

DISPLAY:OFDM:CRESPONSE:PHASE:AUTO rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:OFDM:CRESPonse:PHASe:OFFSet

Sets or queries the phase offset in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CRESPonse:PHASe:OFFSet <value>  
DISPlay:OFDM:CRESPonse:PHASe:OFFSet?
```

Arguments

<value>::<NRf> specifies the phase offset.

Examples

DISPLAY:OFDM:CRESPONSE:PHASE:OFFSET -14.5 sets the minimum vertical value to -14.5 ° in the OFDM Channel response graph.

DISPlay:OFDM:CRESPonse:PHASe[:SCALe]

Sets the vertical scale automatically to fit the waveform to the screen in the OFDM Channel response graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CRESPonse:PHASe[:SCALe] <value>  
DISPlay:OFDM:CRESPonse:PHASe[:SCALe]?
```

Arguments

<value>::<NRf> specifies the vertical range.

Examples

DISPlay:OFDM:CRESPonse:PHASe[:SCALe] 30 sets the vertical range to 30 ° in the OFDM Channel response graph.

DISPlay:OFDM:CRESPonse:WINDow:SElect:PLOT

Sets or queries the plot in the OFDM Channel Response window measurement.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CRESPonse:WINDow:SElect:PLOT { MAGNitude | PHASe }  
DISPlay:OFDM:CRESPonse:WINDow:SElect:PLOT?
```

Arguments

MAGNitude selects the magnitude display.

PHASe selects the phase display

Examples

DISPlay:OFDM:CRESPonse:WINDow:SElect:PLOT PHASe selects the phase display.

DISPlay:OFDM:CRESPonse:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the OFDM Channel Response view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:CRESPonse:WINDow:TRACe:GRATICule:GRID:STATe { OFF | ON | 1 | 0}  
DISPlay:OFDM:CRESPonse:WINDow:TRACe:GRATICule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the graph.

ON or 1 shows the graticule in the graph.

Examples

DISPLAY:OFDM:CRESPONSE:WINDOW:TRACE:GRATICULE:GRID:STATE OFF turns off the graticule in the graph.

DISPlay:OFDM:EVM:FREQuency:AUTO (No Query Form)

Rescales the frequency automatically to fit the waveform to the screen in the OFDM EVM graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:EVM:FREQuency:AUTO
```

Arguments

None

Examples

DISPLAY:OFDM:EVM:FREQUENCY:AUTO rescales the frequency scale automatically to fit the waveform to the screen.

DISPlay:OFDM:EVM:FREQuency:OFFSet

Sets or queries the frequency offset in the OFDM EVM graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:EVM:FREQuency:OFFSet <value>  
DISPlay:OFDM:EVM:FREQuency:OFFSet
```

Arguments

<value>::<NRf> specifies the frequency offset.

Examples

`DISPLAY:OFDM:EVM:FREQUENCY:OFFSET -21` sets the frequency offset to –21 subcarriers.

DISPlay:OFDM:EVM:FREQuency[:SCALe]

Sets or queries the horizontal range of the OFDM EVM graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

`DISPlay:OFDM:EVM:FREQuency[:SCALe] <value>`
`DISPlay:OFDM:EVM:FREQuency[:SCALe]?`

Arguments

`<value>::= <NRf>` specifies the horizontal range.

Examples

`DISPLAY:OFDM:EVM:FREQUENCY[:SCALE] 10E+6` sets the horizontal range to 10 MHz.

DISPlay:OFDM:EVM:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

`DISPlay:OFDM:EVM:MARKer:SHOW:STATe { OFF | ON | 1 | 0 }`
`DISPlay:OFDM:EVM:MARKer:SHOW:STATe?`

Arguments

`OFF` or `0` hides the readout for the selected marker in the graph.

`ON` or `1` shows the readout for the selected marker in the graph.

Examples

`DISPLAY:OFDM:EVM:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the graph.

DISPlay:OFDM:EVM:TIME:AUTO (No Query Form)

Rescales the time automatically to fit the waveform to the screen in the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:EVM:TIME:AUTO

Arguments

None

Examples

DISPlay:OFDM:EVM:TIME:AUTO rescales the time scale automatically to fit the waveform to the screen.

DISPlay:OFDM:EVM:TIME:OFFSet

Sets or queries the time offset in the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:EVM:TIME:OFFSet <value>
DISPlay:OFDM:EVM:TIME:OFFSet?

Arguments

<value> ::= <NRf> specifies the magnitude offset.

Examples

DISPlay:OFDM:EVM:TIME:OFFSET -11.7 sets the time scale offset to -11.7 symbols.

DISPlay:OFDM:EVM:TIME[:SCALE]

Sets or queries the time scale in the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:EVM:TIME[:SCALE] <value>
DISPlay:OFDM:EVM:TIME[:SCALE]?

Arguments

<value> ::= <NRf> specifies the time scale.

Examples

`DISPLAY:OFDM:EVM:TIME[:SCALE]` 13 sets the time scale to 13 symbols.

DISPlay:OFDM:EVM:WINDow:SElect:PLOT

Sets or queries the plot in the OFDM EVM window measurement.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:EVM:WINDow:SElect:PLOT { BOTH | SCARrier | SYMBols }  
DISPlay:OFDM:EVM:WINDow:SElect:PLOT?
```

Arguments

`SCARrier` selects the subcarrier display.

`SYMBols` selects the symbols display

`BOTH` selects both displays.

Examples

`DISPLAY:OFDM:EVM:WINDOW:SELECT:PLOT SYMBols` selects the symbols display.

DISPlay:OFDM:EVM:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:EVM:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 1 | 0 }  
DISPlay:OFDM:EVM:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

`OFF` or 0 hides the graticule in the graph.

`ON` or 1 shows the graticule in the graph.

Examples

`DISPLAY:OFDM:EVM:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` turns off the graticule in the graph.

DISPlay:OFDM:EVM:Y:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform in the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:EVM:Y:AUTO

Arguments

None

Examples

DISPLAY:OFDM:EVM:Y:AUTO rescales the vertical scale to fit the waveform on the screen.

DISPlay:OFDM:EVM:Y:OFFSet

Sets or queries the vertical offset in the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:EVM:Y:OFFSet <value>
DISPlay:OFDM:EVM:Y:OFFSet?

Arguments

<value> ::= <NRf> specifies the vertical offset.

Examples

DISPLAY:OFDM:EVM:Y:OFFSET -20 sets the vertical offset to -20%.

DISPlay:OFDM:EVM:Y[:SCALe]

Sets or queries the vertical range of the OFDM EVM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:EVM:Y[:SCALe] <value>
DISPlay:OFDM:EVM:Y[:SCALe]?

Arguments

<value> ::= <NRf> specifies the vertical scale.

Examples

`DISPLAY:OFDM:EVM:Y[:SCALE] 200` sets the vertical scale to 200%.

DISPlay:OFDM:FLATness:AUTO (No Query Form)

Automatically rescales the horizontal and vertical axes for the best display in the OFDM Spectral Flatness view.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Display commands

Syntax

`DISPlay:OFDM:FLATness:AUTO`

Arguments

None

Examples

`DISP:OFDM:FLAT:AUTO` automatically rescales the horizontal and vertical axes for the best display.

DISPlay:OFDM:FLATness:X:AUTO (No Query Form)

Rescales the horizontal axis automatically in the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Display commands

Syntax

`DISPlay:OFDM:FLATness:X:AUTO`

Arguments

None

Examples

`DISP:OFDM:FLAT:X:AUTO` rescales the horizontal axis automatically for the best display.

DISPlay:OFDM:FLATness:X:OFFSet

Sets or queries the value of the offset of the horizontal axis from the center of the OFDM WLAN Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Display commands

Syntax

```
DISPlay:OFDM:FLATness:X:OFFSet <NRf>  
DISPlay:OFDM:FLATness:X:OFFSet?
```

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 recenters the plot.

Returns

The value of the offset of the X axis from the center of the plot as a floating point number.

Examples

DISP:OFDM:FLAT:X:OFFS 150 shifts the display to the left by 150%.

DISPlay:OFDM:FLATness:X[:SCALE]

Sets or queries the value of the horizontal scale in the OFDM Spectral Flatness display. The units are Frequency or Subcarrier. To set the units, use the command [SENSe]:OFDM:UNIT:FREQUENCY.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Display commands

Syntax

```
DISPlay:OFDM:FLATness:X[:SCALE] <NRf>  
DISPlay:OFDM:FLATness:X[:SCALE]?
```

Arguments

Floating point number that represents the value of the horizontal scale.

Examples

DISP:OFDM:FLAT:X:SCALE 32 sets the horizontal scale to 32.

DISPlay:OFDM:FLATness:Y:AUTO (No Query Form)

Rescales the vertical axis scale and position values automatically in the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Display commands

Syntax

`DISPlay:OFDM:FLATness:Y:AUTO`

Arguments

None

Examples

`DISP:OFDM:FLAT:Y:AUTO` automatically selects the vertical scale and position values.

DISPlay:OFDM:FLATness:Y:OFFSet

Sets or queries the value of the offset from the center (vertical position), in percent terms, for the OFDM Spectral Flatness display. To set the Vertical Scale, use the command `DISPlay:OFDM:FLATness:Y[:SCALE]`.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Display commands

Syntax

`DISPlay:OFDM:FLATness:Y:OFFSet <NRf>`
`DISPlay:OFDM:FLATness:Y:OFFSet?`

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 re-centers the plot.

Returns

The value of the offset from the center of the Y axis for the plot as a floating point number.

Examples

`DISP:OFDM:FLAT:Y:OFFS 150` sets the offset from the center (vertical position) of the plot to 150%.

DISPlay:OFDM:FLATness:Y[:SCALE]

Sets or queries the vertical scale value for the OFDM Spectral Flatness display. To set the vertical position (offset) value, use the command `DISPlay:OFDM:FLATness:Y:OFFSet`.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Display commands

Syntax

```
DISPlay:OFDM:FLATness:Y[:SCALE] <NRf>
DISPlay:OFDM:FLATness:Y[:SCALE]?
```

Arguments

Floating point number that specifies the vertical scale value.

Examples

DISP:OFDM:FLAT:Y:SCALE 10 sets the vertical scale value to 10.

DISPlay:OFDM:MEASview:DELeTe (No Query Form)

Deletes the specified OFDM view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MEASview:DELeTe { CONSTe | SUMMary | STABle | CRESpOnse | EVM | PERRor | MERRor |
    POWer }
```

Arguments

CONSTe deletes the OFDM Constellation view.

SUMMary deletes the OFDM Summary view.

STABle deletes the OFDM Symbol table view.

CRESpOnse deletes the OFDM Channel response view.

EVM deletes the EVM (Error Vector Magnitude) versus Time view.

PERRor deletes the Phase error versus Time view.

MERRor deletes the Magnitude error versus Time view.

POWer deletes the OFDM Power view.

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Examples

DISPLAY:OFDM:MEASVIEW:DELETE CONSTe deletes the OFDM Constellation view.

DISPlay:OFDM:MEASview:NEW (No Query Form)

Displays a new OFDM measurement view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

`DISPlay:OFDM:MEASview:NEW { CONSTe | SUMMary | STABle | CRESponse | EVM | PERRor | MERRor | POWer }`

Arguments

`CONSTe` creates a new OFDM Constellation view.

`SUMMary` creates a new OFDM Summary view.

`STABle` creates a new OFDM Symbol table view.

`CRESponse` creates a new OFDM Channel response view.

`EVM` creates a new EVM (Error Vector Magnitude) versus Time view.

`PERRor` creates a new Phase error versus Time view.

`MERRor` creates a new Magnitude error versus Time view.

`POWer` creates a new OFDM Power view.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

`DISPlay:OFDM:MEASVIEW:NEW:CONSTe` creates a new OFDM Constellation view.

DISPlay:OFDM:MEASview:SElect

Selects a OFDM measurement view on the screen. The query returns the currently selected view.

Selecting a measurement optimizes it. Other measurements may be optimized as a side effect. Refer to the `DISPlay:WINDow:OPTimized:MEASurement?` query.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

`DISPlay:OFDM:MEASview:SElect { CONSTe | SUMMary | STABle | CRESponse | EVM | PERRor | MERRor | POWer }`

`DISPlay:OFDM:MEASview:SElect?`

Arguments

`CONSTe` creates a new OFDM Constellation view.

`SUMMary` creates a new OFDM Summary view.

`STABle` creates a new OFDM Symbol table view.

`CRESponse` creates a new OFDM Channel response view.

`EVM` creates a new EVM (Error Vector Magnitude) versus Time view.

`PERRor` creates a new Phase error versus Time view.

`MERRor` creates a new Magnitude error versus Time view.

`POWer` creates a new OFDM Power view.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

`DISPLAY:OFDM:MEASVIEW:SELECT:STABle` selects the OFDM symbol table view.

DISPlay:OFDM:MERRor:FREQuency[:SCALE]

Sets or queries the horizontal range of the OFDM Magnitude error graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:FREQuency[:SCALE] <value>  
DISPlay:OFDM:MERRor:FREQuency[:SCALE]?
```

Arguments

`<value>::= <NRf>` specifies the horizontal range.

Examples

`DISPLAY:OFDM:MERROR:FREQUENCY[:SCALE] 10E+6` sets the horizontal range to 10 MHz.

DISPlay:OFDM:MERRor:FREQuency[:SCALE]:AUTO (No Query Form)

Rescales the frequency automatically to fit the waveform to the screen in the OFDM Magnitude error graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:FREQuency[:SCALE]:AUTO
```

Arguments

None

Examples

`DISPLAY:OFDM:MERROR:FREQUENCY[:SCALE]:AUTO` rescales the frequency scale automatically to fit the waveform to the screen.

DISPlay:OFDM:MERRor:FREQuency[:SCALE]:OFFSet

Sets or queries the frequency offset in the OFDM Magnitude error graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:FREQuency[:SCALe]:OFFSet <value>  
DISPlay:OFDM:MERRor:FREQuency[:SCALe]:OFFSet?
```

Arguments

<value>::<NRf> specifies the frequency offset.

Examples

DISPlay:OFDM:MERRor:FREQuency[:SCALe]:OFFSet -26 sets the offset to -26 subcarriers.

DISPlay:OFDM:MERRor:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:MARKer:SHOW:STATe { OFF | ON | 1 | 0 }  
DISPlay:OFDM:MERRor:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker in the graph.

ON or 1 shows the readout for the selected marker in the graph.

Examples

DISPlay:OFDM:MERRor:MARKer:SHOW:STATe ON shows the readout for the selected marker in the graph.

DISPlay:OFDM:MERRor:TIME[:SCALe]

Sets or queries the time scale in the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:TIME[:SCALe] <value>  
DISPlay:OFDM:MERRor:TIME[:SCALe]?
```

Arguments

<value>::= <NRf> specifies the time scale.

Examples

DISPLAY:OFDM:MERROR:TIME[:SCALE] 50 sets the time scale to 50 subcarriers.

DISPlay:OFDM:MERRor:TIME[:SCALE]:AUTO (No Query Form)

Rescales the time automatically to fit the waveform to the screen in the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:MERRor:TIME[:SCALE]:AUTO

Arguments

None

Examples

DISPLAY:OFDM:MERROR:TIME[:SCALE]:AUTO rescales the time scale automatically to fit the waveform to the screen.

DISPlay:OFDM:MERRor:TIME[:SCALE]:OFFSet

Sets or queries the time offset in the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

DISPlay:OFDM:MERRor:TIME[:SCALE]:OFFSet <value>

DISPlay:OFDM:MERRor:TIME[:SCALE]:OFFSet?

Arguments

<value>::= <NRf> specifies the time offset.

Examples

DISPLAY:OFDM:MERROR:TIME[:SCALE]:OFFSET -47 sets the offset to -47 symbols.

DISPlay:OFDM:MERRor:WINDow:SElect:PLOT

Sets or queries the plot in the OFDM Magnitude error window measurement.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:WINDow:SElect:PLOT { BOTH | SCARrier | SYMBols }  
DISPlay:OFDM:MERRor:WINDow:SElect:PLOT?
```

Arguments

SCARrier selects the subcarrier display.

SYMBols selects the symbols display

BOTH selects both displays.

Examples

DISPlay:OFDM:MERRor:WINDow:SElect:PLOT SYMBols selects the symbols display.

DISPlay:OFDM:MERRor:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 1 | 0 }  
DISPlay:OFDM:MERRor:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the graph.

ON or 1 shows the graticule in the graph.

Examples

DISPlay:OFDM:MERRor:WINDow:TRACe:GRATICULE:GRID:STATE OFF turns off the graticule in the graph.

DISPlay:OFDM:MERRor:Y:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform in the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:Y:AUTO
```

Arguments

None

Examples

`DISPLAY:OFDM:MERROR:Y:AUTO` rescales the vertical scale to fit the waveform on the screen.

DISPlay:OFDM:MERRor:Y:OFFSet

Sets or queries the vertical offset in the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:Y:OFFSet <value>
DISPlay:OFDM:MERRor:Y:OFFSet?
```

Arguments

`<value> ::= <NRf>` specifies the vertical offset.

Examples

`DISPLAY:OFDM:MERROR:Y:OFFSET -90` sets the vertical scale offset to -90%.

DISPlay:OFDM:MERRor:Y[:SCALE]

Sets or queries the vertical range of the OFDM Magnitude error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:MERRor:Y[:SCALE] <value>
DISPlay:OFDM:MERRor:Y[:SCALE]?
```

Arguments

`<value> ::= <NRf>` specifies the vertical scale.

Examples

`DISPLAY:OFDM:MERROR:Y[:SCALE] 100` sets the vertical scale to 100%.

DISPlay:OFDM:PError:FREQuency[:SCALE]

Sets or queries the horizontal range of the OFDM Phase error graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:FREQuency[:SCALe] <value>  
DISPlay:OFDM:PERRor:FREQuency[:SCALe]?
```

Arguments

<value>::= <NRf> specifies the horizontal range.

Examples

DISPLAY:OFDM:ERROR:FREQUENCY[:SCALE] 10E+6 sets the horizontal range to 10 MHz.

DISPlay:OFDM:PERRor:FREQuency[:SCALe]:AUTO (No Query Form)

Rescales the frequency automatically to fit the waveform to the screen in the OFDM Phase error graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:FREQuency[:SCALe]:AUTO
```

Arguments

None

Examples

DISPLAY:OFDM:ERROR:FREQUENCY[:SCALE]:AUTO rescales the frequency scale automatically to fit the waveform to the screen.

DISPlay:OFDM:PERRor:FREQuency[:SCALe]:OFFSet

Sets or queries the frequency offset in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:FREQuency[:SCALe]:OFFSet <value>  
DISPlay:OFDM:PERRor:FREQuency[:SCALe]:OFFSet?
```

Arguments

<value>::= <NRf> specifies the frequency offset.

Examples

`DISPLAY:OFDM:PERROR:FREQUENCY[:SCALE]:OFFSET -26` sets the frequency scale offset to -26 subcarriers.

DISPlay:OFDM:PERRor:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:MARKer:SHOW:STATe { OFF | ON | 1 | 0 }  
DISPlay:OFDM:PERRor:MARKer:SHOW:STATe?
```

Arguments

`OFF` or `0` hides the readout for the selected marker in the graph.

`ON` or `1` shows the readout for the selected marker in the graph.

Examples

`DISPLAY:OFDM:PERROR:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the graph.

DISPlay:OFDM:PERRor:TIME[:SCALE]

Sets or queries the time scale in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:TIME[:SCALE] <value>  
DISPlay:OFDM:PERRor:TIME[:SCALE]?
```

Arguments

`<value> ::= <NRf>` specifies the time scale.

Examples

`DISPLAY:OFDM:PERROR:TIME[:SCALE] 50` sets the time scale to 50 symbols.

DISPlay:OFDM:PERRor:TIME[:SCALE]:AUTO (No Query Form)

Rescales the time automatically to fit the waveform to the screen in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:TIME[:SCALe]:AUTO
```

Arguments

None

Examples

DISPLAY:OFDM:ERROR:TIME[:SCALE]:AUTO rescales the time scale automatically to fit the waveform to the screen.

DISPlay:OFDM:PERRor:TIME[:SCALe]:OFFSet

Sets or queries the time offset in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:TIME[:SCALe]:OFFSet <value>  
DISPlay:OFDM:PERRor:TIME[:SCALe]:OFFSet?
```

Arguments

<value>::= <NRf> specifies the time offset.

Examples

DISPLAY:OFDM:ERROR:TIME[:SCALE]:OFFSET -17 sets the time scale offset to -17 symbols.

DISPlay:OFDM:PERRor:WINDow:SELEct:PLOT

Sets or queries the plot in the OFDM Phase error window measurement.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:WINDow:SELEct:PLOT { BOTH | SCARrier | SYMBols }  
DISPlay:OFDM:PERRor:WINDow:SELEct:PLOT?
```

Arguments

SCARrier selects the subcarrier display.

SYMBols selects the symbols display

BOTH selects both displays.

Examples

`DISPLAY:OFDM:ERROR:WINDOW:SELECT:PLOT SYMBOLs` selects the symbols display.

DISPlay:OFDM:PERRor:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 1 | 0 }  
DISPlay:OFDM:PERRor:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the graph.

ON or 1 shows the graticule in the graph.

Examples

`DISPLAY:OFDM:ERROR:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` turns off the graticule in the graph.

DISPlay:OFDM:PERRor:Y:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

```
Syntax  
DISPlay:OFDM:PERRor:Y:AUTO
```

Arguments

None

Examples

`DISPLAY:OFDM:ERROR:Y:AUTO` rescales the vertical scale to fit the waveform on the screen.

DISPlay:OFDM:PERRor:Y:OFFSet

Sets or queries the vertical offset in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Programmer Manual

Display commands

Syntax

```
DISPlay:OFDM:PERRor:Y:OFFSet <value>  
DISPlay:OFDM:PERRor:Y:OFFSet?
```

Arguments

<value> ::= <NRf> specifies the horizontal range.

Examples

DISPLAY:OFDM:ERROR:Y:OFFSET -173 sets the vertical offset to -173 °.

DISPlay:OFDM:PERRor:Y[:SCALe]

Sets or queries the vertical range of the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:PERRor:Y[:SCALe] <value>  
DISPlay:OFDM:PERRor:Y[:SCALe]?
```

Arguments

<value> ::= <NRf> specifies the vertical scale.

Examples

DISPLAY:OFDM:ERROR:Y[:SCALE] 200 sets the vertical scale to 200 °.

DISPlay:OFDM:POWer:FREQuency[:AUTO] (No Query Form)

Rescales the frequency automatically to fit the waveform to the screen in the OFDM Power graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:FREQuency[:AUTO]
```

Arguments

None

Examples

DISPLAY:OFDM:POWER:FREQUENCY[:AUTO] rescales the frequency scale automatically to fit the waveform to the screen.

DISPlay:OFDM:POWer:FREQuency[:OFFSet]

Sets or queries the frequency offset in the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:FREQuency[:OFFSet] <value>  
DISPlay:OFDM:POWer:FREQuency[:OFFSet]?
```

Arguments

<value>::= <NRf> specifies the frequency offset.

Examples

DISPLAY:OFDM:POWER:FREQUENCY[:OFFSET] -26 sets the frequency offset to -26 subcarriers.

DISPlay:OFDM:POWer:FREQuency[:SCALe]

Sets or queries the horizontal range of the OFDM Power graph.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:FREQuency[:SCALe] <value>  
DISPlay:OFDM:POWer:FREQuency[:SCALe]?
```

Arguments

<value>::= <NRf> specifies the horizontal range.

Examples

DISPLAY:OFDM:POWER:FREQUENCY:SCALE 10E+6 sets the horizontal range to 10 MHz.

DISPlay:OFDM:POWer:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:MARKer:SHOW:STATe { OFF | ON | 1 | 0 }
```

Arguments

OFF or 0 hides the readout for the selected marker in the graph.

ON or 1 shows the readout for the selected marker in the graph.

Examples

DISPLAY:OFDM:POWER:MARKER:SHOW:STATE ON shows the readout for the selected marker in the graph.

DISPlay:OFDM:POWer:TIME[:AUTO](No Query Form)

Rescales the time automatically to fit the waveform to the screen in the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:TIME[:AUTO]
```

Arguments

None

Examples

DISPLAY:OFDM:POWER:TIME:AUTO rescales the time scale automatically to fit the waveform to the screen.

DISPlay:OFDM:POWer:TIME:OFFSet

Sets or queries the time offset in the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:TIME:OFFSet <value>  
DISPlay:OFDM:POWer:TIME:OFFSet?
```

Arguments

<value>::= <NR1> specifies the time offset.

Examples

DISPLAY:OFDM:POWER:TIME:OFFSET? might return 2.00000 indicating the offset is 2 symbols.

DISPlay:OFDM:POWer:TIME[:SCALE]

Sets or queries the time scale in the OFDM Phase error view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:TIME[:SCALE] <value>  
DISPlay:OFDM:POWer:TIME[:SCALE]?
```

Arguments

<value> ::= <NRf> specifies the time scale.

Examples

DISPLAY:OFDM:POWER:TIME[:SCALE] 46 sets the time scale to 46 symbols.

DISPlay:OFDM:POWer:WINDow:SElect:PLOT

Sets or queries the plot in the OFDM Power window measurement.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:WINDow:SElect:PLOT { BOTH | SCARrier | SYMBols }  
DISPlay:OFDM:POWer:WINDow:SElect:PLOT?
```

Arguments

SCARrier selects the subcarrier display.

SYMBols selects the symbols display

BOTH selects both displays.

Examples

DISPLAY:OFDM:POWER:WINDOW:SELECT:PLOT SYMBols selects the symbols display.

DISPlay:OFDM:POWer:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 1 | 0 }  
DISPlay:OFDM:POWer:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the graph.

ON or 1 shows the graticule in the graph.

Examples

DISPLAY:OFDM:POWER:WINDOW:TRACE:GRATICULE:GRID:STATE OFF turns off the graticule in the graph.

DISPlay:OFDM:POWer:Y:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform in the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:Y:AUTO
```

Arguments

None

Examples

DISPLAY:OFDM:POWER:Y:AUTO rescales the vertical scale to fit the waveform on the screen.

DISPlay:OFDM:POWer:Y:OFFSet

Sets or queries the vertical offset in the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:Y:OFFSet <value>  
DISPlay:OFDM:POWer:Y:OFFSet?
```

Arguments

<value>::= <NRf> specifies the horizontal range.

Examples

DISPLAY:OFDM:POWER:Y:OFFSET -37.29 sets the vertical offset to -37.29 dBm.

DISPlay:OFDM:POWer:Y[:SCALe]

Sets or queries the vertical range of the OFDM Power view.

Conditions

Measurement views: OFDM

Group

Display commands

Syntax

```
DISPlay:OFDM:POWer:Y[:SCALe] <value>  
DISPlay:OFDM:POWer:Y[:SCALe]?
```

Arguments

<value>::= <NRf> specifies the vertical scale.

Examples

DISPLAY:OFDM:POWER:Y:SCALE 64.48 sets the vertical scale to 64.48 dB.

DISPlay:P25:CONStE:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries to show or hide the graticule grid on the screen in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation

Group

Display commands

Syntax

```
DISPlay:P25:CONStE:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:P25:CONStE:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

0 means that the graticule grid is hidden.

1 means that the graticule grid is showing.

Examples

DISPLAY:P25:CONStE:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the screen.

DISPlay:P25:EDiagram:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Display commands

Syntax

```
DISPlay:P25:EDIagram:WINDow:TRACe:GRATicule:GRID:STATe {OFF|ON|0|1}  
DISPlay:P25:EDIagram:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

0 means that the graticule grid is hidden.

1 means that the graticule grid is showing.

Examples

DISPlay:P25:EDIagram:WINDow:TRACe:GRATicule:GRID:STATe ON shows the graticule grid on the screen in the P25 Eye Diagram display.

DISPlay:P25:EDIagram:Y[:SCALE]

Sets or queries the vertical scale (Hz) of the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Display commands

Syntax

```
DISPlay:P25:EDIagram:Y[:SCALE]<NRf>  
DISPlay:P25:EDIagram:Y[:SCALE]?
```

Arguments

<value>::<NRf> specifies the vertical scale value (no units).

Range is 1 to 100

Returns

<NR3> = a floating point value with an exponent, which is the vertical scale value in Hz.

Examples

DISP:P25:EDI:Y:SCAL 0.0005 sets the vertical scale to 500 μ Hz in the display.

DISP:P25:EDI:Y:SCAL? might return 500.0000000000E-6, indicating that the vertical scale is 500 μ Hz.

DISPlay:P25:EDiagram:Y[:SCALe]:AUTO (No Query Form)

Sets the vertical scale automatically to fit the waveform to the screen in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Display commands

Syntax

```
DISPlay:P25:EDiagram:Y[:SCALe]:AUTO
```

Arguments

None.

Returns

0 indicates the vertical scale is set to automatically fit the waveform to the screen in the P25 Eye Diagram display.

1 indicates the vertical scale is not set to automatically fit the waveform to the screen in the P25 Eye Diagram display.

Examples

DISPLAY:P25:EDIAGRAM:Y[:SCALE]:AUTO sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:P25:EDiagram:Y[:SCALe]:OFFSet

Sets or queries the vertical offset (center point of the vertical axis) in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Display commands

Syntax

```
DISPlay:P25:EDiagram:Y[:SCALe]:OFFSet  
DISPlay:P25:EDiagram:Y[:SCALe]:OFFSet?
```

Arguments

<value>::<NRf> specifies the minimum vertical value. Range is -50 to +50 (no units).

Returns

Vertical offset value.

Examples

DISPLAY:P25:EDIAGRAM:Y[:SCALE]:OFFSET -0.5 sets the vertical offset to -0.5 in the P25 Eye Diagram display.

DISPlay:P25:MEASview:DELeTe (No Query Form)

Deletes the specified P25 measurement display.

Conditions

Measurement view: P25 measurements

Group

Display commands

Syntax

```
DISPlay:P25:MEASview:DELeTe { FDVT | EDI | PVT | CONS | SUMM }
```

Related Commands

[DISPlay:P25:MEASview:NEW](#) (on page 897)

[DISPlay:P25:MEASview:SELeCt](#) (on page 898)

Arguments

FDVT: Frequency Deviation vs Time display

EDI: P25 Eye Diagram display

PVT: Power vs Time display

CONS: P25 Constellation display

SUMM: P25 Summary display

Examples

DISPlay:P25:MEASVIEW:DELETE CONS deletes the P25 Constellation display.

DISPlay:P25:MEASview:NEW (No Query Form)

Displays a new P25 measurement view.

Conditions

Measurement view: P25 measurements

Group

Display commands

Syntax

```
DISPlay:P25:MEASview:NEW { FDVT | EDI | PVT | CONS | SUMM }
```

Related Commands

[DISPlay:P25:MEASview:SELeCt](#) (on page 898)

[DISPlay:P25:MEASview:DELeTe](#) (on page 896)

Arguments

FDVT: Frequency Deviation vs Time display

EDI: P25 Eye Diagram display

PVT: Power vs Time display

CONS: P25 Constellation display

SUMM: P25 Summary display

NOTE: If you attempt to open a view that is currently displayed on the screen, the error -200, "Execution error; Measurement is already running" will be returned.

Examples

`DISPLAY:P25:MEASVIEW:NEW` PVT creates a new view of the Power vs Time display.

DISPlay:P25:MEASview:SElect

Selects a P25 measurement display. The query form returns the currently selected display.

Conditions

Measurement view: P25 measurements

Group

Display commands

Syntax

`DISPlay:P25:MEASview:SElect { FDVT | EDI | PVT | CONS | SUMM }`

Related Commands

[DISPlay:P25:MEASview:NEW](#) (on page 897)

[DISPlay:P25:MEASview:DELeTe](#) (on page 896)

Arguments

`FDVT`: Frequency Deviation vs Time display

`EDI`: P25 Eye Diagram display

`PVT`: Power vs Time display

`CONS`: P25 Constellation display

`SUMM`: P25 Summary display

NOTE: If you attempt to select a view that is not displayed on the screen, the error -200, "Execution error; Measurement not running" will be returned.

Returns

`FDVT`: Frequency Deviation vs Time display

`EDI`: P25 Eye Diagram display

`PVT`: Power vs Time display

`CONS`: P25 Constellation display

`SUMM`: P25 Summary display

Examples

`DISPLAY:P25:MEASVIEW:SELECT CONS` selects the P25 Constellation display.

DISPlay:P25:PVTime:BURSt:X[:SCALE]

Sets or queries the value of the scale (width) value, in seconds, for the P25 Power vs. Time display when using horizontal Full Burst view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:BURSt:X[:SCALe]  
DISPlay:P25:PVTime:BURSt:X[:SCALe]?
```

Related Commands

[DISPlay:P25:PVTime:BURSt:X\[:SCALe\]:AUTO](#) (on page 898)

Arguments

Floating point number that represents the value of the scale (width), in seconds, when using horizontal Full Burst view.

Returns

Horizontal scale value.

Examples

`DISPlay:P25:PVTime:BURSt:X[:SCALe] 5.0E-6` sets the width of the display to 5.000 μ S for the horizontal Full Burst view.

DISPlay:P25:PVTime:BURSt:X[:SCALe]:AUTO (No Query Form)

Automatically sets the starting time (position) and scale (width) values for the best display in the horizontal Full Burst view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:BURSt:X[:SCALe]:AUTO
```

Related Commands

[DISPlay:P25:PVTime:BURSt:X\[:SCALe\]](#) (on page 898)

Examples

`DISPlay:P25:PVTime:BURSt:X:SCALE:AUTO` automatically sets the starting time (position) and scale (width) values for the best display.

DISPlay:P25:PVTime:BURSt:X[:SCALe]:OFFSet

Sets or queries the starting time (position) value, in seconds, for the P25 Power vs. Time display when using the horizontal Full Burst view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:BURSt:X[:SCALe]:OFFSet  
DISPlay:P25:PVTime:BURSt:X[:SCALe]:OFFSet?
```

Related Commands

[DISPlay:P25:PVTime:BURSt:X\[:SCALe\]:AUTO](#) (on page 899)

Arguments

Floating point number that represents the starting time (position) value, in seconds, when using horizontal Full Burst view.

Returns

Horizontal offset value.

Examples

`DISPLAY:P25:PVTIME:BURST:X[:SCALE]:OFFSET 5.0E-6` sets the starting time (position) of the graph to 5.000 μ S for horizontal Full Burst view.

DISPlay:P25:PVTime:BURSt:X[:SCALe]:RESet (No Query Form)

Resets the starting time (position) and scale (width) values for the horizontal Full Burst view on the P25 Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:BURSt:X[:SCALe]:RESet
```

Related Commands

[DISPlay:P25:PVTime:BURSt:X\[:SCALe\]:AUTO](#) (on page 899)

Examples

`DISPLAY:P25:PVTIME:BURST:X:SCALE:RESET` resets the starting time (position) and scale (width) values for the horizontal Full Burst view.

DISPlay:P25:PVTime:FALL:X[:SCALe]

Sets or queries the scale (width) value, in seconds, for the P25 Power vs. Time display when using the horizontal Falling Edge view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:FALL:X[:SCALE]<NRf>  
DISPlay:P25:PVTime:FALL:X[:SCALE]?
```

Related Commands

Arguments

Floating point number that represents the scale (width), in seconds, when using the horizontal Falling Edge view.

Returns

Horizontal scale value.

Examples

DISPLAY:P25:PVTIME:FALL:X:SCALE 5.0E-6 sets the width of the graph to 5.000 μ s when using the horizontal Falling Edge view.

DISPlay:P25:PVTime:FALL:X[:SCALE]:AUTO (No Query Form)

Automatically sets the starting time (position) and scale (width) values for the best display in the horizontal Falling Edge view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:FALL:X[:SCALE]:AUTO
```

Related Commands

[DISPlay:P25:PVTime:FALL:X\[:SCALE\]:RESet](#) (on page 902)

Examples

DISPLAY:P25:PVTIME:FALL:X:SCALE:AUTO automatically sets the starting time (position) and scale (width) values for the best display.

DISPlay:P25:PVTime:FALL:X[:SCALE]:OFFSet

Sets or queries the value for the starting time (offset) of the graph, in seconds, for the P25 Power vs. Time display when using the horizontal Falling Edge view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

`DISPlay:P25:PVTime:FALL:X[:SCALE]:OFFSet`

Related Commands

[DISPlay:P25:PVTime:RISE:X\[:SCALE\]](#) (on page 903)

Arguments

Floating point number that represents the value of the starting time (offset) of the graph, in seconds, when using the horizontal Falling Edge view.

Returns

Horizontal offset value.

Examples

`DISPlay:P25:PVTime:FALL:X:SCALE:OFFSet 5.0` sets the starting time (position) of the graph to 5.000 μ S when using the horizontal Falling Edge view.

DISPlay:P25:PVTime:FALL:X[:SCALE]:RESet (No Query Form)

Resets the starting time (position) and scale (width) values for the horizontal Falling Edge view on the P25 Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

`DISPlay:P25:PVTime:FALL:X[:SCALE]:RESet`

Examples

`DISPlay:P25:PVTime:FALL:X:SCALE:RESet` resets the starting time (position) and scale (width) values for the horizontal Falling Edge view.

DISPlay:P25:PVTime:MARKer:SHOW:STATe

Shows or hides the marker readout on the P25 Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

`DISPlay:P25:PVTime:MARKer:SHOW:STATe`

Arguments

ON or 1 specifies to show the marker readout. OFF or 0 specifies to turn the marker readout off.

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

DISPLAY:P25:PVTIME:MARKER:SHOW:STATE? might return #43204 (3204-byte data), which represents the vertical values (power) for the P25 Power vs. Time trace.

DISPlay:P25:PVTime:RISE:X[:SCALE]

Sets or queries the scale (width) value, in seconds, for the P25 Power vs. Time display when using the horizontal Rising Edge view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

DISPlay:P25:PVTime:RISE:X[:SCALE]

DISPlay:P25:PVTime:RISE:X[:SCALE]?

Arguments

Floating point number that represents the scale (width) value, in seconds, for the horizontal Rising Edge view.

Returns

Scale value.

Examples

DISPlay:P25:PVTIME:RISE:X:SCALE 5.0E-6 sets the width of the graph to 5.000 μ S for the horizontal Rising Edge view.

DISPlay:P25:PVTime:RISE:X[:SCALE]:AUTO (No Query Form)

Sets the scale (width) value, in seconds, for the P25 Power vs. Time display to automatic.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

DISPlay:P25:PVTime:RISE:X[:SCALE]:AUTO

Related Commands

[DISPlay:P25:PVTime:RISE:X\[:SCALE\]:RESet](#) (on page 904)

Examples

DISPLAY:P25:PVTIME:RISE:X:SCALE:AUTO automatically sets the starting time (position) and scale (width) values for the best display.

DISPlay:P25:PVTime:RISE:X[:SCALE]:OFFSet

Sets or queries the starting time value (offset), in seconds, for the P25 Power vs. Time display when using the horizontal Rising Edge view.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

DISPlay:P25:PVTime:RISE:X[:SCALE]:OFFSet

Related Commands

[DISPlay:P25:PVTime:RISE:X\[:SCALE\]](#) (on page 903)

Arguments

Floating point number that represents the value of the starting time (offset) of the graph, in seconds, for the horizontal Rising Edge view.

Returns

Horizontal scale view

Examples

DISPLAY:P25:PVTIME:RISE:X:SCALE:OFFSET 5.0e-6 sets the starting time (position) of the graph to 5.000 μ S for the horizontal Rising Edge view.

DISPlay:P25:PVTime:RISE:X[:SCALE]:RESet (No Query Form)

Resets the starting time (position) and scale (width) values for the horizontal Rising Edge view on the P25 Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

DISPlay:P25:PVTime:RISE:X[:SCALE]:RESet

Related Commands

[DISPlay:P25:PVTime:RISE:X\[:SCALE\]:OFFSet](#) (on page 904)

Examples

`DISPlay:P25:PVTime:RISE:X:SCALE:RESET` resets the starting time (position) and scale (width) values for the horizontal Rising Edge view.

DISPlay:P25:PVTime:WINDow:SElect:PLOT

Sets or queries which view to use for the P25 Power vs. Time display. Select from Full Burst, Rising Edge or Falling Edge.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:WINDow:SElect:PLOT {BURS|RISE|FALL}
DISPlay:P25:PVTime:WINDow:SElect:PLOT?
```

Related Commands

Arguments

- `BURSt` sets the view to Full Burst, which displays the entire packet, with vertical lines indicating the length of the burst.
- `RISE` sets the view to Rising Edge, which zooms the display into the interval around the burst rising edge, with vertical lines indicating the 10% to 90% Power-On Ramp time.
- `FALL` sets the view to Falling Edge, which zooms the display into the interval around the burst Falling Edge, with vertical lines indicating the 90% to 10% Power-Down Ramp time.

Returns

`DISPlay:P25:PVTime:WINDow:SElect:PLOT BURSt` sets the view to Full Burst.

Examples

`DISPlay:P25:PVTime:WINDOW:SELECT:PLOT?` might return `RISE`, indicating that the view has been set to Rising Edge.

DISPlay:P25:PVTime:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule state in the Power vs Time display to on (showing) or off (hidden).

Conditions

Measurement view: P25 Power vs Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:P25:PVTime:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the Power vs. Time display.

ON or 1 shows the graticule in the Power vs. Time display.

Returns

0 means the graticule in the Noise Temperature display is hidden (off).

1 means the graticule in the Noise Temperature display is showing (on).

Examples

DISPLAY:P25:PVTIME:WINDOW:TRACE:GRATICULE:GRID:STATE ON will turn on the graticule in the Noise Temperature display.

DISPLAY:P25:PVTIME:WINDOW:TRACE:GRATICULE:GRID:STATE? might return 1, indicating that the graticule in the Noise Temperature display is showing (on).

DISPlay:P25:PVTime:Y[:SCALE]

Sets or queries the vertical scale value for the P25 Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

DISPlay:P25:PVTime:Y[:SCALE] <NRf>
DISPlay:P25:PVTime:Y[:SCALE] ?

Related Commands

[DISPlay:P25:PVTime:Y\[:SCALE\]:PDIVision](#) (on page 907)

Arguments

<NRf> = a numeric value for the vertical scale in dB.

Returns

<NR2> = a floating point number without an exponent, which is the vertical scale value.

Examples

DISP:P25:PVT:Y:SCAL 10.5 sets the vertical scale value to 10.50 dB.

DISP:P25:PVT:Y:SCAL? might return 10, indicating that the vertical scale is 10.00 dB.

DISPlay:P25:PVTime:Y[:SCALE]:AUTO (No Query Form)

Automatically selects the vertical scale and position values for the P25 Power vs Time display.

Conditions

Measurement view: P25 Power vs Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:Y[:SCALe]:AUTO
```

Related Commands

[DISPlay:P25:PVTime:Y\[:SCALe\]](#) (on page 906)

Examples

DISP:P25:PVT:Y:SCAL:AUTO specifies to reset the vertical scale and position (offset) values for the P25 Power vs. Time display.

DISPlay:P25:PVTime:Y[:SCALe]:OFFSet

Sets or queries the value of the vertical offset (top edge of the vertical axis) for the P25 Power vs. Time display.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:Y[:SCALe]:OFFSet<NRf>  
DISPlay:P25:PVTime:Y[:SCALe]:OFFSet?
```

Related Commands

[DISPlay:P25:PVTime:Y\[:SCALe\]](#) (on page 906)

Arguments

Floating point number between limits that specifies the value of the vertical offset. Positive inputs move the plot down and negative inputs move the plot up (as viewed by the user).

Returns

The value of the vertical offset for the P25 Power vs. Time display as a floating point number.

Examples

DISPLAY:P25:PVTIME:Y[:SCALE]:OFFSET -10 sets the vertical offset to -10 dBm.

DISPlay:P25:PVTime:Y[:SCALe]:PDIVision

Sets or queries the value of the vertical scale for the P25 Power vs. Time display, in dB/division. This is only a visual control for panning the graph.

Conditions

Measurement view: P25 Power vs. Time

Group

Display commands

Syntax

```
DISPlay:P25:PVTime:Y[:SCALE]:PDIVision<NRf>
DISPlay:P25:PVTime:Y[:SCALE]:PDIVision?
```

Related Commands

[DISPlay:P25:PVTime:Y\[:SCALE\]](#) (on page 906)

Arguments

Floating point value that represents the value of the vertical scale, in dB/division, for the P25 Power vs. Time display.

Examples

DISPLAY:P25:PVTIME:Y:SCALE:PDIVISION 20 sets the vertical scale to 20.0 dB/division.

DISPlay:P25:RADix

Set or queries the symbol radix for the P25 Symbol Table display.

Conditions

Measurement view: P25 Symbol Table

Group

Display commands

Syntax

```
DISPlay:P25:RADix { QUAT | BIN | MODS }
```

Arguments

QUATernary: sets the symbols base to quaternary.

BINary: sets the symbols base to binary.

MODsymbols: sets the symbols to modular.

Returns

QUAT: means that the symbols base is set to Quaternary.

BINary: means that the symbols base is set to Binary.

MODsymbols: means that the symbols base is set to ModSymbols (modular).

Examples

```
DISPLAY:P25:RADIX
```

DISPlay:PError[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries the graticule grid view state for the Phase error versus Time view.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Display commands

Syntax

```
DISPlay:PERRor[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:PERRor[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

OFF or 0

ON or 1

Examples

DISPlay:PERRor:MEASview2:WINDow:TRACe:GRATicule:GRID:STATe ON shows the graticule grid on the Phase error versus Time Measview 2.

DISPlay:PERRor[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the Phase error versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Display commands

Syntax

```
DISPlay:PERRor[:MEASview<y>]:Y[:SCALE] <value>
DISPlay:PERRor[:MEASview<y>]:Y[:SCALE]?
```

Related Commands

[DISPlay:PERRor:\[MEASview1\]:Y\[:SCALE\]:OFFSet](#) (on page 910)

Arguments

<value>::<NRf> specifies the vertical range.

Range: 1 to 100%.

Returns

<NRf>

Examples

`DISPlay:PERRor:MEASview1:Y:SCALe` sets the vertical range to 50% in the Phase error versus Time display Measurement view 1.

DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:AUTO (No query form)

Sets the vertical scale automatically to fit the waveform to the screen in the Phase error versus Time display.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Display commands

Syntax

`DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:AUTO`

Arguments

None

Examples

`DISPlay:PERRor:MEASview2:Y:SCALe:AUTO` sets the vertical scale automatically to fit the waveform to the screen of Phase error versus Time measurement view 2.

DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:OFFSet

Sets or queries the minimum vertical value (bottom edge) of the Phase error versus Time graph.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Display commands

Syntax

`DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:OFFSet <value>`
`DISPlay:PERRor[:MEASview<y>]:Y[:SCALe]:OFFSet?`

Related Commands

[DISPlay:PERRor\[:MEASview<y>\]:Y\[:SCALe\]](#) (on page 909)

Arguments

<value>::<NRf> specifies the minimum vertical value.

Range: -360 to +360°.

Returns

<NRf>

Examples

DISPlay:PERror:MEASview2:Y:SCALE:OFFSet? -9.5 sets the minimum vertical value to -9.5% in the Phase error versus Time graph Measurement view 2.

DISPlay:PHVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:PHVTime[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Examples

DISPlay:PHVTIME:MEASview1:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the Frequency versus Time view.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]

Sets or queries the horizontal scale (full-scale time) of the Phase versus Time graph. Programming a specified scale sets DISPlay:PHVTime[:MEASview<y>]:X[:SCALE] AUTO:STATe OFF.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:X[:SCALE] <value>
DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]?
```

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STAT](#) (on page 913)

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 915)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::={ <NRf> | MAXimum | MINimum } specifies the horizontal scale in full-scale time. MAXimum and MINimum represent the upper and lower limits of the setting range, respectively.

Use the [DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:MAXimum?](#) (on page 915) and [DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet:MINimum?](#) (on page 916) queries to get the upper and lower limit values of the setting range.

Examples

DISPLAY:PHVTIME:MEASview1:X:SCALE 1.5ms sets the horizontal scale to 1.5 ms.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:AUTO (No Query Form)

Sets the horizontal scale automatically to fit the waveform to the screen in the Phase versus Time view. Executing this command sets DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:AUTO:STATe ON.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:AUTO

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATe](#) (on page 913)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

DISPLAY:PHVTIME:MEASview1:X:SCALE:AUTO sets the horizontal scale automatically to fit the waveform to the screen.

DISPlay:PHVTime[:MEASview?]:Y[:SCALE]:AXIS:ENABLE:REFerence {set and query}

Sets or queries the state of Y reference checkbox.

Conditions

Measurement views: Phase VS Time.

Applicable only for MSO/LPD/SX.

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview?]:Y[:SCALe]:AXIS:ENABle:REFerence {0|1|TRUE |FALSE}
DISPlay:PHVTime[:MEASview?]:Y[:SCALe]:AXIS:ENABle:REFerence? (Query)
```

Arguments

0 is used to change the 'Y Reference' checkbox state from checked to unchecked.

1 is used to change the 'Y Reference' checkbox state from unchecked to checked.

Example

DISPlay:PHVTime:MEASview1:Y:SCALE:AXIS:ENABle:REFerence 1 changes the state of 'Y Reference' checkbox to checked.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe

Determines whether to set the horizontal scale automatically or manually.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe { OFF | ON | 0 | 1 }
DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:AUTO:STATe?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 specifies that the horizontal scale is set manually. To set it, use the

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALe\]](#) (on page 916) and [DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALe\]:OFFSet](#) (on page 915) commands.

ON or 1 specifies that the horizontal scale is set automatically.

Examples

DISPlay:PHVTime:MEASview1:X:SCALE:AUTO:STATE ON specifies that the horizontal scale is set automatically.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALe]:MAXimum? (Query Only)

Queries the upper limit of the horizontal scale setting range.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:MAXimum?
```

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 911)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<NRf> The upper limit of the horizontal scale setting range.

Examples

DISPlay:PHVTIME:MEASview1:X:SCALE:MAXIMUM? might return 18.135E-3, indicating that the upper limit of the horizontal scale setting range is 18.135 ms.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:MINimum? (Query Only)

Queries the lower limit of the horizontal scale setting range.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:MINimum?
```

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 911)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<NRf> The lower limit of the horizontal scale setting range.

Examples

DISPlay:PHVTIME:MEASview1:X:SCALE:MINIMUM? might return 10.0E-9, indicating that the lower limit of the horizontal scale setting range is 10.0 ns.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the Phase versus Time graph. Programming a specified offset sets `DISPlay:PHVTime:MEASview<y>:X[SCALE]:AUTO:STATE OFF`.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:OFFSet
DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:AUTO:STATE](#) (on page 913)

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 911)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`<value>::={ <NRf> | MAXimum | MINimum }` specifies the horizontal offset. `MAXimum` and `MINimum` represent the upper and lower limits of the setting range, respectively.

Use the [DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet:MAXimum?](#) (on page 915) and [DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet:MINimum?](#) (on page 916) queries to get the upper and lower limit values of the setting range.

Examples

`DISPlay:PHVTIME:MEASview1:X:SCALE:OFFSET 800ns` sets the minimum horizontal value to 800 ns in the Phase versus Time graph.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MAXimum? (Query Only)

Queries the upper limit of the horizontal offset setting range.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MAXimum?
```

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 915)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<NRf> The upper limit of the horizontal offset setting range.

Examples

DISPLAY:PHVTIME:MEASview1:X:SCALE:OFFSET:MAXIMUM? might return $-1.812\text{E}-3$, indicating that the upper limit of the horizontal offset setting range is -1.812 ms.

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum? (Query Only)

Queries the lower limit of the horizontal offset setting range.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

DISPlay:PHVTime[:MEASview<y>]:X[:SCALE]:OFFSet:MINimum?

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 915)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<NRf> The lower limit of the horizontal offset setting range.

Examples

DISPLAY:PHVTIME:MEASview1:X:SCALE:OFFSET:MINIMUM? might return $-16.28\text{E}-3$, indicating that the lower limit of the horizontal offset setting range is -16.28 ms.

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the Phase versus Time graph.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE] <value>

```
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]?
```

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 918)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> specifies the vertical range. Range: 1 to 1T°.

Examples

DISPLAY:PHVTIME:MEASview1:Y:SCALE 180 sets the vertical range to 180° in the Phase versus Time graph.

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AUTO (No Query Form)

Sets the vertical scale automatically to fit the waveform to the screen in the Phase versus Time view.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AUTO
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

DISPLAY:PHVTIME:MEASview1:Y:SCALE:AUTO sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AXIS

Sets or queries the vertical axis representation.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AXIS { MODulopi | CONTinuous }
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AXIS?
```

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

MODulopi (modulo π) shows the phase constrained within $\pm 180^\circ$ along the vertical axis.

CONTinuous shows the phase as continuous quantity along the vertical axis.

Examples

DISPLAY:PHVTIME:MEASview1:Y:SCALE:AXIS MODulopi selects modulo π representation for the vertical axis.

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AXIS:REference

Sets or queries which time point in the analysis period to use as the zero-phase-value reference.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AXIS:REference <value>
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:AXIS:REference?
```

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<value>` :: <NRf> specifies the phase reference time.

Examples

DISPLAY:PHVTIME:MEASview1:Y:SCALE:AXIS:REFERENCE 1.5us sets the phase reference time to 1.5 μ s.

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the center of the vertical axis) in the Phase versus Time graph.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

```
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:OFFSet <value>
DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:PHVTime\[:MEASview<y>\]:Y\[:SCALE\]](#) (on page 916)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> specifies the vertical offset. Range: -0.5T to +0.5T°.

Examples

DISPLAY:PHVTIME:MEASview1:Y:SCALE:OFFSET -158.5 sets the vertical offset to -158.5° in the Phase versus Time graph.

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:RESCale (No Query Form)

Rescales the vertical axis automatically to fit the Phase versus Time waveform to the screen.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

DISPlay:PHVTime[:MEASview<y>]:Y[:SCALE]:RESCale

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

DISPLAY:PHVTIME:MEASview1:Y:SCALE:RESCALE rescales the vertical axis automatically to fit the Phase versus Time waveform to the screen.

DISPlay:PNOise:LEGend:STATe

Determines whether to show or hide the trace legend on the display. The legend indicates the trace detection and function on the screen for each displayed trace.

Conditions

Measurement views: Phase versus Time

Group

Display commands

Syntax

DISPlay:PNOise:LEGend:STATe { OFF | ON | 0 | 1 }
DISPlay:PNOise:LEGend:STATe?

Arguments

OFF or 0 hides the trace legend.

ON or 1 shows the trace legend.

Examples

DISPLAY:PNOISE:LEGEND:STATE ON shows the trace legend on the screen.

DISPlay:PNOise:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the phase noise view.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:PNOise:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker in the graph.

ON or 1 shows the readout for the selected marker in the graph.

Examples

DISPLAY:PNOISE:MARKER:SHOW:STATE ON shows the readout for the selected marker in the graph.

DISPlay:PNOise:RESet:SCALe (No Query Form)

Resets the horizontal and vertical scale to the default values described below in the phase noise view.

Vertical offset = -50 dBc/Hz, Vertical scale = 100 dB, Horizontal start = 10 Hz, and Horizontal stop = 1 GHz

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:RESet:SCALe
```

Arguments

None

Examples

DISPLAY:PNOISE:RESET:SCALE resets the horizontal and vertical scale to the default values.

DISPlay:PNOise:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:PNOise:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Examples

DISPLAY:PNOISE:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the screen.

DISPlay:PNOise:X[:SCALE]:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the phase noise view.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:X[:SCALE]:AUTO
```

Arguments

None

Examples

DISPLAY:PNOISE:X:SCALE:AUTO rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:PNOise:X[:SCALE]:START

Sets or queries the start frequency (left edge) of the phase noise graph.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:X[:SCALE]:START <value>
DISPlay:PNOise:X[:SCALE]:START?
```

Arguments

<value>::<NRf> specifies the start frequency.

Range: 10 mHz to 100 MHz.

Note that (start frequency) = 104 × (stop frequency).

Examples

`DISPLAY:PNOISE:X:SCALE:START 10Hz` sets the start frequency to 10 Hz in the phase noise graph.

DISPlay:PNOise:X[:SCALe]:STOP

Sets or queries the stop frequency (right edge) of the phase noise graph.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:X[:SCALe]:STOP <value>  
DISPlay:PNOise:X[:SCALe]:STOP?
```

Arguments

`<value>::<NRf>` specifies the stop frequency.

Range: 100 Hz to 1 THz.

Note that (start frequency) = $104 \times$ (stop frequency).

Examples

`DISPLAY:PNOISE:X:SCALE:STOP 2GHz` sets the stop frequency to 2 GHz in the phase noise graph.

DISPlay:PNOise:Y[:SCALe]

Sets or queries the vertical range of the phase noise graph.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:Y[:SCALe] <value>  
DISPlay:PNOise:Y[:SCALe]?
```

Arguments

`<value>::<NRf>` specifies the vertical range. Range: 0.1 to 200 dB.

Examples

`DISPLAY:PNOISE:Y:SCALE 100` sets the vertical range to 100 dB for the phase noise graph.

DISPlay:PNOise:Y[:SCALe]:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the phase noise view.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:Y[:SCALe]:AUTO
```

Arguments

None

Examples

DISPLAY:PNOISE:Y:SCALE:AUTO rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:PNOise:Y[:SCALe]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) of the phase noise graph.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:Y[:SCALe]:OFFSet <value>  
DISPlay:PNOise:Y[:SCALe]:OFFSet?
```

Arguments

<value>::<NRf> specifies the vertical offset. Range: -200 to +20 dBc/Hz.

Examples

DISPLAY:PNOISE:Y:SCALE:OFFSET -12.5 sets the vertical offset to -12.5 dBc/Hz for the phase noise graph.

DISPlay:PNOise:Y[:SCALe]:PDIVision

Sets or queries the vertical scale (per division) of the phase noise graph.

Conditions

Measurement views: Phase noise

Group

Display commands

Syntax

```
DISPlay:PNOise:Y[:SCALe]:PDIVision <value>  
DISPlay:PNOise:Y[:SCALe]:PDIVision?
```

Arguments

<value>::<NRf> specifies the vertical scale (per division).

Range: 0.01 to 20 dB/div.

Examples

DISPLAY:PNOISE:Y:SCALE:PDIVISION 5 sets the vertical scale to 5 dB/div.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:CURRent:BIN

Sets or queries the current bin number where the indicator is positioned from the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:CURRent:BIN <value>  
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:CURRent:BIN?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NR1> sets the current bin number.

Examples

DISPLAY:PULSE:CUMULATIVE:HISTOGRAM:CURRENT:BIN 50 sets the current bin number to 50.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:AUTO (No Query Form)

Sets the scale auto value in the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:AUTO <value>
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NR1>

Examples

DISPLAY:PULSE:CUMULATIVE:HISTOGRAM:MEASview<y>:SCALE:AUTO 1 sets the auto scale value to 1.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:RESEt (No Query Form)

Resets the current scale in the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>:]SCALE:RESEt <value>
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NR1>

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:RESEt sets the scale value to 1.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:AUTO (No Query Form)

Sets the X auto value in the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>:]SCALE:X:AUTO <value>
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Returns

<NR1>

Examples

DISPLAY:PULSE:CUMULATIVE:HISTOGRAM:MEASview<y>:SCALE:X:AUTO 1 sets the X auto value to 1.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:NUMBER

Sets or queries the current X scale number from the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:NUMBER <value>
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:NUMBER?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Returns

<NR1> returns the X scale value.

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:X:NUMBER 50 sets the X scale value to 50.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:OFFSET

Sets or queries the current X offset number from the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:OFFSET <value>
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:OFFSET?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Returns

<NR1> returns the X offset value.

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:X:OFFSET 2 sets the X scale offset value to 2.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:RScale (No Query Form)

Sets the current X reset scale in the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:X:RScale <value>

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

The parameter <x> = 0 to 4.

Returns

<NR1>

Examples

DISPLAY:PULSE:CUMULATIVE:HISTOGRAM:MEASview<y>:SCALE:X:RSCALE 1 sets the X reset scale value to 1.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:AUTO (No Query Form)

Sets the current Y auto value in the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:AUTO <value>

Arguments

<value> sets the Y auto value.

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NR1>

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:Y:AUTO 1 sets the Y auto value to 1.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:FULL

Sets or queries the current Y scale full number from the histogram display.

Conditions

Measurement views:

Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:FULL <value>
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:FULL?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NR1> sets the Y scale full value

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:Y:FULL? 10 sets the Y scale value to 10.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:OFFSet

Sets the current Y offset numbering the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:OFFSet<value>
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:OFFSet?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NR1> returns the Y scale offset value.

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:Y:OFFSET 2 sets the Y scale offset value to 2.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:RSCale (No Query Form)

Sets the current Y reset scale in the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:RSCale <value>

Arguments

<value> sets the Y reset scale value.

Returns

<NR1> sets the Y reset scale value.

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:Y:RSCALE 1 sets the Y reset scale value to 1.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:STOP? (Query Only)

Queries the minimum vertical value (bottom edge) in the cumulative histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:SCALE:Y:STOP?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> is the minimum vertical value (bottom edge).

Examples

DISPlay:PULSe:CUMulative:HISTogram:MEASview<y>:SCALE:Y:STOP? might return 0, indicating that the minimum vertical value is 0 in the pulse cumulative histogram display.

DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATE

Sets or queries the current graticule selection from the histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:HISTogram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATE { 0 | 1 }
```

Arguments

0 sets the display without graticule (box is unchecked)

1 sets the display with graticule (checkbox is checked)

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

0 or 1, <NRf>

Examples

DISPLAY:PULSE:CUMULATIVE:HISTOGRAM:MEASview<y>:WINDOW:TRACE:GRATICULE:GRID:STATE 1 sets the display with graticule option checked.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFReqerror

Sets or queries the Max Frequency error measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFReqerror <value>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFReqerror
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFReqerror?
```

Arguments

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:MFRerror 1` enables the Max Frequency Error measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:ATX

Sets or queries the Peak Power measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:ATX <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:ATX?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:ATX 1` enables the Average Transmitted Power measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:AVERage

Sets or queries the Average ON Power measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:AVERage <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:AVERage?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:AVERage 1` enables the Average ON Power measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DRODb

Sets or queries the Droop dB measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DRODb <0 | 1>`

`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DRODb?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:DRODb 1` enables the Droop dB measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DROOp

Sets or queries the Droop measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DROOp <0 | 1>`

`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DROOp?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:DRoop 1 enables the Droop measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTPct

Sets or queries the Duty Factor (%) measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTPct <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTPct?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:DUTPct 1 enables the Duty Factor(%) measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTRatio

Sets or queries the Duty Factor (Ratio) measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTRatio <0 | 1>
```

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:DUTRatio?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:DUTRatio 1 enables the Duty Factor (Ratio) measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FABS

Sets or queries the Absolute Frequency measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FABS <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FABS?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:FABS 1 enables the Absolute Frequency measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FALL

Sets or queries the Fall Time measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FALL <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FALL?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:FALL 1 enables the Fall Time measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FDELta

Sets or queries the Delta Frequency measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FDELta <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FDELta?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:FDELta 1 enables the Delta Frequency measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FRDeviation

Sets or queries the Frequency Deviation measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FRDeviation <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:FRDeviation?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:FRDeviation 1 enables the Frequency Deviation measurement.

DISPLAY:PULSe:CUMulative:STATistics[:MEASview<y>]:IRAMplitude

Sets or queries the Response Amplitude measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:IRAMplitude <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:IRAMplitude?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:IRAMplitude 1 enables the Response Amplitude measurement.

DISPLAY:PULSe:CUMulative:STATistics[:MEASview<y>]:IRTime

Sets or queries the Impulse Response Time measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPLAY:PULSe:CUMulative:STATistics[:MEASview<y>]:IRTime <0 | 1>  
DISPLAY:PULSe:CUMulative:STATistics[:MEASview<y>]:IRTime?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPLAY:PULSe:CUMulative:STATistics:MEASview1:IRTime 1 enables the Impulse Response Time measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MPHerror

Sets or queries the Max phase error measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MPHerror <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MPHerror?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

<Boolean> , 0 or 1

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:MPHerror 1` enables the Max phase error measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVEDb

Sets or queries the Overshoot dB measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVEDb <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVEDb?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:OVEDb 1` enables the Overshoot dB measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVERshoot

Sets or queries the Overshoot measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVERshoot <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:OVERshoot?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:OVERshoot 1` enables the Overshoot measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PHDeviation

Sets or queries the Phase Deviation measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PHDeviation <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PHDeviation?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:PHDeviation 1` enables the Phase Deviation measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFD

Sets or queries the Pulse-Pulse Frequency Difference measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFD <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFD?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:PPFD 1` enables the Pulse-Pulse Frequency Difference measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFrequency

Sets or queries the Pulse-pulse carrier frequency measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFrequency <0 | 1>`
`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPFrequency?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:PPFrequency 1` enables the Pulse-pulse carrier frequency phase measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPOWer

Sets or queries the Peak Power measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPOWer <0 | 1>`
`DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPOWer?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:PPOwer 1 enables the Peak Power measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPD

Sets or queries the Pulse-Pulse Phase Difference measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPD <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPD?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:PPPD 1 enables the Pulse-Pulse Phase Difference measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPHase

Sets or queries the Pulse-pulse carrier phase measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPHase <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:PPPHase?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:PPPHase 1 enables the Pulse-pulse carrier phase measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RINterval

Sets or queries the Repetition Interval measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RINterval <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RINterval?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:RINterval 1 enables the Repetition Interval measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPDb

Sets or queries the Ripple dB measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPDb <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPDb?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:RIPDb 1 enables the Ripple dB measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPPLE

Sets or queries the Ripple measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPPLE <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RIPPLE?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:RIPPLE 1 enables the Ripple measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RISE

Sets or queries the Rise Time measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RISE <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RISE?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:RISE 1 enables the Rise Time measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSFreqerror

Sets or queries the RMS Frequency error measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSFreqerror <0 | 1>  
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSFreqerror?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:RMSFreqerror 1` enables the RMS Frequency error measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFRreqerror

Sets or queries the Max Frequency error measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFRreqerror <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:MFRreqerror?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

<0 | 1>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:MFRreqerror 1` enables the Max Frequency Error measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSPherror

Sets or queries the Max Frequency error measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSPherror <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RMSPherror?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:RMSPherror 1` enables the Max Frequency Error measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RRATe

Sets or queries the Repetition Rate measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RRATe <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:RRATe?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

`DISPlay:PULSe:CUMulative:STATistics:MEASview1:RRATe 1` enables the Repetition Rate measurement.

DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:WIDTh

Sets or queries the Pulse Width measurement selection from the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:WIDTh <0 | 1>
DISPlay:PULSe:CUMulative:STATistics[:MEASview<y>]:WIDTh?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:CUMulative:STATistics:MEASview1:WIDTh 1 enables the Pulse Width measurement.

DISPlay:PULSe:MEASview<y>:DELeTe (No Query Form)

Deletes the measurement view in the pulsed RF measurements.

Conditions

Measurement views: Pulsed RF measurements

Group

Display commands

Syntax

```
DISPlay:PULSe:MEASview<y>:DELeTe { RESult | TRACe | STATistics }
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

RESult deletes the pulse table view.

TRACe deletes the pulse trace view.

STATistics deletes the pulse statistics view.

If you attempt to delete a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Examples

DISPlay:PULSe:MEASview1:DELeTe deletes the pulse trace view.

DISPlay:PULSe:MEASview<y>[:SOURce<x>]:NEW (No Query Form)

Selects a measurement view in the pulsed RF measurements on the screen. The query command returns the currently selected view.

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Measurement views: Pulsed RF with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:MEASview<y>[:SOURce<x>]:NEW { RESult | TRACe | STATistics }
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<x> = 1 to 8, representing Range of Source.

RESult opens the pulse table view.

TRACe opens the pulse trace view.

STATistics opens the pulse statistics view.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Examples

DISPlay:PULSe:MEASview2:SOURce1:NEW STATistics creates pulse statistics measurement with source 1.

DISPlay:PULSe:MEASview<y>:SElect

Selects a measurement view in the pulsed RF measurements on the screen. The query command returns the currently selected view.

Conditions

Measurement views: Pulsed RF with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:MEASview<y>:SElect { RESult | TRACe | STATistics}
DISPlay:PULSe:MEASview<y>:SElect?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

RESult selects the pulse table view.

TRACe selects the pulse trace view.

STATistics selects the pulse statistics view.

If you attempt to select a view that is not displayed on screen, the error (-200, "Execution error; Measurement not running") will be returned.

Returns

<NRf>

Examples

DISPlay:PULSe:MEASview2:SElect TRACe selects the pulse trace Measurement view 2.

DISPlay:PULSe:OGRAM[:MEASview<y>]

Sets the chosen display from the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

```
DISPlay:PULSe:OGRAM[:MEASview<y>]<arg1>
DISPlay:PULSe:OGRAM[:MEASview<y>]
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<arg1> is FVT or TVT or BOTH

Where

TVT = Time Vs Time

FVT = Frequency Vs Time

BOTH = Both

Returns

<String> FVT or TVT or BOTH

Examples

DISPlay:PULSe:OGRAM:MEASview1 BOTH sets the display type to both.

DISPlay:PULSe:OGRAM[:MEASview<y>]:FRAME:INFOrmation

Sets or queries the Frame Info parameter is enabled or not from the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

```
DISPlay:PULSe:OGRAM[:MEASview<y>]:FRAME:INFOrmation <0 | 1>
DISPlay:PULSe:OGRAM[:MEASview<y>]:FRAME:INFOrmation?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

0 or 1, <NRf>

Examples

DISPlay:PULSe:OGRAM:MEASview1:FRAME:INFORMATION 1 enables the Frame Info parameter.

DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:FRAME

Sets or queries the Marker frame number from the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

```
DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:FRAME <value>
DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:FRAME?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> :: = <NR1> sets the marker frame number.

Returns

<NR1>

Examples

DISPlay:PULSe:OGRAM:MEASview1:MARKer:FRAME 5 sets the marker frame number to 5.

DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:SHOW:STATE

Sets or queries the Show Marker readout in graph option from the Prefs tab of the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

```
DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:SHOW:STATE {OFF | ON | 0 | 1}
DISPlay:PULSe:OGRAM[:MEASview<y>]:MARKer:SHOW:STATE?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

0 unchecks the checkbox

1 checks the checkbox

Returns

{OFF | ON | 0 | 1}

Examples

DISPlay:PULSe:OGRAM:MEASview1:MARKer:SHOW:STATe 1 enables the Show Marker readout in graph parameter.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQuency:START

Sets or queries the current X scale frequency start value from the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

```
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQuency:START <value>
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQuency:START?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> :: = <NR1> sets the X scale frequency start value.

Returns

<NR1>

Examples

DISPlay:PULSe:OGRAM:MEASview1:SCALE:X:FVTime:FREQuency:START 43 sets X scale frequency start value to 43.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQuency:STOP

Sets or queries the current X scale frequency stop value from the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

```
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQuency:STOP <value>
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:FREQuency:STOP?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> :: = <NR1> sets the X scale frequency stop value.

Returns

<NR1>

Examples

DISPlay:PULSe:OGRAM:MEASview1:SCALE:X:FVTime:FREQuency:STOP 155 sets X scale frequency stop value to 155.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:RSCale (No Query Form)

Restores the horizontal axis of start frequency and stop frequency to default value in the Frequency vs Time plot of Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:FVTime:RSCale

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

DISPlay:PULSe:OGRAM:MEASview1:SCALE:X:FVTime:RSCale restores the horizontal axis of start frequency and stop frequency to default value.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:RSCale (No Query Form)

Restores the horizontal axis of position and scale to default value in the Time vs Time plot of Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:RSCale

Arguments

None

Examples

`DISPlay:PULSe:OGRAM:MEASview1[:SCALE]:X:RSCALE` restores the horizontal axis of position and scale to default value.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime (No Query Form)

Sets the scale value in the Time vs Time of Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

`DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime <value>`

Arguments

`<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

`<value>` :: = `<NR1>` sets the scale value in Time vs Time.

Examples

`DISPlay:PULSe:OGRAM:MEASview1:SCALE:X:TVTime 1` sets the scale value to 1.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime:OFFSet (No Query Form)

Sets the scale value in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

`DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime:OFFSet <value>`

Arguments

`<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

`<value>` :: = `<NR1>` sets the X scale offset value.

Examples

`DISPlay:PULSe:OGRAM:MEASview1:SCALE:X:TVTime:OFFSet 1` sets the X scale offset value to 1.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime:RSCale (No Query Form)

Restores the horizontal axis of position and scale to default value in the Time vs Time plot of Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

`DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:X:TVTime:RSCale`

Arguments

`<y> = 1 to 8` represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default `y` is 1.

Returns

None

Examples

`DISPlay:PULSe:OGRAM:MEASview1:SCALE:X:TVTime:RSCale` restores the horizontal axis of position and scale to default value.

DISPlay:PULSe:OGRAM[:MEASview<y>]:FVTime:DETection

Sets or queries the type of detection for the specified trace.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

`DISPlay:PULSe:OGRAM[:MEASview<y>]:FVTime:DETection {AVERage | POSitive | NEGative | POSNegative | SAMPLE}`

`DISPlay:PULSe:OGRAM[:MEASview<y>]:FVTime:DETection?`

Arguments

`<y> = 1 to 8` represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default `y` is 1.

`AVERage` displays the average data value for each pixel.

`POSitive` displays the maximum data value for each pixel.

`NEGative` displays the minimum data value for each pixel.

`POSNegative` displays the maximum and minimum data values for each pixel.

SAMPLE displays the first sample value received for each pixel.

Returns

{AVERage | POSitive | NEGative | POSNegative | SAMPlE}

Examples

DISPlay:PULSe:OGRAM:MEASview1:FVTime:DETection POSitive enables positive detection.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:RSCale

Restores the default value of both the axis inTime vs Time and Frequency vs Time plot of Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:RSCale

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

DISPlay:PULSe:OGRAM:MEASview1:SCALE:RSCale restores default value in PulseOgram displays.

DISPlay:PULSe:OGRAM[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:PULSe:OGRAM[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

{ OFF | ON | 0 | 1 }

Examples

DISPlay:PULSe:OGRAM:MEASview1:WINDow:TRACe:GRATicule:GRID:STATe ON shows the graticule grid on the screen.

DISPlay:PULSe:OGRAM[:MEASview<y>]:TRACE:POINTs

Sets or queries the trace points in the Pulseo-gram measurement.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM[:MEASview<y>]:TRACE:POINTs {ONEK | TENK | HUNDredk | NDECimate | NEVerdecimate}
DISPlay:PULSe:OGRAM[:MEASview<y>]:TRACE:POINTs?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

ONEK sets the trace points to 1k.

TENK sets the trace points to 10k.

HUNDredk sets the trace points to 100k.

NDECimate or NEVerdecimate sets the trace points to Never decimate.

Returns

{ONEK | TENK | HUNDredk | NDECimate | NEVerdecimate}

Examples

DISPlay:PULSe:OGRAM:MEASview1:TRACE:POINTs ONEK selects the trace points of 1000 in the PulseOgram measurement.

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:Y:FRAME:FULL

Sets or queries the frame scale value in the Pulse-Ogram display in fast frame mode acquisition.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:Y:FRAME:FULL <value>
DISPlay:PULSe:OGRAM[:MEASview<y>][:SCALE]:Y:FRAME:FULL?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> :: = <NR1> sets the frame scale value.

Returns

<NR1> sets the frame scale value.

Examples

DISPlay:PULSe:OGRAM:MEASview1:SCALE:Y:FRAME:FULL 4 sets the frame scale value to 4.

DISPlay:PULSe:OGRAM:SCALE:Y:FRAME:OFFSet

Sets or queries the frame offset value in the Pulse-Ogram display in fast frame mode acquisition.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM:SCALE:Y:FRAME:OFFSet <value>

DISPlay:PULSe:OGRAM:SCALE:Y:FRAME:OFFSetDISPlay:PULSe:OGRAM: SCALE:Y:FRAME:OFFSet?

Arguments

<value> :: = <NR1> sets the frame offset value.

Examples

DISPLAY:PULSE:OGRAM:SCALE:Y:FRAME:OFFSET 2 sets the frame offset value to 2.

DISPlay:PULSe:OGRAM[:MEASview<y>]:TVTime:SMOOTH:POINTS

Sets or queries the value of Smooth points from the Traces tab in Time vs Time display of the Pulse-Ogram.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

DISPlay:PULSe:OGRAM[:MEASview<y>]:TVTime:SMOOTH:POINTS <value>

DISPlay:PULSe:OGRAM[:MEASview<y>]:TVTime:SMOOTH:POINTS?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> :: = <NR1> sets the smooth points value.

Returns

<NR1> sets the smooth points value.

Examples

DISPlay:PULSe:OGRAM:MEASview1:TVTime:SMOOTH:POINTS 5 sets the smooth points value to 5.

DISPlay:PULSe:OGRAM[:MEASview<y>]

Sets the chosen display from the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Display commands

Syntax

```
DISPlay:PULSe:OGRAM[:MEASview<y>] <arg1>
DISPlay:PULSe:OGRAM[:MEASview<y>] ?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<arg1> = {TVT | FVT | BOTH}

Where

TVT =Time Vs Time

FVT =Frequency Vs Time

BOTH =Both

Returns

<String> TVT or FVT or BOTH

Examples

DISPlay:PULSe:OGRAM:MEASview1 FVT sets Frequency vs Time as the display type.

DISPlay:PULSe:RESult[:MEASview<y>]:ATX

Determines whether or not to show the average transmitted power measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:ATX { OFF | ON | 0 | 1 }
DISPlay:PULSe:RESult[:MEASview<y>]:ATX?
```

Arguments

OFF or 0 does not show the average transmitted power measurement result.

ON or 1 shows the average transmitted power measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:ATX ON shows the average transmitted power measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:AVERage

Determines whether or not to show the average on power measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:AVERage { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:AVERage?
```

Arguments

OFF or 0 does not show the average on power measurement result.

ON or 1 shows the average on power measurement result in the results table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:AVERAGE ON shows the average on power measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:DRODb

Determines whether or not to show the droop measurement result in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:DRODb { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:DRODb?
```

Arguments

OFF or 0 does not show the droop measurement result in dB.

ON or 1 shows the droop measurement result in dB in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:DRODB ON shows the droop measurement result in dB in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:DROop

Sets or queries showing the droop measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:DROop { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:DROop?
```

Arguments

OFF or 0 does not show the droop measurement result.

ON or 1 shows the droop measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:DROOP ON shows the droop measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:DUTPct

Determines whether or not to show the duty factor (%) measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:DUTPct { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:DUTPct?
```

Arguments

OFF or 0 does not show the duty factor measurement result.

ON or 1 shows the duty factor measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:DUTPCT ON shows the duty factor (%) measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:DUTRatio

Determines whether or not to show the duty factor (ratio) measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:DUTRatio { OFF | ON | 0 | 1 }
DISPlay:PULSe:RESult[:MEASview<y>]:DUTRatio?
```

Arguments

OFF or 0 does not show the duty factor measurement result.

ON or 1 shows the duty factor measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:DUTRATIO ON shows the duty factor (ratio) measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:FABS

Determines whether or not to show the absolute frequency measurement result in the Pulse Table.

Conditions

Measurement views: Pulse Table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:FABS {OFF | ON | 0 | 1}
```

Arguments

OFF or 0 does not show the absolute frequency measurement result in the pulse table.

ON or 1 shows the absolute frequency measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:FABS ON shows the absolute frequency measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:FALL

Determines whether or not to show the fall time measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:FALL { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:FALL?
```

Arguments

OFF or 0 does not show the fall time measurement result.

ON or 1 shows the fall time measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:FALL ON shows the fall time measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:FDELta

Determines whether or not to show the delta frequency measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:FDELta { OFF | ON | 0 | 1 }
```

Arguments

OFF or 0 does not show the delta frequency measurement result.

ON or 1 shows the delta frequency measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:FDELTA ON` shows the delta frequency measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:FRDeviation

Determines whether or not to show the frequency deviation measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:FRDeviation { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:FRDeviation?
```

Arguments

`OFF` or `0` does not show the frequency deviation measurement result.

`ON` or `1` shows the frequency deviation measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:FRDEVIATION ON` shows the frequency deviation measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:IRAMplitude

Sets or queries showing the impulse response amplitude measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:IRAMplitude { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:IRAMplitude?
```

Arguments

`OFF` or `0` does not show the Impulse Response Amplitude measurement result.

`ON` or `1` shows the Impulse Response Amplitude measurement result in the results table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:IRAMPLITUDE ON` shows the Impulse Response Amplitude measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:IRTime

Sets or queries showing the Impulse Response Time measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:IRTime { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:IRTime?
```

Arguments

`OFF` or `0` does not show the Impulse Response Time measurement result.

`ON` or `1` shows the Impulse Response Time measurement result in the results table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:IRTIME ON` shows the Impulse Response Time measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:MFReqerror

Determines whether or not to show the maximum frequency error measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:MFReqerror { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:MFReqerror?
```

Arguments

`OFF` or `0` does not show the maximum frequency error measurement result.

`ON` or `1` shows the maximum frequency error measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:MFREQERROR ON` shows the maximum frequency error measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:MPHerror

Determines whether or not to show the maximum phase error measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:MPHerror { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:MPHerror?
```

Arguments

`OFF` or `0` does not show the maximum phase error measurement result.

`ON` or `1` shows the maximum phase error measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:MPHERROR ON` shows the maximum phase error measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:OVEDb

Determines whether or not to show the Overshoot measurement result in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:OVEDb { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:OVEDb?
```

Arguments

`OFF` or `0` does not show the Overshoot measurement result in dB.

`ON` or `1` shows the Overshoot measurement result in dB in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:OVEDB ON` shows the Overshoot measurement result in dB in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:OVERshoot

Sets or queries whether or not to show the Overshoot measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:OVERshoot { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:OVERshoot?
```

Arguments

`OFF` or `0` does not show the Overshoot measurement result.

`ON` or `1` shows the Overshoot measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:OVERSHOOT ON` shows the Overshoot measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:PHDeviation

Determines whether or not to show the phase deviation measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:PHDeviation { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:PHDeviation?
```

Arguments

`OFF` or `0` does not show the phase deviation measurement result.

`ON` or `1` shows the phase deviation measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:PHDEVIATION ON` shows the phase deviation measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:PPPD

Determines whether or not to show the pulse to pulse phase measurement result in the Pulse Table.

Conditions

Measurement views: Pulse Table

Group

Display commands

Syntax

`DISPlay:PULSe:RESult[:MEASview<y>]:PPPD {OFF | ON | 0 | 1}`

Arguments

`OFF` or `0` does not show the pulse to pulse phase measurement result in the pulse table.

`ON` or `1` shows the pulse to pulse phase measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:PPPD ON` shows the pulse to pulse frequency measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:PPFD

Determines whether or not to show the pulse to pulse frequency measurement result in the Pulse Table.

Conditions

Measurement views: Pulse Table

Group

Display commands

Syntax

`DISPlay:PULSe:RESult[:MEASview<y>]:PPFD {OFF | ON | 0 | 1}`

Arguments

`OFF` or `0` does not show the pulse to pulse frequency measurement result in the pulse table.

`ON` or `1` shows the pulse to pulse frequency measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:PPFD ON shows the pulse to pulse frequency measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:PPFRequency

Determines whether or not to show the pulse-pulse carrier frequency measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:PPFRequency { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:PPFRequency?
```

Arguments

OFF or 0 does not show the pulse-pulse carrier frequency measurement result.

ON or 1 shows the pulse-pulse carrier frequency measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPLAY:PULSE:RESULT:MEASVIEW1:PPFREQUENCY ON shows the pulse-pulse carrier frequency measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:PPOWer

Determines whether or not to show the peak power measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:PPOWer { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:PPOWer?
```

Arguments

OFF or 0 does not show the peak power measurement result.

ON or 1 shows the peak power measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:PPOWER ON` shows the peak power measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:PPPHase

Determines whether or not to show the pulse-pulse carrier phase measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult:PPPHase { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:PPPHase?
```

Arguments

`OFF` or `0` does not show the pulse-pulse carrier phase measurement result.

`ON` or `1` shows the pulse-pulse carrier phase measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASview1:PPPHASE ON` shows the pulse-pulse carrier phase measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:RINTerval

Determines whether or not to show the repetition interval measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:RINTerval { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:RINTerval?
```

Arguments

`OFF` or `0` does not show the repetition interval measurement result.

`ON` or `1` shows the repetition interval measurement result in the results table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:RINTERVAL ON` shows the repetition interval measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:RIPDb

Sets or queries showing the ripple measurement result in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:RIPDb { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:RIPDb?
```

Arguments

OFF or 0 does not show the ripple measurement result in dB.

ON or 1 shows the ripple measurement result in dB in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:RIPDB ON` shows the ripple measurement result in dB in the pulse table.

DISPlay:PULSe:RESult:MEASview<y>:RIPPlE

Sets or queries showing the ripple measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult:MEASview<y>:RIPPlE { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult:MEASview<y>:RIPPlE?
```

Arguments

OFF or 0 does not show the ripple measurement result.

ON or 1 shows the ripple measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:RIPPLE ON` shows the ripple measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:RISE

Determines whether or not to show the rise time measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:RISE { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:RISE?
```

Arguments

OFF or 0 does not show the rise time measurement result.

ON or 1 shows the rise time measurement result in the pulse table.

Returns

See Arguments.

Examples

DISPlay:PULSe:RESult:MEASVIEW1:RISE ON shows the rise time measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:RMSFreqerror

Determines whether or not to show the RMS frequency error measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:RMSFreqerror { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:RMSFreqerror?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 does not show the RMS frequency error measurement result.

ON or 1 shows the RMS frequency error measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:RMSFREQERROR ON` shows the RMS frequency error measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:RMSPherror

Determines whether or not to show the RMS phase error measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:RMSPherror { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:RMSPherror?
```

Arguments

`OFF` or `0` does not show the RMS phase error measurement result.

`ON` or `1` shows the RMS phase error measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:RMSPHERROR ON` shows the RMS phase error measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:RRATe

Determines whether or not to show the repetition rate measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:RRATe { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:RRATe?
```

Arguments

`OFF` or `0` does not show the repetition rate measurement result.

`ON` or `1` shows the repetition rate measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:RRATE ON` shows the repetition rate measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:TIME

Determines whether or not to show the time measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:TIME { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:TIME?
```

Arguments

`OFF` or `0` does not show the time measurement result.

`ON` or `1` shows the time measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:TIME ON` shows the time measurement result in the pulse table.

DISPlay:PULSe:RESult[:MEASview<y>]:WIDTH

Determines whether or not to show the pulse width measurement result in the pulse table.

Conditions

Measurement views: Pulse table

Group

Display commands

Syntax

```
DISPlay:PULSe:RESult[:MEASview<y>]:WIDTH { OFF | ON | 0 | 1 }  
DISPlay:PULSe:RESult[:MEASview<y>]:WIDTH?
```

Arguments

`OFF` or `0` does not show the pulse width measurement result.

`ON` or `1` shows the pulse width measurement result in the pulse table.

Returns

See Arguments.

Examples

`DISPLAY:PULSE:RESULT:MEASVIEW1:WIDTH ON` shows the pulse width measurement result in the pulse table.

DISPlay:PULSe[:MEASview<y>]:SElect:NUMBer

Sets or queries a pulse to measure. For the selected pulse, the statistics view indicates the measurement result while the table view highlights it, and the trace view displays the waveform.

Conditions

Measurement views: : Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe[:MEASview<y>]:SElect:NUMBer <number>
DISPlay:PULSe[:MEASview<y>]:SElect:NUMBer?
```

Arguments

<number>::<NR1> specifies the number of pulse to measure. Range: -(the number of acquired pulses before the time reference) to +(the number of acquired pulses after the time reference).

Zero (0) represents the pulse at the analysis time reference specified using the [SENSe]:ANALysis:REFeRence command. The number of acquired pulses depends on the analysis range.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NR1>

Examples

DISPlay:PULSe:MEASview2:SElect:NUMBer -28 measures the pulse #-28.

DISPlay:PULSe[:MEASview<y>]:SElect:RESult

Sets or queries which result is shown in the pulse trace and statistics views.

Conditions

Measurement views: Pulse statistics, Pulse trace

Group

Display commands

Syntax

```
DISPlay:PULSe[:MEASview<y>]:SElect:RESult { AVERage | PPOWer | ATX | WIDTH | RISE | FALL | RINTerval
| RRATe | DUTPct | DUTRatio | RIPple | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPHase |
PPFRequency | RMSFreqerror | MFRequerror | RMSPherror | MPHerror | FRDeviation | FDELta |
PHDeviation | IRAMplitude | IRTIME }
DISPlay:PULSe[:MEASview<y>]:SElect:RESult?
```

Arguments

The following table lists the arguments.

Pulse results

Argument	Result
AVERage	Average on power
PPOWer	Peak power
ATX	Average transmitted power
WIDTh	Pulse width
RISE	Rise time
FALL	Fall time
RINterval	Repetition interval
RRATe	Repetition rate
DUTPct	Duty factor (%)
DUTRatio	Duty factor (ratio)
RIPPlE	Ripple
RIPDb	Ripple (dB)
DROop	Droop
DRODb	Droop (dB)
OVERshoot	Overshoot
OVEDb	Overshoot (dB)
PPPHase	Pulse-pulse carrier phase
PPFRequency	Pulse-pulse carrier frequency
RMSFrequerror	RMS frequency error
MFRequerror	Maximum frequency error
RMSPherror	RMS phase error
MPHerror	Maximum phase error
FRDeviation	Frequency deviation
PHDeviation	Phase deviation
FDELta	Delta frequency

Argument	Result
IRAMplitude	Impulse Response Amplitude
IRTime	Impulse Response Sidelobe Offset Time from Mainlobe

Returns

See Arguments.

Examples

`DISPlay:PULSe:MEASview1:SElect:RESult AVERage` shows the average on power result in the pulse trace and statistics views.

DISPlay:PULSe[:MEASview<y>]:SElect:RESult

Sets or queries the result shown in the pulse trace and statistics views.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse trace with specified Measurement view number

Group

Display commands

Syntax

`DISPlay:PULSe[:MEASview<y>]:SElect:RESult <arg>`

`DISPlay:PULSe[:MEASview<y>]:SElect:RESult?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

AVERage is the average on power

PPOWER is the peak power

ATX is the average transmitted power

WIDTH is the Pulse width

RISE is the rise time

FALL is the fall time

RINTERval is the repetition interval

RRATE is the repetition rate

DUTPct is the duty factor (%)

DUTRatio is the duty factor (ratio)

RIPPlE is the ripple

RIPDb is the ripple (dB)

DROOp is the droop

DRODb is the droop (dB)

OVERshoot is the overshoot

OVEDb is the overshoot (dB)

PPPHase is the pulse-pulse carrier phase

PPFrequency is the pulse-pulse carrier frequency

RMSFreqerror is the RMS frequency error

MFRreqerror is the maximum frequency error

RMSPherror is the RMS phase error

MPHerror is the maximum phase error

FRDeviation is the frequency deviation

FDELta is the delta frequency

PHDeviation is the phase deviation

IRAMplitude is the impulse response amplitude

TIME is the time in seconds

IRTime is the impulse response sidelobe offset time from the mainlobe

PPPD is the pulse to pulse phase difference

PPFD is the pulse to pulse frequency difference

FABS is the absolute frequency

Returns

<NRf>

Examples

DISPlay:PULSe:MEASview1:SElect:RESult AVERAGE shows the average on power result in the pulse trace and statistics views.

DISPlay:PULSe:STATistics[:MEASview<y>]:MARKer<x>:SHOW:STATe

Determines whether to show or hide the marker readout in the statistics graph. This command is valid when DISPlay:PULSe:STATistics:PLOT is set to FFT.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:MARKer<x>:SHOW:STATe { OFF | ON | 0 | 1 }
DISPlay:PULSe:STATistics[:MEASview<y>]:MARKer<x>:SHOW:STATe?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

OFF or 0 hides the marker readout.

ON or 1 shows the marker readout.

Returns

See Arguments.

Examples

DISPlay:PULSe:STATistics:MEASview1:MARKer:SHOW:STATE ON shows the marker readout in the statistics graph.

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT

Sets or queries how to show the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT { TREND | FFT | TTRend | HISTogram }  
DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<x> = 0 to 4.

TREND shows the statistics result along with the pulse number.

FFT shows the statistics result transformed into the frequency domain by FFT.

TTRend shows the statistics result along with time.

HISTogram shows the histogram statistics results.

Returns

See Arguments.

Examples

DISPlay:PULSe:STATISTICS:MEASview1:PLOT TREND shows the statistics result along with the pulse number.

DISPlay:PULSe:STATistics[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATE

Determines whether to show or hide the graticule grid in the statistics view.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:PULSe:STATistics[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPlay:PULSe:STATistics:MEASVIEW2:WINDow:TRACe:GRATICULE:GRID:STATE ON shows the graticule grid on the Pulse Statistics.

DISPlay:PULSe:STATistics[:MEASview<y>]:X:RSCale (No Query Form)

Rescales the horizontal axis to fit the waveform to the screen in the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:X:RSCale
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPlay:PULSe:STATistics:MEASview2:X:RSCale rescales the horizontal axis of the statistics graph.

DISPlay:PULSe:STATistics[:MEASview<y>]:X[:SCALE]:NUMBER

Sets or queries the horizontal full scale in the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:X[:SCALE]:NUMBER <value>
DISPlay:PULSe:STATistics[:MEASview<y>]:X[:SCALE]:NUMBER?
```

Related Commands

[DISPlay:PULSe:STATistics\[:MEASview<y>\]:X:SCALe:OFFSet](#) (on page 980)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<value>::<NRf> specifies the horizontal full scale. The setting range depends on the DISPlay:PULSe:STATistics:PLOT command parameters as shown in the table below.

DISPlay:PULSe:STATistics:PLOT	Setting range
TREND	1 to 1000
FFT	1 Hz to 120 MHz

Returns

<NRf>

Examples

DISPlay:PULSe:STATistics:MEASview2:X:SCALe:NUMBer 50 sets the horizontal full scale to 50 pulses when the plot is trend.

DISPlay:PULSe:STATistics[:MEASview<y>]:X:SCALe:OFFSet

Sets or queries the minimum horizontal value (the first pulse to show) in the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:X:SCALe:OFFSet <value>
DISPlay:PULSe:STATistics[:MEASview<y>]:X:SCALe:OFFSet?
```

Arguments

<value>::<NRf> specifies the number of the first pulse.

Range: $-(X - X/10)$ to $+(X - X/10)$ where X is the horizontal scale set by the DISPlay:PULSe:STATistics:X[:SCALe]:NUMBer command.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:PULSE:STATISTICS:MEASview2:X:SCALE:OFFSET 120 sets the first pulse number to #120.

DISPlay:PULSe:STATistics[:MEASview<y>]:Y:RSCale (No Query Form)

Rescales the vertical axis to fit the waveform to the screen in the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:Y:RSCale
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPlay:PULSe:STATistics:MEASview2:Y:RSCale rescales the vertical axis of the statistics graph.

DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:FULL

Sets or queries the vertical full scale in the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:FULL <value>
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:FULL
```

Related Commands

[DISPlay:PULSe:STATistics\[:MEASview<y>\]:X\[:SCALE\]:OFFSET](#) (on page 982)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<value>: : <NRf> specifies the vertical full scale. The setting range depends on the DISPlay:PULSe:STATistics:PLOT command parameters and the measurement items as shown in the following table.

DISPlay:PULSe:STATistics:PLOT	Measurement item	Setting range
TREND	Average on power, Peak power, Average transmitted power	0.1 to 200 dB
	Pulse width, Rise time, Fall time, Repetition interval	1 n to 5 Ms
	Repetition rate	100 m to 100 MHz
	Duty factor, Ripple	1 to 100%
	Droop	1 to 200%
	Pulse-pulse carrier phase	1 to 360°
FFT	All	10 to 200 dB

Returns

<NRf>

Examples

DISPlay:PULSe:STATistics:MEASview2:Y:SCALE:FULL 100 sets the vertical full scale to 100 dB.

DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset in the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

```
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:OFFSet <value>
DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:OFFSet?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

<value>::<NRf> specifies the vertical offset. The vertical offset is the value at the top or the bottom edge of the graph depending on measurement items. The setting range depends on the DISPlay:PULSe:STATistics:PLOT command parameters and the measurement items as shown in the table below.

DISPlay:PULSe:STATistics:PLOt	Measurement item	Setting range	Offset position ¹
TREND	Average on power, Peak power, Average transmitted power	-170 to +50 dBm	Top (Bottom for the unit of Volts or Watts)
	Pulse width, Rise time, Fall time, Repetition interval	0 to 5 Ms	Bottom
	Repetition rate	0 to 100 MHz	Bottom
	Duty factor, Ripple	0 to 100%	Bottom
	Droop	0 to +100%	Bottom
	Pulse-pulse carrier phase	-180 to +180°	Bottom
FFT	All	-400 to +100 dB	Top

Returns

<NRf>

Examples

DISPlay:PULSe:STATISTICS:MEASview2:Y:SCALE:OFFSET 24.8 sets the maximum vertical value to 24.8 dBm in the statistics graph.

DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:STOP? (Query Only)

Queries the minimum vertical value (bottom edge) in the statistics graph.

Conditions

Measurement views: Pulse statistics

Group

Display commands

Syntax

DISPlay:PULSe:STATistics[:MEASview<y>]:Y[:SCALE]:STOP?

Related Commands

[DISPlay:PULSe:STATistics\[:MEASview<y>\]:Y\[:SCALE\]:OFFSET](#) (on page 982)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<y_stop>: :<NRf> is the minimum vertical value (bottom edge).

Examples

DISPlay:PULSe:STATistics:MEASview2:Y:SCALe:STOP? might return -150.0, indicating that the minimum vertical value is -150 dBm in the pulse statistics graph.

DISPlay:PULSe:TRACe[:MEASview<y>]:MARKer:SHOW:STATe

Determines whether to show or hide the marker readout in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }
DISPlay:PULSe:TRACe[:MEASview<y>]:MARKer:SHOW:STATe?
```

Arguments

OFF or 0 hides the marker readout.

ON or 1 shows the marker readout.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPlay:PULSe:TRACe:MEASVIEW1:MARKer:SHOW:STATe ON shows the marker readout on the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:POINT:SHOW

Determines whether to show or hide the measurement points and lines in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:POINT:SHOW { OFF | ON | 0 | 1 }
DISPlay:PULSe:TRACe[:MEASview<y>]:POINT:SHOW?
```

Arguments

OFF or 0 hides the measurement points and lines.

ON or 1 shows the measurement points and lines.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:POINT:SHOW ON shows the measurement points and lines in the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:PULSe:TRACe[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:X:RSCale

Rescales the horizontal axis to fit the waveform to the screen in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:X:RSCale
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:X:RSCALE rescales the horizontal axis in the pulse trace Measurement View 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]

Sets or queries the horizontal full scale in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe] <value>
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]?
```

Arguments

<value>::<NRf> specifies the horizontal full scale.

Range: 10 ns to acquisition memory capacity.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:X:SCALE 5.5E-6 sets the horizontal scale to 5.5 μ s in the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:FULL

Sets or queries the full-scale reference for the horizontal rescale.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:FULL { SELEcted | MAXimum }
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALe]:FULL?
```

Arguments

SELEcted uses the selected pulse for the full-scale reference.

MAXimum uses the maximum pulse for the full-scale reference.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:X:SCALE:FULL SElected uses the selected pulse for the full-scale reference in the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALE]:OFFSet

Sets or queries the minimum horizontal value (left edge) in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALE]:OFFSet <value>
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:PULSe:TRACe\[:MEASview<y>\]:X\[:SCALE\]:PDIVision](#) (on page 987)

Arguments

<value>::<NRf> specifies the minimum horizontal value.

Range: [(analysis offset) - (X scale) × 0.9] to [(analysis offset) + (analysis length) - (X scale) × 0.1]

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:X:SCALE:OFFSET 937.5E-9 sets the minimum horizontal value to 937.5 ns in the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALE]:PDIVision

Sets or queries the horizontal full scale in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALE]:PDIVision <value>
DISPlay:PULSe:TRACe[:MEASview<y>]:X[:SCALE]:PDIVision?
```

Arguments

<value>: : <NRf> specifies the horizontal full scale.

Range: 10 ns to acquisition memory capacity.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:X:SCALE:PDIVISION 5.5E-6 sets the horizontal scale to 5.5 μ s in the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:Y:RSCale

Rescales the vertical axis to fit the waveform to the screen in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

DISPlay:PULSe[:MEASview<y>]:TRACe:Y:RSCale

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:Y:RSCALE rescales the vertical axis in the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALE]:FULL

Sets or queries the vertical full scale in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALE]:FULL <value>
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALE]:FULL?

Related Commands

[DISPlay:PULSe:TRACe\[:MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 989)

Arguments

<value>: : <NRf> specifies the vertical full scale.

Range: 0.1 to 200 dB.

The unit can be changed by the [SENSe]:POWer:UNITs command.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:Y:SCALE:FULL 100 sets the vertical full scale to 100 dB on the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALE]:OFFSet <value>
DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:PULSe:TRACe\[:MEASview<y>\]:Y\[:SCALE\]:STOP?](#) (on page 989)

Arguments

<value>: : <NRf> specifies the vertical offset. Range: -170 to +50 dBm.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:PULSE:TRACE:MEASVIEW1:Y:SCALE:OFFSET 23.5 sets the vertical offset to 23.5 dBm on the pulse trace measurement view 1.

DISPlay:PULSe:TRACe[:MEASview<y>]:Y[:SCALE]:STOP

Queries the minimum vertical value (bottom edge) in the pulse trace view.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Display commands

Syntax

`DISPlay:PULSe:TRACe:MEASview<y>:Y[:SCALe]:STOP?`

Related Commands

[DISPlay:PULSe:TRACe\[:MEASview<y>\]:Y\[:SCALe\]:OFFSet](#) (on page 989)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<y_stop>::<NRf>` is the minimum vertical value (bottom edge).

Examples

`DISPLAY:PULSE:TRACE:MEASVIEW1:Y:SCALE:STOP?` might return `-150.0`, indicating that the minimum vertical value is -150 dBm in the pulse trace measurement view 1.

DISPlay:SEM:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

`DISPlay:SEM:MARKer:SHOW:STATe { OFF | ON | 1 | 0 }`
`DISPlay:SEM:MARKer:SHOW:STATe?`

Arguments

`OFF` or `0` hides the readout for the selected marker in the graph.

`ON` or `1` shows the readout for the selected marker in the graph.

Examples

`DISPLAY:SEM:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the graph.

DISPlay:SEM:RESet:SCALe (No Query Form)

Resets the scale in the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

```
DISPlay:SEM:RESet:SCALE
```

Arguments

None

Examples

DISPLAY:SEM:RESET:SCALE resets the scale in the view.

DISPlay:SEM:SHOW:LIMit

Sets or queries the appearance of the limits in the Spectral Emissions Mask view

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

```
DISPlay:SEM:SHOW:LIMit { SHADEd | LINE | OFF }  
DISPlay:SEM:SHOW:LIMit?
```

Arguments

SHADEd uses shading for the limit area in the display.

LINE uses a line for the limit area.

OFF turns off the limits in the display.

Examples

DISPLAY:SEM:SHOW:LIMIT SHADEd uses shading to identify the limits in the display.

DISPlay:SEM:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule in the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

```
DISPlay:SEM:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 1 | 0 }  
DISPlay:SEM:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule in the graph.

ON or 1 shows the graticule in the graph.

Examples

`DISPLAY:SEM:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` turns off the graticule in the graph.

DISPlay:SEM:X[:SCALE]:AUTO (No Query Form)

Rescales the horizontal scale automatically to fit the waveform in the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

`DISPlay:SEM:X[:SCALE]:AUTO`

Arguments

None

Examples

`DISPLAY:SEM:X[:SCALE]:AUTO` rescales the horizontal scale to fit the waveform on the screen.

DISPlay:SEM:X[:SCALE]:START

Sets or queries the start frequency (left edge) of the Spectral Emissions Mask graph.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

`DISPlay:SEM:X[:SCALE]:START <value>`

`DISPlay:SEM:X[:SCALE]:START?`

Arguments

`<value>::<NRf>` specifies the start frequency.

Examples

`DISPLAY:SEM:X[:SCALE]:START 10Hz` sets the start frequency to 10 Hz in the graph.

DISPlay:SEM:X[:SCALE]:STOP

Sets or queries the stop frequency (right edge) of the Spectral Emissions Mask graph.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

```
DISPlay:SEM:X[:SCALE]:STOP <value>  
DISPlay:SEM:X[:SCALE]:STOP?
```

Arguments

<value>::<NRf> specifies the start frequency.

Examples

DISPLAY:SEM:X[:SCALE]:STOP 2GHz sets the stop frequency to 2 GHz in the graph.

DISPlay:SEM:Y[:SCALE]

Sets or queries the vertical range of the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

```
DISPlay:SEM:Y[:SCALE] <value>  
DISPlay:SEM:Y[:SCALE]?
```

Arguments

<value>:::= <NRf> specifies the vertical scale.

Examples

DISPLAY:SEM:Y[:SCALE] 200 sets the vertical scale to 200 MHz.

DISPlay:SEM:Y[:SCALE]:AUTO (No Query Form)

Rescales the vertical scale automatically to fit the waveform in the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

```
DISPlay:SEM:Y[:SCALE]:AUTO
```

Arguments

None

Examples

DISPLAY:SEM:Y[:SCALE]:AUTO rescales the vertical scale to fit the waveform on the screen.

DISPlay:SEM:Y[:SCALE]:OFFSet

Sets or queries the vertical offset in the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Display commands

Syntax

```
DISPlay:SEM:Y[:SCALE]:OFFSet <value>  
DISPlay:SEM:Y[:SCALE]:OFFSet?
```

Arguments

<value>::= <NRf> specifies the horizontal range.

Examples

DISPLAY:SEM:Y[:SCALE]:OFFSET 40 sets the vertical position to 40 dBm.

DISPlay:SGRam[:MEASview<y>]:FREQuency:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the spectrogram view.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:FREQuency:AUTO
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

DISPlay:SGRam:MEASview1:FREQuency:AUTO rescales the horizontal scale automatically to fit the waveform to the screen in the spectrogram measurement view 1.

DISPlay:SGRam[:MEASview<y>]:FREQuency:OFFSet

Sets or queries the frequency offset (the value at the center of the horizontal axis) in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:FREQuency:OFFSet <value>
DISPlay:SGRam[:MEASview<y>]:FREQuency:OFFSet?
```

Related Commands

[DISPlay:SGRam\[:MEASview<y>\]:FREQuency\[:SCALE\]](#) (on page 995)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the frequency offset.

Range: [(center frequency) - (X scale) × 0.9] to [(center frequency) + (X scale) × 0.9]

Examples

DISPlay:SGRam:MEASview1:FREQuency:OFFSet 1.45GHz sets the frequency offset to 1.45 GHz in the spectrogram measurement view 1.

DISPlay:SGRam[:MEASview<y>]:FREQuency[:SCALE]

Sets or queries the horizontal range of the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:FREQuency[:SCALE] <value>
DISPlay:SGRam[:MEASview<y>]:FREQuency[:SCALE]?
```

Related Commands

[DISPlay:SGRam\[:MEASview<y>\]:FREQuency:OFFSet](#) (on page 994)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the horizontal range.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Returns

<NRf> Returns the horizontal range

Examples

`DISPlay:SGRam:MEASview1:FREQuency:SCAle 10MHz` sets the horizontal range to 10 MHz on the trace of Spectrogram measurement view 1.

DISPlay:SGRam[:MEASview<y>]:MARKer:SHOW:STATe

Sets or queries the display of the Marker legend in the Spectrogram graph.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:MARKer:SHOW:STATe{ OFF | ON | 0 | 1 }
DISPlay:SGRam[:MEASview<y>]:MARKer:SHOW:STATe?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 removes or turns off the Marker legend.

ON or 1 displays or turns on the Marker legend.

Returns

{ OFF | ON | 0 | 1 }

Examples

`DISPlay:SGRam:MEASview1:MARKer:SHOW:STATe ON` turns on the display of the Marker legend in the spectrogram graph of view 1.

DISPlay:SGRam[:MEASview<y>]:SElected:TIMestamp

Sets or queries the display of the time stamp in the Spectrogram graph.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:SElected:TIMestamp {OFF | ON | 0 | 1}
DISPlay:SGRam[:MEASview<y>]:SElected:TIMestamp?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 removes or turns off the time stamp.

ON or 1 displays or turns on the time stamp.

Returns

{OFF | ON | 0 | 1}

Examples

DISPlay:SGRam:MEASview1:SElected:TIMEstamp? queries the display status of the time stamp in the spectrogram graph view 1.

DISPlay:SGRam[:MEASview<y>]:TIME:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the graph to the screen in the spectrogram view.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

DISPlay:SGRam[:MEASview<y>]:TIME:AUTO

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

DISPlay:SGRam:MEASview1:TIME:AUTO rescales the vertical scale automatically to fit the waveform to the screen in the spectrogram measurement view 1.

DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet

Sets or queries the vertical axis (time) offset (bottom line number) in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet <value>
DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet?

Related Commands

[DISPlay:SGRam\[:MEASview<y>\]:TIME\[:SCALE\]](#) (on page 999)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>::<NRf> specifies the time offset.

Range: Line #0 to 125000. Zero (0) represents the latest line.

Returns

<NRf> specifies the time offset

Examples

DISPlay:SGRam:MEASview1:TIME:OFFSet 15 sets the time offset to Line #15 in the spectrogram view 1.

DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet:DIVisions

Sets or queries the Vertical offset or Position in divisions.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet:DIVisions <value>  
DISPlay:SGRam[:MEASview<y>]:TIME:OFFSet:DIVisions?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> sets the vertical offset value in divisions. Range is -130,000 to +130,000.

Returns

<NRf> specifies the vertical offset

Examples

DISPlay:SGRam:MEASview1:TIME:OFFSet:DIVisions 10 sets the vertical offset to 10 divisions in the spectrogram view 1.

DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap

Sets or queries if overlap is enabled or not.

Conditions

Measurement view: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap { OFF | ON | 0 | 1 }  
DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 hides the overlap in the spectrogram view.

ON or 1 shows the overlap in the spectrogram view.

Returns

{ OFF | ON | 0 | 1 }

Examples

DISPlay:SGRam:MEASview1:TIME:OVERlap ON enables time overlap for spectrogram.

DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap:PERCent

Sets or queries the Overlap in percent. Note that changing this value may change the time per division

DISPlay:SGRam:MEASview<y>:TIME:SCAle:PER:DIVision value.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap:PERCent <value>

DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap:PERCent?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>::<NRf> specifies the overlap in percent.

Returns

<NRf> specifies the overlap in percent

Examples

DISPlay:SGRam:MEASview1:TIME:OVERlap:PERCent 1.0E1 sets the overlap to 10% in the spectrogram view 1.

DISPlay:SGRam[:MEASview<y>]:TIME[:SCAle]

NOTE: The user interface on the instrument no longer presents this setting. However, the command is still function. Setting this value will change the TIME:PER:DIVision value.

Sets or queries the vertical scale (the amount of time in each line) in the spectrogram. The vertical axis is composed of successive spectral displays. The new spectra can be added at a timed rate specified by this command. For example, if you set the scale to -5, one line is displayed every 5 spectra.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:TIME[:SCAlE] <value>
DISPlay:SGRam[:MEASview<y>]:TIME[:SCAlE]?
```

Related Commands

[DISPlay:SGRam\[:MEASview<y>\]:TIME:OFFSet](#) (on page 997)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NR1> specifies the vertical scale.

Range: -1023 to 0. Zero (0) displays every spectrum.

Returns

<NRf> specifies the vertical scale

Examples

DISPlay:SGRam:MEASview1:TIME:SCAlE -5 displays one line every 5 spectra in the spectrogram view 1.

DISPlay:SGRam[:MEASview<y>]:TIME[:SCAlE]:PER:DIVision

Sets or queries the vertical Time/division value. Note that changing this value may change the DISPlay:SGRam:MEASview<y>:TIME:OVERlap:PERCent value.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

```
DISPlay:SGRam[:MEASview<y>]:TIME[:SCAlE]:PER:DIVision <value>
DISPlay:SGRam[:MEASview<y>]:TIME[:SCAlE]:PER:DIVision?
```

Related Commands

[DISPlay:SGRam\[:MEASview<y>\]:TIME:OVERlap:PERCent](#) (on page 999)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the time per division in seconds.

Returns

<NRf> specifies the time per division in seconds

Examples

DISPlay:SGRam:MEASview1:TIME:SCAlE:PER:DIVision? might return 1.1160000000E-3 in the spectrogram view 1.

DISPlay:SGRam[:MEASview<y>]:TIME:SPECTrums:PERLine (Query Only)

Queries the Spectrums/Line value.

Conditions

Measurement views: Spectrogram

Group

Display commands

Syntax

DISPlay:SGRam[:MEASview<y>]:TIME:SPECTrums:PERLine?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> specifies the specturm/Line value

Examples

DISPlay:SGRam:MEASview1:TIME:SPECTrums:PERLine? might return a 1.0000000000 as a response in the spectrogram view 1.

DISPlay:SIGClass:REGion? (Query only)

Queries the number of frequency regions for the signal classification present in the Spectrum or DPX measurements.

conditions

Measurement views: Spectrum and DPX

Group

Display commands

Syntax

DISPlay:SIGClass:REGion?

Arguments

None

Returns

<NRf> number of frequency regions.

Example

DISPlay:SIGClass:REGion? might return 3, indicating three classified frequency regions in the spectrum display.

DISPlay:SIGClass:REGion:ADD (No query form)

Adds a frequency region for the signal classification in the Spectrum or DPX measurement.

Conditions

Measurement views: Spectrum and DPX

Group

Display commands

Syntax

```
DISPlay:SIGClass:REGion:ADD <start frequency, end frequency>
```

Arguments

<start frequency, end frequency>:: <NRf> based on the instrument frequency range.

Example

DISPlay:SIGClass:REGion:ADD 826000000, 827000000 adds a frequency region starting at 826 MHz to 827 MHz in the selected Spectrum or DPX trace.

DISPlay:SPECTrum[:MEASview<y>]:FREQuency:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the spectrum view.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>]:FREQuency:AUTO
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:FREQuency:AUTO rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:SPECTrum[:MEASview<y>]:FREQuency:OFFSet

Sets or queries the frequency offset (the value at the center of the horizontal axis) in the spectrum graph.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>]:FREQuency:OFFSet <value>
```

DISPlay:SPECTrum[:MEASview<y>]:FREQuency:OFFSet?

Related Commands

[DISPlay:SPECTrum\[:MEASview<y>\]:FREQuency:OFFSet\[:SCALE\]](#) (on page 1003)

Arguments

<value>::<NRf> specifies the frequency offset.

Range: [(center frequency) - (X scale) × 0.9] to [(center frequency) + (X scale) × 0.9]

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:FREQuency:OFFSet 1.45GHz sets the frequency offset to 1.45 GHz in the spectrum.

DISPlay:SPECTrum[:MEASview<y>]:FREQuency[:SCALE]

Sets or queries the horizontal range of the spectrum graph.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

DISPlay:SPECTrum[:MEASview<y>]:FREQuency[:SCALE] <value>
DISPlay:SPECTrum[:MEASview<y>]:FREQuency[:SCALE]?

Related Commands

DISPlay:SPECTrum[:MEASview<y>]:FREQuency:OFFSet

Arguments

<value>::<NRf> specifies the horizontal range.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:FREQuency:SCALE 10MHz sets the horizontal range to 10 MHz.

DISPlay:SPECTrum[:MEASview<y>]:MARKer:NOISe:MODE

Determines whether to enable or disable the marker noise mode in the spectrum view. In this mode, the marker readout indicates amplitude in dBm/Hz. It is valid for all markers except for the reference marker.

NOTE: To use the marker noise mode, select dBm as the power unit by the `[SENSe]:POWer:UNITs` command.

NOTE: It is an overlapped command, which does not finish executing before the next command starts executing. Use the `*OPC(?)` command to synchronize all pending operations to the execution of this command.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>]:MARKer:NOISe:MODE { OFF | ON | 0 | 1 }
DISPlay:SPECTrum[:MEASview<y>]:MARKer:NOISe:MODE?
```

Related Commands

[\[SENSe\]:POWer:UNITs](#) (on page 2287)

Arguments

OFF or 0 disables the marker noise mode.

ON or 1 enables the marker noise mode.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

Examples

DISPlay:SPECTrum:MEASview2:MARKer:NOISe:MODE ON enables the marker noise mode

DISPlay:SPECTrum[:MEASview<y>][:SCALE]:LOG:STATe

Determines whether or not to set the horizontal axis logarithmic in the Spectrum view.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>][:SCALE]:LOG:STATe { OFF | ON | 0 | 1 }
DISPlay:SPECTrum[:MEASview<y>][:SCALE]:LOG:STATe?
```

Related Commands

[DISPlay:SPECTrum\[:MEASview<y>\]:X:LABel](#) (on page 1006)

Arguments

OFF or 0 sets the horizontal axis linear (default).

ON or 1 sets the horizontal axis logarithmic.

Executing `DISPlay:SPECTrum:SCALe:LOG:STATe ON` sets `DISPlay:SPECTrum:X:LABel` SSFReq.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`DISPlay:SPECTrum:MEASview2:SCALe:LOG:STATe ON` sets the horizontal axis logarithmic in the Spectrum view.

DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`DISPlay:SPECTrum:MEASview2:WINDow:TRACe:GRATicule:GRID:STATe ON` shows the graticule grid on the screen in the spectrum measurement.

DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe:LEGend:STATe

Determines whether to show or hide the trace legend in the Spectrum view. The legend indicates the trace detection and function on the screen for each displayed spectrum trace.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe:LEGend:STATe { OFF | ON | 0 | 1 }
DISPlay:SPECTrum[:MEASview<y>]:WINDow:TRACe:LEGend:STATe?
```

Arguments

OFF or 0 hides the trace legend.

ON or 1 shows the trace legend.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:WINDow:TRACe:LEGend:STATe ON shows the trace legend on the screen in the spectrum measurement.

DISPlay:SPECTrum[:MEASview<y>]:X:LABel

Sets or queries the labels for the horizontal (X) axis in the Spectrum view. The labels are indicated beneath the spectrum graph on the screen.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>]:X:LABel { SSFReq | CFSPan }
DISPlay:SPECTrum[:MEASview<y>]:X:LABel?
```

Arguments

SSFReq sets the labels to the start and stop frequencies.

CFSPan sets the labels to the center frequency and span.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:X:LABel SSFReq sets the labels to the start and stop frequencies for the horizontal axis in the Spectrum view.

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle]

Sets or queries the vertical range of the spectrum graph.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

```
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle] <value>
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle]?
```

Arguments

<value>::<NRf> specifies the vertical range. Range: 0.1 to 200 dB. The amplitude unit is set by the [\[SENSe\]:POWer:UNITs](#) (on page 2287) command.

You can omit the unit in the argument. When you include the unit in the argument, only dB is available. For the amplitude units Watts, Volts, and Amps, omit the unit in the argument.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:Y:SCAle 50dB sets the vertical range to 50 dB in the Spectrum view.

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle]:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the Spectrum view.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle]:AUTO

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:Y:SCAle:AUTO rescales the vertical scale automatically to fit the waveform to the screen

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle]:OFFSET

Sets or queries the vertical offset (the value at the top edge of the vertical axis) of the spectrum graph.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle]:OFFSET <value>
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCAle]:OFFSET?

Arguments

<value>::<NRf> specifies the vertical offset. Range: -270 to +150 dBm. The amplitude unit is set by the [\[SENSe\]:POWer:UNITs](#) (on page 2287) command (default: dBm).

You can omit the unit in the argument. When you include the unit in the argument, only dBm is allowed. For the other amplitude units, omit the unit in the argument.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:Y:SCALE:OFFSET -12.5 sets the vertical offset to -12.5 dBm

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:PDIVision

Sets or queries the vertical scale (per division) of the spectrum graph.

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:PDIVision <value>
DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:PDIVision?

Related Commands

[\[SENSe\]:POWer:UNITs](#) (on page 2287)

Arguments

<value>: : <NRf> specifies the vertical scale (per division).

Range: 0.01 to 20 dB/div.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

DISPlay:SPECTrum:MEASview2:Y:SCALE:PDIVision 0.5 sets the vertical scale to 0.5 dB/div.

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:RESet (No Query Form)

Resets the vertical scale of the spectrum graph to the default values: Vertical offset = Reference level and Vertical scale = 100 dB

Conditions

Measurement views: Spectrum

Group

Display commands

Syntax

DISPlay:SPECTrum[:MEASview<y>]:Y[:SCALE]:RESet

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`DISPlay:SPECTrum:MEASview2:Y:SCAlE:RESet` resets the vertical scale to the default values in the Spectrum view

DISPlay:SPURious:MARKer:SHOW:STATe

Determines whether to show or hide the readout for the selected marker in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:SPURious:MARKer:SHOW:STATe?
```

Arguments

`OFF` or `0` hides the readout for the selected marker in the graph.

`ON` or `1` shows the readout for the selected marker in the graph.

Examples

`DISPLAY:SPURIOUS:MARKER:SHOW:STATE ON` shows the readout for the selected marker in the graph.

DISPlay:SPURious:RESet:SCAlE (No Query Form)

Resets the horizontal and vertical scale to the default values described below in the Spurious view.

Vertical offset = 0 dBm, Vertical scale = 100 dB,

Horizontal offset = Center frequency, and Horizontal scale = Default span

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:RESet:SCAlE
```

Arguments

None

Examples

`DISPLAY:SPURIOUS:RESET:SCALE` resets the horizontal and vertical scale to the default values.

DISPlay:SPURious:SCALe:LOG:STATe

Determines whether or not to set the horizontal axis logarithmic in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:SCALe:LOG:STATe { OFF | ON | 0 | 1 }  
DISPlay:SPURious:SCALe:LOG:STATe?
```

Arguments

OFF or 0 sets the horizontal axis linear (default).

ON or 1 sets the horizontal axis logarithmic.

Examples

DISPLAY:SPURIOUS:SCALE:LOG:STATE ON sets the horizontal axis logarithmic in the Spurious view.

DISPlay:SPURious:SELection:NUMBER

Sets or queries the spurious number in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:SELection:NUMBER <number>  
DISPlay:SPURious:SELection:NUMBER?
```

Arguments

<number>::<NR1> specifies the spurious number.

Range: 1 to the number of spurious signals.

Use the [FETCh:SPURious:COUNT?](#) (on page 1408) or [READ:SPURious:COUNT?](#) (on page 1861) query to get the number of spurious signals.

Examples

DISPLAY:SPURIOUS:SELECT:NUMBER 7 selects the spurious #7.

DISPlay:SPURious:SHOW:LIMit

Sets or queries how to display the limits.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:SHOW:LIMit { SHADEd | LINE | OFF }  
DISPlay:SPURious:SHOW:LIMit?
```

Arguments

SHADEd displays the limits with shade.

LINE displays the limits with line only.

OFF hides the limits.

Examples

DISPlay:SPURious:SHOW:LIMIT LINE displays the limits with line only.

DISPlay:SPURious:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:SPURious:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Examples

DISPlay:SPURious:WINDOW:TRACE:GRATICULE:GRID:STATE ON shows the graticule grid on the screen.

DISPlay:SPURious:X[:SCALE]:AUTO (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:X[:SCALE]:AUTO
```

Arguments

None

Examples

`DISPLAY:SPURIOUS:X:SCALE:AUTO` rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:SPURious:X[:SCALE]:START

Sets or queries the minimum horizontal value (left edge) of the spectrum graph in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:X[:SCALE]:START <value>
DISPlay:SPURious:X[:SCALE]:START?
```

Arguments

`<value>::<NRf>` specifies the minimum horizontal value.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`DISPLAY:SPURIOUS:X:SCALE:START 1.61GHz` sets the minimum horizontal value to 1.61 GHz in the spectrum graph.

DISPlay:SPURious:X[:SCALE]:STOP

Sets or queries the maximum horizontal value (right edge) of the spectrum graph in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:X[:SCALE]:STOP <value>
DISPlay:SPURious:X[:SCALE]:STOP?
```

Arguments

`<value>::<NRf>` specifies the minimum horizontal value.

Range:

- RSA5103AB – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`DISPLAY:SPURIOUS:X:SCALE:STOP 2.16GHz` sets the maximum horizontal value to 2.16 GHz in the spectrum graph.

DISPlay:SPURious:Y[:SCALE]

Sets or queries the vertical range of the spectrum graph in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:Y[:SCALE] <value>  
DISPlay:SPURious:Y[:SCALE]?
```

Arguments

`<value>::<NRf>` specifies the vertical range. Range: 0.1 to 200 dB. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`DISPLAY:SPURIOUS:Y:SCALE 100` sets the vertical range to 100 dB in the Spurious view.

DISPlay:SPURious:Y[:SCALE]:AUTO (No Query Form)

Rescales the vertical axis automatically to fit the waveform to the screen in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:Y[:SCALE]:AUTO
```

Arguments

None

Examples

`DISPLAY:SPURIOUS:Y:SCALE:AUTO` rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:SPURious:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) of the spectrum graph in the Spurious view.

Conditions

Measurement views: Spurious

Group

Display commands

Syntax

```
DISPlay:SPURious:Y[:SCALE]:OFFSet <value>
DISPlay:SPURious:Y[:SCALE]:OFFSet?
```

Arguments

<value>::<NRf> specifies the vertical offset. Range: -270 to +150 dBm. The unit can be changed by the [\[SENSe\]:POWer:UNITs](#) (on page 2287) command.

Examples

DISPLAY:SPURIOUS:Y:SCALE:OFFSET -12.5 sets the vertical offset to -12.5 dBm in the spectrum graph.

DISPlay:TDIagram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen in the Trellis diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Display commands

Syntax

```
DISPlay:TDIagram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:TDIagram[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule grid.

ON or 1 shows the graticule grid.

Returns

OFF or 0

ON or 1

Examples

`DISPlay:TDIagram:MEASview2:WINDOW:TRACe:GRATICULE:GRID:STATE ON` shows the graticule grid on the screen in the Trellis diagram.

DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the trellis diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Display commands

Syntax

```
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE] <value>
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]?
```

Arguments

<value>::<NRf> specifies the vertical range.

Range: 1 ° to 1 T°.

Returns

<NRf>

Examples

`DISPlay:TDIagram:MEASview2:Y:SCALE 2.5` sets the vertical range to 2.5° in the Trellis diagram.

DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:AUTO (No query form)

Sets the vertical scale automatically to fit the waveform to the screen in the Trellis diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Display commands

Syntax

```
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:AUTO
```

Arguments

None

Examples

`DISPlay:TDIagram:MEASview2:Y:SCALE:AUTO` sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (center point of the vertical axis) of the Trellis diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Display commands

Syntax

```
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:OFFSet <value>
DISPlay:TDIagram[:MEASview<y>]:Y[:SCALE]:OFFSet?
```

Arguments

<value>: : <NRf> specifies the vertical offset.

Range: -1 T° to +1 T°.

Returns

<NRf>

Examples

`DISPlay:TDIagram:MEASview2:Y:SCALE:OFFSet -28.5` sets the vertical offset to -28.5 ° in the Trellis diagram measview 2.

DISPlay:TG:MEASview:DELeTe TXGain (No Query Form)

This command removes the Transmission Gain display icon from the Selected displays filed of the Selected Displays window.

Conditions

Measurement view: Select Displays window

Group

Display commands

Syntax

```
DISPlay:TG:MEASview:DELeTe TXGain
```

Arguments

Examples

```
DISPLAY:TG:MEASVIEW:DELETE TXGAIN
```

DISPlay:TG:MEASview:NEW TXGain (No Query Form)

This command opens a new Transmission Gain measurement display window.

Conditions

Measurement view: Select Displays window

Group

Display commands

Syntax

```
DISPlay:TG:MEASview:NEW TXGain
```

DISPlay:TG:MEASview:SElect TXGain

This command selects the Transmission Gain display icon in the Select Display window and queries if the display is selected or not.

Conditions

Measurement view: Select Displays window

Group

Display commands

Syntax

```
DISPlay:TG:MEASview:SElect TXGain { OFF | ON | 0 | 1 }  
DISPlay:TG:MEASview:SElect TXGain?
```

Arguments

OFF or 0 deselects the Transmission Gain display icon.

ON or 1 selects the Transmission Gain display icon.

Returns

0 means the icon is not selected.

1 means the icon is selected.

Examples

```
DISPLAY:TG:MEASVIEW:SELECT TXGAIN
```

DISPlay:TOverview[:MEASview<y>]:WINDow:NAVigator:STATe

Sets or queries whether the navigator view of the Time Overview display is on or off.

Conditions

Measurement view: Time Overview with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:TOVerView[:MEASview<y>]:WINDow:NAVigator:STATe { OFF | ON | 0 | 1 }
DISPlay:TOVerView[:MEASview<y>]:WINDow:NAVigator:STATe?
```

Arguments

OFF or 0 sets the Time Overview display to not show in Navigator View mode.

ON or 1 sets the Time Overview display to show in Navigator View mode.

Returns

OFF or 0 means that the Time Overview display is not in Navigator View mode.

ON or 1 means that the Time Overview display is in Navigator View mode.

Examples

DISPlay:TOVerView:MEASVIEW1:WINDow:NAVigator:STATe ON will set the Time Overview display to show in Navigator View mode.

DISPlay:TOVerView[:MEASview<y>]:WINDow:TIME:MODE

Sets or queries the type of time analysis to be performed for the Time Overview display.

Conditions

Measurement view: Time Overview with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:TOVerView[:MEASview<y>]:WINDow:TIME:MODE { ANALysis | SPECTrum | LINKed }
DISPlay:TOVerView[:MEASview<y>]:WINDow:TIME:MODE?
```

Related Commands

Arguments

ANALysis sets the type of analysis time to Analysis length, which is the period of time within the acquisition record over which all other measurements (such as Amplitude vs. Time) are made.

SPECTrum sets the type of analysis time to Spectrum length, which is the period of time within the acquisition record over which the spectrum is calculated.

LINKed sets the type of analysis time to lock the Spectrum length and Analysis length together so that the data used to produce the Spectrum display is also used for measurement displays.

Returns

ANAL means that the type of time analysis is set to Analysis.

SPEC means that the type of time analysis is set to Spectrum.

LINK means that the type of time analysis is set to Linked.

Examples

`DISPLAY:TOVERVIEW:WINDOW:TIME:MODE?` might return `SPEC`, which indicates that the type of analysis time is set to Spectrum, which is the period of time within the acquisition record over which the spectrum is calculated.

DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticule grid on the screen.

Conditions

Measurement views: Time overview

Group

Display commands

Syntax

```
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

`OFF` or `0` hides the graticule grid.

`ON` or `1` shows the graticule grid.

Examples

`DISPlay:TOVERVIEW:MEASVIEW1:WINDOW:TRACE:GRATICULE:GRID:STATE ON` shows the graticule grid on the screen in the time overview Measurement View 1.

DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:LEGend:STATe

Sets or queries the trace legend state in the Time Overview display to on (showing) or off (hidden).

Conditions

Measurement view: Time Overview with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:LEGend:STATe { OFF | ON | 0 | 1 }
DISPlay:TOVerview[:MEASview<y>]:WINDow:TRACe:LEGend:STATe?
```

Related Commands

Arguments

`OFF` or `0` hides the trace legend in the Time Overview display.

`ON` or `1` shows the trace legend in the Time Overview display.

Returns

`0` means the trace legend in the Time Overview display is hidden (off).

`1` means the trace legend in the Time Overview display is showing (on).

Examples

`DISPLAY:TOVERVIEW:MEASVIEW1:WINDOW:TRACE:LEGEND:STATE ON` will turn on the trace legend in the Time Overview display.

`DISPLAY:TOVERVIEW:MEASVIEW1:WINDOW:TRACE:LEGEND:STATE?` might return 1, which indicates that the trace legend in the Time Overview display is showing (on).

DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]

Sets or queries the horizontal scale (full-scale time) of the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Display commands

Syntax

`DISPlay:TOVerview[:MEASview<y>]:X[:SCALE] <value>`
`DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]?`

Related Commands

[DISPlay:TOVerview\[:MEASview<y>\]:X\[:SCALE\]:OFFSet](#) (on page 1021)

Arguments

`<value>::<NRf>` specifies the horizontal scale in full-scale time.

Range: 10 ns to the acquisition memory capacity.

You can see the acquisition memory capacity using the [\[SENSe\]:ACQuisition:MEMory:CAPacity\[:TIME\]?](#) (on page 1978) query.

Examples

`DISPLAY:TOVERVIEW:MEASVIEW1:X:SCALE 12.5us` sets the horizontal scale to 12.5 μ s.

DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]:AUTO (No Query Form)

Sets the horizontal scale and offset automatically to fit the waveform to the screen in the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Display commands

Syntax

`DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]:AUTO`

Arguments

None

Examples

`DISPLAY:TOVERVIEW:MEASVIEW1:X:SCALE:AUTO` sets the horizontal scale and offset automatically to fit the waveform on the trace of Time overview Measurement View 1.

DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]:OFFSet

Sets or queries the minimum horizontal value (left edge) of the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]:OFFSet <value>
DISPlay:TOVerview[:MEASview<y>]:X[:SCALE]:OFFSet?
```

Related Commands

[DISPlay:TOVerview\[:MEASview<y>\]:X\[:SCALE\]](#) (on page 1020)

Arguments

`<value>::<NRf>` specifies the minimum horizontal value.

Range: [(analysis offset) - (X scale) × 0.9] to [(analysis offset) + (analysis length) - (X scale) × 0.1]

Examples

`DISPLAY:TOVERVIEW:MEASVIEW1:X:SCALE:OFFSET 800ns` sets the minimum horizontal value to 800 ns in the Time overview Measurement View 1.

DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]

Sets or queries the vertical range of the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Display commands

Syntax

```
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE] <value>
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]?
```

Related Commands

[DISPlay:TOVerview\[:MEASview<y>\]:Y\[:SCALE\]:OFFSet](#) (on page 1022)

Arguments

`<value>::<NRf>` specifies the vertical range. Range: 0.1 to 200 dB.

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

DISPLAY:TOVERVIEW:MEASVIEW1:Y:SCALE 50 sets the vertical range to 50 dBm in the time overview.

DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:AUTO (No Query Form)

Sets the vertical scale and offset automatically to fit the waveform to the screen in the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Display commands

Syntax

DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:AUTO

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

DISPLAY:TOVERVIEW:MEASVIEW1:Y:SCALE:AUTO sets the vertical scale and offset automatically to fit the waveform to the screen.

DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:OFFSet

Sets or queries the vertical offset (the value at the top edge of the vertical axis) in the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Display commands

Syntax

DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:OFFSet <value>
DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:OFFSet?

Related Commands

[DISPlay:TOVerview\[:MEASview<y>\]:Y\[:SCALE\]](#) (on page 1021)

Arguments

<value>::<NRf> specifies the vertical offset. Range: -170 to +50 dBm.

Returns

<NRf>

Examples

`DISPLAY:TOVERVIEW:MEASVIEW1:Y:SCALE:OFFSET -80` sets the vertical offset to -80 dBm in the time overview Measurement View 1.

DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:RESCale (No Query Form)

Sets the vertical scale automatically to fit the waveform to the screen in the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Display commands

Syntax

`DISPlay:TOVerview[:MEASview<y>]:Y[:SCALE]:RESCale`

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

`DISPLAY:TOVERVIEW:MEASVIEW1:Y:SCALE:RESCALE` sets the vertical scale automatically to fit the waveform to the screen.

DISPlay:TXGain:MARKer:SHOW:STATe

Displays or hides the marker readout, but not the marker itself, on the graph area.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

`DISPlay:TXGain:MARKer:SHOW:STATe { OFF | ON | 0 | 1 }`
`DISPlay:TXGain:MARKer:SHOW:STATe?`

Arguments

OFF or 0 hides the readout for the selected marker.

ON or 1 shows the readout for the selected marker.

Returns

OFF or 0 means that the readout for the selected marker is hidden.

ON or 1 means that the readout for the selected marker is showing.

Examples

`DISPLAY:TXGAIN:MARKER:SHOW:STATE ON` shows the readout for the marker on the display.

DISPlay:TXGain[:SCALe]:AUTO (No Query Form)

Automatically rescales the horizontal and vertical scale.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

`DISPlay:TXGain[:SCALe]:AUTO`

Arguments

None

Examples

`DISPLAY:TXGAIN[:SCALE]:AUTO` rescales the horizontal and vertical scale automatically.

DISPlay:TXGain:WINDow:TRACe:GRATicule:GRID:STATe

Displays or hides the graticule grid in the display. Queries whether the graticule grid is hidden or showing.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

`DISPlay:TXGain:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }`
`DISPlay:TXGain:WINDow:TRACe:GRATicule:GRID:STATe?`

Arguments

`OFF` or `0` hides the graticule.

`ON` or `1` shows the graticule.

Returns

`OFF` or `0` means that the graticule is hidden.

`ON` or `1` means that the graticule is showing.

Examples

`DISPLAY:TXGAIN:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` will hide the graticule.

DISPlay:TXGain:WINDow:TRACe:POINts:SHOW:STATe

Sets to mark each measurement point on the trace.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:WINDow:TRACe:POINTs:SHOW:STATe { OFF | ON | 0 | 1 }  
DISPlay:TXGain:WINDow:TRACe:POINTs:SHOW:STATe?
```

Arguments

OFF or 0 hides each measurement point on the trace.

ON or 1 shows each measurement point on the trace.

Returns

OFF or 0 means that each measurement point on the trace is hidden.

ON or 1 means that each measurement point on the trace is showing.

Examples

DISPlay:TXGAIN:WINDOW:TRACE:POINTS:SHOW:STATE 1 shows each measurement point on the trace.

DISPlay:TXGain:X[:SCALE]:AUTO (No Query Form)

Resets the scale of the horizontal axis to contain the complete trace.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:X[:SCALE]:AUTO
```

Arguments

None

Examples

DISPlay:TXGAIN:X:SCALE:AUTO resets the scale of the horizontal axis to contain the complete trace.

DISPlay:TXGain:X[:SCALE]:LOG:STATe

Sets or queries the display to show the frequency axis in a logarithmic scale.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:X[:SCALe]:LOG:STATe { OFF | ON | 0 | 1 }  
DISPlay:TXGain:X[:SCALe]:LOG:STATe?
```

Arguments

OFF or 0 sets the frequency axis in linear scale.

ON or 1 sets the frequency axis in logarithmic scale.

Returns

OFF or 0 means that the frequency axis is set to linear scale.

ON or 1 means that the frequency axis is set to logarithmic scale.

Examples

DISPlay:TXGAIN:X:SCALE:LOG:STATE 1 sets the frequency axis to logarithmic scale.

DISPlay:TXGain:X[:SCALe]:START

Sets the Zoom Start frequency. This only affects the start frequency shown on the graph.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:X[:SCALe]:START <value>  
DISPlay:TXGain:X[:SCALe]:START?
```

Arguments

<value>::=<Nrf> is a floating point number that is the zoom start frequency.

Returns

See Arguments.

Examples

DISPlay:TXGAIN:X:SCALE:START 1E9 sets the zoom start frequency to 1 GHz.

DISPlay:TXGain:X[:SCALe]:STOP

Sets the Zoom Stop frequency. This only affects the stop frequency shown on the graph.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:X[:SCALe]:STOP <value>
```

```
DISPlay:TXGain:X[:SCALe]:STOP?
```

Arguments

<value>::=<NRf> specifies the zoom stop frequency.

Returns

A floating point value that is the zoom stop frequency.

Examples

DISPLAY:TXGAIN:X:SCALE:STOP 1E9 sets the zoom stop frequency to 1 GHz.

DISPlay:TXGain:Y[:SCALe]

Sets or queries the vertical scale value in dB.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:Y[:SCALe] <value>  
DISPlay:TXGain:Y[:SCALe]?
```

Arguments

<value>::=<NRf> specifies the vertical scale in dB.

Returns

A floating point value that is the vertical scale in dB.

Examples

DISPLAY:TXGAIN:Y:SCALE 100 sets the vertical scale to 100 dB.

DISPlay:TXGain:Y[:SCALe]:AUTO (No Query Form)

Automatically scales the plot vertically.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:Y[:SCALe]:AUTO
```

Arguments

None

Examples

`DISPLAY:TXGAIN:Y:SCALE:AUTO` automatically scales the plot vertically.

DISPlay:TXGain:Y[:SCALe]:BOTTom

Sets or queries the bottom of the vertical position of the display.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:Y[:SCALe]:BOTTom <value>
DISPlay:TXGain:Y[:SCALe]:BOTTom?
```

Arguments

`<value>::=<NRf>` specifies the bottom of the vertical position of the display.

Returns

A floating point value that is the bottom of the vertical position of the display.

Examples

`DISPLAY:TXGAIN:Y:SCALE:BOTTOM -100` sets the bottom of Y axis to -100 dB.

DISPlay:TXGain:Y[:SCALe]:PDIVision

Sets or queries the vertical scale (per division) of the graph.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:Y[:SCALe]:PDIVision <value>
DISPlay:TXGain:Y[:SCALe]:PDIVision?
```

Arguments

`<value>::=<NRf>` specifies the vertical scale (per division).

Returns

A floating point value that is the vertical scale (per division) of the graph.

Examples

`DISPLAY:TXGAIN:Y:SCALE:PDIVision 0.5` sets the vertical scale to 0.5 dB/div.

DISPlay:TXGain:Y[:SCALe]:POSition

Sets or queries the vertical position of the trace.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:Y[:SCALe]:POSition <value>  
DISPlay:TXGain:Y[:SCALe]:POSition?
```

Arguments

<value>::=<NRf> specifies the vertical position.

Returns

A floating point value that is the vertical position.

Examples

DISPLAY:TXGAIN:Y:SCALE:PDIVision 0 sets the vertical position to 0 dB.

DISPlay:TXGain:Y[:SCALe]:TOP

Sets or queries the top of the vertical scale.

Conditions

Measurement view: Transmission Gain

Group

Display commands

Syntax

```
DISPlay:TXGain:Y[:SCALe]:TOP <value>  
DISPlay:TXGain:Y[:SCALe]:TOP?
```

Arguments

<value>::=<NRf> specifies the top of the vertical scale.

Returns

A floating point value that is the top of the vertical scale.

Examples

DISPLAY:TXGAIN:Y:SCALE:TOP 10 sets the vertical top to 10 dB.

:DISPlay:WINDow:ACQuisition:BANdwidth:SHOw:STAtE {set and query}

Sets or queries the state of show acquisition bandwidth checkbox.

Conditions

Measurement views: Spectrum, Spectrogram

Group

Display commands

Syntax

```
:DISPlay:WINDow:ACQuisition:BANdwidth:SHOw:STAtE {0|1|TRUE |FALSE}  
:DISPlay:WINDow:ACQuisition:BANdwidth:SHOw:STAtE?
```

Arguments

0 is used to change 'Show Acquisition Bandwidth' checkbox state from checked to unchecked.

1 is used to change 'Show Acquisition Bandwidth' checkbox state from unchecked to checked.

Examples

:DISPlay:WINDow:ACQuisition:BANdwidth:SHOw:STAtE 1 changes the state of 'Show Acquisition Bandwidth' checkbox to checked.

DISPlay:WINDow:ACTive:MEASurement? (Query Only)

Queries the active measurement views.

Conditions

Measurement views: All

Group

Display commands

Syntax

```
DISPlay:WINDow:ACTive:MEASurement?
```

Arguments

None

Returns

<view1>,<view2>,...,<view(n)>

Where

<view(n)>::<string> is the view name as shown in the following table.

Measurement view mnemonic

Return value	Measurement view	Display group
"SPEC"	Spectrum	General signal viewing
"DPX"	DPX (Digital Phosphor) spectrum	
"MAGVT"	Amplitude versus Time	
"ACP"	Channel power and ACPR	
"FVT"	Frequency versus Time	
"PHVT"	Phase versus Time	
"IQVT"	RF I&Q versus Time	
"SGRam"	Spectrogram	
"TOV"	Time overview	
"AM"	Amplitude modulation	Analog Modulation
"FM"	Frequency modulation	
"PM"	Phase modulation	
"CONS"	Constellation	General purpose digital modulation
"DIQV"	Demodulated I&Q versus Time	
"EDI"	Eye Diagram	
"EVM"	EVM versus Time	
"FVDT"	Frequency deviation versus Time	
"MERR"	Magnitude error versus Time	
"PERR"	Phase error versus Time	
"SIGN"	Signal quality	
"STAB"	Symbol table	
"TDI"	Trellis Diagram	

Return value	Measurement view	Display group
"CCDF"	CCDF	RF measurements
"MCP"	MCPR (Multiple Carrier Power Ratio)	
"OBW"	Occupied bandwidth	
"PNO"	Phase noise	
"SPUR"	Spurious	
"STAT"	Pulse statistics	Pulsed RF
"RES"	Pulse table (results table)	
"TRAC"	Pulse trace	

DISPlay:WINDow:APPLy:SOURce:COLOr {set and query}

Sets or queries the state of apply source color to trace checkbox.

Conditions

Measurement views: All

Applicable for only MSO/LPD/SX.

Group

Display commands

Syntax

```
:DISPlay:WINDow:APPLy:SOURce:COLOr {0|1|TRUE |FALSE}
:DISPlay:WINDow:APPLy:SOURce:COLOr?
```

Argument

0 is used to change 'Apply Source Color to Trace' checkbox state from unchecked to checked.

1 is used to change 'Apply Source Color to Trace' checkbox state from checked to unchecked.

Examples

:DISPlay:WINDow:APPLy:SOURce:COLOr 1 changes the state of 'Apply Source Color to Trace' checkox to checked.

DISPlay:WINDow:COLor:SCHEME

Sets or queries the color scheme for displaying traces and background on the screen.

Conditions

Measurement views: All

Group

Display commands

Syntax

```
DISPlay:WINDow:COLor:SCHeM { THUNderstorm | BLIZzard | CLASsic }
DISPlay:WINDow:COLor:SCHeM?
```

Arguments

THUNderstorm displays the background in dark blue.

BLIZzard displays the background in white. It saves ink when printing the screen image.

CLASsic displays the background in black (default).

Examples

DISPlay:WINDow:COLor:SCHeM BLIZzard displays the background in white.

DISPlay:WINDow:OPTimized:MEASurement? (Query Only)

Queries the measurement views that are optimized. "Optimized" means that there is a perfect match between the view's settings and the actual acquisition parameters to meet the specifications. When multiple measurements are running at one time, the measurements can have different requirements for setting the acquisition hardware. You can make a measurement optimized by selecting it using the following commands:

- [DISPlay:GENeral:MEASview<y>:SElect](#) (on page 796) for the general signal viewing
- [DISPlay:DDEMod\[:MEASview<y>\]:SElect](#) (on page 750) for the digital modulation views
- [DISPlay:GPRF:MEASview:SElect](#) (on page 799) for the RF measurement views
- [DISPlay:PULSe:MEASview<y>:SElect](#) (on page 948) for the pulsed RF measurement views

Conditions

Measurement views: All

Group

Display commands

Syntax

```
DISPlay:WINDow:OPTimized:MEASurement?
```

Arguments

None

Returns

```
<view1>,<view2>,...,<view(n)>
```

Where

<view(n)>::<string> is the view name as shown in the table. The following table shows the view arguments. The arguments are the string type.

General signal viewing views

Argument	View
SPECTrum	Spectrum
DPX	DPX (Digital Phosphor) spectrum
AVTime	Amplitude versus Time

Argument	View
FVTime	Frequency versus Time
PHVTime	Phase versus Time
IQVTime	IQ versus Time
SGRam	Spectrogram
TOVerview	Time overview

Examples

`DISPLAY:WLAN:AD:CONStE:MEASUREMENT?` might return "SPEC", "MCP", indicating that the views of spectrum and MCPR are optimized.

DISPlay:WLAN:AD:CONStE:WINDow:TRACe:GRATicule:GRID:STATe

Determines whether to show or hide the graticules in the 802.11ad Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:CONStE:WINDow:TRACe:GRATicule:GRID:STATe { 0 | 1 | ON | OFF }
DISPlay:WLAN:AD:CONStE:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

0 or OFF hides the graticules in the graph

1 or ON shows the graticules in the graph

Returns

0 or OFF means that the graticules in the graph are hidden

1 or ON means that the graticules in the graph are showing

Examples

`DISPLAY:WLAN:AD:CONStE:WINDow:TRACe:GRATICULE:GRID:STATE 1` shows the graticules in the display.

DISPlay:WLAN:AD:CONStE:WINDow:TRACe:MARKer:STATe

Determines whether to show or hide marker readout in graph in the 802.11ad Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:CONStE:WINDow:TRACe:MARKer:STATe { 0 | 1 | ON | OFF }  
DISPlay:WLAN:AD:CONStE:WINDow:TRACe:MARKer:STATe?
```

Arguments

OFF or 0 hides the marker readout in the graph

ON or 1 shows the marker readout in the graph

Returns

0 or OFF means that the graticules in the graph are hidden

1 or ON means that the graticules in the graph are shown

Examples

DISPLAY:WLAN:AD:CONSTE:WINDOW:TRACE:MARKER:STATE 1 shows the marker readout in the display.

DISPlay:WLAN:AD:CONStE:ZOOM:SCALe

Sets or queries the zoom scale value in the Scale tab of the Settings control panel for the 802.11ad Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:CONStE:ZOOM:SCALe <value>  
DISPlay:WLAN:AD:CONStE:ZOOM:SCALe?
```

Arguments

<value>=<NRf> where range is 0.1 to 10

Returns

<NRf> where range is 0.1 to 10

Examples

DISPLAY:WLAN:AD:CONSTE:ZOOM:SCALE 5 sets the zoom scale value to 5.

DISPlay:WLAN:AD:CONStE:ZOOM[:SCALe]:X:OFFSet

Sets or queries the Horizontal Position value in the Scale tab of the Settings control panel for the 802.11ad Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:CONStE:ZOOM[:SCALe]:X:OFFSet <value>  
DISPlay:WLAN:AD:CONStE:ZOOM[:SCALe]:X:OFFSet?
```

Arguments

<value>=<NRf> where range is -5.1 to 5.1

Returns

<NRf> where range is -5.1 to 5.1

Examples

DISPLAY:WLAN:AD:CONSTE:ZOOM[:SCALE]:X:OFFSET 3.5 sets the Horizontal Position to 3.5.

DISPlay:WLAN:AD:CONStE:ZOOM[:SCALe]:Y:OFFSet

Sets or queries the Vertical Position value in the Scale tab of the Settings control panel for the 802.11ad Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:CONStE:ZOOM[:SCALe]:Y:OFFSet <value>  
DISPlay:WLAN:AD:CONStE:ZOOM[:SCALe]:Y:OFFSet?
```

Arguments

<value>=<NRf> where range is -5.1 to 5.1

Returns

<NRf> where range is -5.1 to 5.1

Examples

DISPLAY:WLAN:AD:CONSTE:ZOOM[:SCALE]:Y:OFFSET -3.5 sets the Vertical Position to -3.5.

DISPlay:WLAN:AD:DATA:RADix

Set or queries the symbol radix type (set in the Prefs tab of the Settings control panel) in the display.

Conditions

Measurement views: All 802.11ad Symbol Table and Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:DATA:RADix {DEC,BIN}  
DISPlay:WLAN:AD:DATA:RADix?
```

Arguments

DEC sets the radix type to Decimal

BIN sets the radix type to Binary

Returns

See Arguments

Examples

DISPLAY:WLAN:AD:DATA:RADIX might return BIN, indicating the data radix selected is binary.

DISPlay:WLAN:AD:EVM:SCALE:AUTO (No Query Form)

Rescales both horizontal and vertical axis automatically to fit the waveform to the screen in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

DISPlay:WLAN:AD:EVM:SCALE:AUTO

Arguments

None

Returns

None

Examples

DISPLAY:WLAN:AD:EVM:SCALE:AUTO fits the waveform to the graph both horizontally and vertically.

DISPlay:WLAN:AD:EVM:WINDow:TRACe:GRATicule:GRID:STATE

Determines whether to show or hide the graticule in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

DISPlay:WLAN:AD:EVM:WINDow:TRACe:GRATicule:GRID:STATE { 0 | 1 | ON | OFF }
DISPlay:WLAN:AD:EVM:WINDow:TRACe:GRATicule:GRID:STATE ?

Arguments

OFF or 0 hides the graticules in the graph

1 or ON shows the graticules in the graph

Returns

0 or OFF means that the graticules in the graph are hidden

1 or ON means that the graticules in the graph are showing

Examples

`DISPLAY:WLAN:AD:EVM:WINDOW:TRACE:GRATICULE:GRID:STATE OFF` turns off the graticule in the graph.

DISPlay:WLAN:AD:EVM:WINDow:TRACe:MARKer:STATe

Determines whether to show or hide the readout for the selected marker in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

`DISPlay:WLAN:AD:EVM:WINDow:TRACe:MARKer:STATe { 0 | 1 | ON | OFF }`

`DISPlay:WLAN:AD:EVM:WINDow:TRACe:MARKer:STATe ?`

Arguments

OFF or 0 hides the marker readout in the graph

1 or ON shows the marker readout in the graph

Returns

0 or OFF means that the graticules in the graph are hidden

1 or ON means that the graticules in the graph are shown

Examples

`DISPLAY:WLAN:AD:EVM:WINDOW:TRACE:MARKER:STATE ON` shows the readout for the selected marker in the graph.

DISPlay:WLAN:AD:EVM:X:SCALE

Sets or queries the horizontal scale (time) axis range in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

`DISPlay:WLAN:AD:EVM:X:SCALE <value>`

`DISPlay:WLAN:AD:EVM:X:SCALE?`

Arguments

`<value>=<NRf>`

Returns

<NRf> = time trace

Examples

DISPLAY:WLAN:AD:EVM:X:SCALE 30E-3 sets the horizontal scale to 30 ms.

DISPlay:WLAN:AD:EVM:X:SCALE:Auto (No Query Form)

Rescales the horizontal axis automatically to fit the waveform to the screen in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

DISPlay:WLAN:AD:EVM:X:SCALE:Auto

Arguments

None

Returns

None

Examples

DISPLAY:WLAN:AD:EVM:X:SCALE:Auto rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:WLAN:AD:EVM:X:SCALE:OFFSet

Sets or queries the start of the horizontal offset value (position) of the trace in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

DISPlay:WLAN:AD:EVM:X:SCALE:OFFSet <value>
DISPlay:WLAN:AD:EVM:X:SCALE:OFFSet?

Arguments

<value>=<NRf>

Returns

<NRf> = position of trace

Examples

`DISPLAY:WLAN:AD:EVM:X:SCALE:OFFSET 150E-3` sets the horizontal offset value of the trace to 150 ms.

DISPlay:WLAN:AD:EVM:Y:SCALe

Sets or queries the vertical scale (time) axis range of the in display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:EVM:Y:SCALe<value>  
DISPlay:WLAN:AD:EVM:Y:SCALe?
```

Arguments

<value>=<NRf>

Returns

<NRf> = vertical range

Examples

`DISPLAY:WLAN:AD:EVM:Y:SCALE 100` sets the vertical range scale to 100 dB.

DISPlay:WLAN:AD:EVM:Y:SCALE:AUtO (No Query Form)

Rescales the vertical scale automatically to fit the waveform in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:EVM:Y:SCALE:AUtO
```

Arguments

None

Returns

None

Examples

`DISPLAY:WLAN:AD:EVM:Y:SCALE:AUtO` rescales the vertical scale to fit the waveform on the screen.

DISPlay:WLAN:AD:EVM:Y:SCALE:OFFSet

Sets or queries the start of the vertical offset scale value (position) in the display.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:EVM:Y:SCALE:OFFSet<value>  
DISPlay:WLAN:AD:EVM:Y:SCALE:OFFSet?
```

Arguments

<value>=<NRf>

Returns

<NRf> = vertical offset

Examples

DISPLAY:WLAN:AD:EVM:Y:SCALE:OFFSET 100 sets the vertical offset to 100 dB.

DISPlay:WLAN:AD:MEASview:DELeTe (No Query Form)

Delete (Close) the corresponding 802.11ad measurement view from the analysis window.

Conditions

Measurement views: All 802.11ad measurement views

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:MEASview:DELeTe {CONS,SUMM,EVM,STAB}
```

Arguments

CONS selects the 802.11ad Constellation view

SUMM selects the 802.11ad Summary view

EVM selects the 802.11ad EVM vs Time view

STAB selects the 802.11ad Symbol Table view

Returns

See Arguments

Examples

DISPLAY:WLAN:AD:MEASVIEW:DELETE CONS will close the Constellation display.

DISPlay:WLAN:AD:MEASview:NEW (No Query Form)

Displays a new 802.11ad measurement view in the analysis window.

Conditions

Measurement views: All 802.11ad measurement views

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:MEASview:NEW {CONS,SUMM,EVM,STAB}
```

Arguments

CONS selects the 802.11ad Constellation view

SUMM selects the 802.11ad Summary view

EVM selects the 802.11ad EVM vs Time view

STAB selects the 802.11ad Symbol Table view

Returns

See Arguments

Examples

DISPlay:WLAN:AD:MEASVIEW:NEW CONS will display the constellation display.

DISPlay:WLAN:AD:MEASview:SElect

Selects the corresponding 802.11 ad measurement view on the analysis window. The query command returns the currently selected view.

Conditions

Measurement views: All 802.11ad measurement views

Group

Display commands

Syntax

```
DISPlay:WLAN:AD:MEASview:SElect {CONS,SUMM,EVM,STAB}  
DISPlay:WLAN:AD:MEASview:SElect?
```

Arguments

CONS selects the 802.11ad Constellation view

SUMM selects the 802.11ad Summary view

EVM selects the 802.11ad EVM vs Time view

STAB selects the 802.11ad Symbol Table view

Returns

See Arguments

Examples

DISPlay:WLAN:AD:MEASVIEW:SELECT SUMM selects the 802.11ad Summary view.

DISPlay:WLAN:AY:CONSte:WINDow:TRACe:GRATicule:GRID:STATe

Set or query whether to show or hide the graticule in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:CONSte:WINDow:TRACe:GRATicule:GRID:STATe { OFF | ON | 0 | 1 }  
DISPlay:WLAN:AY:CONSte:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

OFF or 0 hides the graticule on the graph.

ON or 1 shows the graticule on the graph.

Returns

0 indicates the graticule is hidden on the graph.

1 indicates the graticule is shown on the graph.

Examples

DISP:WLAN:AY:CONS:WIND:TRAC:GRAT:GRID:STAT 1 enables the graticule to show.

DISP:WLAN:AY:CONS:WIND:TRAC:GRAT:GRID:STAT? may return 0, which means the graticule is disabled.

DISPlay:WLAN:AY:CONSte:WINDow:TRACe:MARKer:STATe

Set or query whether to show or hide the marker readout on the graph in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:CONSte:WINDow:TRACe:MARKer:STATe { OFF | ON | 0 | 1 }  
DISPlay:WLAN:AY:CONSte:WINDow:TRACe:MARKer:STATe?
```

Arguments

OFF or 0 hides the marker readout on the graph.

ON or 1 shows the marker readout on the graph.

Returns

OFF or 0 means the marker readout is hidden on the graph.

ON or 1 means the marker readout shows on the graph.

Examples

DISP:WLAN:AY:CONS:WIND:TRAC:MARK:STAT 1 enables marker readout to show.

DISP:WLAN:AY:CONS:WIND:TRAC:MARK:STAT? may return 0, which means marker readout is disabled.

DISPlay:WLAN:AY:CONStE:ZOOM:SCALe

Set or query the scale value, which is located under the scale tab.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Display commands

Syntax

DISPlay:WLAN:AY:CONStE:ZOOM:SCALe <value>

DISPlay:WLAN:AY:CONStE:ZOOM:SCALe?

Arguments

<value>::=<NRf> specifies the scale value.

Range: 0.1 to 10

Returns

<NRf>

Examples

DISP:WLAN:AY:CONS:ZOOM:SCAL 5 sets the scale value to 5.

DISP:WLAN:AY:CONS:ZOOM:SCAL? may return 6, indicating that 6 is the scale value.

DISPlay:WLAN:AY:CONStE:ZOOM:[SCALe]:X:OFFSet

Set or query the horizontal position value of the scale in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Display commands

Syntax

DISPlay:WLAN:AY:CONStE:ZOOM:[SCALe]:X:OFFSet <value>

DISPlay:WLAN:AY:CONStE:ZOOM:[SCALe]:X:OFFSet?

Arguments

<value>::=<NRf> specifies the horizontal position value.

Range: -3.5 to 3.5

Returns

<NRf>

Examples

`DISP:WLAN:AY:CONS:ZOOM:SCAL:X:OFFS 3.5` sets the horizontal position value of the scale to 3.5.

`DISP:WLAN:AY:CONS:ZOOM:SCAL:X:OFFS?` may return 3.5, which is the horizontal position value of the scale.

DISPlay:WLAN:AY:CONSte:ZOOM:[SCALE]:Y:OFFSet

Set or query the vertical position of the scale.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Display commands

Syntax

`DISPlay:WLAN:AY:CONSte:ZOOM:[SCALE]:Y:OFFSet <value>`
`DISPlay:WLAN:AY:CONSte:ZOOM:[SCALE]:Y:OFFSet?`

Arguments

`<value>::=<NRf>` specifies the vertical position value.

Range: -3.5 to 3.5

Returns

`<NRf>`

Examples

`DISP:WLAN:AY:CONS:ZOOM:Y:OFFS -3.5` sets the vertical position value of the scale to -3.5.

`DISP:WLAN:AY:CONS:ZOOM:Y:OFFS?` may return -3.5, which is the vertical position value of the scale.

DISPlay:WLAN:AY:DATA:RADix

Set or query the type of symbol radix present in the WLAN 802.11ay Symbol Table control panel settings.

Conditions

Measurement views: WLAN 802.11ay Symbol Table display

Group

Display commands

Syntax

`DISPlay:WLAN:AY:DATA:RADix { DEC | BIN }`
`DISPlay:WLAN:AY:DATA:RADix?`

Arguments

`DEC` sets the data radix type to decimal.

`BIN` sets the data radix type to binary.

Returns

`DEC` means that the data radix type is decimal.

BIN means that the data radix type is binary.

Examples

DISP:WLAN:AY:DATA:RAD DEC sets the data radix to decimal.

DISP:WLAN:AY:DATA:RAD? may return BIN, indicating the data radix selected is binary.

DISPlay:WLAN:AY:EVM:SCALE:Auto (No Query Form)

Rescales both horizontal and vertical axis automatically to fit the waveform to the screen in the 802.11ay EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

DISPlay:WLAN:AY:EVM:SCALE:Auto

Arguments

None

Examples

DISP:WLAN:AY:EVM:SCALE:Auto rescales both horizontal and vertical axis to fit the waveform to the graph.

DISPlay:WLAN:AY:EVM:WINDow:TRACe:GRATicule:GRID:STATE

Set or query whether to show or hide the graticule in the 802.11ay EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

DISPlay:WLAN:AY:EVM:WINDow:TRACe:GRATicule:GRID:STATE { OFF | ON | 1 | 0 }
DISPlay:WLAN:AY:EVM:WINDow:TRACe:GRATicule:GRID:STATE?

Arguments

OFF or 0 hides the graticule on the graph.

ON or 1 shows the graticule on the graph.

Returns

OFF or 0 means the graticule is hidden on the graph.

ON or 1 means that the graticule shows on the graph.

Examples

DISP:WLAN:AY:EVM:WIND:TRAC:GRAT:GRID:STAT OFF hides the graticule on the graph.

DISP:WLAN:AY:EVM:WIND:TRAC:GRAT:GRID:STAT? may return ON, which means the graticule shows on the graph.

DISPlay:WLAN:AY:EVM:WINDow:TRACe:MARKer:STATe

Set or query whether to show or hide the readout for the selected marker in the 802.11ay EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:EVM:WINDow:TRACe:MARKer:STATe { OFF | ON | 0 | 1 }  
DISPlay:WLAN:AY:EVM:WINDow:TRACe:MARKer:STATe?
```

Arguments

OFF or 0 hides the readout for the selected marker on the graph.

ON or 1 shows the readout for the selected marker on the graph.

Returns

OFF or 0 means the readout for the selected marker is hidden on the graph.

ON or 1 means the readout for the selected marker shows on the graph.

Examples

DISP:WLAN:AY:EVM:WIND:TRAC:MARK:STAT ON shows the readout for the selected marker on the graph.

DISP:WLAN:AY:EVM:WIND:TRAC:MARK:STAT? may return OFF, which means the readout for the selected marker is hidden on the graph.

DISPlay:WLAN:AY:EVM:X:SCALE

Set or query the horizontal (time) axis range in the 802.11ay EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:EVM:X:SCALE <value>  
DISPlay:WLAN:AY:EVM:X:SCALE?
```

Arguments

<value>::=<NRf> specifies the horizontal (time) axis range.

Units: ms (milliseconds)

Returns

<NRf>

Examples

`DISP:WLAN:AY:EVM:X:SCAL 30e-3` sets the horizontal scale to 30 ms.

`DISP:WLAN:AY:EVM:X:SCAL?` may return `30e-3`, which means that the horizontal scale is 30 ms.

DISPlay:WLAN:AY:EVM:X:SCALe:AUTO (No Query Form)

Rescale the horizontal axis automatically to fit the waveform to the screen in the EVM display.

Conditions

Measurement views: 802.11ay Analysis in 802.11ay EVM

Group

Display commands

Syntax

`DISPlay:WLAN:AY:EVM:X:SCALe:AUTO`

Arguments

None

Examples

`DISP:WLAN:AY:EVM:X:SCAL:AUTO` rescales the horizontal scale automatically to fit the waveform to the screen.

DISPlay:WLAN:AY:EVM:X:SCALe:OFFSet

Set or query the start of the horizontal (time) trace in the 802.11ay EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

`DISPlay:WLAN:AY:EVM:X:SCALe:OFFSet <value>`

`DISPlay:WLAN:AY:EVM:X:SCALe:OFFSet?`

Arguments

`<value>::=<NRf>` specifies the minimum horizontal value.

Units: ms (milliseconds)

Returns

`<NRf>`

Examples

`DISP:WLAN:AY:EVM:X:SCAL:OFFS 150e-3` sets the horizontal offset value to 150 ms.

`DISP:WLAN:AY:EVM:X:SCAL:OFFS?` may return `150e-3`, which means the horizontal offset value is 150 ms.

DISPlay:WLAN:AY:EVM:Y:SCALe

Set or query the vertical range in the 802.11ay EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:EVM:Y:SCALe <value>  
DISPlay:WLAN:AY:EVM:Y:SCALe?
```

Arguments

<value>::=<NRf> specifies the vertical scale. Units: % or dB (based on the EVM units set)

Returns

<NRf>

Examples

DISP:WLAN:AY:EVM:Y:SCAL 100 sets the vertical range to 100 dB.

DISP:WLAN:AY:EVM:Y:SCAL? may return 100, which means that the vertical range is 100%.

DISPlay:WLAN:AY:EVM:Y:SCALe:AUTO (No Query Form)

Rescale the vertical scale automatically to fit the waveform in the 802.11ay EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:EVM:Y:SCALe:AUTO
```

Arguments

None

Examples

DISP:WLAN:AY:EVM:X:SCAL:AUTO rescales the vertical scale automatically to fit the waveform to the screen.

DISPlay:WLAN:AY:EVM:Y:SCALe:OFFSet

Set or query the start of the vertical (EVM) trace in the 802.11ay EVM display. This command corresponds to setting or query positions in the EVM display.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:EVM:Y:SCALe:OFFSet <value>  
DISPlay:WLAN:AY:EVM:Y:SCALe:OFFSet?
```

Arguments

<value>::=<Nrf> specifies the vertical range.

Units: % or dB (based on the EVM units set)

Returns

<Nrf>

Examples

DISP:WLAN:AY:EVM:Y:SCAL:OFFS 0 sets the vertical offset to 0%.

DISP:WLAN:AY:EVM:Y:SCAL:OFFS? may return 0, which means the vertical offset is 0 dB.

DISPlay:WLAN:AY:MEASview:DElete (No Query Form)

Deletes the corresponding WLAN 802.11ay display from the analysis window.

Conditions

Measurement views: All WLAN 802.11ay

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:MEASview:DElete { CONS | SUMM | EVM | STAB }
```

Arguments

Select one of the below arguments:

Arguments	Description
CONS	Selects the WLAN 802.11ay Constellation view.
SUMM	Selects the WLAN 802.11ay Summary view.
EVM	Selects the WLAN 802.11ay EVM versus Time view.
STAB	Selects the WLAN 802.11ay Symbol Table view.

Examples

DISP:WLAN:AY:MEAS:DEL CONS deletes the Constellation display.

DISPlay:WLAN:AY:MEASview:NEW (No Query Form)

Shows a new WLAN 802.11ay display on the analysis window.

Conditions

Measurement views: All WLAN 802.11ay

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:MEASview:NEW { CONS | SUMM | EVM | STAB }
```

Arguments

Select one of the below arguments:

Argument	Description
CONS	Selects the WLAN 802.11ay Constellation view.
SUMM	Selects the WLAN 802.11ay Summary view.
EVM	Selects the WLAN 802.11ay EVM versus Time view.
STAB	Selects the WLAN 802.11ay Symbol Table view.

Examples

DISP:WLAN:AY:MEAS:NEW CONS opens the Constellation display.

DISPlay:WLAN:AY:MEASview:SElect

Set or query the corresponding 802.11 ay display on the analysis window. The query command returns the currently selected view.

Conditions

Measurement views: All WLAN 802.11ay

Group

Display commands

Syntax

```
DISPlay:WLAN:AY:MEASview:SElect { CONS | SUMM | EVM | STAB }  
DISPlay:WLAN:AY:MEASview:SElect?
```

Arguments

Select one of the below arguments:

Arguments

Select one of the below arguments:

Arguments	Description
CONS	Selects the WLAN 802.11ay Constellation view.

Arguments	Description
SUMM	Selects the WLAN 802.11ay Summary view.
EVM	Selects the WLAN 802.11ay EVM versus Time view.
STAB	Selects the WLAN 802.11ay Symbol Table view.

Returns

See Arguments.

Examples

DISP:WLAN:AY:MEAS:SEL SUMM selects the Summary view.

DISP:WLAN:AY:MEAS:SEL? may return STAB, which indicates the Symbol Table view.

DISPlay:WLAN:CONStE[:SCALe]

Sets the magnification value (zoom factor) for the WLAN constellation plot.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:CONStE[:SCALe] <NRf>

DISPlay:WLAN:CONStE[:SCALe]?

Arguments

Floating point number that represents the scale factor. Valid inputs are any floating point number between 0.1 and 10. A positive value zooms in and a negative value zooms out.

Returns

A floating point number indicating the current magnification value.

Examples

DISP:WLAN:CONS:SCAL 5.0 zooms the display out by a factor of 5.

DISPlay:WLAN:CONStE:X:OFFSet

Sets or queries the value of the offset of the horizontal axis from the center of the WLAN Constellation display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CONSte:X:OFFSet <NRf>  
DISPlay:WLAN:CONSte:X:OFFSet?
```

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the Constellation plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 recenters the plot.

Returns

The value of the offset of the X axis from the center for the Constellation plot as a floating point number.

Examples

```
DISP:WLAN:CONST:X:OFFS 1 shifts the constellation display to the left by 1.
```

DISPlay:WLAN:CONSte:Y:OFFSet

Sets or queries the value of the offset of the vertical axis from the center for the WLAN Constellation display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CONSte:Y:OFFSet <NRf>  
DISPlay:WLAN:CONSte:Y:OFFSet?
```

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the constellation plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 re-centers the plot.

Returns

The value of the offset of the Y axis from the center for the Constellation display as a floating point number.

Examples

```
DISP:WLAN:CONST:Y:OFFS 1 shifts the constellation display up by 1.
```

DISPlay:WLAN:CRESPonse:AUTO (No Query Form)

Automatically rescales the horizontal and vertical values for the best display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:CRESPonse:AUTO`

Arguments

None

Examples

`DISP:WLAN:CRES:AUTO` automatically rescales the horizontal and vertical values.

DISPlay:WLAN:CRESPonse:FREQuency:AUTO (No Query Form)

Automatically rescales the horizontal subcarrier (frequency) start and stop values to fit the waveform to the screen in the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:CRESPonse:FREQuency:AUTO`

Arguments

None

Examples

`DISP:WLAN:CRES:FREQ:AUTO` automatically rescales the horizontal subcarrier (frequency) start and stop values to fit the waveform to the screen.

DISPlay:WLAN:CRESPonse:FREQuency:START

Specifies or queries the horizontal start value (left edge) on the WLAN Channel Response display. The units are either Frequency (Hz) or Subcarriers, and are set using the command `[SENSe]:WLAN:UNIT:FREQuency`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:CRESPonse:FREQuency:START <NRf>`
`DISPlay:WLAN:CRESPonse:FREQuency:START?`

Arguments

Floating point number that specifies the horizontal start value (left edge) on the graph.

Returns

The returned value indicates the Subcarrier (for non-b standards only) or frequency shown at the left edge of the display.

Examples

`DISP:WLAN:CRES:FREQ:START 2.41e9` sets the horizontal start value (left edge) to 2.41 GHz (assuming the units have been set to Frequency).

DISPlay:WLAN:CRESponse:FREQuency:STOP

Specifies or queries the horizontal stop value (right edge) on the WLAN Channel Response display. The units are either Frequency (Hz) or Subcarriers, and are set using the command `[SENSe]:WLAN:UNIT:FREQuency`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:CRESponse:FREQuency:STOP <NRf>`
`DISPlay:WLAN:CRESponse:FREQuency:STOP?`

Arguments

Floating point number that specifies the horizontal stop value (right edge) on the display.

Examples

`DISP:WLAN:CRES:FREQ:STOP 8.1250e9` sets the horizontal stop value to 8.1250 GHz (assuming the units have been set to Frequency).

DISPlay:WLAN:CRESponse:MAGNitude:AUTO (No Query Form)

Rescales the vertical magnitude offset (position) and scale values to automatically to fit the waveform to the screen in the WLAN Channel Response magnitude graph.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:CRESponse:MAGNitude:AUTO`

Arguments

None

Examples

`DISP:WLAN:CRES:MAGN:AUTO` rescales the vertical magnitude offset (position) and scale values automatically to fit the waveform to the screen.

DISPlay:WLAN:CRESPonse:MAGNitude:OFFSet

Sets or queries the vertical offset (position in the center of the vertical axis) in the WLAN Channel Response magnitude graph.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:MAGNitude:OFFSet <NRf>  
DISPlay:WLAN:CRESPonse:MAGNitude:OFFSet?
```

Arguments

Floating point number that specifies the vertical offset in dB.

Examples

`DISP:WLAN:CRES:MAGN:OFFS 5` sets the vertical offset to 5 dB.

DISPlay:WLAN:CRESPonse:MAGNitude[:SCALE]

Sets or queries the value of the vertical scale for the WLAN Channel Response magnitude display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:MAGNitude[:SCALE] <NRf>  
DISPlay:WLAN:CRESPonse:MAGNitude[:SCALE]?
```

Arguments

Floating point number that represents the vertical scale value in dB.

Examples

`DISP:WLAN:CRES:MAGN:SCAL 5.0` sets the vertical scale to 5 dB.

DISPlay:WLAN:CRESPonse:MARKer:SHOW:STATe

Shows or hides the marker readout on the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:MARKer:SHOW:STATe {0|1|OFF|ON}  
DISPlay:WLAN:CRESPonse:MARKer:SHOW:STATe?
```

Arguments

ON or 1 specifies to show the marker readout.

OFF or 0 specifies to turn the marker readout off.

Examples

DISP:WLAN:CRES:MARK:SHOW:STATE ON specifies to turn the marker readout on.

DISPlay:WLAN:CRESPonse:PHASe:AUTO (No Query Form)

Rescales the vertical phase value automatically to fit the waveform to the screen in the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:PHASe:AUTO
```

Arguments

None

Examples

DISP:WLAN:CRES:PHAS:AUTO rescales the vertical phase value automatically to fit the waveform to the screen.

DISPlay:WLAN:CRESPonse:PHASe:OFFSet

Sets or queries the vertical offset (position in the center of the vertical axis) in the WLAN Channel Response phase graph.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:PHASe:OFFSet <NRf>  
DISPlay:WLAN:CRESPonse:PHASe:OFFSet?
```

Arguments

Floating point number that specifies the vertical offset (position) in degrees.

Examples

DISPlay:WLAN:CRESPonse:PHASe:OFFSet -14.5 sets the vertical offset value to -14.5° in the WLAN Channel Response phase graph.

DISPlay:WLAN:CRESPonse:PHASe[:SCALE]

Sets or queries the phase value for the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:PHASe[:SCALE] <NRf>  
DISPlay:WLAN:CRESPonse:PHASe[:SCALE]?
```

Arguments

Floating point number that represents the phase value in degrees.

Examples

DISP:WLAN:CRESPonse:PHASe:SCALE 5 sets the vertical scale to 5 degrees for the display.

DISPlay:WLAN:CRESPonse:WINDow:SElect:PLOT

Specifies or queries which graphs are displayed in the WLAN Channel Response display view. Select from Magnitude, Phase, or Both.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:WINDow:SElect:PLOT {MAGNitude|PHASe|BOTH}  
DISPlay:WLAN:CRESPonse:WINDow:SElect:PLOT?
```

Arguments

MAGNitude displays the Magnitude graph.

PHAS_e displays the Phase graph.

BOTH displays both graphs.

Examples

DISP:WLAN:CRES:WIND:SEL:PLOT PHAS displays the Phase graph on the WLAN Channel Response analysis display.

DISPlay:WLAN:CRESPonse:WINDow:TRACe:GRATicule:GRID:STATe

Sets or queries whether to show the graticule grid on the WLAN Channel Response analysis display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:CRESPonse:WINDow:TRACe:GRATicule:GRID:STATe {0|1|OFF|ON}  
DISPlay:WLAN:CRESPonse:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

ON or 1 specifies to show the graticule.

OFF or 0 specifies to turn it off.

Examples

SENSE:WLAN:CRES:WIND:TRAC:GRAT:GRID:STATE ON specifies to turn the graticule on.

DISPlay:WLAN:EVM:FREQuency:AUTO (No Query Form)

Automatically rescales the horizontal subcarrier (frequency) start and stop values to fit the waveform to the screen in the WLAN EVM display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:FREQuency:AUTO
```

Arguments

None

Examples

DISP:WLAN:EVM:FREQ:AUTO automatically rescales the horizontal Subcarrier (frequency) values to fit the waveform to the screen.

DISPlay:WLAN:EVM:FREQuency:RESet (No Query Form)

Automatically resets the horizontal subcarrier (frequency) start and stop values for the WLAN EVM display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:FREQuency:RESet
```

Arguments

None

Examples

`DISP:WLAN:EVM:FREQ:RES` automatically resets the horizontal subcarrier start and stop values for the WLAN EVM display.

DISPlay:WLAN:EVM:FREQuency:STARt

Specifies or queries the horizontal start value (left edge) on the WLAN EVM display. The units are either Frequency (Hz) or Subcarriers, and are set using the command `[SENSe]:WLAN:UNIT:FREQuency`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:FREQuency:STARt <NRf>
```

```
DISPlay:WLAN:EVM:FREQuency:STARt?
```

Arguments

Floating point number that specifies the horizontal start value (left edge) on the graph.

Returns

The returned value indicates the Subcarrier (for non-b standards only) or frequency shown at the left edge of the display.

Examples

`DISP:WLAN:EVM:FREQ:START 2.41e9` sets the horizontal start value (left edge) to 2.41e9 MHz (assuming the units have been set to Frequency).

DISPlay:WLAN:EVM:FREQuency:STOP

Specifies or queries the horizontal stop value (right edge) on the WLAN EVM display. The units are either Frequency (Hz) or Subcarriers, and are set using the command [SENSe]:WLAN:UNIT:FREQuency.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:FREQuency:STOP <NRf>  
DISPlay:WLAN:EVM:FREQuency:STOP?
```

Arguments

Floating point number that specifies the horizontal stop value (right edge) on the display.

Examples

DISP:WLAN:EVM:FREQ:STOP 8.1250 sets the horizontal stop value to 8.1250 MHz (assuming the units have been set to Frequency).

DISPlay:WLAN:EVM:MARKer:SHOW:STATe

Shows or hides the Marker readout on the WLAN EVM display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:MARKer:SHOW:STATe {0|1|OFF|ON}  
DISPlay:WLAN:EVM:MARKer:SHOW:STATe?
```

Arguments

ON or 1 specifies to show the Marker readout.

OFF or 0 specifies to turn the Marker readout off.

Examples

DISP:WLAN:EVM:MARK:SHOW:STATE ON specifies to turn the Marker readout on.

DISPlay:WLAN:EVM[:SCALE]:AUTO (No Query Form)

Automatically adjusts all vertical and horizontal values to provide the best display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM[:SCALE]:AUTO
```

Arguments

None

Examples

DISP:WLAN:EVM:SCALE:AUTO automatically adjusts all vertical and horizontal values to provide the best display.

DISPlay:WLAN:EVM:TIME:AUTO (No Query Form)

Sets the horizontal start and stop values to fit the waveform to the WLAN EVM display, and also enables Auto horizontal scaling so the waveform will remain properly scaled as burst lengths change.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:TIME:AUTO
```

Arguments

None

Examples

DISP:WLAN:EVM:TIME:AUTO sets the horizontal start and stop values to fit the waveform to the display, and also enables Auto horizontal scaling.

DISPlay:WLAN:EVM:TIME:AUTO:STATe

When enabled, sets the horizontal symbol scale value automatically for the WLAN EVM display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:TIME:AUTO:STATe {0|1|OFF|ON}
```

DISPlay:WLAN:EVM:TIME:AUTO:STATe?

Arguments

ON or 1 sets the horizontal symbol scale value automatically.

OFF or 0 specifies to stop setting the horizontal symbol scale value automatically.

Examples

DISP:WLAN:EVM:TIME:AUTO:STATE ON specifies to the horizontal symbol scale value automatically.

DISPlay:WLAN:EVM:TIME:RESet (No Query Form)

Resets the horizontal symbol start and stop values for the WLAN EVM display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:EVM:TIME:RESet

Arguments

None

Examples

DISP:WLAN:EVM:TIME:RES resets the horizontal symbol start and stop values for the WLAN EVM display.

DISPlay:WLAN:EVM:TIME:START

Sets or queries the horizontal symbol start value for the WLAN EVM display. The units are either Symbols or Seconds, and are set using the command [SENSe]:WLAN:UNIT:TIME.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:EVM:TIME:START <NRf>

DISPlay:WLAN:EVM:TIME:START?

Arguments

Floating point number.

Examples

`DISP:WLAN:EVM:TIME:START 40` sets the horizontal symbol start value of the WLAN EVM display to 40 Symbols (assuming the units have been set to Symbols).

DISPlay:WLAN:EVM:TIME:STOP

Sets or queries the horizontal symbol stop value for the WLAN EVM display. The units are either Symbols or Seconds, and are set using the command `[SENSe]:WLAN:UNIT:TIME`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:TIME:STOP <NRf>  
DISPlay:WLAN:EVM:TIME:STOP?
```

Arguments

Floating point number.

Examples

`DISP:WLAN:EVM:TIME:STOP 804.96e-6` sets the horizontal symbol stop value for the WLAN EVM display to 804.960 μ s (assuming the units have been set to Seconds).

DISPlay:WLAN:EVM:WINDow:SElect:PLOT

Specifies or queries which graphs are displayed in the WLAN EVM display. Select from Symbols, Subcarriers, or Both.

To set the Time units, use `[SENSe]:WLAN:UNIT:TIME`. To set the Frequency units, use `[SENSe]:WLAN:UNIT:FREQuency`. To set the Radix, use `[SENSe]:WLAN:RADix`.

NOTE: Use this command only with multicarrier standards and not singlecarrier (802.11b).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:WINDow:SElect:PLOT {SYMBols|SCARrier|BOTH}  
DISPlay:WLAN:EVM:WINDow:SElect:PLOT?
```

Arguments

`SYMBols` displays the Symbols graph.

`SCARrier` displays the Subcarriers graph.

`BOTH` displays both graphs.

Examples

`DISP:WLAN:EVM:WIND:SEL:PLOT` SCAR displays the Subcarrier graph on the WLAN EVM display.

DISPlay:WLAN:EVM:WINDow:TRACe:GRATicule:GRID:STATe

Shows or hides the graticule grid on the screen.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:EVM:WINDow:TRACe:GRATicule:GRID:STATe {0|1|OFF|ON}`
`DISPlay:WLAN:EVM:WINDow:TRACe:GRATicule:GRID:STATe?`

Arguments

`ON` or `1` specifies to show the graticule.

`OFF` or `0` specifies to turn it off.

Examples

`DISP:WLAN:EVM:WIND:TRAC:GRAT:GRID:STATE ON` specifies to turn the graticule on.

DISPlay:WLAN:EVM:Y:AUTO (No Query Form)

Automatically sets the vertical scale and position values for the WLAN EVM display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:EVM:Y:AUTO`

Arguments

None

Examples

`DISP:WLAN:EVM:Y:AUTO` automatically sets the vertical scale and position values for the WLAN EVM display.

DISPlay:WLAN:EVM:Y:OFFSet

Sets or queries the value of the offset from the center (vertical position), in percent terms, for the WLAN EVM display. To set the vertical scale, use the command `DISPlay:WLAN:EVM:Y[:SCALE]`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:Y:OFFSet <NRf>  
DISPlay:WLAN:EVM:Y:OFFSet?
```

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the EVM plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 re-centers the plot.

Returns

The value of the offset from the center of the Y axis for the Error Magnitude Vector plot as a floating point number.

Examples

DISP:WLAN:EVM:Y:OFFS 150 sets the offset from the center (vertical position) of the EVM plot to 150%.

DISPlay:WLAN:EVM:Y:RESet (No Query Form)

Resets the vertical scale and position (offset) values for the WLAN EVM display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:Y:RESet
```

Arguments

None

Examples

DISP:WLAN:EVM:Y:RES specifies to reset the vertical scale and position (offset) values for the WLAN EVM display.

DISPlay:WLAN:EVM:Y[:SCALE]

Sets or queries the vertical scale value for the WLAN EVM display. To set the vertical position (offset) value, use the command [DISPlay:WLAN:EVM:Y:OFFSet](#) (on page 1065).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:EVM:Y[:SCALE] <Nrf>  
DISPlay:WLAN:EVM:Y[:SCALE] ?
```

Arguments

Floating point number that specifies the vertical scale value for the WLAN EVM display.

Examples

DISP:WLAN:EVM:Y:SCALE 10 sets the vertical scale value for the WLAN EVM display to 10.

DISPlay:WLAN:FLATness:AUTO (No Query Form)

Automatically rescales the horizontal and vertical axes for the best display in the WLAN Spectral Flatness view.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:FLATness:AUTO
```

Arguments

None

Examples

DISP:WLAN:FLAT:AUTO automatically rescales the horizontal and vertical axes for the best display.

DISPlay:WLAN:FLATness:X:AUTO (No Query Form)

Rescales the horizontal axis automatically in the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:FLATness:X:AUTO

Arguments

None

Examples

DISP:WLAN:FLAT:X:AUTO rescales the horizontal axis automatically for the best display.

DISPlay:WLAN:FLATness:X:OFFSet

Sets or queries the value of the offset of the horizontal axis from the center of the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:FLATness:X:OFFSet <NRf>

DISPlay:WLAN:FLATness:X:OFFSet?

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 recenters the plot.

Returns

The value of the offset of the X axis from the center of the plot as a floating point number.

Examples

DISP:WLAN:FLAT:X:OFFS 150 shifts the display to the left by 150%.

DISPlay:WLAN:FLATness:X[:SCALE]

Sets or queries the horizontal scale value in the WLAN Spectral Flatness display. The units are Frequency or Subcarrier. To set the units, use [SENSe]:WLAN:UNIT:FREQuency.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:FLATness:X[:SCALE] <NRf>  
DISPlay:WLAN:FLATness:X[:SCALE] ?
```

Arguments

Floating point number that represents the horizontal scale.

Examples

DISP:WLAN:FLAT:X:SCALE 32 sets the horizontal scale value to 32.

DISPlay:WLAN:FLATness:Y:AUTO (No Query Form)

Automatically rescales the vertical axis scale and position values in the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:FLATness:Y:AUTO
```

Arguments

None

Examples

DISP:WLAN:FLAT:Y:AUTO automatically selects the vertical scale and position values.

DISPlay:WLAN:FLATness:Y:OFFSet

Sets or queries the value of the offset from the center (vertical position), in percent terms, for the WLAN Spectral Flatness display. To set the Vertical Scale, use the command [DISPlay:WLAN:FLATness:Y\[:SCALE\]](#) (on page 1070).

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:FLATness:Y:OFFSet <NRf>  
DISPlay:WLAN:FLATness:Y:OFFSet ?
```

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 re-centers the plot.

Returns

The value of the offset from the center of the Y axis for the plot as a floating point number.

Examples

`DISP:WLAN:FLAT:Y:OFFS 150` sets the offset from the center (vertical position) of the plot to 150 %.

DISPlay:WLAN:FLATness:Y[:SCALE]

Sets or queries the vertical scale value for the WLAN Spectral Flatness display. To set the vertical position (offset) value, use the command `DISPlay:WLAN:FLATness:Y:OFFSet`.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:FLATness:Y[:SCALE] <NRf>`
`DISPlay:WLAN:FLATness:Y[:SCALE] ?`

Arguments

Floating point number that specifies the vertical scale value.

Examples

`DISP:WLAN:FLAT:Y:SCALE 10` sets the vertical scale value to 10.

DISPlay:WLAN:MEASview:DElete (No Query Form)

Deletes the selected measurement view in the WLAN display.

If you attempt to delete a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MEASview:DELeTe {SUMMary|FLATness|CONStellation|EVM|MERRor|PERRor|CRESpone|STABle|PVTTime}
```

Arguments

The following table lists the arguments.

Argument	WLAN measurement view
SUMMary	Summary measurements
FLATness	Spectral Flatness measurement
CONStellation	Constellation measurement

Examples

DISP:WLAN:MEAS:DEL PERR deletes the Phase Error measurement view.

DISPlay:WLAN:MEASview:NEW (No Query Form)

Displays a new measurement view in the WLAN display.

If you attempt to open a view that is currently displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MEASview:NEW {SUMMary|FLATness|CONStellation|EVM|MERRor|PERRor|CRESpone|STABle|PVTTime}
```

Arguments

The following table lists the arguments.

Argument	WLAN measurement view
SUMMary	Summary measurements
FLATness	Spectral Flatness measurement
CONStellation	Constellation measurement

Examples

DISP:WLAN:MEASVIEW:NEW CONSTELLATION creates the Constellation measurement view.

DISPlay:WLAN:MEASview:SElect

Selects a measurement view on the screen in the WLAN measurements. The query command returns the currently selected view.

If you attempt to select a view that is not displayed on screen, the error (-200, "Execution error; Measurement is already running") will be returned.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MEASview:SElect {SUMMARY|FLATness|CONStellation|EVM|MERRor|PERRor|CRESpone|STABle|PVTime}  
DISPlay:WLAN:MEASview:SElect?
```

Arguments

The following table lists the arguments.

The following table lists the arguments.

Argument	WLAN measurement view
SUMMARY	Summary measurements
FLATness	Spectral Flatness measurement
CONStellation	Constellation measurement
EVM	Error Vector Magnitude measurement
MERRor	Magnitude Error vs. Time
PERRor	Phase Error vs. Time
CRESpone	Channel Response measurement
STABle	Symbol Table
PVTime	Power Vs. Time

Examples

DISP:WLAN:MEASVIEW:SEL CONSTELLATION selects the Constellation measurement view.

DISP:WLAN:MEASVIEW:SEL? might return FLAT, indicating that the Spectral Flatness measurement view is the currently selected view.

DISPlay:WLAN:MERRor:FREQuency:AUTO (No Query Form)

Automatically rescales the horizontal subcarrier (frequency) start and stop values to fit the waveform to the screen in the WLAN Magnitude Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:MERRor:FREQuency:AUTO

Arguments

None

Examples

DISPlay:WLAN:MERRor:FREQuency:AUTO automatically rescales the horizontal Subcarrier (frequency) values to fit the waveform to the screen.

DISPlay:WLAN:MERRor:FREQuency:RESet (No Query Form)

Automatically resets the horizontal subcarrier (frequency) start and stop values for the WLAN Magnitude Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:MERRor:FREQuency:RESet

Arguments

None

Examples

DISP:WLAN:MERR:FREQ:RES automatically resets the horizontal subcarrier start and stop values for the WLAN Magnitude Error display.

DISPlay:WLAN:MERRor:FREQuency:STARt

Specifies or queries the horizontal start value (left edge) on the WLAN Magnitude Error display. The units are either Frequency (Hz) or Subcarriers, and are set using the command [\[SENSe\]:WLAN:UNIT:FREQuency](#) (on page 2494).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:FREQuency:START <Nrf>  
DISPlay:WLAN:MERRor:FREQuency:START?
```

Arguments

Floating point number that specifies the horizontal start value (left edge) on the graph.

Returns

The returned value indicates the Subcarrier (for non-b standards only) or frequency shown at the left edge of the display.

Examples

DISP:WLAN:MERR:FREQ:START 2.41e9 sets the horizontal start value (left edge) to 2.41e9 MHz (assuming the units have been set to Frequency).

DISPlay:WLAN:MERRor:FREQuency:STOP

Specifies or queries the horizontal stop value (right edge) on the WLAN Magnitude Error display. The units are either Frequency (Hz) or Subcarriers, and are set using the command [\[SENSe\]:WLAN:UNIT:FREQuency](#) (on page 2494).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:FREQuency:STOP <Nrf>  
DISPlay:WLAN:MERRor:FREQuency:STOP?
```

Arguments

Floating point number that specifies the horizontal stop value (right edge) on the display.

Examples

DISP:WLAN:MERR:FREQ:STOP 8.1250 sets the horizontal stop value to 8.1250 MHz (assuming the units have been set to Frequency).

DISPlay:WLAN:MERRor:MARKer:SHOW:STATe

Shows or hides the marker readout on the WLAN Magnitude Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:MARKer:SHOW:STATe {0|1|OFF|ON}  
DISPlay:WLAN:MERRor:MARKer:SHOW:STATe?
```

Arguments

ON or 1 specifies to show the marker readout.

OFF or 0 specifies to turn the marker readout off.

Examples

DISP:WLAN:MERR:MARK:SHOW:STATE ON specifies to turn the marker readout on.

DISPlay:WLAN:MERRor[:SCALE]:AUTO (No Query Form)

Automatically adjusts all vertical and horizontal values to provide the best display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor[:SCALE]:AUTO
```

Arguments

None

Examples

DISP:WLAN:MERR:SCALE:AUTO automatically adjusts all vertical and horizontal values to provide the best display.

DISPlay:WLAN:MERRor:TIME:AUTO (No Query Form)

Sets the horizontal start and stop values to fit the waveform to the WLAN Magnitude Error display, and also enables Auto horizontal scaling so the waveform will remain properly scaled as burst lengths change.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:TIME:AUTO
```

Arguments

None

Examples

`DISP:WLAN:MERR:TIME:AUTO` sets the horizontal start and stop values to fit the waveform to the display, and also enables Auto horizontal scaling.

DISPlay:WLAN:MERRor:TIME:AUTO:STATe

When enabled, automatically sets the horizontal symbol scale value for the WLAN MERR display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:TIME:AUTO:STATe {0|1|OFF|ON}  
DISPlay:WLAN:MERRor:TIME:AUTO:STATe?
```

Arguments

`ON` or `1` sets the horizontal symbol scale value automatically.

`OFF` or `0` specifies to stop setting the horizontal symbol scale value automatically.

Examples

`DISP:WLAN:MERR:TIME:AUTO:STATE ON` specifies to the horizontal symbol scale value automatically.

DISPlay:WLAN:MERRor:TIME:RESet (No Query Form)

Resets the horizontal symbol start and stop values for the WLAN Magnitude Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:TIME:RESet
```

Arguments

None

Examples

`DISP:WLAN:MERR:TIME:RES` resets the horizontal symbol start and stop values for the WLAN Magnitude Error display.

DISPlay:WLAN:MERRor:TIME:START

Sets or queries the horizontal symbol start value for the WLAN Magnitude Error display. The units are either Symbols or Seconds, and are set using the command `[SENSe]:WLAN:UNIT:TIME`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:TIME:START <Nrf>  
DISPlay:WLAN:MERRor:TIME:START?
```

Arguments

Floating point number.

Examples

`DISP:WLAN:MERR:TIME:START 40` sets the horizontal symbol start value of the WLAN Magnitude Error display to 40 Symbols (assuming the units have been set to Symbols).

DISPlay:WLAN:MERRor:TIME:STOP

Sets or queries the horizontal symbol stop value for the WLAN Magnitude Error display. The units are either Symbols or Seconds, and are set using the command `[SENSe]:WLAN:UNIT:TIME`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:TIME:STOP <Nrf>  
DISPlay:WLAN:MERRor:TIME:STOP?
```

Arguments

Floating point number.

Examples

`DISP:WLAN:MERR:TIME:STOP 804.96e-6` sets the horizontal symbol stop value for the WLAN Magnitude Error display to 804.960 μ s (assuming the units have been set to Seconds).

DISPlay:WLAN:MERRor:WINDow:SElect:PLOT

Specifies or queries which graphs are displayed in the WLAN Magnitude Error display. Select from Symbols, Subcarriers, or Both.

To set the Time units, use [\[SENSe\]:WLAN:UNIT:TIME](#) (on page 2495). To set the Frequency units, use [\[SENSe\]:WLAN:UNIT:FREQuency](#) (on page 2494). To set the Radix, use [\[SENSe\]:WLAN:RADix](#) (on page 2485).

NOTE: Use this command only with multicarrier standards and not singlecarrier (802.11b).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:WINDow:SElect:PLOT{SYMBOLs|SCARrier|BOTH}  
DISPlay:WLAN:MERRor:WINDow:SElect:PLOT?
```

Arguments

SYMBOLs displays the Symbols graph.

SCARrier displays the Subcarriers graph.

BOTH displays both graphs.

Examples

DISP:WLAN:MERR:WIND:SEL:PLOT SCAR displays the Subcarrier graph on the WLAN Magnitude Error display.

DISPlay:WLAN:MERRor:WINDow:TRACe:GRATicule:GRID:STATE

Shows or hides the graticule grid on the display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:WINDow:TRACe:GRATicule:GRID:STATE {0|1|OFF|ON}  
DISPlay:WLAN:MERRor:WINDow:TRACe:GRATicule:GRID:STATE?
```

Arguments

ON or 1 specifies to show the graticule.

OFF or 0 specifies to turn it off.

Examples

DISP:WLAN:MERR:WIND:TRAC:GRAT:GRID:STATE ON specifies to turn the graticule on.

DISPlay:WLAN:MERRor:Y:AUTO (No Query Form)

Automatically sets the vertical scale and position values for the WLAN Magnitude Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:MERRor:Y:AUTO`

Arguments

None

Examples

`DISP:WLAN:MERR:Y:AUTO` automatically sets the vertical scale and position values for the WLAN Magnitude Error display.

DISPlay:WLAN:MERRor:Y:OFFSet

Sets or queries the offset from the center (vertical position), in percent terms, for the WLAN Magnitude Error display. To set the vertical scale, use the command `DISPlay:WLAN:EVM:Y[:SCALE]`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:MERRor:Y:OFFSet <NRf>`

`DISPlay:WLAN:MERRor:Y:OFFSet?`

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the Magnitude Error plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 re-centers the plot.

Returns

The offset from the center of the Y axis for the Magnitude Error plot as a floating point number.

Examples

`DISP:WLAN:MERR:Y:OFFS 150` sets the offset from the center of the vertical axis of the Magnitude Error plot to 150%.

DISPlay:WLAN:MERRor:Y:RESet (No Query Form)

Resets the vertical scale and position (offset) for the WLAN Magnitude Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:Y:RESet
```

Arguments

None

Examples

`DISP:WLAN:MERR:Y:RES` specifies to reset the vertical scale and position (offset) values for the WLAN Magnitude Error display.

DISPlay:WLAN:MERRor:Y[:SCALE]

Sets or queries the vertical scale value for the WLAN Magnitude Error display. To set the vertical position (offset) value, use the command `DISPlay:WLAN:EVM:Y:OFFSet`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:MERRor:Y[:SCALE] <NRf>  
DISPlay:WLAN:MERRor:Y[:SCALE] ?
```

Arguments

Floating point number that specifies the vertical scale value for the WLAN Magnitude Error display.

Examples

`DISP:WLAN:MERR:Y:SCALE 10` sets the vertical scale for the WLAN Magnitude Error display to 10.

DISPlay:WLAN:PERRor:FREQuency:AUTO (No Query Form)

Automatically rescales the horizontal subcarrier (frequency) start and stop values to fit the waveform to the screen in the WLAN Phase Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax


```
DISPlay:WLAN:PERRor:FREQuency:AUTO
```

Arguments

None

Examples

`DISP:WLAN:PERR:FREQ:AUTO` automatically rescales the horizontal Subcarrier (frequency) start and stop values to fit the waveform to the screen.

DISPlay:WLAN:PERRor:FREQuency:RESet (No Query Form)

Automatically resets the horizontal subcarrier (frequency) start and stop values for the WLAN Phase Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:FREQuency:RESet
```

Arguments

None

Examples

`DISP:WLAN:PERR:FREQ:RES` automatically resets the horizontal Subcarrier start and stop values for the WLAN Phase Error display.

DISPlay:WLAN:PERRor:FREQuency:STARt

Specifies or queries the horizontal start value (left edge) on the WLAN Phase Error display. The units are either Frequency (Hz) or Subcarriers, and are set using the command `[SENSe]:WLAN:UNIT:FREQuency`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:FREQuency:STARt <NRf>  
DISPlay:WLAN:PERRor:FREQuency:STARt?
```

Arguments

Floating point number that specifies the horizontal start value (left edge) on the display.

Returns

The readout indicates the Subcarrier (for non-b standards only) or frequency shown at the left edge of the display.

Examples

`DISP:WLAN:PERR:FREQ:START -8.1250` sets the horizontal start value to -8.1250 MHz (assuming the units have been set to Frequency).

DISPlay:WLAN:PERRor:FREQuency:STOP

Specifies or queries the horizontal stop value (right edge) on the WLAN Phase Error display. The units are either Frequency (Hz) or Subcarriers, and are set using the command `[SENSe]:WLAN:UNIT:FREQuency`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:PERRor:FREQuency:STOP <NRf>`
`DISPlay:WLAN:PERRor:FREQuency:STOP?`

Arguments

Floating point number that specifies the horizontal stop value (right edge) on the display.

Examples

`DISP:WLAN:PERR:FREQ:STOP 8.1250` sets the horizontal stop value to 8.1250 MHz (assuming the units have been set to Frequency).

DISPlay:WLAN:PERRor:MARKer:SHOW:STATe

Show or hides the Marker readout on the WLAN Phase Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:PERRor:MARKer:SHOW:STATe {0|1|OFF|ON}`
`DISPlay:WLAN:PERRor:MARKer:SHOW:STATe?`

Arguments

`ON` or `1` specifies to show the Marker readout.

`OFF` or `0` specifies to turn the Marker readout off.

Examples

`DISP:WLAN:PERR:MARK:SHOW:STATE ON` specifies to turn the Marker readout on.

DISPlay:WLAN:PERRor[:SCALe]:AUTO (No Query Form)

Automatically adjusts all vertical and horizontal settings to provide the best display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor[:SCALe]:AUTO
```

Arguments

None

Examples

DISP:WLAN:PERRor:SCALE:AUTO automatically adjusts all vertical and horizontal settings to provide the best display.

DISPlay:WLAN:PERRor:TIME:AUTO (No Query Form)

Automatically sets the horizontal symbol start and stop values to fit the waveform to the screen for the WLAN Phase Error vs. Symbol plot. In addition, sets the state for this feature to ON.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:TIME:AUTO
```

Arguments

None

Examples

DISP:WLAN:PERR:TIME:AUTO sets the instrument to automatically select the horizontal symbol start and stop values to fit the waveform to the screen, and turns the AUTO feature on.

DISPlay:WLAN:PERRor:TIME:AUTO:STATe

When enabled, automatically sets the horizontal symbol scale value for the WLAN Phase Error display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:TIME:AUTO:STATE {0|1|OFF|ON}  
DISPlay:WLAN:PERRor:TIME:AUTO:STATE?
```

Arguments

ON or 1 specifies to set the Analysis Time value automatically.

OFF or 0 specifies to turn stop setting the Analysis Time value automatically.

Examples

DISP:WLAN:PERR:TIME:AUTO:STATE ON specifies to set the Analysis Time value automatically, based on the requirements of the selected display

DISPlay:WLAN:PERRor:TIME:RESet (No Query Form)

Resets the horizontal symbol start and stop values for the WLAN Phase Error Average vs. Symbol display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:TIME:RESet
```

Arguments

None

Examples

DISP:WLAN:PERR:TIME:RES resets the horizontal symbol start and stop values for the WLAN Phase Error Average vs. Symbol display.

DISPlay:WLAN:PERRor:TIME:START

Sets or queries the horizontal symbol start value for the WLAN Phase Error Average vs. Symbol display. The units are either Symbols or Seconds, and are set using the command [SENSe]:WLAN:UNIT:TIME.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:TIME:START <NRf>
```

DISPlay:WLAN:PERRor:TIME:START?

Arguments

Floating point number.

Examples

DISP:WLAN:PERR:TIME:START 40 sets the horizontal symbol start value of the Average vs. Symbol display to 40 Symbols (assuming the units have been set to Symbols).

DISPlay:WLAN:PERRor:TIME:STOP

Sets or queries the horizontal symbol stop value for the WLAN Phase Error Average vs. Symbol display. The units are either Symbols or Seconds, and are set using the command [SENSe]:WLAN:UNIT:TIME.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:PERRor:TIME:STOP <Nrf>
DISPlay:WLAN:PERRor:TIME:STOP?

Arguments

Floating point number.

Examples

DISP:WLAN:PERR:TIME:STOP 804.960 sets the horizontal symbol stop value for the Average vs. Symbol display to 804.960 μ s (assuming the units have been set to Seconds).

DISPlay:WLAN:PERRor:WINDow:SElect:PLOT

Specifies or queries which displays are displayed in the WLAN Phase Error analysis display (Symbols, Subcarriers, or Both).

To set the Time units, use [SENSe]:WLAN:UNIT:TIME (on page 2495). To set the Frequency units, use [SENSe]:WLAN:UNIT:FREQUENCY (on page 2494). To set the Radix, use [SENSe]:WLAN:RADix (on page 2485).

NOTE: Use this command only with multicarrier standards and not singlecarrier (802.11b).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:PERRor:WINDow:SElect:PLOT {SYMBOLs|SCARrier|BOTH}
DISPlay:WLAN:PERRor:WINDow:SElect:PLOT?

Arguments

SYMBOLs displays the Symbols graph.

SCARrier displays the Subcarriers graph.

BOTH displays both graphs.

Examples

DISP:WLAN:PERR:WIND:SEL:PLOT SCAR displays the Subcarrier graph on the WLAN Phase Error analysis display.

DISPlay:WLAN:PERRor:WINDow:TRACe:GRATicule:GRID:STATe

Shows or hides the graticule grid on the screen.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:PERRor:WINDow:TRACe:GRATicule:GRID:STATe {0|1|OFF|ON}

DISPlay:WLAN:PERRor:WINDow:TRACe:GRATicule:GRID:STATe?

Arguments

ON or **1** specifies to show the graticule.

OFF or **0** specifies to turn it off.

Examples

DISP:WLAN:PERR:WIND:TRAC:GRAT:GRID:STATE ON specifies to turn the graticule on.

DISPlay:WLAN:PERRor:Y:AUTO (No Query Form)

Automatically selects the vertical scale and position values for the WLAN Phase Error Symbol and Subcarrier plots.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:PERRor:Y:AUTO

Arguments

None

Examples

`DISP:WLAN:PERR:Y:AUTO` automatically selects the vertical scale and position values for the WLAN Phase Error Symbol and Subcarrier plots.

DISPlay:WLAN:PERRor:Y:OFFSet

Sets or queries the value of the offset from the center (vertical position), in percent terms, for the WLAN Phase Error Symbol and Subcarrier plots. To set the Vertical Scale, use the command `DISPlay:WLAN:PERRor:Y[:SCALE]`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:Y:OFFSet <NRf>  
DISPlay:WLAN:PERRor:Y:OFFSet?
```

Arguments

Floating point number between limits which are set as a function of the current scale value guaranteed to keep the plot at least partially visible on the display. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up. 0 re-centers the plot.

Returns

The value of the offset from the center of the Y axis for the Phase Error plot as a floating point number.

Examples

`DISP:WLAN:PERR:Y:OFFS 150` sets the offset from the center (vertical position) of the Phase Error plot to 150%.

DISPlay:WLAN:PERRor:Y:RESet (No Query Form)

Resets the vertical scale and position (offset) values for the WLAN Phase Error Symbol and Subcarrier plots.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:Y:RESet
```

Arguments

None

Examples

`DISP:WLAN:PERR:Y:RES` specifies to reset the vertical scale and position (offset) values for the WLAN Phase Error plot.

DISPlay:WLAN:PERRor:Y[:SCALe]

Sets or queries the vertical scale value for the WLAN Phase Error plots. To set the vertical position (offset) value, use the command `DISPlay:WLAN:PERRor:Y:OFFSet`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PERRor:Y[:SCALe] <NRf>  
DISPlay:WLAN:PERRor:Y[:SCALe]?
```

Arguments

Floating point number that specifies the vertical scale value.

Examples

`DISP:WLAN:PERR:Y:SCALE 10` sets the vertical scale value to 10.

DISPlay:WLAN:PVTime:BURSt:X[:SCALe]

Sets or queries the value of the scale (width), in seconds, for the WLAN Power vs. Time display when using horizontal Full Burst view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:BURSt:X[:SCALe] <NRf>  
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]?
```

Arguments

Floating point number that represents the value of the scale (width), in seconds, when using horizontal Full Burst view.

Examples

`DISP:WLAN:PVT:BURS:X:SCALE 5.0E-6` sets the width of the display to 5.000 μ S for the horizontal Full Burst view.

DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:AUTO (No Query Form)

Automatically sets the starting time (position) and scale (width) values for the best display in the horizontal Full Burst view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:AUTO
```

Arguments

None

Examples

`DISP:WLAN:PVT:BURS:X:SCALE:AUTO` automatically sets the starting time (position) and scale (width) values for the best display.

DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:OFFSet

Sets or queries the starting time (position) value, in seconds, for the WLAN Power vs. Time display when using the horizontal Full Burst view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:OFFSet <NRf>  
DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:OFFSet?
```

Arguments

Floating point number that represents the starting time (position) value, in seconds, when using horizontal Full Burst view.

Examples

`DISP:WLAN:PVT:BURS:X:OFFFSET 5.0E-6` sets the starting time (position) of the graph to 5.000 μ S for horizontal Full Burst view.

DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:RESet (No Query Form)

Resets the starting time (position) and scale (width) values for the horizontal Full Burst view on the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:PVTime:BURSt:X[:SCALe]:RESet

Arguments

None

Examples

DISP:WLAN:PVT:BURST:X:SCALE:RESET resets the starting time (position) and scale (width) values for the horizontal Full Burst view.

DISPlay:WLAN:PVTime:FALL:X[:SCALe]

Sets or queries the scale (width) value, in seconds, for the WLAN Power vs. Time display when using the horizontal Falling Edge view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:PVTime:FALL:X[:SCALe] <NRf>
DISPlay:WLAN:PVTime:FALL:X[:SCALe] ?

Arguments

Floating point number that represents the scale (width), in seconds, when using the horizontal Falling Edge view.

Examples

DISP:WLAN:PVT:FALL:X:SCALE 5.0E-6 sets the width of the graph to 5.000 μ S when using the horizontal Falling Edge view.

DISPlay:WLAN:PVTime:FALL:X[:SCALe]:AUTO (No Query Form)

Automatically sets the starting time (position) and scale (width) values for the best display in the horizontal Falling Edge view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

DISPlay:WLAN:PVTime:FALL:X[:SCALe]:AUTO

Arguments

None

Examples

`DISP:WLAN:PVT:FALL:X:SCALE:AUTO` automatically sets the starting time (position) and scale (width) values for the best display.

DISPlay:WLAN:PVTime:FALL:X[:SCALE]:OFFSet

Sets or queries the value for the starting time (offset) of the graph, in seconds, for the WLAN Power vs. Time display when using the horizontal Falling Edge view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:PVTime:FALL:X[:SCALE]:OFFSet <NRf>`
`DISPlay:WLAN:PVTime:FALL:X[:SCALE]:OFFSet?`

Arguments

Floating point number that represents the value of the starting time (offset) of the graph, in seconds, when using the horizontal Falling Edge view.

Examples

`DISP:WLAN:PVT:FALL:X:SCALE 5.0` sets the starting time (position) of the graph to 5.000 μ S when using the horizontal Falling Edge view.

DISPlay:WLAN:PVTime:FALL:X[:SCALE]:RESet (No Query Form)

Resets the starting time (position) and scale (width) values for the horizontal Falling Edge view on the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:PVTime:FALL:X[:SCALE]:RESet`

Arguments

None

Examples

`DISP:WLAN:PVT:FALL:X:SCALE:RESET` resets the starting time (position) and scale (width) values for the horizontal Falling Edge view.

DISPlay:WLAN:PVTime:MARKer:SHOW:STATe

Shows or hides the marker readout on the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:MARKer:SHOW:STATe {0|1|OFF|ON}
```

```
DISPlay:WLAN:PVTime:MARKer:SHOW:STATe?
```

Arguments

ON or 1 specifies to show the marker readout.

OFF or 0 specifies to turn the marker readout off.

Examples

DISP:WLAN:PVT:MARK:SHOW:STATE ON specifies to turn the marker readout on.

DISPlay:WLAN:PVTime:RISE:X[:SCALE]

Sets or queries the scale (width) value, in seconds, for the WLAN Power vs. Time display when using the horizontal Rising Edge view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:RISE:X[:SCALE] <NRf>
```

```
DISPlay:WLAN:PVTime:RISE:X[:SCALE]?
```

Arguments

Floating point number that represents the scale (width) value, in seconds, for the horizontal Rising Edge view.

Examples

DISP:WLAN:PVT:RISE:X:SCALE 5.0E-6 sets the width of the graph to 5.000µS for the horizontal Rising Edge view.

DISPlay:WLAN:PVTime:RISE:X[:SCALE]:AUTO (No Query Form)

Automatically sets the starting time (position) and scale (width) values for the best display in the horizontal Rising Edge view of the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:AUTO
```

Arguments

None

Examples

DISP:WLAN:PVT:RISE:X:SCALE:AUTO automatically sets the starting time (position) and scale (width) values for the best display.

DISPlay:WLAN:PVTime:RISE:X[:SCALe]:OFFSet

Sets or queries the starting time value (offset), in seconds, for the WLAN Power vs. Time display when using the horizontal Rising Edge view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:OFFSet <NRf>  
DISPlay:WLAN:PVTime:RISE:X[:SCALe]:OFFSet?
```

Arguments

Floating point number that represents the value of the starting time (offset) of the graph, in seconds, for the horizontal Rising Edge view.

Examples

DISP:WLAN:PVT:RISE:X:OFFSET 5.0e-6 sets the starting time (position) of the graph to 5.000 μ S for the horizontal Rising Edge view.

DISPlay:WLAN:PVTime:RISE:X[:SCALe]:RESet (No Query Form)

Resets the starting time (position) and scale (width) values for the horizontal Rising Edge view on the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:PVTime:RISE:X[:SCALe]:RESet`

Arguments

None

Examples

`DISP:WLAN:PVT:RISE:X:SCALE:RESET` resets the starting time (position) and scale (width) values for the horizontal Rising Edge view.

DISPlay:WLAN:PVTime:WINDow:SElect:PLOT

Specifies or queries which view to use for the WLAN Power vs. Time display. Select from Full Burst, Rising Edge or Falling Edge.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

`DISPlay:WLAN:PVTime:WINDow:SElect:PLOT {BURSt|RISE|FALL}`
`DISPlay:WLAN:PVTime:WINDow:SElect:PLOT?`

Arguments

`BURSt` sets the view to Full Burst, which displays the entire packet, with vertical lines indicating the length of the burst.

`RISE` sets the view to Rising Edge, which zooms the display into the interval around the burst rising edge, with vertical lines indicating the 10% to 90% Power-On Ramp time.

`FALL` sets the view to Falling Edge, which zooms the display into the interval around the burst Falling Edge, with vertical lines indicating the 90% to 10% Power-Down Ramp time.

Returns

`DISP:WLAN:PVT:WIND:SEL:PLOT BURS` sets the view to Full Burst.

`DISP:WLAN:PVT:WIND:SEL:PLOT?` might return `RISE`, indicating that the view has been set to Rising Edge.

DISPlay:WLAN:PVTime:WINDow:TRACe:GRATicule:GRID:STATe

Shows or hides the graticule grid on the screen.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:WINDow:TRACe:GRATicule:GRID:STATe {0|1|OFF|ON}  
DISPlay:WLAN:PVTime:WINDow:TRACe:GRATicule:GRID:STATe?
```

Arguments

ON or 1 specifies to show the graticule.

OFF or 0 specifies to turn it off.

Examples

DISP:WLAN:PVT:WIND:TRAC:GRAT:GRID:STATE ON specifies to turn the graticule on.

DISPlay:WLAN:PVTime:Y[:SCALE]

Sets or queries the vertical scale value for the WLAN Power vs. Time display.

To set the vertical position (offset) value, use the command [DISPlay:WLAN:PVTime:Y\[:SCALE\]:OFFSet](#) (on page 1096).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:Y[:SCALE] <NRf>  
DISPlay:WLAN:PVTime:Y[:SCALE]?
```

Arguments

Floating point number that specifies the vertical scale value for the WLAN Power vs. Time display.

Examples

DISP:WLAN:PVT:Y:SCALE 10 sets the vertical scale value to 10 dB.

DISPlay:WLAN:PVTime:Y[:SCALE]:AUTO (No Query Form)

Automatically selects the vertical scale and position values for the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:Y[:SCALE]:AUTO
```

Arguments

None

Examples

`DISP:WLAN:PVT:Y:AUTO` automatically selects the vertical scale and position values for the display.

DISPlay:WLAN:PVTime:Y[:SCALE]:OFFSet

Sets or queries the value of the vertical offset (top edge of the vertical axis) for the WLAN Power vs. Time display. To set the vertical scale, use the command `DISPlay:WLAN:PVTime:Y[:SCALE]`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:Y[:SCALE]:OFFSet <NRf>  
DISPlay:WLAN:PVTime:Y[:SCALE]:OFFSet?
```

Arguments

Floating point number between limits which specifies the value of the vertical offset. Positive inputs push the plot down (as viewed by the user) and negative inputs push the plot up.

Returns

The value of the vertical offset for the WLAN Power vs. Time display as a floating point number.

Examples

`DISP:WLAN:PVT:Y:OFFS -10` sets the vertical offset to -10 dBm.

DISPlay:WLAN:PVTime:Y[:SCALE]:PDIVision

Sets or queries the value of the vertical scale for the WLAN Power vs. Time display, in dB/division. This is only a visual control for panning the graph.

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:Y[:SCALE]:PDIVision <NRf>  
DISPlay:WLAN:PVTime:Y[:SCALE]:PDIVision?
```

Arguments

Floating point value that represents the value of the vertical scale, in dB/division, for the WLAN Power vs. Time display.

Examples

`DISP:WLAN:PVT:Y:SCALE:PDIV 20` sets the vertical scale to 20.0 dB/division.

DISPlay:WLAN:PVTime:Y[:SCALE]:RESet (No Query Form)

Resets the vertical scale and position (offset) values for the WLAN Power vs. Time display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:PVTime:Y[:SCALE]:RESet
```

Arguments

None

Examples

DISP:WLAN:PVT:Y:RES specifies to reset the vertical scale and position (offset) values for the WLAN Power vs. Time display.

DISPlay:WLAN:SUMMARY:EVMUnits

Sets or queries the EVM Units setting in the WLAN Summary display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Display commands

Syntax

```
DISPlay:WLAN:SUMMARY:EVMUnits {PERCent | DB}  
DISPlay:WLAN:SUMMARY:EVMUnits?
```

Arguments

PERCent. Units in the WLAN Summary display are shown as percentages.

DB. Units in the WLAN Summary display are shown in decibels (dB).

*ESE

Sets or queries the bits in the Event Status Enable Register (ESER). The ESER prevents events from being reported to the Status Byte Register (STB). Refer to [Status and Events](#) (on page 2746) for the register information.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

```
*ESE <value>  
*ESE?
```

Related Commands

[*CLS](#) (on page 705)

[*ESR?](#) (on page 1098)

[*SRE](#) (on page 2496)

[*STB?](#) (on page 2496)

Arguments

<value>::<NR1> is a value in the range from 0 through 255.

The binary bits of the ESER are set according to this value.

Examples

*ESE 145 sets the ESER to binary 10010001, which enables the PON, EXE, and OPC bits.

*ESE? might return the string *ESE 184, showing that the ESER contains the binary value 10111000.

*ESR? (Query Only)

Returns the contents of the Standard Event Status Register (SESR). *ESR? also clears the SESR (since reading the SESR clears it). Refer to [Status and Events](#) (on page 2746) for the register information.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*ESR?

Related Commands

[*CLS](#) (on page 705)

[*ESE](#) (on page 1097)

[*SRE](#) (on page 2496)

[*STB?](#) (on page 2496)

Arguments

None

Returns

<NR1> representing the contents of the SESR by a 0 to 255 decimal number.

Examples

*ESR? might return the value 213, showing that the SESR contains binary 11010101.

Fetch commands

FETCh:ACPower? (Query Only)

Returns the Channel power and ACPR measurement results for all available channels.

Conditions

Measurement views: Channel power and ACPR

Group

Fetch commands

Syntax

FETCh:ACPower?

Arguments

None

Returns

```
<chan_power>,<acpr_lower(1)>,<acpr_upper(1)>,  
<acpr_lower(2)>,<acpr_upper(2)>,...  
<acpr_lower(n)>,<acpr_upper(n)>
```

Where

<chan_power> is the average power of the main channel as the power reference in dBm. The unit can be changed by the [SENSe]:POWer:UNITs command.

<acpr_lower(n)> is the ACPR for the lower channel #n in dB.

<acpr_upper(n)> is the ACPR for the upper channel #n in dB.

The number of n depends on the setting of the [SENSe]:ACPower:CHANnel:PAIRs command.

Examples

FETCh:ACPOWER? might return 4.227,-28.420,-23.847,-22.316,-29.225, indicating (average power of the main channel) = 4.227 dBm, (ACPR for the lower channel 1) = -28.420 dB, (ACPR for the upper channel 1) = -23.847 dB, (ACPR for the lower channel 2) = -22.316 dB, and (ACPR for the upper channel 2) = -29.225 dB.

FETCh:ACPower:CHANnel:POWer? (Query Only)

Returns the average power of the main channel (power reference) in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Fetch commands

Syntax

FETCh:ACPower:CHANnel:POWer?

Arguments

None

Returns

`<chan_power>::<Nrf>` is the average power of the main channel in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCh:ACPOWER:CHANNEL:POWER?` might return 4.227, indicating that the average power of the main channel is 4.227 dBm.

FETCh:ACPower:SPECTrum? (Query Only)

Returns spectrum trace data of the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Fetch commands

Syntax

`FETCh:ACPower:SPECTrum?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the amplitude in dBm at the nth data point,

4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCh:ACPOWER:SPECTRUM?` might return `#43204xxxx... (3204-byte data)` for the spectrum trace data of the Channel power and ACPR measurement.

FETCh:{AM|FM|PM}? (Query Only)

Returns the trace data in the AM/FM/PM measurement.

Conditions

Measurement views: AM, FM, and PM

Group

Fetch commands

Syntax

`FETCh: {AM|FM|PM}?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the modulation factor in percent (AM), frequency deviation in Hz (FM), or phase deviation in degrees (PM) at the *n*th data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:AM?` might return `#3156xxxx...` (156-byte data) for the AM measurement trace.

FETCh:AM:AMINdex? (Query Only)

Returns the modulation depth which is the (positive peak modulation factor - negative peak modulation factor)/2 returned as a percentage (%).

Conditions

Measurement views: AM

Group

Fetch commands

Syntax

`FETCh:AM:AMINdex?`

Arguments

None

Returns

`<value>: : <NRf>` the modulation index.

Examples

`FETCh:AM:AMINDEX?` might return `77.1854035556E-3`, indicating the modulation index is 0.0772% or 77.2 m%.

FETCh:AM:AMNegative? (Query Only)

Returns the negative peak modulation factor (–AM) in the AM measurement.

Conditions

Measurement views: AM

Group

Fetch commands

Syntax

`FETCh:AM:AMNegative?`

Arguments

None

Returns

`<-AM>: : <NRf>` is the negative peak modulation factor in percent (%).

Examples

`FETCh:AM:AMNEGATIVE?` might return `-23.4`, indicating the negative peak modulation factor is `-23.4%`.

FETCh:AM:AMPositive? (Query Only)

Returns the positive peak modulation factor (+AM) in the AM measurement.

Conditions

Measurement views: AM

Group

Fetch commands

Syntax

`FETCh:AM:AMPositive?`

Arguments

None

Returns

`<+AM>: : <NRf>` is the positive peak modulation factor in percent (%).

Examples

`FETCh:AM:AMPOSITIVE?` might return `43.8`, indicating the positive peak modulation factor is `43.8%`.

FETCh:AM:RESult? (Query Only)

Returns the AM measurement results.

Conditions

Measurement views: AM

Group

Fetch commands

Syntax

`FETCh:AM:RESult?`

Arguments

None

Returns

<+AM>, <-AM>, <Total AM>

Where

<+AM>::<NRf> is the positive peak modulation factor in percent (%).

<-AM>::<NRf> is the negative peak modulation factor in percent (%).

<Total AM>::<NRf> is the (peak to peak modulation factor)/2 in percent (%).

Examples

FETCH:AM:RESULT? might return 62.63, -50.89, 56.76.

FETCh:AUDio:FERRor? (Query Only)

Returns the carrier frequency error in the audio measurement. This command is only available for FM and PM measurements.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

FETCh:AUDio:FERRor?

Arguments

None

Returns

<value> ::= <NRf> the carrier frequency error.

Examples

FETCH:AUDIO:FERROR? might return 419.9529809622 indicating that the audio frequency error is approximately 420 Hz.

FETCh:AUDio:FREQuency? (Query Only)

Returns the audio frequency.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

FETCh:AUDio:FREQuency?

Arguments

None

Returns

<value> ::= <NRf> the audio frequency.

Examples

FETCh:AUDio:FREQUENCY? might return 5.8239462705E+3 indicating that the audio frequency is 5.824 kHz.

FETCh:AUDio:HARMonic:COUNT? (Query Only)

Returns the number of harmonics in the audio spectrum measurement.

The number of harmonics appear in the results table in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Fetch commands

Syntax

FETCh:AUDio:HARMonic:COUNT?

Related Commands

[FETCh:AUDio:NHARmonic:COUNT?](#) (on page 1108)

Arguments

None

Returns

<count> ::= <NR1> the number of harmonics in the measurement view.

Examples

FETCh:AUDio:HARMONIC:COUNT? might return 3 indicating that there are three harmonics in the measurement.

FETCh:AUDio:HARMonic<x>:AMPLitude? (Query Only)

Returns the amplitude of the specified harmonic in the audio spectrum measurement.

The value <x> represents the specific harmonic, from 1 to the value specified by the CALCulate:AUDio:HARMonic:HNUMber command.

Conditions

Measurement views: Audio Spectrum

Group

Fetch commands

Syntax

FETCh:AUDio:HARMonic<x>:AMPLitude?

Related Commands

[CALCulate:AUDio:HARMonic:HNUMber](#) (on page 394)

Arguments

None

Returns

<value> ::= <NRf> the amplitude of the specified harmonic in dBc.

Examples

FETCh:AUDio:HARMonic3:AMPLitude? might return -2.861 indicating that amplitude of the third harmonic is -2.86 dBc.

FETCh:AUDio:HARMonic<x>:FREQuency? (Query Only)

Returns the frequency of the specified harmonic in the audio spectrum measurement.

The value <x> represents the specific harmonic, from 1 to the value specified by the [CALCulate:AUDio:HARMonic:HNUMber](#) command.

Conditions

Measurement views: Audio Spectrum

Group

Fetch commands

Syntax

FETCh:AUDio:HARMonic<x>:FREQuency?

Related Commands

[CALCulate:AUDio:HARMonic:HNUMber](#) (on page 394)

Arguments

None

Returns

<value> ::= <NRF> the frequency of the specified harmonic.

Examples

FETCh:AUDio:HARMonic3:FREQuency? might return 17.4718007813E+3, indicating that the frequency of the third harmonic is 17.472 kHz.

FETCh:AUDio:HNOise? (Query Only)

Returns the difference between the current RMS modulation value and the reference value.

This information is only available when the Hum & Noise is measurement is enabled; see the [\[SENSe\]:AUDio:HNOise:ENABle](#) command. The reference value is stored after capturing the reference by pressing the Capture Reference button or by enabling the [\[SENSe\]:AUDio:HNOise:REFerence](#) command.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:HNOise?`

Related Commands

[\[SENSe\]:AUDio:HNOise:ENABle](#) (on page 2010)

[\[SENSe\]:AUDio:HNOise:REFerence](#) (on page 2010)

Arguments

None

Returns

`<value> ::= <NRF>` specifies the difference between the Hum & Noise reference and the actual signal in dB.

Examples

`FETCh:AUDio:HNOISE?` might return `0.00 dB`, indicating that there is no difference between the Hum & Noise reference and the actual signal.

FETCh:AUDio:HNREFerence? (Query Only)

Returns the Hum and Noise RMS modulation reference value.

The value is stored after capturing the reference by pressing the Capture Reference button or by enabling the `[SENSe]:AUDio:HNOise:REFerence` command. This information is only available when the Hum & Noise measurement is enabled; see the `[SENSe]:AUDio:HNOise:ENABle` command.

For AM signal types, the reference represents modulation depth. For FM signal types, the reference represents frequency deviation. For PM signal types the reference represents phase. For Direct signal types the reference represents power.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:HNREFerence?`

Related Commands

[\[SENSe\]:AUDio:HNOise:ENABle](#) (on page 2010)

[\[SENSe\]:AUDio:HNOise:REFerence](#) (on page 2010)

Arguments

None

Returns

<value> ::= <NRf> the Hum & Noise reference frequency.

Examples

`FETCH:AUDIO:HNREFERENCE?` might return `20.581121E+3` indicating that the Hum & Noise reference frequency is 20.58 kHz.

FETCh:AUDio:HPTPeak? (Query Only)

Returns the half peak-to-peak modulation excursion (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:HPTPeak?`

Arguments

None

Returns

<value> ::= <NRF> specifies the half peak modulation excursion.

Examples

`FETCH:AUDIO:HPTPEAK?` might return `125.28231E+3`, indicating that the half peak modulation excursion is 125.28 kHz.

FETCh:AUDio:MODDist? (Query Only)

Returns the modulation distortion for the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:MODDist?`

Arguments

None

Returns

<value> ::= <NRf> specifies the modulation distortion.

Examples

`FETCH:AUDIO:MODDIST?` might return 98.6282113 indicating that the modulation distortion is 98.628%.

FETCh:AUDio:NHARmonic:COUNT? (Query Only)

Returns the number of non-harmonics in the audio spectrum measurement.

The number of non-harmonics appear in the results table in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Fetch commands

Syntax

`FETCh:AUDio:NHARmonic:COUNT?`

Related Commands

[FETCh:AUDio:HARMonic:COUNT?](#) (on page 1104)

Arguments

None

Returns

`<count> ::= <NR1>` the number of non-harmonics in the measurement view.

Examples

`FETCH:AUDIO:NHARMONIC:COUNT?` might return 7, indicating that there are seven harmonics in the measurement.

FETCh:AUDio:NHARmonic<x>:AMPLitude? (Query Only)

Returns the amplitude of the specified non-harmonic in the audio spectrum measurement.

The value `<x>` represents the specific non-harmonic, from 1 to the value specified by the `CALCulate:AUDio:HARMonic:NHNumber` command.

Conditions

Measurement views: Audio Spectrum

Group

Fetch commands

Syntax

`FETCh:AUDio:NHARmonic<x>:AMPLitude?`

Related Commands

[CALCulate:AUDio:HARMonic:NHNumber](#) (on page 394)

Arguments

None

Returns

<value> ::= <NRF> the amplitude of the specified non-harmonic in dBc.

Examples

`FETCh:AUDio:NHARmonic3:AMPLitude?` might return `-2.861`, indicating that amplitude of the third non-harmonic is `-2.86 dBc`.

FETCh:AUDio:NHARmonic<x>:FREQuency? (Query Only)

Returns the frequency of the specified non-harmonic in the audio spectrum measurement.

The value <x> represents the specific non-harmonic, from 1 to the value specified by the `CALCulate:AUDio:HARmonic:NHNumber` command.

Conditions

Measurement views: Audio Spectrum

Group

Fetch commands

Syntax

`FETCh:AUDio:NHARmonic<x>:FREQuency?`

Related Commands

[CALCulate:AUDio:HARmonic:NHNumber](#) (on page 394)

Arguments

None

Returns

<value> ::= <NRF> the frequency of the specified non-harmonic.

Examples

`FETCh:AUDio:NHARmonic3:FREQuency?` might return `17.4718007813E+3`, indicating that the frequency of the third non-harmonic is `17.472 kHz`.

FETCh:AUDio:PNEGative? (Query Only)

Returns the minus peak modulation excursion (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:PNEGative?`

Arguments

None

Returns

<value> ::= <NRf> specifies the minus peak modulation excursion.

Examples

`FETCh:AUDio:PNEGATIVE?` might return `-196.04321E+3`, indicating that the minus peak modulation excursion is -196.04 kHz.

FETCh:AUDio:POWer? (Query Only)

Returns the carrier power or signal power depending the signal type.

If the signal type is Direct, the returned value is the average power of the input signal. If the signal type is AM, FM, or PM, the returned value is the carrier power; the average power of the carrier signal with the modulation removed.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:POWer?`

Arguments

None

Returns

<value> ::= <NRf> specifies the carrier or signal power in dBm.

Examples

`FETCh:AUDio:POWER?` might return `-22.231123`, indicating that the carrier power is -22.23 dBm.

FETCh:AUDio:PPOSitive? (Query Only)

Returns the positive peak modulation excursion (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:PPOSitive?`

Arguments

None

Returns

<value> ::= <NRf> specifies the positive peak modulation excursion.

Examples

`FETCh:AUDio:PPOSITIVE?` might return `215.04321E+3`, indicating that the positive peak modulation excursion is -215.04 kHz.

FETCh:AUDio:RMS? (Query Only)

Returns the RMS modulation excursion for the audio measurement (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:RMS?`

Arguments

None

Returns

<value> ::= <NRf> specifies the RMS modulation excursion.

Examples

`FETCh:AUDio:RMS?` might return `20.575039E+3`, indicating that RMS modulation excursion is 20.575 kHz.

FETCh:AUDio:SINad? (Query Only)

Returns the signal-to-noise and distortion for the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:SINad?`

Arguments

None

Returns

`<value> ::= <NRf>` specifies the RMS modulation excursion.

Examples

`FETCh:AUDIO:SINAD?` might return `176.229024E-3`, indicating that the signal-to-noise and distortion for the audio measurement is 0.18 dB.

FETCh:AUDio:SNOise? (Query Only)

Returns the signal level to noise level with the harmonic distortion and non-harmonic distortion components removed.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

`FETCh:AUDio:SNOise?`

Arguments

None

Returns

`<value> ::= <NRf>` specifies the signal level to noise level.

Examples

`FETCh:AUDIO:SNOISE?` might return `-12.8156364`, indicating the signal level to noise level is -12.82 dB.

FETCh:AUDio:SPECTrum:TRACe<x>? (Query Only)

Returns the audio spectrum trace data for the audio measurement.

The `<x>` represents trace 1 for this measurement. No other traces are supported.

Conditions

Measurement views: Audio Spectrum

Group

Fetch commands

Syntax

`FETCh:AUDio:SPECTrum:TRACe<x>?`

Arguments

None

Returns

#<num_digit><num_byte><date(1)><data(2)> . . . <data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating point format specified in IEEE.488.2.

Examples

FETCh:AUDio:SPECTrum:TRACe1? might return #516004xxxx . . . (16004 byte data) for the audio measurement.

FETCh:AUDio:THDist? (Query Only)

Returns the percentage of the total harmonic distortion in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

FETCh:AUDio:THDist?

Related Commands

[FETCh:AUDio:THDist:DB?](#) (on page 1113)

Arguments

None

Returns

<value> ::= <Nrf> specifies the percentage of the total harmonic distortion.

Examples

FETCh:AUDio:THDIST? might return 53.332921, indicating the percentage of total harmonic distortion is 53.333%.

FETCh:AUDio:THDist:DB? (Query Only)

Returns the total harmonic distortion in dB in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

FETCh:AUDio:THDist:DB?

Related Commands

[FETCh:AUDio:THDist?](#) (on page 1113)

Arguments

None

Returns

<value> ::= <NRf> specifies the total harmonic distortion in dB.

Examples

FETCh:AUDio:THDIST:DB? might return -5.46009, indicating that the total harmonic distortion is -5.46 dB.

FETCh:AUDio:TNHDist? (Query Only)

Returns the percentage of the total non-harmonic distortion in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

FETCh:AUDio:TNHDist?

Related Commands

[FETCh:AUDio:TNHDist:DB?](#) (on page 1114)

Arguments

None

Returns

<value> ::= <NRf> specifies the percentage of the total non-harmonic distortion.

Examples

FETCh:AUDio:TNHDIST? might return 297.332921, indicating the percentage of total non-harmonic distortion is 297.333%.

FETCh:AUDio:TNHDist:DB? (Query Only)

Returns the total non-harmonic distortion in dB in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Fetch commands

Syntax

FETCh:AUDio:TNHDist:DB?

Related Commands

[FETCh:AUDio:TNHDist?](#) (on page 1114)

Arguments

None

Returns

`<value> ::= <NRf>` specifies the total non-harmonic distortion in dB.

Examples

`FETCh:AUDIO:TNHDIST:DB?` might return `9.46009`, indicating that the total harmonic distortion is 9.46 dB.

FETCh:AVTime[:MEASview<y>]:AVERage? (Query Only)

Returns the RMS (root-mean-square) value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

`FETCh:AVTime[:MEASview<y>]:AVERage?`

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

`<avg> ::= <NRf>` is the RMS amplitude in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCh:AVTIME:MEASVIEW1:AVERAGE?` might return `-2.53`, indicating the RMS amplitude is -2.53 dBm for Amplitude versus Time Measurement View 1.

FETCh:AVTime[:MEASview<y>]:{FIRSt|SECond|THIRd|FOURth}? (Query Only)

Returns the trace data in the Amplitude versus Time measurement.

The mnemonics FIRSt, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the `TRACe<x>:AVTime` command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

```
FETCh:AVTime[:MEASview<y>]:{FIRSt|SECond|THIRd|FOURth}?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude in dBm at the nth data point,

4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:AVTIME:MEASVIEW1:FIRST? might return #3156xxxx... (156-byte data) for Trace 1 for the Amplitude versus Time Measurement View 1.

FETCh:AVTime[:MEASview<y>]:MAXimum? (Query Only)

Returns the maximum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the TRACe<x>:AVTime[:MEASview<y>]:SElect command.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

```
FETCh:AVTime[:MEASview<y>]:MAXimum?
```

Related Commands

[FETCh:AVTime\[:MEASview<y>\]:MAXLocation?](#) (on page 1117)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>: :<NRf> is the maximum Amplitude in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

`FETCH:AVTIME:MEASVIEW1:MAXIMUM?` might return `-2.84`, indicating the maximum amplitude is `-2.84` dBm for the Amplitude versus Time Measurement View 1.

FETCh:AVTime[:MEASview<y>]:MAXLocation? (Query Only)

Returns the time at which the amplitude is maximum for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

`FETCh:AVTime[:MEASview<y>]:MAXLocation?`

Related Commands

[FETCh:AVTime\[:MEASview<y>\]:MAXimum?](#) (on page 1116)

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is 1

Returns

`<max_time>::<NRf>` is the time at the maximum in seconds.

Examples

`FETCH:AVTIME:MEASVIEW1:MAXLOCATION:FIRST?` might return `25.03E-9`, indicating the amplitude is maximum at 25.03 ns in Amplitude versus Time Measurement View 1.

FETCh:AVTime[:MEASview<y>]:MINimum? (Query Only)

Returns the minimum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

`FETCh:AVTime[:MEASview<y>]:MINimum?`

Related Commands

[FETCh:AVTime\[:MEASview<y>\]:MINLocation?](#) (on page 1118)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<min>::<NRf> is the minimum amplitude in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:AVTIME:MEASVIEW1:MINIMUM? might return -57.64, indicating the minimum amplitude is -57.64 dBm for Amplitude versus Time Measurement View 1.

FETCh:AVTime[:MEASview<y>]:MINLocation? (Query Only)

Returns the time at which the amplitude is minimum for the selected trace in the Amplitude versus Time measurement. Select the trace using the TRACe<x>:AVTime[:MEASview<y>]:SElect command.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

FETCh:AVTime[:MEASview<y>]:MINLocation?

Related Commands

[FETCh:AVTime\[:MEASview<y>\]:MINimum?](#) (on page 1117)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<min_time>::<NRf> is the time at the minimum in seconds.

Examples

FETCH:AVTIME:MEASVIEW1:MINLOCATION? might return 450.7E-9, indicating the amplitude is minimum at 450.7 ns for Amplitude versus Time Measurement View 1.

FETCh:AVTime[:MEASview<y>]:RESult? (Query Only)

Returns the measurement results for the selected trace in the Amplitude versus Time measurement. Select the trace using the TRACe<x>:AVTime[:MEASview<y>]:SElect command.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

```
FETCh:AVTime[:MEASview<y>]:RESult?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
<max>,<max_time>,<min>,<min_time>,<rms>
```

Where

<max>::<NRf> is the maximum amplitude in dBm.

<max_time>::<NRf> is the time at the maximum in seconds.

<min>::<NRf> is the minimum amplitude in dBm.

<min_time>::<NRf> is the time at the minimum in seconds.

<rms>::<NRf> is the RMS amplitude in dBm.

The unit of amplitude can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:AVTIME:MEASVIEW1:RESULT? might return -2.68,48.62E-6,-82.47,22.11E-6,-8.24, indicating that the maximum amplitude is -2.68 dBm at 48.62 μ s, the minimum amplitude is -82.47 dBm at 22.11 μ s, and the RMS amplitude is -8.24 dBm on Amplitude versus Time Measurement View 1.

:FETCh:AVTime[:MEASview<y>]:AVERage:{FIRSt|SECond|THIRd|FOURth}

Returns the RMS (root-mean-square) value for the selected trace in the Amplitude versus Time measurement. Select the trace using the :TRACe<x>:AVTime[:MEASview<y>]:SElect command.

The mnemonics FIRSt, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

```
:FETCh:AVTime[:MEASview<y>]:AVERage:{FIRSt|SECond|THIRd|FOURth}?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>::<NRf> is the maximum Amplitude in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command

Examples

`:FETCH:AVTIME:MEASVIEW1:AVERAGE:FIRST?` might return -2.53, indicating the RMS amplitude is -2.53 dBm for Trace1 in Amplitude versus Time Measurement View 1.

`:FETCh:AVTime[:MEASview<y>]:MAXimum:{FIRSt|SECond|THIRd|FOURth}`

Returns the maximum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

The mnemonics `FIRSt`, `SECond`, `THIRd`, and `FOURth` represent Trace 1, Trace 2, Trace 3, and Math trace, respectively.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

`:FETCh:AVTime[:MEASview<y>]:MAXimum:{FIRSt|SECond|THIRd|FOURth}?`

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is 1

Returns

`<max>: :<NRf>` is the maximum Amplitude in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`:FETCH:AVTIME:MEASVIEW1:MAXIMUM:FIRST?` might return -2.84, indicating the maximum amplitude is -2.84 dBm for the Trace1 in Amplitude versus Time Measurement View 1.

`:FETCh:AVTime[:MEASview<y>]:MAXLocation:{FIRSt|SECond|THIRd|FOURth}`

Returns the time at which the amplitude is maximum for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

The mnemonics `FIRSt`, `SECond`, `THIRd`, and `FOURth` represent Trace 1, Trace 2, Trace 3, and Math trace, respectively.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

`:FETCh:AVTime[:MEASview<y>]:MAXimum:{FIRSt|SECond|THIRd|FOURth}?`

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>: : <NRf> is the maximum Amplitude in dBm.

Examples

:FETCH:AVTIME:MEASVIEW1:MAXLOCATION? might return 25.03E-9, indicating the amplitude is maximum at 25.03 ns in Trace1 for Amplitude versus Time Measurement View 1.

:FETCh:AVTime[:MEASview<y>]:MINimum:{FIRSt|SECond|THIRd|FOURth}

Returns the minimum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the :TRACE<x>:AVTime[:MEASview<y>]:SElect command.

The mnemonics FIRSt, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

:FETCh:AVTime[:MEASview<y>]:MINimum:{FIRSt|SECond|THIRd|FOURth}?

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>: : <NRf> is the maximum Amplitude in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

:FETCH:AVTIME:MEASVIEW1:MINIMUM:FIRST? might return -57.64, indicating the minimum amplitude is -57.64 dBm for Trace1 in Amplitude versus Time Measurement View 1.

:FETCh:AVTime[:MEASview<y>]:MINLocation:{FIRSt|SECond|THIRd|FOURth}

Returns the time at which the amplitude is minimum for the selected trace in the Amplitude versus Time measurement. Select the trace using the :TRACE<x>:AVTime[:MEASview<y>]:SElect command.

The mnemonics FIRSt, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

```
:FETCh:AVTime[:MEASview<y>]:MINLocation:{FIRSt|SECond|THIRd|FOURth}?
```

Related Commands

[:FETCh:AVTime\[:MEASview<y>\]:MINimum?](#) (on page 1121)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>: :<NRf> is the maximum Amplitude in dBm.

Examples

:FETCH:AVTIME:MEASVIEW1:MINLOCATION:FIRST? Might return 450.7E-9, indicating the amplitude is minimum at 450.7 ns for Trace1 in Amplitude versus Time Measurement View 1.

:FETCh:AVTime[:MEASview<y>]:RESult:{FIRSt|SECond|THIRd|FOURth}

Returns the measurement results for the selected trace in the Amplitude versus Time measurement. Select the trace using the :TRACe<x>:AVTime[:MEASview<y>]:SElect command.

The mnemonics FIRSt, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively.

Conditions

Measurement views: Amplitude versus Time

Group

Fetch commands

Syntax

```
:FETCh:AVTime[:MEASview<y>]:RESult:{FIRSt|SECond|THIRd|FOURth}??
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>, <max_time>, <min>, <min_time>, <rms>

Where

<max>: :<NRf> is the maximum amplitude in dBm.

<max_time>: :<NRf> is the time at the maximum in seconds.

<min>: :<NRf> is the minimum amplitude in dBm.

<min_time>: :<NRf> is the time at the minimum in seconds.

<rms>: :<NRf> is the RMS amplitude in dBm.

The unit of amplitude can be changed by the `[ :SENSe ] :POWer:UNITs` command.

Examples

`:FETCH:AVTIME:MEASVIEW1:RESULT:FIRST?` might return `-2.68,48.62E-6,-82.47,22.11E-6,-8.24`, indicating that the maximum amplitude is -2.68 dBm at 48.62 μ s, the minimum amplitude is -82.47 dBm at 22.11 μ s, and the RMS amplitude is -8.24 dBm for Trace1 on Amplitude versus Time Measurement View 1.

FETCh:BIBEmissions:FTX? (Query Only)

Returns the band number corresponding to the transmitted FTX detected in the Bluetooth InBand Emission display.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Fetch commands

Syntax

`FETCh:BIBEmissions:FTX?`

Arguments

None

Returns

`<value> ::= <NR1>` the band number.

Examples

`FETCH:BIBEMISSIONS:FTX?` might return 39 indicating the band number corresponding to transmitted FTX.

FETCh:BIBEmissions:POWer? (Query Only)

Returns all channel power results from the Bluetooth InBand Emission display.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Fetch commands

Syntax

`FETCh:BIBEmissions:POWer?`

Arguments

None

Returns

`<Band0_power>,<Band1_power>,<Band2_power>,...<Band78_power>`

Where:

`Bandx_power` is the integrated power in that band. All power values are in dBm

Examples

`FETCH:BIBEMISSIONS:POWER?` might return `4.227,-28.420,-23.847, . . .,-29.225`, indicating:

(integrated power for Band 0) = 4.227 dBm,

(Integrated power for Band 1) = -28.420 dBm,

(Integrated power for Band 2) = -23.847 dBm, and

(Integrated power for Band 78) = -29.225 dBm.

FETCh:BIBEmissions:RESUltS:STATus? (Query Only)

Returns the Pass/Fail result status of the Bluetooth InBand Emission display.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Fetch commands

Syntax

`FETCh:BIBEmissions:RESUltS:STATus?`

Arguments

None

Examples

`FETCH:BIBEMISSIONS:RESULTS:STATUS?` returns the Pass/Fail status result on the display.

FETCh:BLUEtooth:CONStE:FERRor? (Query Only)

Returns the frequency error in Hz in the Bluetooth Constellation. The frequency error is the difference between the measured carrier frequency of the signal and the user-selected center frequency.

Conditions

Measurement views: Bluetooth Constellation

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:CONStE:FERRor?`

Arguments

None

Returns

`<freq_error> ::= <NRf>` the frequency error.

Examples

`FETCh:BLUEtooth:CONStE:FERRor?` might return `-10.7E+3`, which is a frequency error of -10.7 kHz.

FETCh:BLUEtooth:CONStE:TRACe? (Query Only)

Queries the Bluetooth Constellation trace data.

Conditions

Measurement views: Bluetooth Constellation

Group

Fetch commands

Syntax

FETCh:BLUEtooth:CONStE:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><I (1)><Q1><I (2)><Q2> . . . <I (n)><Qn>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<I (n)> and <Qn> are the normalized I- and Q-coordinate values at the nth data point. 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:BLUEtooth:CONStE:TRACe? might return #43848xxxx . . . (3848-byte data) for the trace.

FETCh:BLUEtooth:EDIagram:FDEVIation? (Query Only)

Returns the frequency deviation vs. time trace data with the X values in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Fetch commands

Syntax

FETCh:BLUEtooth:EDIagram:FDEVIation?

Arguments

None

Returns

#<num_digits><num_bytes><Y (1)><X (1)><Y (2)><X (2)> . . . <Y (n)><X (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

$\langle Y(1) \rangle$ and $\langle X(1) \rangle$ are the normalized I- and Q-coordinate values at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

`FETCh:BLUEtooth:EDIagram:FDEVIiation?` might return `#3160xxxx...` (160-byte data) for the frequency deviation versus time trace.

FETCh:BLUEtooth:EDIagram:FERRor? (Query Only)

Returns the frequency error in the Bluetooth eye diagram measurement.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:EDIagram:FERRor?`

Arguments

None

Returns

`<freq_error> ::= <NRf>` the frequency error in Hz.

Examples

`FETCh:BLUEtooth:EDIagram:FERRor?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz.

FETCh:BLUEtooth:EDIagram:HORiz:SCALE? (Query Only)

Returns the value of the horizontal scale in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:EDIagram:HORiz:SCALE?`

Arguments

None

Returns

`<value> ::= <NR3>` the horizontal scale value.

Examples

`FETCh:BLUETOOTH:EDIAGRAM:HORIZ:SCALE?` might return `2`, indicating the horizontal scale value is 2 symbols.

FETCh:BLUEtooth:EDiagram:I? (Query Only)

Returns the I vs. time trace in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Fetch commands

Syntax

FETCh:BLUEtooth:EDiagram:I?

Arguments

None

Returns

#<num_digits><num_bytes><Y(1)><X(1)><Y(2)><X(2)> . . . <Y(n)><X(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(1)> and <X(1)> are the normalized I- and Q-coordinate values at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

FETCh:BLUEtooth:EDiagram:I? might return #3160xxxx... (160-byte data) for the I vs. time trace.

FETCh:BLUEtooth:EDiagram:Q? (Query Only)

Returns the Q vs. time trace in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Fetch commands

Syntax

FETCh:BLUEtooth:EDiagram:Q?

Arguments

None

Returns

#<num_digits><num_bytes><Y(1)><X(1)><Y(2)><X(2)> . . . <Y(n)><X(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

$\langle Y(1) \rangle$ and $\langle X(1) \rangle$ are the normalized I- and Q-coordinate values at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

`FETCh:BLUEtooth:EDIagram:Q?` might return `#3160xxxx...` (160-byte data) for the Q vs. time trace.

FETCh:BLUEtooth:FDVTime:TRACe? (Query Only)

Returns the Bluetooth Frequency Deviation vs. Time trace data.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:FDVTime:TRACe?`

Arguments

None

Returns

`#<num_digits><num_bytes><data(1)><data(2)> . . . <data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the frequency deviation in Hz at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

`FETCh:BLUEtooth:FDVTime:TRACe?` might return `#3160xxxx...` (160-byte data) for the trace.

FETCh:BLUEtooth:FREQuency:ERROr? (Query Only)

Returns the frequency error from the Bluetooth Constellation diagram.

Conditions

Measurement views: Bluetooth Constellation

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:FREQuency:ERROr?`

Arguments

None

Returns

<NR3>, the frequency error value in Hz.

Examples

`FETCh:BLUETOOTH:FREQUENCY:ERROR?` might return `0.0000`, indicating the frequency error is 0.0000 Hz.

FETCh:BLUETOOTH:FREQUENCY:ERROR:TYPE? (Query Only)

Returns the frequency error type in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Fetch commands

Syntax

`FETCh:BLUETOOTH:FREQUENCY:ERROR:TYPE?`

Arguments

None

Returns

1 indicates the error is automatically detected.

0 indicates the error is not automatically detected.

Examples

`FETCh:BLUETOOTH:FREQUENCY:ERROR:TYPE?` might return 1, indicating the frequency error is automatically detected.

FETCh:BLUETOOTH:FREQUENCY:OFFSET:DRIFT:F1FZero? (Query Only)

Returns the drift in frequency offset ($f_1 - f_0$ — the frequency offset calculated in the first interval in the payload — the frequency offset calculated in the preamble) in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUETOOTH:FREQUENCY:OFFSET:DRIFT:F1FZero?`

Arguments

None

Returns

<NR3> the drift in frequency offset ($f_1 - f_0$ — the frequency offset calculated in the first interval in the payload — the frequency offset calculated in the preamble)

Examples

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:F1FZero?` might return `-207.6465301514`, indicating the drift in frequency offset (f_1 to f_0 – the frequency offset calculated in the first interval in the payload – the frequency offset calculated in the preamble)

FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5? (Query Only)

Returns the maximum drift of the frequency offset in payload intervals spaced 50 μ s away in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5?`

Arguments

None

Returns

`<NR3>` the maximum drift of the frequency offset in payload intervals spaced 50 μ s away.

Examples

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNF5?` might return `-207.6465301514`, indicating the maximum drift of the frequency offset in payload intervals spaced 50 μ s away.

FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5:INTERval? (Query Only)

Returns the interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5:INTERval?`

Arguments

None

Returns

`<NR1>` interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred.

Examples

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNF5:INTERval?` might return 16, indicating the interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred. Here 16 refers to the 16th interval and that the drift of frequency offset calculated in the 16th interval from that calculated in the 11th interval is the maximum among those calculated 50 μ s away.

FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO? (Query Only)

Returns the maximum drift of the frequency offset of the intervals in the payload from the preamble packet in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO?`

Arguments

None

Returns

<NR3> the maximum drift of frequency offset calculated in payload intervals from the offset calculated in the preamble.

Examples

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZero?` might return -207.6465301514, indicating that the maximum drift of frequency offset calculated in payload intervals from the offset calculated in the preamble is -207.6465301515 Hz.

FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO:INTERval? (Query Only)

Returns the interval (n) at which the maximum drift $f_n - f_0$ occurred in the Bluetooth Frequency Deviation vs. Time display. (The $f_n - f_0$ indicates the drift of the frequency offset calculated in each payload interval from the offset calculated in the preamble.)

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO:INTERval?`

Arguments

None

Returns

<NR1> the interval at which the maximum drift ($f_n - f_0$) occurred.

Examples

`FETCh:BLUETOOTH:FREQuency:OFFSet:DRIFT:FNFZero:INTERval?` might return 16, indicating that at the 16th payload interval, the maximum drift occurred. $f(16) - f(0)$ is the maximum drift among all $f(n) - f(0)$.

FETCh:BLUETOOTH:FREQuency:OFFSet:MAX? (Query Only)

Returns the maximum frequency offset in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.

Conditions

Measurement views: Frequency Deviation vs. Time, CF Offset

Group

Fetch commands

Syntax

`FETCh:BLUETOOTH:FREQuency:OFFSet:MAX?`

Arguments

None

Returns

<NR3> the maximum frequency offset value.

Examples

`FETCh:BLUETOOTH:FREQuency:OFFSet:MAX?` might return -189.4632263184, the frequency offset value.

FETCh:BLUETOOTH:FREQuency:OFFSet:MAX:INTERval? (Query Only)

Returns the maximum frequency offset interval in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.

Conditions

Measurement views: Frequency Deviation vs. Time, CF Offset

Group

Fetch commands

Syntax

`FETCh:BLUETOOTH:FREQuency:OFFSet:MAX:INTERval?`

Arguments

None

Returns

<NR1> the maximum frequency offset interval.

Examples

`FETCh:BLUEtooth:FREQuency:OFFSet:MAX:INTERval?` might return 271, indicating that the maximum drift $f(n) - f(0)$ occurred at the 271st payload interval.

FETCh:BLUEtooth:FREQuency:OFFSet:PREAmble? (Query Only)

Returns the offset calculated in the preamble region in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.

Conditions

Measurement views: Frequency Deviation vs. Time, CF Offset

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:FREQuency:OFFSet:PREAmble?`

Arguments

None

Returns

<NR3> the offset calculated in the preamble region.

Examples

`FETCh:BLUEtooth:FREQuency:OFFSet:PREAmble?` might return 106.4204711914, indicating the offset calculated in the preamble region.

FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:F? (Query Only)

Returns the average frequency value when the selected test pattern is Other in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:F?`

Arguments

None

Returns

<NRf> the average frequency.

Examples

`FETCh:BLUEtooth:MODUlation:CHARacteristics:AVERage:F?` might return `140.8309531250E+3`, the average frequency value.

FETCh:BLUEtooth:MODUlation:CHARacteristics:AVERage:F2F1ratio? (Query Only)

Returns the average ratio value for the high and low frequency deviation in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:MODUlation:CHARacteristics:AVERage:F2F1ratio?`

Arguments

None

Returns

`<NRf>` the average ratio value.

Examples

`FETCh:BLUEtooth:MODUlation:CHARacteristics:AVERage:F2F1ratio?` might return `24.37E-3`, the average ratio value.

FETCh:BLUEtooth:MODUlation:CHARacteristics:AVERage:FONE? (Query Only)

Returns the average frequency deviation for the low deviation pattern in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:MODUlation:CHARacteristics:AVERage:FONE?`

Arguments

None

Examples

`FETCh:BLUEtooth:MODUlation:CHARacteristics:AVERage:FONE?` might return `139.8309531250E+3`, the average frequency deviation for the low deviation pattern.

FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:FTWO? (Query Only)

Returns the average frequency deviation for the high deviation pattern in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Fetch commands

Syntax

FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:FTWO?

Arguments

None

Examples

FETCh:BLUEtooth:MODUlation:CHARacteristics:AVErage:FTWO? might return 139.8309531250E+3, the average frequency deviation for the high deviation pattern.

FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFt:COUNT? (Query Only)

Returns the number of packets analyzed to obtain average drift results from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFt:COUNT?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFt:COUNT? might return 8, the number of packets analyzed.

FETCh:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFt:F1FZero? (Query Only)

Returns the drift f1–f0 from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:F1FZero?`

Arguments

None

Returns

<NRf> the drift f1–f0 value.

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:F1FZERO?` might return `2.846E+3`, indicating that the drift f1–f0 value is 2.846 kHz.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:F1FZero:STATus? (Query Only)

Returns the Pass/Fail drift f1–f0 result status in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:F1FZero:STATus?`

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:F1FZERO:STATUS?` might return `PASS`, `FAIL`, or `NA` indicating whether the drift f1–f0 is within the specified limit.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5? (Query Only)

Returns the maximum drift of the fn–fn-5 value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5?`

Arguments

None

Returns

<NRf> the fn–fn-5 value.

Examples

`FETCH:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFN5?` might return `2.846E+3` indicating that the maximum drift fn–fn-5 value in the preamble region is -2.846 kHz.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5:STATUS? (Query Only)

Returns the Pass/Fail status of the maximum fn–fn-5 drift in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5:STATUS?`

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

`FETCH:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFN5:STATUS?` might return `PASS`, `FAIL`, or `NA` indicating whether the maximum drift fn–fn-5 is within the specified limit.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero? (Query Only)

Returns the maximum drift fn–f0 from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero?`

Arguments

None

Returns

<NRf> the fn–fn0 value.

Examples

`FETCH:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFZERO?` might return `4.846E+3`, indicating that the drift fn–f0 value in the preamble region is 4.846 kHz.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero:STATUs? (Query Only)

Returns the Pass/Fail result status of the fn–f0 maximum drift in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero:STATUs?`

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

`FETCH:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFZERO:STATUS?` might return `PASS`, `FAIL`, or `NA` indicating whether the maximum drift fn–f0 is within the specified limit.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:CODIng:SCHEme (Query Only)

Returns the offset drift coding scheme value (LE Coded) in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMAry:FREQuency:OFFSet:DRIFt:LECoded:CODIng:SCHEme?`

Arguments

None

Returns

<NR1> 2 or 8

Where 2 is data at 500 Kb/s and 8 is 125 Kb/s

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:CODING:SCHEME` might return "2", indicating the offset drift coding scheme value is 2.

FETCh:BLUEtooth:SUMMAry:FREQuency:OFFSet:DRIFt:LECoded:F0FThree (Query Only)

Returns the Drift value f0-f3 for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMAry:FREQuency:OFFSet:DRIFt:LECoded:F0FThree?`

Arguments

None

Returns

<NRf> Maximum Frequency value in kHz

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F0FTHREE` might return 207.2 kHz, indicating the f0-f3 drift value is 207.2 kHz.

FETCh:BLUEtooth:SUMMAry:FREQuency:OFFSet:DRIFt:LECoded:F0FThree:STATus (Query Only)

Returns the Drift value Status of f0-f3 for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded: F0FTHree:STATus?`

Arguments

None

Returns

<String> PASS ,FAIL or NA

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable

Examples

`FETCH:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F0FTHREE:STATUS` might return Pass, indicating the test result Status of f0-f3 was Pass.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:F1FFour (Query Only)

Returns the Drift value of f1-f4 for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:F1FFour?`

Arguments

None

Returns

<NRf> Maximum Frequency value in kHz

Examples

`FETCH:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F1FFOUR` might return `-10.22` kHz, indicating the f1-f4 drift value is -10.22 kHz.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:F1FFour:STATus (Query Only)

Returns the Drift value Status of f1-f4 for LE Coded in Bluetooth Summary display

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded: F1FFour:STATus?`

Arguments

None

Returns

<String> PASS, FAIL or NA

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F1FFOUR:STATUS?` might return Pass, indicating the test result Status of f1-f4 was Pass.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:FNFN3 (Query Only)

Returns the Drift value of fn-f(n-3) for LE Coded in Bluetooth Summary display

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:FNFN3?`

Arguments

None

Returns

<NRf> Maximum Frequency value in kHz

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3` might return -10.42 kHz, indicating the fn-f(n-3) drift value is -10.42 kHz.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:FNFN3:STATus (Query Only)

Returns the Drift value Status of fn-f(n-3) for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSet:DRIFT:LECoded:FNFN3:STATUS?`

Arguments

None

Returns

<String> PASS, FAIL or NA

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3:STATUS?` might return `Pass`, indicating the test result Status of fn-f(n-3) was Pass.

FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSet:MAX? (Query Only)

Returns the maximum frequency offset present in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSet:MAX?`

Arguments

None

Returns

<NRf> the maximum frequency offset value in the packet.

Examples

`FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX?` might return `7.446E+3`, indicating that the maximum frequency offset value in the packet is 7.446 kHz.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:MAX:STATus? (Query Only)

Returns the Pass/Fail result status of the frequency offset maximum in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:MAX:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX:STATUS? might return PASS, FAIL, or NA indicating whether the maximum frequency offset in the packet is within the specified limit.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:PREAmble? (Query Only)

Returns the frequency offset value in the preamble region from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:PREAmble?

Arguments

None

Returns

<NRf> the frequency offset value in the preamble region.

Examples

FETCh:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:PREAMBLE? might return 3.546E+3 indicating that the frequency offset value in the preamble region is 3.546 kHz.

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:PREAmble:STATus? (Query Only)

Returns the Pass/Fail result status of the frequency offset in the preamble region.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:PREAmble:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

FETCh:BLUEtooth:SUMMary:FREQuency:OFFSet:PREAmble:STATus? might return PASS, FAIL, or NA indicating whether the frequency offset in the preamble region is within the specified limit.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:DELTA:F:MAX:PERCentage:COUNt? (Query Only)

Returns the number of packets analyzed out of 10 packets for ΔF average from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage: DELTA:F:MAX:PERCentage:COUNt?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage: DELTA:F:MAX:PERCENTAGE:COUNt? might return 3, indicating that three packets were analyzed.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:DELTA:FONE:MAX:PERCentage:COUNt? (Query Only)

Returns the number of packets analyzed out of 10 packets for the $\Delta F1_{avg}$ from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:DELTA:FONE:MAX:PERCentage:COUNt?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:DELTA:FONE:MAX:PERCentage:COUNt?
might return 6, indicating that six packets were analyzed.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:DELTA:FTWO:MAX:PERCentage:COUNt? (Query Only)

Returns the number of packets analyzed out of 10 packets for the $\Delta F2_{Max\%}$ from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage: DELTA:FTWO:MAX:PERCentage:COUNt?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

FETCh:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE: DELTA: FTWO: MAX: PERCENTAGE: COUNT?
might return 6, indicating that six packets were analyzed.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:DELTA:FTWO:MAX:PERCentage? (Query Only)

Returns the percentage of the $\Delta F2Max$ values that are above the specified limit.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: DELTA:FTWO:MAX:PERCentage?

Arguments

None

Returns

<NRf> the number of packets analyzed.

Examples

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:DELTA:FTWO:MAX:PERCENTAGE? might return 99.2, indicating that 99.2% of the deltaF2 maximum values are above the specified limit.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:DELTA:FTWO:MAX:PERCentage:STATus? (Query Only)

Returns the Pass/Fail result status of the $\Delta F2Max\%$ field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage: DELTA:FTWO:MAX:PERCentage:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:DELTA:FTWO:MAX:PERCENTAGE:STATUS? might return PASS, FAIL, or NA, indicating the Pass/Fail status of the $\Delta F2Max\%$ field in the Bluetooth summary.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:F? (Query Only)

Returns the ΔF_{avg} value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:F?`

Arguments

None

Returns

<NRf> the delta F value.

Examples

`FETCH:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F?` might return `2.8723E+3`, indicating the delta F average is 2.8723 kHz.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:F2F1ratio? (Query Only)

Returns the ratio of the ΔF_{2avg} to ΔF_{1avg} from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:F2F1ratio?`

Arguments

None

Returns

<NRf> the value of the delta F1 to delta F2 ratio.

Examples

`FETCH:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F2F1RATIO?` might return `225.12E+3`, indicating the average ratio is 225.12 kHz.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:F2F1ratio:STATus? (Query Only)

Returns the Pass/Fail results status of the $\Delta F2_{avg}/\Delta F1_{avg}$ field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage: F2F1ratio:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

FETCH:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F2F1RATIO:STATUS? might return PASS, FAIL, or NA, indicating the Pass/Fail result status of the $\Delta F2_{avg}/\Delta F1_{avg}$ field.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:FONE? (Query Only)

Returns the $\Delta F1_{avg}$ value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVERage:FONE?

Arguments

None

Returns

<NRf> the delta F1 value.

Examples

FETCH:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FONE? might return 155.3672E+3, indicating the delta F1 average is 155.3672 kHz.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:FONE:STATus? (Query Only)

Returns the Pass/Fail results status of the $\Delta F1$ avg from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:FONE:STATus?

Arguments

None

Returns

<string> the Pass/Fail results status.

Examples

FETCh:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FONE:STATUS? might return PASS, FAIL, or NA, indicating whether the delta F1 average is within the limit.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:FTWO? (Query Only)

Returns the $\Delta F2$ avg value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:AVErage:FTWO?

Arguments

None

Returns

<NRf> the delta F2 value.

Examples

FETCh:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FTWO? might return 225.12E+3, indicating that the delta F2 value is 225.12 kHz.

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:INDEX (Query Only)

Returns the Modulation index value in Bluetooth Summary display (for LE 1M, LE 2M, LE Coded).

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:MODUlation:CHARacteristics:INDEX?

Arguments

None

Returns

<String>

Examples

FETCh:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:INDEX might return "Stable", indicating the status of modulation index is "Stable".

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:AVERage? (Query Only)

Returns the average output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:AVERage?

Arguments

None

Returns

<NRf> the average output power value in dBm.

Examples

FETCh:BLUETOOTH:SUMMARY:OUTPUT:POWER:AVERAGE? might return -29.1, indicating that the average output power is -29.1 dBm.

FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:AVErage:STATus? (Query Only)

Returns the Pass/Fail results status of the average output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:AVErage:STATus?

Arguments

None

Returns

<string> the Pass/Fail results status.

Examples

FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:AVErage:STATus? might return PASS, FAIL, or NA, indicating whether the average output power is within the specified limit.

FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:COUNt? (Query Only)

Returns the number of packets analyzed out of 10 packets for the calculation of the output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:COUNt?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

FETCh:BLUEtooth:SUMMary:OUTPut:POWEr:COUNt? might return 6, indicating that six packets were analyzed.

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:EDR:COUNT? (Query Only)

Returns the number of packets analyzed out of 10 packets for calculation of the output power for EDR from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:EDR:COUNT?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

FETCh:BLUETOOTH:SUMMARY:OUTPUT:POWER:EDR:COUNT? might return 6, indicating that six packets were analyzed.

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:EDR:DPSK? (Query Only)

Returns the power in the DPSK portion of the EDR burst from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:EDR:DPSK?

Arguments

None

Returns

<NRf> the power in the DPSK portion of the EDR burst.

Examples

FETCh:BLUETOOTH:SUMMARY:OUTPUT:POWER:EDR:DPSK? might return -29.2, indicating that the average output power is -29.2 dBm.

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:EDR:GPSK? (Query Only)

Returns the power in the GFSK portion of the EDR burst from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:EDR:GPSK?

Arguments

None

Returns

<NRf> the power in the GFSK portion of the EDR burst.

Examples

FETCh:BLUEtooth:SUMMARY:OUTPUT:POWER:EDR:GPSK? might return -29.1, indicating that the average output power is -29.1 dBm.

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:PEAK? (Query Only)

Returns the peak output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:PEAK?

Arguments

None

Returns

<NRf> the peak output power value in dBm.

Examples

FETCh:BLUEtooth:SUMMARY:OUTPUT:POWER:PEAK? might return -29.3 indicating that the peak output power is -29.3 dBm.

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:PEAK:STATus? (Query Only)

Returns the Pass/Fail results status of the peak output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:PEAK:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

FETCh:BLUEtooth:SUMMary:OUTPut:POWER:PEAK:STATus? might return PASS, FAIL, or NA, indicating whether the peak output power is within the specified limit.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:CRC? (Query Only)

Returns the Basic Rate value of the CRC field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BDR:CRC?

Arguments

None

Returns

<string> the value of the CRC field.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:Basic Rate:CRC? might return "0x9DB0" indicating the value of the CRC field in hexadecimal.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:ARQN? (Query Only)

Returns the value of ARQN field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:ARQN?`

Arguments

None

Returns

<NR2> the value of the ARQN field.

Examples

`FETCh:BLUEtooth:SUMMary:PACKet:Basic Rate:HEADer:ARQN?` might return 0.000000 indicating the value of the flow field.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:FLOW? (Query Only)

Returns the value of Flow field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:FLOW?`

Arguments

None

Returns

<NR2> the flow value.

Examples

`FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:FLOW?` might return 1.000000 indicating the value of the flow field.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:HEC? (Query Only)

Returns the value of HEC field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:HEC?`

Arguments

None

Returns

<string> the value of the HEC field.

Examples

`FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:HEC?` might return "00110010" indicating the value of the HEC field in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:LT:ADDRess? (Query Only)

Returns the LT address from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:LT:ADDRess?`

Arguments

None

Returns

<string> the LT address.

Examples

`FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:LT:ADDR?` might return "101" indicating the LT address in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:SEQN? (Query Only)

Returns the value of SEQN field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:SEQN?

Arguments

None

Returns

<NR2> the value of the SEQN field.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:SEQN? might return 1.000000 indicating the value of the flow field.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:TYPE? (Query Only)

Returns the value of Type field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:TYPE?

Arguments

None

Returns

<string> the value of the type field.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BDR:HEADer:TYPE? might return "00001111" indicating the type field in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:PAYLoad:LENgth? (Query Only)

Returns the Basic Rate payload length from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BDR:PAYLoad:LENgth?

Arguments

None

Returns

<string> the value of the payload length.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BDR:PAYLoad:LENgth? might return "0101010011" indicating the payload length value in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:PREAmble? (Query Only)

Returns the preamble of the Basic Rate packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BDR:PREAmble?

Arguments

None

Returns

<string> the preamble of the packet.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BDR:PREAmble? might return "0101" indicating the preamble is 0101 in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD? (Query Only)

Returns the sync word from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD?

Arguments

None

Returns

<string> the sync word.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD? might return "0x4F36F2CEE85390CB" indicating the sync word in hexadecimal format.

FETCh:BLUEtooth:SUMMary:PACKet:BDR:TYPE? (Query Only)

Returns the packet type of the Basic Rate signal from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BDR:TYPE?

Arguments

None

Returns

<string> the packet type.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BDR:TYPE? might return "DH5" indicating that the DH5 packet is being analyzed.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:ACCEss:ADDRes? (Query Only)

Returns the 32-bit Access Address from the Bluetooth Summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:ACCEss:ADDRes?

Arguments

None

Returns

<string> the 32-bit Access Address.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BLE:ACCEss:ADDRes? might return "0x71764129" indicating the Access Address in hexadecimal.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:CRC? (Query Only)

Returns the value of the CRC field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:CRC?

Arguments

None

Returns

<string> the value of the CRC field.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BLE:CRC? might return "0xAAAAAA" indicating value CRC field in hexadecimal.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:CHANnel:SElect (Query Only)

Returns the channel selected under decoded packet information section in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:CHANnel:SElect?

Arguments

None

Returns

<String> 0 or 1 or -1 or "-"

0 and 1 represents valid

-1 represents invalid

"-" represents NIL

Examples

FETCh:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:CHANNEL:SELECT might return "1", indicating the selected channel is valid.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:LENGth? (Query Only)

Returns the value of the length field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:LENGth?

Arguments

None

Returns

<string> the value of the length field.

Examples

`FETCH:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LENGTH?` might return "100101" indicating value length field in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:LLID (Query Only)

Returns the LLID value (2 bits) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:LLID?`

Arguments

None

Returns

<String> Either 00,01,10,11

Examples

`FETCH:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LLID` might return 01, indicating the value of LLID is "01".

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:MD (Query Only)

Returns the MD value (1 bit) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:MD?`

Arguments

None

Returns

<Boolean> 0, 1

Examples

`FETCH:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:MD` might return 1, indicating the value of MD is "1".

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:NESN (Query Only)

Returns the NESN value (1 bit) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:NESN?

Arguments

None

Returns

<Boolean> 0, 1

Examples

FETCh:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:NESN might return 1, indicating the value of NESN is "1".

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:RX:ADDResS? (Query Only)

Returns the Rx address from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:RX:ADDResS?

Arguments

None

Returns

<string> the Rx address.

Examples

FETCh:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:RX:ADDRESS? might return 0.00000000 indicating the Rx Address.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:SN (Query Only)

Returns the SN value (1 bit) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:SN?`

Arguments

None

Returns

<Boolean> 0, 1

Examples

`FETCh:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:SN` might return 1, indicating the value of SN is "1".

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TX:ADDRess? (Query Only)

Returns the Tx address from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TX:ADDRess?`

Arguments

None

Returns

<string> the Tx address.

Examples

`FETCh:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:TX:ADDRESS?` might return 0.00000000 indicating Tx Address.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TYPE? (Query Only)

Returns the PDU type from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TYPE?

Arguments

None

Returns

<string> the PDU type.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TYPE? might return "0010" indicating the PDU type in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PREAmble? (Query Only)

Returns the preamble of the BLE packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PREAmble?

Arguments

None

Returns

<string> the preamble of the packet.

Examples

FETCh:BLUEtooth:SUMMary:PACKet:BLE:PREAmble? might return "01010101" indicating the preamble is 01010101 in binary.

FETCh:BLUEtooth:SUMMary:PACKet:BLE:TYPE? (Query Only)

Returns the packet type from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Fetch commands

Syntax

`FETCh:BLUETOOTH:SUMMARY:PACKet:BLE:TYPE?`

Arguments

None

Returns

<string> the BLE packet type.

Examples

`FETCH:BLUETOOTH:SUMMARY:PACKET:BLE:TYPE?` might return "BLE_TEST" indicating the BLE test signal is being analyzed.

FETCh:CCDF? (Query Only)

Returns the CCDF measurement results.

Conditions

Measurement views: CCDF

Group

Fetch commands

Syntax

`FETCh:CCDF?`

Related Commands

Arguments

None

Returns

<avg_ampl>,<avg_ccdf>,<crest_factor>,<ampl_10>,<ampl_1>,
<ampl_p1>,<ampl_p01>,<ampl_p001>,<ampl_p0001>

Where

<avg_ampl> is the average amplitude in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

<avg_ccdf> is the average CCDF in percent.

<crest_factor> is the crest factor in dB.

<ampl_10> is the amplitude at CCDF of 10% in dB.

<ampl_1> is the amplitude at CCDF of 1% in dB.

<ampl_p1> is the amplitude at CCDF of 0.1% in dB.

<ampl_p01> is the amplitude at CCDF of 0.01% in dB.

<ampl_p001> is the amplitude at CCDF of 0.001% in dB.

<ampl_p0001> is the amplitude at CCDF of 0.0001% in dB.

Examples

FETCh:CCDF? might return -33.35,35.8,9.75,3.88,7.07,8.50,9.25,9.72,9.74, indicating (average amplitude) = -33.35 dBm, (average CCDF) = 35.8%, (crest factor) = 9.75 dB, (amplitude at CCDF of 10%) = 3.88 dB, (amplitude at CCDF of 1%) = 7.07 dB, (amplitude at CCDF of 0.1%) = 8.50 dB, (amplitude at CCDF of 0.01%) = 9.25 dB, (amplitude at CCDF of 0.001%) = 9.72 dB, and (amplitude at CCDF of 0.0001%) = 9.74 dB.

FETCh:CCDF:{FIRSt|SECond|THIRd}:X? (Query Only)

Returns the horizontal values of the specified trace in the CCDF measurement.

The mnemonics FIRSt, SECond, and THIRd represent Trace 1, Trace 2, and Gaussian reference curve, respectively.

Conditions

Measurement views: CCDF

Group

Fetch commands

Syntax

FETCh:CCDF:{FIRSt|SECond|THIRd}:X?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the horizontal value (dB) of the CCDF graph at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:CCDF:FIRSt:X? might return #41024xxxx... (1024-byte data) for the horizontal values of Trace 1.

FETCh:CCDF:{FIRSt|SECond|THIRd}:XY? (Query Only)

Returns the horizontal and vertical value pairs of the specified trace in the CCDF measurement.

The mnemonics FIRSt, SECond, and THIRd represent Trace 1, Trace 2, and Gaussian reference curve, respectively.

Conditions

Measurement views: CCDF

Group

Fetch commands

Syntax

`FETCh:CCDF:{FIRSt|SECond|THIRd}:XY?`

Arguments

None

Returns

`#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<x(n)><y(n)>` is the horizontal value (dB) and vertical value (%) pair at the *n*th data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:CCDF:FIRSt:XY?` might return `#41024xxxx... (1024-byte data)` for the horizontal and vertical value pairs of Trace 1.

FETCh:CCDF:{FIRSt|SECond|THIRd}[:Y]? (Query Only)

Returns the vertical values of the specified trace in the CCDF measurement.

The mnemonics `FIRSt`, `SECond`, and `THIRd` represent Trace 1, Trace 2, and Gaussian reference curve, respectively.

Conditions

Measurement views: CCDF

Group

Fetch commands

Syntax

`FETCh:CCDF:{FIRSt|SECond|THIRd}[:Y]?`

Arguments

None

Returns

`#<num_digit><num_byte><y(1)><y(2)>...<y(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<y(n)>` is the vertical value (%) of the CCDF graph at the *n*th point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:CCDF:FIRSt:Y?` might return `#41024xxxx... (1024-byte data)` for the vertical values of Trace 1.

FETCh:CONSte[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in Hz. The frequency error is the difference between the measured carrier frequency of the signal and the user-selected center frequency of the analyzer.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Fetch commands

Syntax

FETCh:CONSte[:MEASview<y>]:FERRor?

Related Commands

[FETCh:EVM\[:MEASview<y>\]:FERRor?](#) (on page 1192)

Arguments

None.

Returns

<freq_error>::<NRf> which is the frequency error in Hz.

Examples

FETCh:CONSte:MEASview2:FERRor? might return -10.7E+3, which is a frequency error of -10.7 kHz for measview 2 of constellation.

FETCh:CONSte[:MEASview<y>]:RESults? (Query only)

Returns the constellation measurement results of **EVM** RMS, peak, and location displayed on the bottom of the screen.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Fetch commands

Syntax

FETCh:CONSte[:MEASview<y>]:RESults?

Arguments

None

Returns

For modulation types 2|4|8|16FSK or C4FM:

FSK_deviation_Avg_Leftmost, FSK_deviation_Avg_Rightmost

Where

FSK_deviation_Avg_Leftmost is the average FSK deviation of the left-most symbol in Hz.

FSK_deviation_Avg_Rightmost is the average FSK deviation of the right-most symbol in Hz.

For all other valid modulation types:

<EVM_RMS>, <EVM_peak>, <location>

Where

<EVM_RMS>::<NRf> is the RMS EVM in percent (%).

<EVM_peak>::<NRf> is the peak EVM in percent (%).

<location>::<NRf> is the peak location in symbol number.

The time unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

FETCh:CONStE:MEASview2:RESults? might return 2.841, 3.227, 68.000, indicating that the RMS EVM is 2.841% and the peak EVM is 3.227% at symbol #68 for measview 2 of constellation.

FETCh:CONStE[:MEASview<y>]:TRACe? (Query only)

Returns the constellation trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Fetch commands

Syntax

FETCh:CONStE[:MEASview<y>]:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><I(1)><Q(1)><I(2)><Q(2)>...<I(n)><Q(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<I(n)> and <Q(n)> are the normalized I- and Q-coordinate values at the nth data point. 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:CONSTe:MEASview2:TRACe?` might return `#43848xxxx...` (3848-byte data) for the constellation trace data for measview 2 of constellation.

FETCH:DDEMod[:MEASview<y>]:STABle? (Query only)

Returns the symbol table data.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Symbol table

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Symbol table)

Group

Fetch commands

Syntax

`FETCH:DDEMod[:MEASview<y>]:STABle?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the symbol table data at the n^{th} data point,

4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:DDEMod:MEASview1:STABle?` might return `#3512xxxx...` (512-byte data) for the Symbol table measurement view1.

FETCH:DDEMod:SYNCh:WORD:LENGth? (Query only)

Returns the length of the synch word in the symbol table.

Conditions

Measurement views: Symbol table

Group

Fetch commands

Syntax

`FETCH:DDEMod:SYNCh:WORD:LENGth?`

Related Commands

[FETCh:DDEMod:SYNCh:WORD:POSition?](#) (on page 1172)

Arguments

None

Returns

<NR1> indicates the length of the synch word in symbols.

Examples

FETCh:DDEMOD:SYNCH:WORD:LENGTH? might return 3, indicating the length of the synch word is three symbols.

FETCh:DDEMod:SYNCh:WORD:POSition? (Query Only)

Returns the position of the synch word in the symbol table.

Conditions

Measurement views: Symbol table

Group

Fetch commands

Syntax

FETCh:DDEMod:SYNCh:WORD:POSition?

Related Commands

[FETCh:DDEMod:SYNCh:WORD:LENGth?](#) (on page 1171)

Arguments

None

Returns

<NR1> indicates what symbol number the synch word begins at in the table. Zero (0) represents the first symbol in the table. A "-1" indicates that the synch word was not found.

Examples

FETCh:DDEMOD:SYNCH:WORD:POSITION? might return 10, indicating the synch word begins at 11th symbol in the table.

FETCh:DIQVtime[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Demod I&Q versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Fetch commands

Syntax

`FETCh:DIQVtime[:MEASview<y>]:FERRor?`

Arguments

None

Returns

`<freq_error>::<NRf>` is the frequency error in Hz.

Examples

`FETCh:DIQVtime:MEASview1:FERRor?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz measurement view 1.

FETCh:DIQVtime[:MEASview<y>]:I? (Query only)

Returns the I versus Time trace data.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Fetch commands

Syntax

`FETCh:DIQVtime[:MEASview<y>]:I?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the I level in volts at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:DIQVtime:MEASview1:I?` might return `#3160xxxx...` (160-byte data) for the I versus Time trace measurement view 1.

FETCh:DIQVtime[:MEASview<y>]:Q? (Query only)

Returns the Q versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Fetch commands

Syntax

```
FETCh:DIQVtime[:MEASview<y>]:Q?
```

Arguments

None

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the Q level in volts at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:DIQVtime:MEASview1:Q? might return #3160xxxx... (160-byte data) for the Q versus Time trace measurement view 1.

FETCh:DPX:DDENsity? (Query Only)

Returns the calculated density for the selected region in the DPXogram measurement.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

```
FETCh:DPX:DDENsity?
```

Arguments

None

Returns

<NR1> value.

Examples

`FETCH:DPX:DDENSITY?` might return a DPX signal density value of 24.4802413393.

FETCH:DPX:DGRam:LINE:COUNT? (Query Only)

Returns the number of lines in the DPXogram measurement.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

`FETCH:DPX:DGRam:LINE:COUNT?`

Arguments

None

Returns

<NR1> number of lines in the measurement.

Examples

`FETCH:DPX:DGRAM:LINE:COUNT?` might return 40, indicating that there were 40 lines in the measurement.

FETCH:DPX:DGRam:TIME[:SCALE]:OFFSet? (Query Only)

Returns the time scale offset in the DPXogram measurement.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

`FETCH:DPX:DGRam:TIME[:SCALE]:OFFSet?`

Arguments

None

Returns

<string> The time offset in the DPXogram measurement in seconds.

Examples

`FETCH:DPX:DGRAM:TIME[:SCALE]:OFFSET?` might return "0.000 s" indicating that the time scale offset was 0.000 s.

FETCh:DPX:RESults:TRACe<x>? (Query Only)

Returns waveform data of specified trace <x> in the DPX spectrum measurement, where x is 1 to 5. The traces 1–4 are in the standard form. Trace 5 is the bitmap trace and its data is returned in a binary block. Trace 6 is the DPXogram trace on DPX spectrum plots. Trace 7 is the Ogram line in the DPXogram display.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

FETCh:DPX:RESults:TRACe<x>?

Arguments

<NR1>

Returns

For traces 1 to 4:

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude of the trace sample at the nth data point.

<data(n)> is in the 4-byte little endian floating-point format specified in IEEE 488.2.

The format is a binary block of 32 bit floating point values. Each value ranges from 0 to 1.0, where 1.0 represents 100%.

Examples

FETCh:DPX:RESULTS:TRACE1? might return #42004xxxx... (2004-byte of data) for the waveform data of trace one (1).

FETCh:DPX:TDM:FREQuency:TXBer:BER? (Query Only)

Returns the Tx BER measurement BER results.

Conditions

Measurement views: DPX:Frequency

Group

Fetch commands

Syntax

FETCh:DPX:TDM:FREQuency:TXBer:BER?

Related Commands

Arguments

None

Returns

<NR1> is the calculated BER.

Examples

`FETCH:DPX:TDM:FREQUENCY:TXBER:BER?` might return `9.1135684130E-6`.

FETCh:DPX:TDM:FREQuency:TXBer:BITS? (Query Only)

Returns the number of bits counted in the active Tx BER measurement session.

Conditions

Measurement views: DPX:Frequency

Group

Fetch commands

Syntax

`FETCh:DPX:TDM:FREQuency:TXBer:BITS?`

Related Commands

Arguments

None

Returns

<NR1> is the number of bits counted in the current Tx BER measurement session.

Examples

`FETCH:DPX:TDM:FREQUENCY:TXBER:BITS?` might return `72.0820000000E+12`.

FETCh:DPX:TDM:FREQuency:TXBer:ERRors? (Query Only)

Returns the number of errors counted in the active Tx BER measurement session.

Conditions

Measurement views: DPX:Frequency

Group

Fetch commands

Syntax

`FETCh:DPX:TDM:FREQuency:TXBer:ERRors?`

Arguments

None

Returns

<NR1> is the number of errors counted in the current Tx BER measurement session.

Examples

`FETCH:DPX:TDM:FREQUENCY:TXBER:ERRORS?` might return `1.0000000000`.

FETCh:DPX:TDM:FREQuency:TXBer:STATe? (Query Only)

Returns the state of the Tx BER measurement.

Conditions

Measurement views: DPX:Frequency

Group

Fetch commands

Syntax

`FETCh:DPX:TDM:FREQuency:TXBer:STATe?`

Returns

`IDLE` indicates the Tx BER measurement is not running.

`ACTIVE` indicates the Tx BER measurement is in progress.

`SYNC` indicates the instrument is in the process of syncing with the data pattern.

`DONE` indicates the Tx BER measurement is finished.

Examples

`FETCH:DPX:TDM:FREQUENCY:TXBER:STATE?` might return `ACTIVE`, indicating the instrument is measuring the Tx BER.

FETCh:DPX:TRACe:AVERAge? (Query Only)

Returns waveform data of the average trace in the DPX spectrum measurement.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

`FETCh:DPX:TRACe:AVERAge?`

Arguments

None

Returns

`#<num_digit><num_byte><data (1)><data (2)>...<data (n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

<data(n)> is the amplitude of the average trace at the nth data point in dBm, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:DPX:TRACe:AVERAGE? might return #42004xxxx... (2004-byte data) for the waveform data of the average trace.

FETCh:DPX:TRACe:BITMap? (Query Only)

Returns a data block of the DPX spectrum measurement bitmap waveform data.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

FETCh:DPX:TRACe:BITMap?

Arguments

None

Returns

A binary block of 32-bit floating point values (IEEE standard single precision floating point format). Each value ranges from 0 to 1.0, where 1.0 represents 100%. Bitmaps have 201 rows and 801 columns. Data[0] is the first column in the first row, data[801] is the first column in the 2nd row, and so on.

Bitmap values are returned in the following order: Top left pixel first, then the rest of the top row, after that row by row. In other words, the pixels in the bitmap are returned from left to right and top to bottom; one row at a time.

Examples

FETCh:DPX:TRACe:BITMAP? might return #6644004xxxx...

FETCh:DPX:TRACe:MATH? (Query Only)

Returns waveform data of the math trace in the DPX spectrum measurement.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

FETCh:DPX:TRACe:MATH?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude of the math trace at the nth data point in dBm, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:DPX:TRACE:MATH? might return #42004xxxx... (2004-byte data) for the waveform data of the math trace.

FETCh:DPX:TRACe:MAXimum? (Query Only)

Returns waveform data of the maximum trace in the DPX spectrum measurement.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

FETCh:DPX:TRACe:MAXimum?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude of the maximum trace at the nth data point in dBm, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:DPX:TRACE:MAXIMUM? might return #42004xxxx... (2004-byte data) for the waveform data of the maximum trace.

FETCh:DPX:TRACe:MINimum? (Query Only)

Returns waveform data of the minimum trace in the DPX spectrum measurement.

Conditions

Measurement views: DPX spectrum

Group

Fetch commands

Syntax

FETCh:DPX:TRACe:MINimum?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude data of the minimum trace at the nth data point in dBm, 4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:DPX:TRACe:MINIMUM? might return #42004xxxx... (2004-byte data) for the waveform data of the minimum trace.

FETCh:EDiagram[:MEASview<y>]:FDEVIation? (Query only)

Returns the frequency deviation versus Time trace data with the X values.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Fetch commands

Syntax

FETCh:EDiagram[:MEASview<y>]:FDEVIation?

Returns

#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)> and <X(n)> is the frequency deviation in Hz and time (symbols) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:EDiagram:MEASview2:FDEviation?` might return `#3160xxxx...` (160-byte data) for the frequency deviation versus Time trace for measview2 of the Eye diagram.

FETCh:EDiagram[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the eye diagram measurement.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Fetch commands

Syntax

`FETCh:EDiagram[:MEASview<y>]:FERRor?`

Arguments

None

Returns

`<freq_error>::<NRf>` is the frequency error in Hz.

Examples

`FETCh:EDiagram:MEASview2:FERRor?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz for measview2 of the Eye diagram.

FETCh:EDiagram[:MEASview<y>]:I? (Query only)

Returns the I versus Time trace data in the eye diagram measurement.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Fetch commands

Syntax

`FETCh:EDiagram[:MEASview<y>]:I?`

Arguments

None

Returns

#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)><X(n)> is the I level (normalized) and time (symbols) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:EDIagram:MEASview2:I? might return #3160xxxx... (160-byte data) for the I versus Time trace for measview2 of the Eye diagram.

FETCh:EDIagram[:MEASview<y>]:Q? (Query only)

Returns the Q versus Time trace data in the eye diagram measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Fetch commands

Syntax

FETCh:EDIagram[:MEASview<y>]:Q?

Arguments

None

Returns

#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)><X(n)> is the Q level (normalized) and time (symbols) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:EDIagram:MEASview2:Q? might return #3160xxxx... (160-byte data) for the Q versus Time trace for measview2 of the Eye diagram.

FETCh:EMC:COUNt? (Query only)

Queries the total numbers of spots detected in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCH:EMC:COUNT?`

Arguments

None

Returns

<NR1>

Examples

`FETCH:EMC:COUNT?` might return 15, indicating that 15 spots are detected.

FETCH:EMC:EMISSION:RESULTS:STATUS? (Query Only)

Queries the status of the emission results in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCH:EMC:EMISSION:RESULTS:STATUS?`

Arguments

None

Returns

<String> Either PASS or FAIL

Examples

`FETCH:EMC:EMISSION:RESULTS:STATUS?` returns PASS, indicating that the status of emission results is passed.

FETCH:EMC:SPOT<x>:AMBIent:AMPLitude? (Query Only)

Queries the amplitude of the selected spot in ambient trace of EMC view.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:AMBIent:AMPLitude?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:EMC:SPOT1:AMBIent:AMPLitude?` might return `52.612`, indicating that the amplitude of spot 1 in the ambient trace is 52.61 dBuV.

FETCh:EMC:SPOT<x>:AMBIent:DELTA? (Query Only)

Queries the Delta value of the selected spot in ambient trace of EMC View.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:AMBIent:DELTA?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:EMC:SPOT2:AMBIent:DELTA?` might return `3.3614`, indicating that the delta value of spot 2 in the ambient trace is 3.36 dBuV.

FETCh:EMC:SPOT<x>:AMBIent:PASS? (Query Only)

Queries the status of the selected spot in ambient trace in EMC view. The default status is THRE.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:AMBIent:PASS?`

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

Where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

`FETCh:EMC:SPOT3:AMBIent:PASS?` might return `THRE`, indicating that spot 3 of the ambient trace is failing by crossing the threshold.

FETCh:EMC:SPOT<x>:FREQuency? (Query Only)

Queries the frequency of the specified spot in EMC View.

<x> = <NR1> indicates the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:FREQuency?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:EMC:SPOT2:FREQuency?` might return `366.12500000E+3`, indicating that the frequency of spot 2 is 366.125 kHz.

FETCh:EMC:SPOT<x>:PASS? (Query Only)

Queries the overall status of the specified spot in EMC view. The default status is THRE.

<x> = <NR1> indicates the spot number.

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:PASS?`

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

`FETCh:EMC:SPOT1:PASS?` might return OLIM, indicating that spot 1 is failing by crossing over the limit.

FETCh:EMC:SPOT<x>:RANGe? (Query Only)

Queries the range of the specified spot in EMC View.

<x> = <NR1> indicates the spot number.

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:RANGe?`

Arguments

None

Returns

<String> from A to T

Examples

`FETCh:EMC:SPOT1:RANGe?` might return "A", indicating that the range of spot 1 is "A".

FETCh:EMC:SPOT<x>:RECALL:AMPLitude? (Query Only)

Queries the amplitude of the selected spot in recalled trace of EMC View.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:RECA11:AMPLitude?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:EMC:SPOT1:RECA11:AMPLitude?` might return 23.598, indicating that the amplitude of spot 1 in the recalled trace is 23.59 dBuV.

FETCh:EMC:SPOT<x>:RECA11:DELTA? (Query Only)

Queries the Delta value of the specified spot in recalled trace of EMC View.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:RECA11:DELTA?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:EMC:SPOT2:RECA11:DELTA?` might return 5.5878, indicating that delta value of the spot 2 in the recalled trace is 5.58 dBuV.

FETCh:EMC:SPOT<x>:RECA11:PASS? (Query Only)

Queries the status of the selected spot in recalled trace in EMC view. The default status is THRE.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

FETCh:EMC:SPOT<x>:RECA11:PASS?

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

Where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

FETCh:EMC:SPOT1:RECA11:PASS? might return OMAR, indicating that spot 1 of the recalled trace is failing by crossing the Margin.

FETCh:EMC:SPOT<x>:SCDEtector<y>:AMPLitude? (Query Only)

Queries the amplitude of the specified spot with respect to specified scan detector in the results table.

<x> = the spot number

<y> = the scan detector number (either 1 or 2)

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

FETCh:EMC:SPOT<x>:SCDEtector<y>:AMPLitude?

Arguments

None

Returns

<NRf>

Examples

FETCh:EMC:SPOT1:SCDEtector1:AMPLitude? might return 20.6209, indicating that the amplitude of spot 1 for scan detection 1 is 20.62 dBuV.

FETCh:EMC:SPOT<x>:SCDEtector<y>:DELTA? (Query Only)

Queries the Delta value of the specified spot with respect to specified scan detector in the results table.

<x> = the spot number

<y> = the scan detector number (either 1 or 2)

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:SCDEtector<y>:DELTA?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:EMC:SPOT2:SCDEtector1:DELTA?` might return `3.6209`, indicating that the delta value of spot 2 for scan detection 1 is 3.62 dBuV.

FETCh:EMC:SPOT<x>:SCDEtector<y>:PASS? (Query Only)

Queries the status of the specified spot based on the specified scan detector in EMC view. The default status is THRE.

<x> = the spot number

<y> = the scan detector number (either 1 or 2)

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:SCDEtector<y>:PASS?`

Arguments

None

Returns

<String> either OLIM, OMAR or THRE

where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

`FETCh:EMC:SPOT2:SCDEtector1:PASS?` might return `THRE`, indicating that spot 2 of scan detector 1 is failing by crossing the threshold.

FETCh:EMC:SPOT<x>:SPDEtector<y>:AMPLitude? (Query Only)

Queries the amplitude of the specified spot with respect to specified spot detector in the results table.

<x> = the spot number

<y> = the spot detector number (either 1, 2, or 3)

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:SPDEtector<y>:AMPLitude?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:EMC:SPOT1:SPDEtector1:AMPLitude?` might return `18.365`, indicating that amplitude of spot 1 for spot detection 1 is 18.36 dBuV.

FETCh:EMC:SPOT<x>:SPDEtector<y>:DELTA? (Query Only)

Queries the Delta value of the specified spot with respect to specified spot detector in the results table.

<x> = the spot number

<y> = the spot detector number (either 1, 2, or 3)

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCh:EMC:SPOT<x>:SPDEtector<y>:DELTA?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:EMC:SPOT2:SPDEtector1:DELta?` might return `2.2578`, indicating that delta value of spot 2 for spot detection 1 is 2.25 dBuV.

FETCH:EMC:SPOT<x>:SPDEtector<y>:PASS? (Query Only)

Queries the status of the selected spot based on the specified spot detector in EMC view. The default status is THRE.

<x> = the spot number

<y> = the spot detector number (either 1, 2, or 3)

Conditions

Measurement view: EMC - EMI Display

Group

Fetch commands

Syntax

`FETCH:EMC:SPOT<x>:SPDEtector<y>:PASS?`

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

`FETCH:EMC:SPOT1:SPDEtector2:PASS?` might return OMAR, indicating that the spot 1 of spot detector 2 is failing by crossing Margin.

FETCH:EVM[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the EVM versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Fetch commands

Syntax

`FETCh:EVM[:MEASVIEW<y>]:FERRor?`

Arguments

None

Returns

`<freq_error>::<Nrf>` is the frequency error in Hz.

Examples

`FETCh:EVM:MEASview2:FERRor?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz for measview2 of EVM.

FETCh:EVM[:MEASview<y>]:PEAK? (Query only)

Returns the peak value in the **EVM** versus Time measurement.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Fetch commands

Syntax

`FETCh:EVM[:MEASview<y>]:PEAK?`

Related Commands

[FETCh:EVM\[:MEASVIEW<y>\]:PINDEX?](#) (on page 1193)

Arguments

None

Returns

`<peak>::<Nrf>` is the peak EVM value in percent (%).

Examples

`FETCh:EVM:MEASview2:PEAK?` might return `1.32`, indicating the peak EVM value is 1.32% for measview2 of EVM.

FETCh:EVM[:MEASview<y>]:PINDEX? (Query only)

Returns the time at the **EVM** peak.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Fetch commands

Syntax

```
FETCh:EVM[:MEASview<y>]:PINdex?
```

Related Commands

[FETCh:EVM\[:MEASview<y>\]:PEAK?](#) (on page 1193)

Arguments

None

Returns

<peak_time>::<NRf> is the time at the EVM peak in symbol number.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

FETCh:EVM:MEASview2:PINdex might return 68.000, indicating that the EVM peak is at symbol #68 for measview2 of EVM.

FETCh:EVM[:MEASview<y>]:RMS? (Query only)

Returns the RMS (Root-Mean-Square) value in the **EVM** versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Fetch commands

Syntax

```
FETCh:EVM[:MEASview<y>]:RMS?
```

Arguments

None

Returns

<rms>::<NRf> is the RMS EVM value in percent (%).

Examples

FETCh:EVM:MEASview2:RMS? might return 0.582, indicating the RMS EVM value is 0.582% for the measview2 of EVM.

FETCh:EVM[:MEASview<y>]:TRACe? (Query only)

Returns the **EVM** versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Fetch commands

Syntax

```
FETCh:EVM[:MEASview<y>]:TRACe?
```

Arguments

None

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the EVM value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:EVM:MEASview2:TRACe? might return #42036xxxx... (2036-byte data) for the EVM versus Time Measview 2.

FETCh:FDVTime[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Frequency deviation versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Fetch commands

Syntax

```
FETCh:FDVTime:MEASview<y>:FERRor?
```

Arguments

None

Returns

`<freq_error>::<NRf>` is the frequency error in Hz.

Examples

`FETCH:FDVTime:MEASview2:FERROR?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz.

FETCh:FDVTime[:MEASview<y>]:TRACe? (Query only)

Returns the Frequency deviation versus Time trace data.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Fetch commands

Syntax

`FETCh:FDVTime:MEASview<y>:TRACe?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the frequency deviation value at the n^{th} data point in percent (Hz), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:FDVTime:MEASview2:TRACE?` might return `#3160xxxx...` (160-byte data) for the Frequency deviation versus Time Measview 2.

FETCh:{FM|PM}:FERRor? (Query Only)

Returns the frequency error in the Frequency modulation or Phase modulation measurements.

Conditions

Measurement views: Frequency deviation versus Time

Group

Fetch commands

Syntax

`FETCh:{FM|PM}:FERRor?`

Arguments

None

Returns

`<freq_error>::<NRf>` is the frequency error in Hz.

Examples

`FETCh:{FM|PM}:FERROR?` might return `-10.7E+3`, indicating the frequency error is `-10.7 kHz`.

FETCh:FM:PHALf? (Query Only)

Returns the half peak-peak frequency deviation ($Pk-Pk/2$) in the FM measurement.

Conditions

Measurement views: FM

Group

Fetch commands

Syntax

`FETCh:FM:PHALf?`

Arguments

None

Returns

`<Pk-Pk/2>::<NRf>` is the half peak-peak frequency deviation in Hz.

Examples

`FETCh:FM:PHALF?` might return `628.9E+3`, indicating the half peak-peak frequency deviation is `628.9 kHz`.

FETCh:FM:PNEGative? (Query Only)

Returns the negative peak frequency deviation ($-Pk$) in the FM measurement.

Conditions

Measurement views: FM

Group

Fetch commands

Syntax

`FETCh:FM:PNEGative?`

Arguments

None

Returns

`<-Pk> : : <NRf>` is the negative peak frequency deviation in Hz.

Examples

`FETCh:FM:PNEGATIVE?` might return `-495.6E+3`, indicating the negative peak frequency deviation is `-495.6 kHz`.

FETCh:FM:PPOSitive? (Query Only)

Returns the positive peak frequency deviation (+Pk) in the FM measurement.

Conditions

Measurement views: FM

Group

Fetch commands

Syntax

`FETCh:FM:PPOSitive?`

Arguments

None

Returns

`<+Pk> : : <NRf>` is the positive peak frequency deviation in Hz.

Examples

`FETCh:FM:PPOSITIVE?` might return `763.2E+3`, indicating the positive peak frequency deviation is `763.2 kHz`.

FETCh:FM:PTPeak? (Query Only)

Returns the peak-peak frequency deviation (Pk-Pk) in the FM measurement.

Conditions

Measurement views: FM

Group

Fetch commands

Syntax

`FETCh:FM:PTPeak?`

Arguments

None

Returns

`<Pk-Pk> : : <NRf>` is the peak-peak frequency deviation in Hz.

Examples

`FETCh:FM:PTPEAK?` might return `1.258E+6`, indicating the peak-peak frequency deviation is `1.258 MHz`.

FETCh:FM:RESult? (Query Only)

Returns the FM measurement results.

Conditions

Measurement views: FM

Group

Fetch commands

Syntax

FETCh:FM:RESult?

Arguments

None

Returns

<+Pk>, <-Pk>, <RMS>, <Pk-Pk>, <Pk-Pk/2>

Where

<+Pk>: : <NRf> is the positive peak frequency deviation in Hz.

<-Pk>: : <NRf> is the negative peak frequency deviation in Hz.

<RMS>: : <NRf> is the RMS frequency deviation in Hz.

<Pk-Pk>: : <NRf> is the peak-peak frequency deviation in Hz.

<Pk-Pk/2>: : <NRf> is the half peak-peak frequency deviation in Hz.

Examples

FETCh:FM:RESULT? might return 763.2E+3, -494.6E+3, 271.2E+3, 1.258E+6, 628.9E+3.

FETCh:FM:RMS? (Query Only)

Returns the RMS frequency deviation in the FM measurement.

Conditions

Measurement views: FM

Group

Fetch commands

Syntax

FETCh:FM:RMS?

Arguments

None

Returns

<RMS>: : <NRf> is the RMS frequency deviation in Hz.

Examples

`FETCH:FM:RMS?` might return `271.2E+3`, indicating the RMS frequency deviation is 271.2 kHz.

`FETCH:{FSETtling|PSETtling}:FTTime? (Query Only)`

Returns the settling time from the trigger position in seconds. The settling time is measured from the trigger point (see `:FETCH:FSETtling:TRIGger:TIME`).

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

`FETCH:{FSETtling|PSETtling}:FTTime?`

Arguments

None

Returns

`<value>::<NRf>` is the settling time in seconds.

Examples

`FETCH:FSETTLING:FTTIME?` might return `44.8300E-6`, indicating the settling time is 44.83 μ s.

`FETCH:{FSETtling|PSETtling}:MASK[:PASS]? (Query Only)`

Returns whether the input signal passes the mask test.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

`FETCH:{FSETtling|PSETtling}:MASK[:PASS]?`

Arguments

None

Returns

0 is returned if the signal fails the mask test.

1 is returned if the signal passes the mask test.

Examples

`FETCH:FSETTLING:MASK:PASS?` might return 1, indicating the signal passed (did not exceed the mask limits).

FETCH:{FSETtling|PSETtling}:SETTled:FREQuency? (Query Only)

Returns the frequency at which the signal is considered settled.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

`FETCH:{FSETtling|PSETtling}:SETTled:FREQuency?`

Arguments

None

Returns

`<value>: : <Nrf>` is the frequency at which the signal is settled.

Examples

`FETCH:FSETTLING:SETTLED:FREQUENCY?` might return `2.44838E+9`, indicating the input signal frequency at the point where the signal is considered settled is 2.44838 GHz.

FETCH:{FSETtling|PSETtling}:SETTled[:PASS]? (Query Only)

Returns whether the input signal is settled with the tolerance range.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

`FETCH:{FSETtling|PSETtling}:SETTled[:PASS]?`

Arguments

None

Returns

0 is returned if the signal is not settled within the tolerance range.

1 is returned if the signal is settled within the tolerance range.

Examples

`FETCH:FSETTLING:SETTLED:PASS?` might return 1, indicating the signal is settled within the tolerance range.

FETCH:{FSETtling|PSETtling}:SETTled:TIME? (Query Only)

Returns the settled time in seconds. The settled time is measured from the measurement start point.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

```
FETCh:{FSETtling|PSETtling}:SETTled:TIME?
```

Arguments

None

Returns

<value>: : <NRf> is the settled time in seconds.

Examples

FETCH:FSETTLING:SETTLED:TIME? might return `299.830000E-6`, indicating the settled time is 299.83 μ s.

FETCh:{FSETtling|PSETtling}:SLMSd[:PASS]? (Query Only)

Returns whether the input signal is settled within the specified tolerance and the signal is settled longer than the Minimum Settled Duration ([SENSe]:{FSETtling|PSETtling}:SDURation:MINimum).

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

```
FETCh:{FSETtling|PSETtling}:SLMSd[:PASS]?
```

Arguments

None

Returns

0 is returned if the signal is not settled within the tolerance range and minimum settled duration.

1 is returned if the signal is settled within the tolerance range and minimum settled duration.

Examples

FETCH:FSETTLING:SLMSD:PASS? might return 1, indicating the signal is settled within the tolerance range and the minimum settled duration.

FETCh:{FSETtling|PSETtling}:START:TIME? (Query Only)

Returns the start time for the measurement in seconds. The start time is measured from the start of the analysis period.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

`FETCh:{FSETtling|PSETtling}:STARt:TIME?`

Arguments

None

Returns

`<value>: : <NRf>` is the time in seconds when the measurement started.

Examples

`FETCH:FSETTLING:STARt:TIME?` might return `251.4300E-6`, indicating the measurement started 251.43 μ s after the beginning of the analysis period.

FETCh:{FSETtling|PSETtling}:TIME? (Query Only)

Returns the settling time in seconds. The settling time is measured from the start time (see `:FETCh:FSETtling:STARt:TIME`).

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

`FETCh:{FSETtling|PSETtling}:TIME?`

Arguments

None

Returns

`<value>: : <NRf>` is the settling time in seconds.

Examples

`FETCH:FSETTLING:TIME?` might return `48.4000E-6`, indicating the settling time is 48.4 μ s.

FETCh:{FSETtling|PSETtling}:TRACe<x>:X? (Query Only)

Returns the Frequency or Phase values of the specified trace.

The parameter `<x>` = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

```
FETCh:{FSETtling|PSETtling}:TRACe<x>:X?
```

Arguments

None

Returns

```
#<num_digit><num_byte><y(1)><y(2)>...<y(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the frequency (Hz) or phase (degrees) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:FSETTLING:TRACE1:X? might return #574232xxxx... (74232-byte data) for the frequency values of Trace 1.

FETCh:{FSETtling|PSETtling}:TRACe<x>:XY? (Query Only)

Returns the time and frequency or phase value pairs of the specified trace. The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

```
FETCh:{FSETtling|PSETtling}:TRACe<x>:XY?
```

Arguments

None

Returns

```
#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the time and frequency or phase value pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:FSETTLING:TRACE2:XY? might return #574232xxxx... (74232-byte data) for the time and frequency pairs of the Trace 2.

FETCh:{FSETtling|PSETtling}:TRACe<x>[:Y]? (Query Only)

Returns the frequency or phase values of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

FETCh:{FSETtling|PSETtling}:TRACe<x>[:Y]?

Arguments

None

Returns

#<num_digit><num_byte><y(1)><y(2)>...<y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the frequency or phase value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:FSETTLING:TRACE1:Y? might return #575148xxxx... (75148-byte data) for the frequency values of Trace 1.

FETCh:{FSETtling|PSETtling}:TRIGger:TIME? (Query Only)

Returns the time when the trigger occurred in seconds.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

FETCh:{FSETtling|PSETtling}:TRIGger:TIME?

Arguments

None

Returns

<value>::<NRf> is the time in seconds after the measurement start point when the trigger occurred.

Examples

`FETCH:FSETTLING:TRIGGER:TIME?` might return `2.255E-6`, indicating the time when the trigger occurred 255 µs after the start of the measurement.

`FETCh:{FSETtling|PSETtling}:VALue? (Query Only)`

Returns the settled value in Hz for Frequency Settling and in degrees for Phase Settling.

Conditions

Measurement views: Frequency and Phase Settling

Group

Fetch commands

Syntax

`FETCh:{FSETtling|PSETtling}:VALue?`

Arguments

None

Returns

`<value>::<NRf>` is the settling value in Hz for Frequency Settling and in degrees for Phase Settling.

Examples

`FETCH:FSETTLING:VALUE?` might return `2.44838155E+9`, indicating the settled frequency is 2.44838 GHz.

`FETCh:FSETtling:ERRor? (Query Only)`

Returns the settled error in Hz in Frequency Settling. Only for Frequency Settling Time measurement. In Frequency Settling:

- When Target Reference is set to Auto, Settled Error = 0.

Conditions

Measurement views: Frequency Settling

Group

Fetch commands

Syntax

`FETCh:FSETtling:ERRor?`

Arguments

None

Returns

`<value>::<NRf>` returns the settled error in Hz.

When Target Reference is set to Auto, Settled Error = 0.

When Target Reference is set to Meas Freq:

Settled Error = Settled Frequency – (Measurement Frequency + Offset)

Examples

`FETCH:FSETTLING:FTTIME?` might return 0, indicating the Target Reference is set to Auto.

FETCh:FVTime[:MEASview<y>]? (Query Only)

Returns the Frequency versus Time trace data.

Conditions

Measurement views: Frequency versus Time

Group

Fetch commands

Syntax

`FETCh:FVTime[:MEASview<y>]?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the frequency in Hz at the *n*th data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:FVTIME:MEASview1?` might return `#3156xxxx...` (156-byte data) for the Frequency versus Time trace.

FETCh:FVTime[:MEASview<y>]:MAXimum? (Query Only)

Returns the maximum value in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Fetch commands

Syntax

`FETCh:FVTime[:MEASview<y>]:MAXimum?`

Related Commands

[FETCh:FVTime\[:MEASview<y>\]:MAXLocation?](#) (on page 1208)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max> : : <NRf> is the maximum frequency drift in Hz.

Examples

FETCH:FVTIME:MEASview1:MAXIMUM? might return 2.625E+6, indicating the maximum frequency drift is 2.625 MHz.

FETCh:FVTime[:MEASview<y>]:MAXLocation? (Query Only)

Returns the time at which the frequency drift is maximum.

Conditions

Measurement views: Frequency versus Time

Group

Fetch commands

Syntax

FETCH:FVTime[:MEASview<y>]:MAXLocation?

Related Commands

[FETCh:FVTime\[:MEASview<y>\]:MAXimum?](#) (on page 1207)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max_time>::<NRf> is the time in seconds at which the frequency drift is maximum.

Examples

FETCH:FVTIME:MEASview1:MAXLOCATION? might return 25.03E-9, indicating the frequency drift is maximum at 25.03 ns.

FETCh:FVTime[:MEASview<y>]:MINimum? (Query Only)

Returns the minimum value in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Fetch commands

Syntax

FETCH:FVTime[:MEASview<y>]:MINimum?

Related Commands

[FETCh:FVTime\[:MEASview<y>\]:MINLocation?](#) (on page 1209)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min>::<NRf> is the minimum frequency drift in Hz.

Examples

FETCh:FVTIME:MEASview1:MINIMUM? might return -6.618E+6, indicating the minimum frequency drift is -6.618 MHz.

FETCh:FVTime[:MEASview<y>]:MINLocation? (Query Only)

Returns the time at which the frequency drift is minimum.

Conditions

Measurement views: Frequency versus Time

Group

Fetch commands

Syntax

FETCh:FVTime[:MEASview<y>]:MINLocation?

Related Commands

[FETCh:FVTime\[:MEASview<y>\]:MINimum?](#) (on page 1208)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min_time>::<NRf> is the time in seconds at which the frequency drift is minimum.

Examples

FETCh:FVTIME:MEASview1:MINLOCATION? might return 450.7E-9, indicating the frequency drift is minimum at 450.7 ns.

FETCh:FVTime[:MEASview<y>]:RESult? (Query Only)

Returns the Frequency versus Time measurement results.

Conditions

Measurement views: Frequency versus Time

Group

Fetch commands

Syntax

`FETCh:FVTime[:MEASview<y>]:RESult?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

`<max>,<max_time>,<min>,<min_time>`

Where

`<max>::<NRf>` is the maximum frequency drift in Hz.

`<max_time>::<NRf>` is the time in seconds at which the frequency drift is maximum.

`<min>::<NRf>` is the minimum frequency drift in Hz.

`<min_time>::<NRf>` is the time in seconds at which the frequency drift is minimum.

Examples

`FETCH:FVTIME:MEASview1:RESULT?` might return `2.625E+6,25.03E-9,-6.618E+6,450.7E-9`, indicating the maximum frequency drift is 2.625 MHz at 25.03 ns and the minimum frequency drift is -6.618 MHz at 450.7 ns.

FETCh:IQVTime[:MEASview<y>]:I? (Query Only)

Returns the I versus Time trace data.

Conditions

Measurement views: RF I&Q versus Time

Group

Fetch commands

Syntax

`FETCh:IQVTime[:MEASview<y>]:I?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the I level in volts at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:IQVTIME:MEASview1:I?` might return `#3160xxxx...` (160-byte data) for the I versus Time trace.

FETCh:IQVTime[:MEASview<y>]:MAXimum (Query Only)

Returns the maximum value in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Fetch commands

Syntax

FETCh:IQVTime[:MEASview<y>]:MAXimum

Related Commands

[FETCh:IQVTime\[:MEASview<y>\]:MAXLocation](#) (on page 1211)

Arguments

None

Returns

<max>::<NRf> is the maximum I or Q level in volts.

Use the TRACE:IQVTime[:MEASview<y>]:SElect:I or TRACE:IQVTime[:MEASview<y>]:SElect:Q command to select the trace.

Examples

FETCh:IQVTime:MEASview1:MAXimum? might return 1.214, indicating the maximum I or Q level is 1.214 V.

FETCh:IQVTime[:MEASview<y>]:MAXLocation (Query Only)

Returns the time at which the I or Q level is maximum.

Conditions

Measurement views: RF I&Q versus Time

Group

Fetch commands

Syntax

FETCh:IQVTime[:MEASview<y>]:MAXLocation

Related Commands

[FETCh:IQVTime\[:MEASview<y>\]:MAXimum](#) (on page 1211)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max_time>::<NRf> is the time in seconds at which the I or Q level is maximum.

Examples

`FETCh:IQVTime:MEASview1:MAXLocation` might return `175.3E-9`, indicating the I or Q level is maximum at 175.3 ns.

FETCh:IQVTime[:MEASview<y>]:MINimum (Query Only)

Returns the minimum value in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Fetch commands

Syntax

`FETCh:IQVTime[:MEASview<y>]:MINimum`

Related Commands

[FETCh:IQVTime\[:MEASview<y>\]:MINLocation](#) (on page 1212)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

Returns

`<min>::<NRf>` is the minimum I or Q level in volts.

Use the `TRACe:IQVTime[:MEASview<y>]:SElect:I` or `TRACe:IQVTime[:MEASview<y>]:SElect:Q` command to select the trace.

Examples

`FETCh:IQVTime:MEASview1:MINimum?` might return `-370.5E-3`, indicating the minimum I or Q level is -370.5 mV.

FETCh:IQVTime[:MEASview<y>]:MINLocation (Query Only)

Returns the time at which the I or Q level is minimum.

Conditions

Measurement views: RF I&Q versus Time

Group

Fetch commands

Syntax

`FETCh:IQVTime[:MEASview<y>]:MINLocation`

Related Commands

[FETCh:IQVTime\[:MEASview<y>\]:MINimum](#) (on page 1212)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min_time>::<Nrf> is the time in seconds at which the I or Q level is minimum.

Examples

FETCh:IQVTime:MEASview1:MINLocation might return 450.7E-9, indicating the I or Q level is minimum at 450.7 ns.

FETCh:IQVTime[:MEASview<y>]:Q (Query Only)

Returns the Q versus Time trace data.

Conditions

Measurement views: RF I&Q versus Time

Group

Fetch commands

Syntax

FETCh:IQVTime[:MEASview<y>]:Q

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the Q level in volts at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:IQVTime:MEASview1:Q? might return #3160xxxx... (160-byte data) for the Q versus Time trace.

FETCh:IQVTime[:MEASview<y>]:RESult (Query Only)

Returns the RF I&Q versus Time measurement results.

Conditions

Measurement views: RF I&Q versus Time

Group

Fetch commands

Syntax

FETCh:IQVTime[:MEASview<y>]:RESult

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>, <max_time>, <min>, <min_time>

Where

<max>::<NRf> is the maximum I or Q level in volts.

<max_time>::<NRf> is the time in seconds at which the I or Q level is maximum.

<min>::<NRf> is the minimum I or Q level in volts.

<min_time>::<NRf> is the time in seconds at which the I or Q level is minimum.

Use the `TRACe:IQVTime[:MEASview<y>]:SElect:I` or `TRACe:IQVTime:MEASview<y>:SElect:Q` command to select the trace.

Examples

`FETCH:IQVTime:MEASview1:RESult?` might return `1.214,175.3E-9,-370.5E-3,450.7E-9`, indicating the maximum I or Q level is 1.214 V at 175.3 ns and the minimum I or Q level is -370.5 mV at 450.7 ns.

FETCH:LTE:ACLR:MHITs:COUNT? (Query Only)

Returns the number of rows in the results table of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Fetch commands

Syntax

`FETCH:LTE:ACLR:MHITs:COUNT?`

Returns

<NR1>

Examples

`FETCH:LTE:ACLR:MHITs:COUNT?` might return 7, indicating there are seven rows in the results table.

FETCH:LTE:ACLR:MHITs<x>:BANDwidth? (Query Only)

Returns the bandwidth value of the channel (row) of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is the row number in the LTE ACLR display results table.

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:MHITs<x>:BANDwidth?`

Returns

<NR3>

Examples

`FETCh:LTE:ACLR:MHITS1:BANDWIDTH?` might return `4.515000000E+6`, which indicates a bandwidth for Channel 1 of 4.515 MHz.

FETCh:LTE:ACLR:MHITs<x>:CHANnel:NAME? (Query Only)

Returns the channel name of the specified index in the results table of the LTE ACLR display. The minimum index will be 1 and the maximum index will be the count of the channels in the results table.

Conditions

Measurement view: LTE ACLR

The parameter <x> is a positive integer and represents the row number in the LTE ACLR display results table.

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:MHITs<x>:CHANnel:NAME?`

Returns

<string>

Examples

`FETCh:LTE:ACLR:MHITS2:CHANNEL:NAME?` might return `"B"`, which is the name of channel 2.

FETCh:LTE:ACLR:MHITs<x>:FREQuency:OFFSet? (Query Only)

Returns the frequency offset of the specified channel (row) of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is a positive integer and represents the row number in the LTE ACLR display results table.

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:MHITs<x>:FREQuency:OFFSet?`

Returns

<NR3>

Examples

`FETCh:LTE:ACLR:MHITS1:FREQUENCY:OFFSET?` might return `5.0000000000E+6` which indicates the frequency offset of Channel 1 is 5 MHz.

FETCh:LTE:ACLR:MHITS<x>:INTEg:LOWEr:ABSolute? (Query Only)

Returns the lower absolute value of the channel (row) of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is the row number in the LTE ACLR display results table.

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:MHITS<x>:INTEg:LOWEr:ABSolute?`

Returns

<NRf>

Examples

`FETCh:LTE:ACLR:MHITS1:INTEg:LOWEr:ABSOLUTE?` might return `-53.3921980303`, which indicates the lower absolute value of Channel 1 is -53.3921980303 dBm.

NOTE: The actual units depends on the choice made from the units tab of the Analysis control panel.

FETCh:LTE:ACLR:MHITS<x>:INTEg:LOWEr:RELative? (Query Only)

Returns the lower relative value of the channel (row) of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is the row number in the LTE ACLR display results table.

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:MHITS<x>:INTEg:LOWEr:RELative?`

Returns

<NRf>

Examples

`FETCh:LTE:ACLR:MHITS1:INTEg:LOWEr:RELATIVE?` might return `-53.3921980303`, which indicates lower relative value of Channel 1 is -53.3921980303 dB.

FETCh:LTE:ACLR:MHITS<x>:INTEg:UPPEr:ABSolute? (Query Only)

Returns the upper absolute value of the channel (row) of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is a positive integer and represents the row number in the LTE ACLR display results table.

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:MHITs<x>:INTEg:UPPEr:ABSolute?`

Returns

<NRf>

Examples

`FETCh:LTE:ACLR:MHITS1:INTEG:UPPER:ABSOLUTE?` might return `-53.3921980303`, which indicates upper absolute value of Channel 1 is -53.3921980303 dBm.

FETCh:LTE:ACLR:MHITs<x>:INTEg:UPPEr:RELative? (Query Only)

Returns the upper relative value of the channel (row) of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is the row number in the LTE ACLR display results table.

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:MHITs<x>:INTEg:UPPEr:RELative?`

Returns

<NRf>

Examples

`READ:LTE:ACLR:MHITS1:INTEG:UPPER:RELATIVE?` might return `-53.3921980303`, which indicates upper relative value of Channel 1 is -53.3921980303 dB.

FETCh:LTE:ACLR:REFerence:POWEr? (Query Only)

Returns the reference power level in the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:REFerence:POWEr?`

Returns

<NRf>

Examples

FETCH:LTE:ACLR:REFERENCE:POWER? might return -16.92, indicating that the reference power level is -16.92 dBm.

FETCh:LTE:ACLR:RESUltS:STATUs? (Query Only)

Returns the pass or fail status of the LTE ACLR display measurement.

Conditions

Measurement view: LTE ACLR

Group

Fetch commands

Syntax

FETCh:LTE:ACLR:RESUltS:STATUs?

Returns

0: means measurement status is FAIL.

1: means measurement status is PASS.

Examples

FETCH:LTE:ACLR:RESULTS:STATUS? might return 1, indicating that the LTE ACLR measurement status is PASS.

FETCh:LTE:ACLR:SPECTrum:X? (Query Only)

Returns the frequencies of the spectrum trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Fetch commands

Syntax

FETCh:LTE:ACLR:SPECTrum:X?

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the frequency (Hz) at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:LTE:ACLR:SPECTRUM:X?` might return `#516020xxxx...` (16020-byte data) for the frequencies of the spectrum trace.

FETCh:LTE:ACLR:SPECTrum:XY? (Query Only)

Returns the frequency and amplitude pairs of the spectrum trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:SPECTrum:XY?`

Returns

`#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>`

Where,

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<x(n)><y(n)>` is the frequency (Hz) and amplitude (dBm) pair at the *n*th point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:LTE:ACLR:SPECTRUM:XY?` might return `#516020xxxx...` (16020-byte data) for the frequency and amplitude pairs of the spectrum trace.

FETCh:LTE:ACLR:SPECTrum:Y? (Query Only)

Returns the amplitude of the spectrum trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Fetch commands

Syntax

`FETCh:LTE:ACLR:SPECTrum:Y?`

Returns

`#<num_digit><num_byte><y(1)><y(2)>...<y(n)>`

Where,

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<y(n)>` is the amplitude (dB) at the *n*th point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:LTE:ACLR:SPECTRUM:Y?` might return `#516020xxxx...` (16020-byte data) for the amplitude of the spectrum trace.

FETCh:LTE:CHSPectrum:OBW? (Query Only)

Returns the Occupied Bandwidth (OBW) in Hz of the LTE Channel Spectrum measurement view.

Conditions

Measurement view: LTE Channel Spectrum

Group

Fetch commands

Syntax

`FETCh:LTE:CHSPectrum:OBW?`

Returns

<NR3>

Examples

`FETCH:LTE:CHSPECTRUM:OBW?` might return `1.0851851250E+6`, indicating the Occupied Bandwidth is 1.09 MHz.

FETCh:LTE:CHSPectrum:POWer:CHANnel? (Query Only)

Returns the Channel Power value in LTE Channel Spectrum display. The result will be in dBm (by default) or in the units chosen from the Units tab of the Analysis Control panel.

Conditions

Measurement view: LTE Channel Spectrum

Group

Fetch commands

Syntax

`FETCh:LTE:CHSPectrum:POWer:CHANnel?`

Returns

<NRf>

Examples

`FETCH:LTE:CHSPECTRUM:POWER:CHANNEL?` might return `-14.9248560147`, indicating that the Channel Power is -14.92 dBm.

FETCh:LTE:CHSPectrum:SPECTrum? (Query Only)

Returns spectrum trace data of the LTE Channel Spectrum measurement.

Conditions

Measurement view: LTE Channel Spectrum

Group

Fetch commands

Syntax

`FETCh:LTE:CHSPepectrum:SPECTrum?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the amplitude in dBm at the n^{th} data point, 4-byte little endian floating point format specified in IEEE 488.2.

Examples

`FETCh:LTE:CHSPepectrum:SPECTrum?` might return `#43204 xxxx...` (3204-byte data) for the spectrum trace data of the LTE Channel Spectrum measurement.

FETCh:LTE:CONStE:CELL:ID? (Query Only)

Queries the Cell ID value LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Fetch commands

Syntax

`FETCh:LTE:CONStE:CELL:ID?`

Returns

`<NR1>`

Examples

`FETCh:LTE:CONStE:CELL:ID?` might return 112, indicating CELLID measurement number is 112.

FETCh:LTE:CONStE:FREQuency:ERROr? (Query Only)

Queries Frequency Error value in Hz LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Fetch commands

Syntax

`FETCh:LTE:CONStE:FREQuency:ERROr?`

Returns

<NRf>

Examples

`FETCh:LTE:CONStE:FREQUENCY:ERROR?` might return `-71.9780578613`, indicating frequency error value is `-71.9780578613` Hz.

FETCh:LTE:CONStE:GROUp:ID? (Query Only)

Queries the Group ID value LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Fetch commands

Syntax

`FETCh:LTE:CONStE:GROUp:ID?`

Returns

<NR1>

Examples

`FETCh:LTE:CONStE:GROUp:ID?` might return `160`, indicating Group ID measurement number is `160`.

FETCh:LTE:CONStE:SECTor:ID? (Query Only)

Queries the Sector ID value for the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Fetch commands

Syntax

`FETCh:LTE:CONStE:SECTor:ID?`

Returns

<NRf>

Examples

`FETCh:LTE:CONStE:SECTOR:ID?` might return `2`, indicating the Sector ID value is `2`.

FETCh:LTE:PVTime:OFFSlot:POWer? (Query Only)

Returns the TOff power measurement value in dBm/MHz for the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Fetch commands

Syntax

`FETCh:LTE:PVTime:OFFSlot:POWer?`

Returns

<NRf>

Examples

`FETCh:LTE:PVTIME:OFFSLOT:POWER?` might return `-76.11514587403`, indicating the offslot power is `-76.11514` dBm/MHz.

FETCh:LTE:PVTime:RESUltS:STATus

Returns the pass or fail status for the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Fetch commands

Syntax

`FETCh:LTE:PVTime:RESUltS:STATus`

Returns

0: means measurement status is FAIL.

1: means measurement status is PASS.

Examples

`FETCh:LTE:PVTIME:RESULTS:STATUS` might return `1`, indicating the measurement status is PASS.

FETCh:LTE:PVTime:TRACe:X? (Query Only)

Returns the horizontal values (time in seconds) for the LTE Power vs. Time trace.

Conditions

Measurement view: LTE Power vs Time

Group

Fetch commands

Syntax

`FETCh:LTE:PVTime:TRACe:X?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the n^{th} point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:LTE:PVTIME:TRACE:X? might return #43204 (3204-byte data), which represents the time in seconds (horizontal values).

FETCh:LTE:PVTIME:TRACe:XY? (Query Only)

Returns the horizontal value (time in seconds) and vertical value (power) for the LTE Power vs. Time trace.

Conditions

Measurement view: LTE Power vs Time

Group

Fetch commands

Syntax

FETCh:LTE:PVTIME:TRACe:XY?

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the n^{th} point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:LTE:PVTIME:TRACE:XY? might return #43204 (3204-byte data), which represents the horizontal value (time in seconds) and vertical value (power) pair at the n^{th} data point.

FETCh:LTE:PVTIME:TRACe:Y? (Query Only)

Returns the vertical values (power) for the LTE Power vs. Time trace.

Conditions

Measurement view: LTE Power vs Time

Group

Fetch commands

Syntax

FETCh:LTE:PVTIME:TRACe:Y?

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the n^{th} point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:LTE:PVTIME:TRACE:Y? might return #43204 (3204-byte data), which represents the vertical values (power).

FETCh:MCPower:ADJacent:CHANnels? (Query Only)

Returns the power of adjacent channels in order of increasing frequency.

Conditions

Measurement views: MCPR

Group

Fetch commands

Syntax

FETCh:MCPower:ADJacent:CHANnels?

Arguments

None

Returns

<acpr_lower (n)>, ...<acpr_lower (2)>, <acpr_lower (1)>,
<acpr_upper (1)>, <acpr_upper (2)>, ...<acpr_upper (n)>

Where

<acpr_lower (n)> is the ACPR for the lower channel #n in dB.

<acpr_upper (n)> is the ACPR for the upper channel #n in dB.

To add a pair of upper and lower adjacent channels, use the [SENSe]:MCPower: CHANnel:ADJacent:ADD command.

Examples

FETCH:MCPower:ADJacent:CHANNELS? might return -4.420, -4.847, -4.316, -4.225, indicating (ACPR for the lower channel 2) = -4.420 dB, (ACPR for the lower channel 1) = -4.847 dB, (ACPR for the upper channel 1) = -4.316 dB, and (ACPR for the upper channel 2) = -4.225 dB.

FETCh:MCPower:CHANnel:POWer? (Query Only)

Returns the reference power in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Fetch commands

Syntax

FETCh:MCPower:CHANnel:POWer?

Arguments

None

Returns

<ref_power>: <NRf> is the reference power in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

To select the power reference, use the [SENSe]:MCPower:RCHannels? commands.

Examples

FETCh:MCPOWER:CHANNEL:POWER? might return 4.227, indicating that the reference power is 4.227 dBm.

FETCh:MCPower:MAIN:CHANnels? (Query Only)

Returns the power of main channels in order of increasing frequency.

Conditions

Measurement views: MCPR

Group

Fetch commands

Syntax

FETCh:MCPower:MAIN:CHANnels?

Arguments

None

Returns

<power_main(1)>, <power_main(2)>, ... <power_main(n)>

Where

<power_main(n)> is the power of main channel #n in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

To specify the main channels, use the [SENSe]:MCPower:CHANnel:MAIN commands.

Examples

FETCh:MCPOWER:MAIN:CHANNELS? might return -2.420, -2.847, -2.316, -2.225, indicating (power of the main channel 1) = -2.420 dBm, (power of the main channel 2) = -2.847 dBm, (power of the main channel 3) = -2.316 dBm, and (power of the main channel 4) = -2.225 dBm.

FETCh:MCPower:SPECTrum? (Query Only)

Returns spectrum trace data of the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Fetch commands

Syntax

`FETCh:MCPower:SPECTrum?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the amplitude in dBm at the nth data point,

4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCh:MCPOWER:SPECTRUM?` might return `#43204xxxx...` (3204-byte data) for the spectrum trace data of the MCPR measurement.

FETCh:MERRor[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Magnitude error versus Time measurement.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Fetch commands

Syntax

`FETCh:MERRor[:MEASview<y>]:FERRor?`

Arguments

None

Returns

`<freq_error>::<NRf>` is the frequency error in Hz.

Examples

`FETCh:MERRor:MEASview2:FERRor?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz.

FETCh:MERRor[:MEASview<y>]:PEAK? (Query only)

Returns the peak value in the Magnitude error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Fetch commands

Syntax

```
FETCh:MERRor[:MEASview<y>]:PEAK?
```

Related Commands

[FETCh:MERRor\[:MEASview<y>\]:PINDeX?](#) (on page 1228)

Arguments

None

Returns

<peak>::<NRf> is the peak magnitude error value in percent (%).

Examples

FETCh:MERRor:MEASview2:PEAK? might return 1.57, indicating the peak magnitude error value is 1.57%.

FETCh:MERRor[:MEASview<y>]:PINDeX? (Query only)

Returns the time at the magnitude error peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Fetch commands

Syntax

```
FETCh:MERRor[:MEASview<y>]:PINDeX?
```

Related Commands

[FETCh:MERRor\[:MEASview<y>\]:PEAK?](#) (on page 1228)

Arguments

None

Returns

`<peak_time>::<NRf>` is the time at the magnitude error peak in symbol number.

The unit can be changed by the `[SENSe]:DDEMod:TIME:UNITs` command.

Examples

`FETCH:MERRor:MEASview2:PINDEX?` might return 68.000, indicating that the Magnitude error peak is at symbol #68.

FETCH:MERRor[:MEASview<y>]:RMS? (Query only)

Returns the RMS (Root-Mean-Square) value in the Magnitude error versus Time measurement.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Fetch commands

Syntax

`FETCH:MERRor[:MEASview<y>]:RMS?`

Arguments

None

Returns

`<rms>::<NRf>` is the RMS magnitude error in percent (%).

Examples

`FETCH:MERRor:MEASview2:RMS?` might return 0.382, indicating the RMS Magnitude error value is 0.382%.

FETCH:MERRor[:MEASview<y>]:TRACe? (Query only)

Returns the Magnitude error versus Time trace data.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Fetch commands

Syntax

```
FETCh:MERRor[:MEASview<y>]:TRACe?
```

Arguments

None

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the magnitude error in percent (%) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:MERRor:MEASview2:TRACe? might return #42036xxxx... (2036-byte data) for the Magnitude error versus Time Measview 2.

FETCh:NOISe:GAIN:TRACe<x>:RESult? (Query Only)

This query returns the gain value in mdB of the specified trace in the Gain display.

Conditions

Measurement view: Gain

The parameter <x> = 1 to 3.

Group

Fetch commands

Syntax

```
FETCh:NOISe:GAIN:TRACe<x>:RESult?
```

Returns

The gain value in mdB of the specified trace.

Examples

FETCh:NOISe:GAIN:TRACE1:RESULT? might return -88.7, indicating that the gain is -88.7 mdB.

FETCh:NOISe:TABLE:VALue? (Query Only)

Returns Noise Table data. A total of 7 values per frequency (28 bytes per frequency) is returned. The number of frequencies returned depends on the settings.

Conditions

Measurement view: Noise Table

Group

Fetch commands

Syntax

`FETCh:NOISe:TABLE:VALue?`

Returns

Returns an array of floats (size of 4 bytes each) defined as:

- First frequency gain, noise figure, noise factor, y factor, noise temperature, power hot, power cold
- Second frequency gain, noise figure, noise factor, y factor, noise temperature, power hot, power cold

Examples

`FETCh:NOISe:TABLE:VALue?` might return #3308, indicating that the

FETCh:NR:ACP:TAGGpower ? (Query Only)

Queries the Total Aggregate Power of the NR ACP display in the NR Summary View table.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:ACP:TAGGpower?`

Returns

<NRf>

Examples

`FETCh:NR:ACP:TAGGPOWER?` might return -18.4524345398 dBm, indicating the Total Aggregate Power.

FETCh:NR:ACP:NO:OF:NR:OFFsets? (Query Only)

Queries NR Offsets of the NR ACP display in the NR Summary View Table.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:ACP:NO:OF:NR:OFFsets?`

Returns

<NRf>

Examples

`FETCh:NR:ACP:NO:OF:NR:OFFSETS?` might return 6.0000000000, indicating the maximum offset is 6.

FETCh:NR:ACP:ADJChannel<x>:INTBw? (Query Only)

Queries the bandwidth of the adjacent channel of the NR ACP in NR Summary View Table. <x> is the adjacent channel. Range is 1 to 6.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

FETCh:NR:ACP:ADJChannel<x>:INTBw?

Returns

<NRf>

Examples

FETCh:NR:ACP:ADJChannel2:INTBw? might return 4.5150000000E+6 Hz, indicating the bandwidth of adjacent channel 2.

FETCh:NR:ACP:ADJChannel<x>:UABS? (Query Only)

Queries the upper absolute value of the adjacent channel of the NR ACP in NR Summary View Table. <x> is the adjacent channel. Range is 1 to 6.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

FETCh:NR:ACP:ADJChannel<x>:UABS?

Returns

<NRf>

Examples

FETCh:NR:ACP:ADJChannel2:UABS? might return -46.5615577698 dB, indicating the upper absolute value of adjacent channel 2.

FETCh:NR:ACP:ADJChannel<x>:UREL ? (Query Only)

Queries the upper relative value of the adjacent channel of the NR ACP in NR Summary View Table. <x> is the adjacent channel. Range is 1 to 6.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:ACP:ADJChannel<x>:UREL?`

Returns

<NRf>

Examples

`FETCh:NR:ACP:ADJChannel1:UREL?` might return `-47.5079994202 dB`, indicating the upper relative value of adjacent channel 1.

FETCh:NR:ACP:ADJChannel<x>:LABS? (Query Only)

Queries the lower absolute value of the adjacent channel of the NR ACP in NR Summary View Table. <x> is the adjacent channel. Range is 1 to 6.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:ACP:ADJChannel<x>:LABS?`

Returns

<NRf>

Examples

`FETCh:NR:ACP:ADJChannel1:LABS?` might return `-65.0139923096 dB`, indicating the lower absolute value of adjacent channel 1.

FETCh:NR:ACP:ADJChannel<x>:LREL ? (Query Only)

Queries the lower relative value of the adjacent channel of the NR ACP in NR Summary View Table. <x> is the adjacent channel. Range is 1 to 6.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:ACP:ADJChannel<x>:LREL?`

Returns

<NRf>

Examples

`FETCh:NR:ACP:ADJChannel2:LREL?` might return `-46.5615577698 dB`, indicating the lower relative value of adjacent channel 2.

FETCh:NR:ACP:ADJChannel<x>:FREQoffset ? (Query Only)

Queries the frequency offset of the adjacent channel of the NR ACP in the NR Summary View Table. <x> is the adjacent channel. Range is 1 to 6.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:ACP:ADJChannel<x>:FREQoffset?`

Returns

<NRf>

Examples

`FETCh:NR:ACP:ADJChannel2:FREQoffset?` might return `5.0000000000E+6 Hz`, indicating the frequency offset of adjacent channel 2.

FETCh:NR:CHP:CARRier<x>:ABSPower? (Query Only)

Queries the absolute power of each component carrier in the NR Channel Power in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:CHP:CARRier<x>:ABSPower?`

Returns

<NRf>

Examples

`FETCh:NR:CHP:CARRier6:ABSPower?` might return `-13.8919143677 dBm`, indicating the absolute power of component carrier 6.

FETCh:NR:CHP:CARRier<x>:RELPower? (Query Only)

Queries the relative power of each component carrier in the NR Channel Power in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:CHP:CARRier<x>:RELPower?`

Returns

<NRf>

Examples

`FETCh:NR:CHP:CARRier3:RELPower?` might return `0.0000`, indicating the relative power of component carrier 3.

FETCh:NR:CHP:TAGGpower? (Query Only)

Queries the total aggregate power of the NR Channel Power in the NR Summary View Table.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:CHP:TAGGpower?`

Returns

<NRf>

Examples

`FETCh:NR:CHP:TAGGPOWER?` might return `-13.8919143677` dBm, indicating the total aggregate power.

FETCh:NR:EVM:ATSymbol (Query Only)

Queries Symbol value for the selected trace in NR EVM.

Conditions

Measurement view: NR EVM measurement view

Group

Fetch commands

Syntax

`FETCh:NR:EVM:ATSymbol`

Returns

<NRf>

Examples

`FETCh:NR:EVM:ATSymbol?` might return `9.9988253091E-3%` indicating Symbol value for the selected trace.

FETCh:NR:EVM:PEAK (Query Only)

Queries Peak value for the selected trace in NR **EVM**.

Conditions

Measurement view: NR EVM measurement view

Group

Fetch commands

Syntax

`FETCh:NR:EVM:PEAK`

Returns

`<NRf>`

Examples

`FETCh:NR:EVM:PEAK?` might return `9.9988253091E-3%` indicating Peak value for the selected trace.

FETCh:NR:EVM:RMS (Query Only)

Queries RMS value for the selected trace in NR **EVM**.

Conditions

Measurement view: NR EVM measurement view

Group

Fetch commands

Syntax

`FETCh:NR:EVM:RMS`

Returns

`<NRf>`

Examples

`FETCh:NR:EVM:RMS?` might return `9.9988253091E-3%` indicating RMS value for the selected trace.

FETCh:NR:LINK:DIREction? (Query Only)

Queries the link direction of the NR Constellation in NR Summary View Table.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:LINK:DIREction?`

Returns

<NRf>

Examples

`FETCh:NR:LINK:DIRECTION?` might return `DOWN`, indicating that the link direction is downlink.

FETCh:NR:MODAcc:CARRier<x>:CELL:ID? (Query Only)

Queries the Cell ID of the NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:CELL:ID?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier5:CELL:ID?` might return 1, indicating that the cell ID is 5.

FETCh:NR:MODAcc:CARRier<x>:OFFSet? (Query Only)

Queries the carrier offset of the NR Constellation in NR Summary View Table.

<x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:OFFSet?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier2:OFFSet?` might return `-184.740`, indicating the offset value for component carrier 2 is -184.740 MHz.

FETCh:NR:MODAcc:CARRier<x>:CREM? (Query Only)

Queries the Composite RMS **EVM** Mean Value of the NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

```
FETCh:NR:MODAcc:CARRier<x>:CREM?
```

Returns

<NRf>

Examples

FETCh:NR:MODAcc:CARRier2:CREM? might return 255.7628555223E-3, indicating that the component carrier 2 Composite RMS EVM Mean value is 0.256%.

FETCh:NR:MODAcc:CARRier<x>:CPEM? (Query Only)

Queries the Composite Peak **EVM** Maximum Value of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

```
FETCh:NR:MODAcc:CARRier<x>:CPEM?
```

Returns

<NRf>

Examples

FETCh:NR:MODAcc:CARRier3:CPEM? might return 672.3846774548E-3, indicating the component carrier 3 Composite Peak EVM Maximum Value is 0.672%.

FETCh:NR:MODAcc:CARRier<x>:CPESLI? (Query Only)

Queries the Composite Peak Slot Index of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCH:NR:MODAcc:CARRier<x>:CPESLI?`

Returns

<NRf>

Examples

`FETCH:NR:MODAcc:CARRier1:CPESLI?` might return 0, indicating the component carrier 1 Composite Peak **EVM** Slot Index is 0.

FETCH:NR:MODAcc:CARRier<x>:CPESYI? (Query Only)

Queries the Composite Peak Symbol Index of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCH:NR:MODAcc:CARRier<x>:CPESYI?`

Returns

<NRf>

Examples

`FETCH:NR:MODAcc:CARRier2:CPESYI` might return 13, indicating component carrier 2 Composite Peak **EVM** Symbol Index is 13.

FETCH:NR:MODAcc:CARRier<x>:CPESCI? (Query Only)

Queries the Composite Peak **EVM** Subcarrier Index of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCH:NR:MODAcc:CARRier<x>:CPESCI?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier3:CPESCI?` might return 113, indicating the component carrier 3 Composite Peak EVM Subcarrier Index is 113.

FETCh:NR:MODAcc:CARRier<x>:CCFME? (Query Only)

Queries the Composite Carrier Frequency Mean Error of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:CCFME?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier1:CCFME?` might return 528.9274902344, indicating the composite carrier 1 Frequency Mean Error is 528.9274902344 Hz.

FETCh:NR:MODAcc:CARRier<x>:CCIOOM? (Query Only)

Queries the Composite Carrier IQ Origin Offset Mean of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:CCIOOM?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier2:CCIOOM?` might return -70.8180387744, indicating composite carrier 2 IQ Origin Offset Mean is -70.8180387744 dBc.

FETCh:NR:MODAcc:CARRier<x>:CCIGIM? (Query Only)

Queries the Composite Carrier IQ Gain Imbalance Mean of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:CCIGIM?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier3:CCIGIM?` might return `0.001`, indicating component carrier 3 Composite Carrier IQ Gain Imbalance Mean is 0.001 dB.

FETCh:NR:MODAcc:CARRier<x>:CCIQEM? (Query Only)

Returns the Composite Carrier IQ Quadrature Error Mean of NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:CCIQEM?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier3:CCIQEM?` might return `19.3109996617E-3`, indicating component carrier 3 Composite Carrier IQ Quadrature Error Mean is 19.3109996617E-3.

FETCh:NR:MODAcc:CARRier<x>:IBEM? (Query Only)

Queries the In-Band Emission Range of the NR Constellation in NR Summary View Table. <x> is the component carrier. Range is 1 to 8.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:IBEM?`

Returns

<NRf>

Examples

FETCH:NR:MODAcc:CARRier1:IBEM? might return 9.9100E+37, indicating the component carrier 1 In-Band Emission Range.

FETCh:NR:MODAcc:CARRier<x>:DATA:PEAK (Query Only)

Queries the SCH Data Peak **EVM** Maximum Value of NR Constellation in NR Summary View Table display.

The parameter <x>=1 to 8, representing range of Component Carrier.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:MODAcc:CARRier<x>:DATA:PEAK?

Returns

<NRf>

Examples

FETCh:NR:MODAcc:CARRier1:DATA:PEAK? might return 672.3846774548E-3, indicating SCH Data Peak EVM Maximum Value is 0.672%.

FETCh:NR:MODAcc:CARRier<x>:DATA:RMS (Query Only)

Queries the SCH Data RMS **EVM** Mean Value of NR Constellation in NR Summary View Table display.

The parameter <x>=1 to 8, representing range of Component Carrier

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:MODAcc:CARRier<x>:DATA:RMS?

Returns

<NRf>

Examples

FETCh:NR:MODAcc:CARRier1:DATA:RMS? might return 286.3456029445E-3, indicating SCH Data RMS EVM Mean Value is 0.286%.

FETCh:NR:MODAcc:CARRier<x>:DMRS:PEAK (Query Only)

Queries the SCH DMRS Peak **EVM** Maximum Value of NR Constellation in NR Summary View Table display.

The parameter <x>=1 to 8, representing range of Component Carrier.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:MODAcc:CARRier<x>:DMRS:PEAK?

Returns

<NRf>

Examples

FETCh:NR:MODAcc:CARRier1:DMRS:PEAK? might return 616.6561972350E-3, indicating SCH DMRS Peak EVM Maximum Value is 0.617%.

FETCh:NR:MODAcc:CARRier<x>:DMRS:RMS (Query Only)

Queries the SCH DMRS **EVM** Mean Value of NR Constellation in NR Summary View Table display.

The parameter <x>=1 to 8, representing range of Component Carrier.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:MODAcc:CARRier<x>:DMRS:RMS?

Returns

<NRf>

Examples

FETCh:NR:MODAcc:CARRier1:DMRS:RMS? might return 251.3078739867E-3, indicating SCH DMRS EVM Value is 0.251%.

FETCh:NR:MODAcc:CARRier<x>:PREM (Query Only)

Queries the Peak RMS EVM Maximum Value of NR Constellation in NR Summary View Table display.

The parameter <x>=1 to 8, representing range of Component Carrier.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:PREM?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier1:PREM?` might return `672.3846774548E-3`, indicating Peak EVM Maximum Value is 0.672%.

FETCh:NR:MODAcc:CARRier<x>:PTRS: RMS (Query Only)

Queries the SCH PTRS EVM Mean Value of NR Constellation in NR Summary View Table display.

The parameter <x>=1 to 8, representing range of Component Carrier

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:PTRS:RMS?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier1:PTRS:RMS?` might return `672.3846774548E-3`, indicating SCH PTRS EVM MEAN Value is 0.672%.

FETCh:NR:MODAcc:CARRier<x>:PTRS:PEAK (Query Only)

Queries the SCH PTRS Peak EVM Maximum Value of NR Constellation in NR Summary View Table display.

The parameter <x>=1 to 8, representing range of Component Carrier.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:MODAcc:CARRier<x>:PTRS:PEAK?`

Returns

<NRf>

Examples

`FETCh:NR:MODAcc:CARRier1:PTRS:PEAK?` might return `815.3068833053E-3`, indicating SCH PTRS Peak EVM Maximum.

FETCh:NR:OBW:ABSPower (Query Only)

Queries Absolute power of NR OBW display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:OBW:ABSPower`

Returns

<NRf>

Examples

`FETCh:NR:OBW:ABSPower?` might return `-13.8897142410 dBm`, indicating the Absolute power.

FETCh:NR:OBW:OCCUpiedbw (Query Only)

Queries Occupied Bandwidth of NR OBW display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:OBW:OCCUpiedbw`

Returns

<NRf>

Examples

`FETCh:NR:OBW:OCCUpiedbw?` might return `3.9506140488 MHz`, indicating the Occupied Bandwidth.

FETCh:NR:OBW:STARtfreq (Query Only)

Queries Start frequency of NR OBW display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:OBW:STARTfreq`

Returns

<NRf>

Examples

`FETCh:NR:OBW:STARTfreq?` might return `998.0183831384E+6`, indicating the Stop frequency.

FETCh:NR:OBW:STOPfreq (Query Only)

Queries Stop frequency of NR OBW display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:OBW:STOPfreq`

Returns

<NRf>

Examples

`FETCh:NR:OBW:STOPfreq?` might return `1.0019689972E+9`, indicating the Stop frequency.

FETCh:NR:PVT:ABS:OFFpower:AFTR (Query Only)

Queries Absolute Off Power After NR Power vs Time display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

`FETCh:NR:PVT:ABS:OFFpower:AFTR`

Returns

<NRf>

Examples

`FETCh:NR:PVT:ABS:OFFpower:AFTR?` might return `-62.4365692139` dBm, indicating the Absolute Off Power After.

FETCh:NR:PVT:ABS:OFFpower:BFR (Query Only)

Queries Absolute Off Power Before of NR Power vs Time display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:PVT:ABS:OFFpower:BFR

Returns

<NRf>

Examples

FETCh:NR:PVT:ABS:OFFpower:BFR? might return -62.4902038574 dBm, indicating the Absolute Off Power Before.

FETCh:NR:PVT:ABS:ONpower (Query Only)

Queries Absolute ON Power NR Power vs Time display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:PVT:ABS:ONpower

Returns

<NRf>

Examples

FETCh:NR:PVT:ABS:ONpower? might return -22.0409736633 dBm, indicating Absolute on power.

FETCh:NR:PVT:BURStwidth (Query Only)

Queries Burst Width NR Power vs Time display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:PVT:BURStwidth

Returns

<NRf>

Examples

FETCh:NR:PVT:BURStwidth? might return 9.9988253091E-3 s, indicating Burst Width.

FETCh:NR:PVT:MEASurement:STATus (Query Only)

Queries measurement status of NR Power vs Time display in NR Summary View Table display.

Conditions

Measurement view: NR Summary View Table measurement view

Group

Fetch commands

Syntax

FETCh:NR:PVT:MEASurement:STATus

Returns

<NRf>

Examples

FETCh:NR:PVT:MEASurement:STATus? might return "PASS", indicating the Power vs Time passed.

FETCh:NR:SEM:TAGGpower? (Query Only)

Queries the Total Aggregate Power of the NR SEM in NR Summary View Table.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

FETCh:NR:SEM:TAGGpower?

Returns

<NRf>

Examples

FETCh:NR:SEM:TAGGPOWER? might return -14.0847625732 dBm, indicating the Total Aggregate Power.

FETCh:NR:SEM:OFFSet<x>:STARtfreq? (Query Only)

Queries the Start Frequency of the specified offset of the NR SEM display in NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:STARTfreq?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet5:STARTfreq?` might return `-25.0000000000E+3` Hz, indicating the Start Frequency of offset 5.

FETCh:NR:SEM:OFFSet<x>:STOPfreq? (Query Only)

Queries the Stop Frequency of the specified offset of the NR SEM display in NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:STOPfreq?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet10:STOPfreq?` might return `-975.0000000000E+3` Hz, indicating the Stop Frequency of offset 10.

FETCh:NR:SEM:OFFSet<x>:PEAK:ABS? (Query Only)

Queries the peak absolute value of specified offset of NR SEM display in NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:PEAK:ABS?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet1:PEAK:ABS?` might return `-65.5201115608 dBm`, indicating the Peak Absolute value of offset 1.

FETCh:NR:SEM:OFFSet<x>:PEAK:REL? (Query Only)

Queries the peak relative value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:PEAK:REL?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet1:PEAK:REL?` might return `-51.4353489876 dB`, indicating the Peak Relative of offset 1.

FETCh:NR:SEM:OFFSet<x>:PEAK:FREQ? (Query Only)

Queries the peak frequency of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:PEAK:FREQ?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet1:PEAK:FREQ?` might return `997.4753714650E+6 GHz`, indicating the Peak Frequency of offset 1.

FETCh:NR:SEM:OFFSet<x>:MARGIn? (Query Only)

Queries the margin of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:MARGin?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet3:MARGin?` might return `-52.5201110840 dB`, indicating the Margin of offset 3.

FETCh:NR:SEM:OFFSet<x>:MARGin:ABS? (Query Only)

Queries the margin absolute value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:MARGin:ABS?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet2:MARGin:ABS?` might return `-51.4353489876 dBm`, indicating the Margin Absolute value of offset 2.

FETCh:NR:SEM:OFFSet<x>:MARGin:REL? (Query Only)

Queries the margin relative value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:MARGin:REL?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet1:MARGin:REL?` might return `-51.4353489876` dB, indicating the Margin Relative value of offset 1.

FETCh:NR:SEM:OFFSet<x>:MARGin:FREQ? (Query Only)

Queries the margin frequency of the specified offset of the NR SEM display in the NR Summary View Table <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:MARGin:FREQ?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet1:MARGin:FREQ?` might return `-51.4353489876` GHz, indicating the margin frequency of offset 1.

FETCh:NR:SEM:OFFSet<x>:INTEg:ABS? (Query Only)

Queries the Integ Absolute value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:INTEg:ABS?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet3:INTEg:ABS?` might return `-51.4353489876` dBm, indicating the Integ Absolute value of offset 3.

FETCh:NR:SEM:OFFSet<x>:INTEg:REL? (Query Only)

Queries the Integ Relative value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:INTEg:REL?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet2:INTEg:REL?` might return `-51.4353489876` dB, indicating the Integ Relative value of offset 2.

FETCh:NR:SEM:OFFSet<x>:RBW? (Query Only)

Queries the RBW of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:RBW?`

Returns

<NRf>

Examples

`FETCh:NR:SEM:OFFSet1:RBW?` might return `-51.4353489876` kHz, indicating the RBW of offset 1.

FETCh:NR:SEM:OFFSet<x>:ABSLimit:START? (Query Only)

Queries the Absolute Start value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCh:NR:SEM:OFFSet<x>:ABSLimit:START?`

Returns

<NRf>

Examples

`FETCH:NR:SEM:OFFSET2:ABSLimit:START?` might return `-51.4353489876 dBm`, indicating the Absolute Start of offset 2.

FETCH:NR:SEM:OFFSET<x>:ABSLimit:STOP? (Query Only)

Queries the Absolute Stop value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCH:NR:SEM:OFFSET<x>:ABSLimit:STOP?`

Returns

<NRf>

Examples

`FETCH:NR:SEM:OFFSET2:ABSLimit:START?` might return `-51.4353489876 dBm`, indicating the Absolute Stop value of offset 2.

FETCH:NR:SEM:OFFSET<x>:RELLimit:START? (Query Only)

Queries the Relative Start value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

`FETCH:NR:SEM:OFFSET<x>:RELLimit:START?`

Returns

<NRf>

Examples

`FETCH:NR:SEM:OFFSET2:RELLimit:START?` might return `-51.4353489876 dBm`, indicating the Relative Start value of offset 2.

FETCh:NR:SEM:OFFSet<x>:RELLimit:STOP? (Query Only)

Queries the Relative Stop value of the specified offset of the NR SEM display in the NR Summary View Table. <x> is the offset. Range is 1 to 16.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

FETCh:NR:SEM:OFFSet<x>:RELLimit:STOP?

Returns

<NRf>

Examples

FETCh:NR:SEM:OFFSet2:RELLimit:STOP? might return -51.4353489876 dBm, indicating the Relative Stop value of offset 2.

FETCh:NR:SUBblock<x>:NUMCcs? (Query Only)

Queries the number of component carriers in the specified subblock of the NR Constellation in the NR Summary View Table. <x> is the subblock. Range is 1.

Conditions

Measurement view: NR Summary View Table

Group

Fetch commands

Syntax

FETCh:NR:SUBblock<x>:NUMCcs?

Returns

<NRf>

Examples

FETCh:NR:SUBblock1:NUMCcs? might return 8, indicating that the number of component carriers in subblock 1 is 8.

FETCh:OBWidth:BOBW:FREQuency:ERRor (Query Only)

Returns the frequency error in the Bluetooth 20dB BW display.

Conditions

Measurement view: Bluetooth 20dB BW

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:FREQuency:ERRor?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:OBWIDTH:BOBW:FREQUENCY:ERROR` might return `-999.1 kHz`, indicating the frequency error is `-999.1 kHz`.

FETCh:OBWidth:BOBW:RESUlts:STATus (Query Only)

Returns the test result as Pass or Fail in the Bluetooth 20dB BW display.

Conditions

Measurement views: Bluetooth 20dB BW

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:RESUlts:STATus`

Arguments

None

Returns

`PASS` means the test passed.

`FAIL` means the test failed.

`INVALID` means there was an error and the test did not complete.

Examples

`FETCh:OBWIDTH:BOBW:RESULTS:STATUS` might return `Pass` or `Fail` or `Invalid` for Bluetooth 20dB BW display.

FETCh:OBWidth:BOBW:XDBB:POWer (Query Only)

Returns the x dB BW Ref Power value for the selected bandwidth as shown in the Bluetooth 20dB BW display.

Conditions

Measurement view: Bluetooth 20dB BW

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:XDBB:POWer?`

Returns

<NR3>

Examples

`FETCH:OBWIDTH:BOBW:XDBB:POWER` might return `-9.0197525024`, indicating that the x dB reference power for the selected bandwidth is -9.0197525024 dB.

FETCh:OBWidth:BOBW:XDBBandwidth? (Query Only)

Returns the difference between the higher and lower frequency points corresponding to the value where it is X dB less from the value at the center frequency.

Set the measurement direction using the appropriate inward or outward command before issuing this command.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:XDBBandwidth?`

Related Commands

[FETCh:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth?](#) (on page 1257)

[FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth?](#) (on page 1259)

Arguments

None

Returns

<value> ::= <NRf> the X dBm bandwidth in Hz.

Examples

`FETCH:OBWIDTH:BOBW:XDBBANDWIDTH?` might return `89.12000E+3`, indicating the difference between the higher and lower frequency points is 89.12 kHz.

FETCh:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth? (Query Only)

Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured inwards (coming from the ends to the center frequency).

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Fetch commands

Syntax

FETCh:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth?

Related Commands

[FETCh:OBWidth:BOBW:XDBBAndwidth?](#) (on page 1257)

[FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth?](#) (on page 1259)

Arguments

None

Returns

<value> ::= <NRf> the input X dBm value in Hz.

Examples

FETCh:OBWIDTH:BOBW:XDBMBANDWIDTH:IN:BANDWIDTH? might return 1.2518400000E+6, indicating that the bandwidth corresponding to the input XdBm vaue is 1.2518 MHz measured in the inward direction.

FETCh:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the inward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwith

Group

Fetch commands

Syntax

FETCh:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency?

Related Commands

[FETCh:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency?](#) (on page 1258)

Arguments

None

Returns

<value> ::= <NRf> the left frequency in Hz.

Examples

FETCh:OBWIDTH:BOBW:XDBMBANDWIDTH:IN:LEFT:FREQUENCY? might return 2.401E+9 indicating that the frequency corresponding to the X dbm value to the left of the center frequency is 2.401 GHz.

FETCh:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the inward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency?`

Related Commands

[FETCh:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency?](#) (on page 1258)

Arguments

None

Returns

<value> ::= <NRf> the right frequency in Hz.

Examples

`FETCh:OBWidth:BOBW:XDBMBANDWIDTH:IN:RIGHT:FREQUENCY?` might return `2.445E+9`, indicating that the frequency corresponding to the XdBm value to the right of the center the frequency is 2.445 GHz.

FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth? (Query Only)

Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured outwards (from the center frequency to the ends).

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth?`

Related Commands

[FETCh:OBWidth:BOBW:XDBBANDwidth?](#) (on page 1257)

[FETCh:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth?](#) (on page 1257)

Arguments

None

Returns

<value> ::= <NRf> the input X dBm value in Hz.

Examples

`FETCH:OBWIDTH:BOBW:XDBMBANDWIDTH:OUT:BANDWIDTH?` might return `1.2518400000E+6`, indicating that the bandwidth corresponding to the output XdBm value is 1.2518 MHz measured in the outward direction.

FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the outward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency?`

Related Commands

[FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency?](#) (on page 1260)

Arguments

None

Returns

`<value> ::= <NRf>` the left frequency in Hz.

Examples

`FETCH:OBWIDTH:BOBW:XDBMBANDWIDTH:OUT:LEFT:FREQUENCY?` might return `2.401E+9`, indicating that the frequency corresponding to the X dbm value to the left of the center frequency is 2.401 GHz..

FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the outward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency?`

Related Commands

[FETCh:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency?](#) (on page 1260)

Arguments

None

Returns

<value> ::= <NRf> the Right frequency in Hz.

Examples

`FETCH:OBWIDTH:BOBW:XDBMBANDWIDTH:OUT:RIGHT:FREQUENCY?` might return `2.445E+9`, indicating that the frequency corresponding to the XdBm value to the right of the center the frequency is 2.445 GHz.

FETCh:OBWidth:FREQuency:ERRor? (Query Only)

Returns the frequency error in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:FREQuency:ERRor?`

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

`FETCH:OBWIDTH:FREQUENCY:ERROR?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz.

FETCh:OBWidth:OBWidth:BANDwidth? (Query Only)

Returns the occupied bandwidth in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:OBWidth:BANDwidth?`

Arguments

None

Returns

<OBW>::<NRf> is the occupied bandwidth in Hz.

Examples

`FETCH:OBWIDTH:OBWIDTH:BANDWIDTH?` might return `4.0E+6`, indicating the occupied bandwidth is 4 MHz.

FETCh:OBWidth:OBWidth:LEFT:FREQuency? (Query Only)

Returns the left (lower) frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:OBWidth:LEFT:FREQuency?`

Related Commands

[FETCh:OBWidth:OBWidth:RIGHT:FREQuency?](#) (on page 1263)

Arguments

None

Returns

`<OBW_left_freq>::<NRf>` is the left frequency in Hz.

Examples

`FETCH:OBWIDTH:OBWIDTH:LEFT:FREQUENCY?` might return `1.498E+9`, indicating the left frequency is 1.498 GHz.

FETCh:OBWidth:OBWidth:LEFT:LEVel? (Query Only)

Returns the level at the left frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:OBWidth:LEFT:LEVel?`

Related Commands

[FETCh:OBWidth:OBWidth:RIGHT:LEVel?](#) (on page 1264)

Arguments

None

Returns

`<OBW_left_level>::<NRf>` is the level at the left frequency in dB.

Examples

`FETCH:OBWIDTH:OBWIDTH:LEFT:LEVEL?` might return `-23.5`, indicating the level at the left frequency is -23.5 dB.

FETCh:OBWidth:OBWidth:POWer? (Query Only)

Returns the reference power in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:OBWidth:POWer?`

Arguments

None

Returns

`<OBW_ref_power>::<NRf>` is the reference power in dBm. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCH:OBWIDTH:OBWIDTH:POWER?` might return `-10.0`, indicating the reference power is -10 dBm.

FETCh:OBWidth:OBWidth:RIGHT:FREQuency? (Query Only)

Returns the right (higher) frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:OBWidth:RIGHT:FREQuency?`

Related Commands

[FETCh:OBWidth:OBWidth:LEFT:FREQuency?](#) (on page 1262)

Arguments

None

Returns

`<OBW_right_freq>::<NRf>` is the right frequency in Hz.

Examples

`FETCH:OBWIDTH:OBWIDTH:RIGHT:FREQUENCY?` might return `1.502E+9`, indicating the right frequency is 1.502 GHz.

FETCh:OBWidth:OBWidth:RIGHT:LEVel? (Query Only)

Returns the level at the right frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:OBWidth:RIGHT:LEVel?`

Related Commands

[FETCh:OBWidth:OBWidth:LEFT:LEVel?](#) (on page 1262)

Arguments

None

Returns

`<OBW_right_level>::<NRf>` is the level at the right frequency in dB.

Examples

`FETCH:OBWIDTH:OBWIDTH:RIGHT:LEVEL?` might return `-23.5`, indicating the level at the right frequency is -23.5 dB.

FETCh:OBWidth:SPECTrum? (Query Only)

Returns spectrum trace data of the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:SPECTrum?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

<data (n) > is the amplitude in dBm at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:OBWidth:SPECTRUM? might return #43204xxxx . . . (3204-byte data) for the spectrum trace data of the Occupied Bandwidth measurement.

FETCh:OBWidth:XDBBandwidth:BANDwidth? (Query Only)

Returns the x dB bandwidth in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

FETCh:OBWidth:XDBBandwidth:BANDwidth?

Arguments

None

Returns

<xdbBW>: : <NRf> is the x dB bandwidth in Hz.

Examples

FETCh:OBWidth:XDBBANDWIDTH:BANDWIDTH? might return 2.0E+6, indicating the x dB bandwidth is 2 MHz.

FETCh:OBWidth:XDBBandwidth:LEFT:FREQuency? (Query Only)

Returns the left (lower) frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

FETCh:OBWidth:XDBBandwidth:LEFT:FREQuency?

Related Commands

[FETCh:OBWidth:XDBBandwidth:RIGHT:FREQuency?](#) (on page 1267)

Arguments

None

Returns

<xdbBW_left_freq>: : <NRf> is the left frequency in Hz.

Examples

`FETCH:OBWIDTH:XDBBANDWIDTH:LEFT:FREQUENCY?` might return `1.498E+9`, indicating the left frequency is 1.498 GHz.

FETCh:OBWidth:XDBBandwidth:LEFT:LEVel? (Query Only)

Returns the level at the left frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:XDBBandwidth:LEFT:LEVel?`

Related Commands

[FETCh:OBWidth:XDBBandwidth:RIGHT:LEVel?](#) (on page 1267)

Arguments

None

Returns

`<xdbBW_left_level>::<NRf>` is the level at the left frequency in dB.

Examples

`FETCH:OBWIDTH:XDBBANDWIDTH:LEFT:LEVEL?` might return `-23.5`, indicating the level at the left frequency is -23.5 dB.

FETCh:OBWidth:XDBBandwidth:POWer? (Query Only)

Returns the reference power in the x dB bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:XDBBandwidth:POWer?`

Arguments

None

Returns

`<xdbBW_ref_power>::<NRf>` is the reference power in dBm. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCH:OBWIDTH:XDBBANDWIDTH:POWER?` might return `-10.0`, indicating the reference power is -10 dBm.

FETCh:OBWidth:XDBBandwidth:RIGht:FREQuency? (Query Only)

Returns the right (higher) frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:XDBBandwidth:RIGht:FREQuency?`

Related Commands

[FETCh:OBWidth:XDBBandwidth:LEFT:FREQuency?](#) (on page 1265)

Arguments

None

Returns

`<xdbBW_right_freq>::<NRf>` is the right frequency in Hz.

Examples

`FETCH:OBWIDTH:XDBBANDWIDTH:RIGHT:FREQUENCY?` might return `1.502E+9`, indicating the right frequency is 1.502 GHz.

FETCh:OBWidth:XDBBandwidth:RIGht:LEVel? (Query Only)

Returns the level at the right frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Fetch commands

Syntax

`FETCh:OBWidth:XDBBandwidth:RIGht:LEVel?`

Related Commands

[FETCh:OBWidth:XDBBandwidth:LEFT:LEVel?](#) (on page 1266)

Arguments

None

Returns

<xdBW_right_level>::<NRf> is the level at the right frequency in dB.

Examples

FETCH:OBWIDTH:XDBBANDWIDTH:RIGHT:LEVEL? might return -23.5, indicating the level at the right frequency is -23.5 dB.

FETCh:OFDM:APOWer? (Query Only)

Returns the average power in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:APOWer?

Arguments

None

Returns

<apower>::<NRf> the average power in dB.

Examples

FETCH:OFDM:APOWER? might return -23.4584459235, indicating the average power is -23.46 dB.

FETCh:OFDM:APOWer:PEAK? (Query Only)

Returns the peak-to-average power in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:APOWer:PEAK?

Arguments

None

Returns

<apower_peak>::<NRf> is the peak-to-average power in dBm.

Examples

FETCH:OFDM:APOWER:PEAK? might return 10.4140096289, indicating that peak-to-average power is 10.41 dBm.

FETCh:OFDM:CONStE:MAGNitude? (Query Only)

Returns the constellation magnitude data for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:CONStE:MAGNitude?

Related Commands

[FETCh:OFDM:CONStE:PHASe?](#) (on page 1269)

[FETCh:OFDM:CONStE:TYPE?](#) (on page 1270)

[FETCh:OFDM:CONStE:VALue?](#) (on page 1271)

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:OFDM:CONStE:MAGNITUDE? might return #510400xxxx... (10400-byte data) for the measurement.

FETCh:OFDM:CONStE:PHASe? (Query Only)

Returns the constellation phase values of the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:CONStE:PHASe?

Related Commands

[FETCh:OFDM:CONStE:MAGNitude?](#) (on page 1269)

[FETCh:OFDM:CONStE:TYPE?](#) (on page 1270)

[FETCh:OFDM:CONStE:VALue?](#) (on page 1271)

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:OFDM:CONStE:PHASe? might return #510400xxxx... (10400-byte data) for the measurement.

FETCh:OFDM:CONStE:TYPE? (Query Only)

Returns the constellation context value of the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:CONStE:TYPE?

Related Commands

[FETCh:OFDM:CONStE:MAGNitude?](#) (on page 1269)

[FETCh:OFDM:CONStE:PHASe?](#) (on page 1269)

[FETCh:OFDM:CONStE:VALue?](#) (on page 1271)

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in 16-bit little endian integers. The integers must be translated to the proper context as listed below.

Integer value	Type (context)
0	Pilot

Integer value	Type (context)
1	Data
2	Unused or Null

Examples

`FETCH:OFDM:CONStE:TYPE?` might return `#41352` (1352-byte data) for the measurement. The actual data must be decoded to the context type using the table above.

FETCh:OFDM:CONStE:VALue? (Query Only)

Returns the constellation value (decoded symbol) of the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:CONStE:VALue?`

Related Commands

[FETCh:OFDM:CONStE:MAGNitude?](#) (on page 1269)

[FETCh:OFDM:CONStE:PHASe?](#) (on page 1269)

[FETCh:OFDM:CONStE:TYPE?](#) (on page 1270)

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in 16-bit little endian integers.

Examples

`FETCH:OFDM:CONStE:VALUE?` might return `#41352` indicating 1352 bytes of data for the measurement.

FETCh:OFDM:CPE? (Query Only)

Returns the Common Pilot Error magnitude for the OFDM measurement

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:CPE?

Arguments

None

Returns

<NRf> the RMS magnitude error in percent.

Examples

FETCh:OFDM:CPE? might return 3.7868041505, indicating that the CPE is 3.787%.

FETCh:OFDM:CRESPonse:MAGNitude? (Query Only)

Returns the channel response magnitude data for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:CRESPonse:MAGNitude?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:OFDM:CRESPONSE:MAGNITUDE? might return #3804xxxx. . . (804 byte data) for the measurement.

FETCh:OFDM:CRESPonse:PHASe? (Query Only)

Returns the channel response phase data for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:CRESPonse:PHASe?`

Arguments

None

Returns

`#<num_digit><num_byte><data (1)><data (2)>...<data (n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data (n)>` is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:OFDM:CRESPONSE:PHASE?` might return `#3804xxxx. . .` (804 byte data) for the measurement.

FETCh:OFDM:EVM:PEAK:DECibel:ALL? (Query Only)

Returns the peak EVM data for all subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:DECibel:ALL?`

Arguments

None

Returns

`<NRf>` data in dB.

Examples

`FETCh:OFDM:EVM:PEAK:DECIBEL:ALL?` might return `-20.1872549032`, indicating the data is `-20.19` dB for the measurement.

FETCh:OFDM:EVM:PEAK:DECibel:DATA? (Query Only)

Returns the peak EVM data for the data subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:DECibel:DATA?`

Arguments

None

Returns

<NRf> data in dB.

Examples

`FETCh:OFDM:EVM:PEAK:DECIBEL:DATA?` might return `-20.1872549032` indicating the data is `-20.19` dB for the measurement.

FETCh:OFDM:EVM:PEAK:DECibel:PILots? (Query Only)

Returns the peak EVM data for the pilot subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:DECibel:PILots?`

Arguments

None

Returns

<NRf> data in dB.

Examples

`FETCh:OFDM:EVM:PEAK:DECIBEL:PILOTS?` might return `-20.2872549032`, indicating the data is `-20.29` dB for the measurement.

FETCh:OFDM:EVM:PEAK:PERCent:ALL? (Query Only)

Returns the peak EVM data for all subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:PERCent:ALL?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`FETCh:OFDM:EVM:PEAK:PERCENT:ALL?` might return `19.3223863840`, indicating the data is 19.322% for the measurement.

FETCh:OFDM:EVM:PEAK:PERCent:DATA? (Query Only)

Returns the peak EVM data for the data subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:PERCent:DATA?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`FETCh:OFDM:EVM:PEAK:PERCENT:DATA?` might return `19.3223863840`, indicating the data is 19.322% for the measurement.

FETCh:OFDM:EVM:PEAK:PERCent:PILots? (Query Only)

Returns the peak EVM data for the pilot subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:PERCent:PILots?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`FETCH:OFDM:EVM:PEAK:PERCENT:PILOTS?` might return `10.8543863840`, indicating the data is 10.854% for the measurement.

FETCh:OFDM:EVM:PEAK:SCARrier:ALL? (Query Only)

Returns the peak EVM data for all subcarriers at the subcarrier level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:SCARrier:ALL?`

Arguments

None

Returns

<NR1>

Examples

`FETCH:OFDM:EVM:PEAK:SCARRIER:ALL?` might return `99.00000`, indicating the data is 99 for the measurement.

FETCh:OFDM:EVM:PEAK:SCARrier:DATA? (Query Only)

Returns the peak EVM data for all data subcarriers at the subcarrier level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:PEAK:SCARrier:DATA?`

Arguments

None

Returns

<NR1>

Examples

`FETCH:OFDM:EVM:PEAK:SCARRIER:DATA?` might return `99.00000`, indicating the data is 99 for the measurement.

FETCH:OFDM:EVM:PEAK:SCARrier:PILots? (Query Only)

Returns the peak EVM data for the pilot subcarriers at the subcarrier level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:PEAK:SCARrier:PILots?`

Arguments

None

Returns

<NR1>

Examples

`FETCH:OFDM:EVM:PEAK:SCARRIER:PILOTS?` might return `88.00000`, indicating the data is 88 for the measurement

FETCH:OFDM:EVM:PEAK:SYMBol:ALL? (Query Only)

Returns the peak EVM data for all subcarriers at the symbol level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:PEAK:SYMBol:ALL?`

Arguments

None

Returns

<NR1>

Examples

`FETCH:OFDM:EVM:PEAK:SYMBOL:ALL?` might return `2.00000` indicating the data is 2 for the measurement.

FETCH:OFDM:EVM:PEAK:SYMBol:DATA? (Query Only)

Returns the peak EVM data for the data subcarriers at the symbol level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:PEAK:SYMBOL:DATA?`

Arguments

None

Returns

<NR1>

Examples

`FETCH:OFDM:EVM:PEAK:SYMBOL:DATA?` might return `2.00000`, indicating the data is 2 for the measurement.

FETCH:OFDM:EVM:PEAK:SYMBOL:PILOTS? (Query Only)

Returns the peak EVM data for the pilot subcarriers at the symbol level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:PEAK:SYMBOL:PILOTS?`

Arguments

None

Returns

<NR1>

Examples

`FETCH:OFDM:EVM:PEAK:SYMBOL:PILOTS?` might return `1.00000`, indicating the data is 1 for the measurement.

FETCH:OFDM:EVM:RMS:DECibel:ALL? (Query Only)

Returns the RMS EVM data for all subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:RMS:DECibel:ALL?`

Arguments

None

Returns

<NRf> data in dB.

Examples

`FETCH:OFDM:EVM:RMS:DECIBEL:ALL?` might return `-26.9012093267`, indicating the data is `-26.90` for the measurement.

FETCH:OFDM:EVM:RMS:DECibel:DATA? (Query Only)

Returns the RMS EVM data for the data subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:RMS:DECibel:DATA?`

Arguments

None

Returns

<NRf> data in dB.

Examples

`FETCH:OFDM:EVM:RMS:DECIBEL:DATA?` might return `-26.8477116269`, indicating the data is `-26.85` for the measurement.

FETCH:OFDM:EVM:RMS:DECibel:PILOTS? (Query Only)

Returns the RMS EVM data for the pilot subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:RMS:DECibel:PILOTS?`

Arguments

None

Returns

<NRf> data in dB.

Examples

`FETCH:OFDM:EVM:RMS:DECIBEL:PILOTS?` might return `-33.0589143032`, indicating the data is `-33.06` dB.

FETCh:OFDM:EVM:RMS:PERCent:ALL? (Query Only)

Returns the peak RMS data for all subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:RMS:PERCent:ALL?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`FETCH:OFDM:EVM:RMS:PERCENT:ALL?` might return `225.0743627548`, indicating the data is `225.074%` for the measurement.

FETCh:OFDM:EVM:RMS:PERCent:DATA? (Query Only)

Returns the peak RMS data for the data subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:EVM:RMS:PERCent:DATA?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`FETCH:OFDM:EVM:RMS:PERCENT:DATA?` might return `260.6973409653`, indicating that the data is 260.697% for the measurement.

FETCH:OFDM:EVM:RMS:PERCent:PILots? (Query Only)

Returns the peak RMS data for the pilot subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:RMS:PERCent:PILots?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`FETCH:OFDM:EVM:RMS:PERCENT:PILOTS?` might return `210.8103863840`, indicating the data is 210.810% for the measurement.

FETCH:OFDM:EVM:TRACe<x>? (Query Only)

Returns the EVM trace data for the OFDM measurement.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbols.

When <x> is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCH:OFDM:EVM:TRACe<x>?`

Arguments

None

Returns

`#<num_digit><num_byte><data (1)><data (2)>...<data (n)>`

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:OFDM:EVM:TRACE2? might return #252xxxx. . . (52 byte data) for the Average versus Symbols measurement.

FETCh:OFDM:FERRor? (Query Only)

Returns the Frequency error reading for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:FERRor?

Arguments

None

Returns

<NRf> frequency error.

Examples

FETCH:OFDM:FERROR? might return 82.8617142098E+3, indicating the frequency error was 82.86 kHz.

FETCh:OFDM:FLATness:PASS? (Query Only)

Queries whether the average power levels of subcarriers across the signal bandwidth on the OFDM Spectral Flatness display remain within the limits defined for a particular standard.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Fetch commands

Syntax

FETCh:OFDM:FLATness:PASS?

Returns

Returns "1" in the case that all data remains within the defined limits, and "0" otherwise.

Examples

`FETCH:OFDM:FLAT:PASS?` might return 1, which means that the average power levels of subcarriers across the signal bandwidth remain within the defined limits.

FETCh:OFDM:FLATness:RESult? (Query Only)

Returns the summary results of each segment of the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Fetch commands

Syntax

`FETCh:OFDM:FLATness:RESult?`

Returns

The data is returned as 12 comma delineated text values. The specific values are :

- minimum subcarrier within segment 1
- minimum subcarrier average energy deviation from the global average within segment 1
- deviation the of minimum subcarrier average from the allowed value in segment 1
- maximum subcarrier within segment 1
- maximum subcarrier average energy deviation from the global average within segment 1
- deviation of the maximum subcarrier average from the allowed value in segment 1
- minimum subcarrier within segment 2
- minimum subcarrier average energy deviation from the global average within segment 2
- deviation the of minimum subcarrier average from the allowed value in segment 2
- maximum subcarrier within segment 2
- maximum subcarrier average energy deviation from the global average within segment 2
- deviation of the maximum subcarrier average from the allowed value in segment 2

Examples

`FETCH:OFDM:FLAT:RES?` might return

`-6.0000000000,-17.0626174659E-3,3.9829373825,12.0000000000,19.979260861` which represents the summary results of each segment of the OFDM Spectral Flatness display.

FETCh:OFDM:FLATness:TRACe<x>? (Query Only)

Returns the OFDM Spectral Flatness trace data. When <x> is 1, the parameter is Matrix (symbol deviation per subcarrier). When <x> is 2, the parameter is Average Deviation vs Subcarrier.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Fetch commands

Syntax

`FETCh:OFDM:FLATness:TRACe<x>?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:OFDM:FLAT:TRACE2?` might return `#510400..` (10400-byte data) which represents the data for the Average Deviation vs. Subcarrier trace.

FETCh:OFDM:GAIN:IMBalance? (Query Only)

Returns the gain imbalance for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:GAIN:IMBalance?`

Arguments

None

Returns

`<NRf>` gain imbalance in dB.

Examples

`FETCh:OFDM:GAIN:IMBALANCE?` might return `-57.746E-3`, indicating that the gain imbalance is `-0.057746` dB.

FETCh:OFDM:IQ:ORIGIN:OFFSet? (Query Only)

Returns the IQ origin offset for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCH:OFDM:IQ:ORIGIN:OFFSET?

Arguments

None

Returns

<NRf> gain imbalance in dB.

Examples

FETCH:OFDM:IQ:ORIGIN:OFFSET? might return -53.47017 indicating that the IQ origin offset is -53.47 dB.

FETCH:OFDM:MERRor:TRACe<x>? (Query Only)

Returns the magnitude error trace data for the OFDM measurement.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbols.

When <x> is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCH:OFDM:MERRor:TRACe<x>?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:OFDM:MERROR:TRACE2 might return #3108xxxx. . . (108-byte data) for the average versus symbols trace measurement.

FETCH:OFDM:PACKet:DIRection? (Query Only)

Returns the direction of the packet in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:PACKet:DIRection?`

Arguments

None

Returns

One of the following values.

`UP` specifies that the packet is in the up direction.

`DOWN` specifies that the packet is in the down direction.

`BOTH` specifies that the packet is both directions.

Examples

`FETCh:OFDM:PACKET:DIRECTION?` might return `DOWN`, indicating that the packet was in the down direction.

FETCh:OFDM:PERRor:TRACe<x>? (Query Only)

Returns the phase error trace data for the OFDM measurement.

When `<x>` is 1, the parameter is Matrix.

When `<x>` is 2, the parameter is Average versus Symbols.

When `<x>` is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:PERRor:TRACe<x>?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:OFDM:ERROR:TRACE2` might return `#3100xxxx. . .` (100-byte data) for the average versus symbols trace measurement.

FETCh:OFDM:POWer:TRACe<x>? (Query Only)

Returns the power trace data for the OFDM measurement. When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbols. When <x> is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:POWer:TRACe<x>?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:OFDM:POWER:TRACE2` might return `#296xxxx. . .` (96-byte data) for the average versus symbols trace measurement.

FETCh:OFDM:QUADrature:OFFSet? (Query Only)

Returns the quadrature offset in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:QUADrature:OFFSet?`

Arguments

None

Returns

<NRf> quadrature offset in degrees.

Examples

`FETCH:OFDM:QUADRATURE:OFFSET?` might return `-99.9`, indicating that the offset is -99° .

FETCh:OFDM:SCARriers? (Query Only)

Returns the number of subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:SCARriers?`

Arguments

None

Returns

<NR1> number of subcarriers.

Examples

`FETCH:OFDM:SCARRIERS?` might return `200.0000`, indicating that there are 200 subcarriers in the measurement.

FETCh:OFDM:SCARriers:SPACing? (Query Only)

Returns the subcarrier spacing for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

`FETCh:OFDM:SCARriers:SPACing?`

Arguments

None

Returns

<NRf> subcarrier spacing.

Examples

`FETCH:OFDM:SCARRIERS:SPACING?` might return `90.000E+3`, indicating that the subcarrier spacing is 90.000 kHz.

FETCh:OFDM:STABle:VALUe? (Query Only)

Returns the number of bytes in the symbol table for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:STABle:VALUe?

Arguments

None

Returns

#<num_digit><num_byte>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

Examples

FETCh:OFDM:STABle:VALUe? might return #43848 indicating that there are 3848 bytes in the symbol table.

FETCh:OFDM:SYMBol:CERRor? (Query Only)

Returns the symbol clock error for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:SYMBol:CERRor?

Arguments

None

Returns

<NRf> symbol clock error in ppm.

Examples

FETCh:OFDM:SYMBOL:CERROR? might return 422.7135479929, indicating that the symbol clock error was 422.714 ppm.

FETCh:OFDM:SYMBol:COUNT? (Query Only)

Returns the number of symbols for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Fetch commands

Syntax

FETCh:OFDM:SYMBol:COUNT?

Arguments

None

Returns

<NR1> number of symbols in the measurement.

Examples

FETCh:OFDM:SYMBOL:COUNT? might return 25.00000, indicating that there were 25 symbols for the measurement.

FETCh:P25:CONStE:FERRor? (Query Only)

Returns the frequency error in Hz. The frequency error is the difference between the measured carrier frequency of the signal and the user-selected center frequency of the analyzer.

When Frequency Error is in Auto mode, this query returns the frequency error value. When in Manual mode, it returns the frequency offset.

Conditions

Measurement view: P25 Constellation

Group

Fetch commands

Syntax

FETCh:P25:CONStE:FERRor?

Returns

<freq_error>::<NRf>, which is the frequency error in Hz.

Examples

FETCh:P25:CONStE:FERROR? might return -10.7E+3, which is a frequency error of -10.7 kHz.

FETCh:P25:CONStE:TRACe? (Query Only)

Returns the P25 Constellation display trace data.

Conditions

Measurement view: P25 Constellation

Group

Fetch commands

Syntax

`FETCh:P25:CONStE:TRACe?`

Returns

`#<num_digit><num_byte><I(1)><Q(1)><I(2)><Q(2)>...<I(n)><Q(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<I(n)>` and `<Q(n)>` are the normalized I- and Q- coordinate values at the n^{th} data point. 4-byte little endian floating point format specified in IEEE 488.2.

Examples

`FETCh:P25:CONStE:TRACe?` might return `#43848xxxx...` (3848-byte data) for the P25 Constellation trace data.

FETCh:P25:EDIagram:FDEVIation? (Query Only)

Returns the Frequency Deviation vs Time trace data with the X value.

Conditions

Measurement view: P25 Eye Diagram

Group

Fetch commands

Syntax

`FETCh:P25:EDIagram:FDEVIation?`

Returns

`#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<Y(n)>` and `<X(n)>` are the frequency deviation in Hz and time (symbols) coordinate pair at the n^{th} data point. 4-byte little endian floating point format specified in IEEE 488.2.

Examples

`FETCh:P25:EDIAGRAM:FDEVIATION?` might return `#3160xxxx...` (160-byte data) for the Frequency Deviation vs Time trace.

FETCh:P25:EDIagram:FERRor? (Query Only)

Returns the frequency error in the P25 Eye Diagram display.

When Frequency Error is in Auto mode, this query returns the frequency error value. When in Manual mode, it returns the frequency offset.

Conditions

Measurement view: P25 Eye Diagram

Group

Fetch commands

Syntax

`FETCh:P25:EDIagram:FERRor?`

Returns

`<freq_error>::<NRf>` is the frequency error in Hz.

Examples

`FETCh:P25:EDIAGRAM:FERROR?` might return `-10.7E+3`, indicating the frequency Error is -10.7 kHz.

FETCh:P25:EDIagram:I? (Query Only)

Returns the I versus Time trace data in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Fetch commands

Syntax

`FETCh:P25:EDIagram:I?`

Returns

`#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<Y(n)>` and `<X(n)>` are the normalized I- and time (symbols) coordinate values at the n^{th} data point. 4-byte little endian floating point format specified in IEEE 488.2.

Examples

`FETCh:P25:EDIAGRAM:I?` might return `#3160xxxx...` (160-byte data) for the I versus Time trace.

FETCh:P25:EDIagram:Q? (Query Only)

Returns the Q versus Time trace data in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Fetch commands

Syntax

FETCh:P25:EDIagram:Q?

Returns

#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)> and <X(n)> are the normalized Q- and time (symbols) coordinate values at the *n*th data point. 4-byte little endian floating point format specified in IEEE 488.2.

Examples

FETCh:P25:EDIAGRAM:Q? might return #3160xxxx... (160-byte data) for the Q Versus Time trace.

FETCh:P25:PVTime:BURSt:WIDTh? (Query Only)

Returns the value of the measured time width of the burst packet from poweron to powerdown (or the end of waveform, if that occurs before powerdown), in seconds, for the P25 Power vs. Time trace.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

FETCh:P25:PVTime:BURSt:WIDTh?

Returns

Floating point number that represents the value of the measured time width of the burst packet from power on to power down (or the end of waveform, if that occurs before power down), in seconds.

Examples

FETCh:P25:PVTIME:BURST:WIDTH? might return 156.0000000000E-6, which represents a width of the burst packet of 156 μ s.

FETCh:P25:PVTime:FALL:TIME:StARt? (Query Only)

Returns the value of the start time of the falling edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

`FETCh:P25:PVTime:FALL:TIME:START?`

Related Commands

[FETCh:P25:PVTime:FALL:TIME:STOP?](#) (on page 1294)

Returns

Floating point number which represents the value of the start time of the falling edge of the burst, in seconds.

Examples

`FETCh:P25:PVTime:FALL:TIME:START?` might return $6e-6$, which indicates that the start time of the falling edge is at 6 μ s.

FETCh:P25:PVTime:FALL:TIME:STOP? (Query Only)

Returns the value of the stop time of the falling edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

`FETCh:P25:PVTime:FALL:TIME:STOP?`

Related Commands

[FETCh:P25:PVTime:FALL:TIME:START?](#) (on page 1293)

Returns

Floating point number which represents the value of the stop time of the falling edge of the burst, in seconds.

Examples

`FETCh:P25:PVTime:FALL:TIME:STOP?` might return $7e-6$, which indicates the stop time of the falling edge is at 7 μ s.

FETCh:P25:PVTime:RISE:TIME? (Query Only)

Returns the value of the width of the rising edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

`FETCh:P25:PVTime:RISE:TIME?`

Related Commands

[FETCh:P25:PVTime:RTIME?](#) (on page 1296)

Returns

Floating point number which represents the value of the start time of the rising edge of the burst, in seconds.

Examples

`FETCH:P25:PVTIME:RISE:TIME?` might return $6e-6$, which indicates the start time of the rising edge is 6 μ s.

FETCh:P25:PVTime:RISE:TIME:STARt? (Query Only)

Returns the value of the start time of the rising edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

`FETCh:P25:PVTime:RISE:TIME:STARt?`

Related Commands

[FETCh:P25:PVTime:RISE:TIME?](#) (on page 1294)

[FETCh:P25:PVTime:RTIME?](#) (on page 1296)

Returns

Floating point number which represents the value of the start time of the rising edge of the burst, in seconds.

Examples

`FETCH:P25:PVTIME:RISE:TIME:START?` might return $6e-6$, which indicates the start time of the rising edge is at 6 μ s.

FETCh:P25:PVTime:RISE:TIME:STOP? (Query Only)

Returns the value of the stop time of the rising edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

`FETCh:P25:PVTime:RISE:TIME:STOP?`

Related Commands

[FETCh:P25:PVTime:RISE:TIME:STARt?](#) (on page 1294)

[FETCh:P25:PVTime:RTIME?](#) (on page 1296)

[FETCh:P25:PVTime:RISE:TIME?](#) (on page 1294)

Returns

Floating point number which represents the value of the stop time of the rising edge of the burst, in seconds.

Examples

`FETCh:P25:PVTime:RISE:TIME:STOP?` might return $7e-6$, which indicates the width of the rising edge is 7 μ s.

FETCh:P25:PVTime:RTIME? (Query Only)

Returns the value of the width of the rising edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

`FETCh:P25:PVTime:RTIME?`

Related Commands

[FETCh:P25:PVTime:RISE:TIME?](#) (on page 1294)

Returns

Floating point number which represents the value of the width of the rising edge of the burst, in seconds.

Examples

`FETCh:P25:PVTime:RTIME?` might return $7e-6$, which indicates the width of the rising edge is 7 μ s.

FETCh:P25:PVTime:TRACe[:Y]? (Query Only)

Returns the vertical values (power) for the P25 Power vs. Time trace.

Conditions

Measurement view: P25 Power vs. Time

Group

Fetch commands

Syntax

`FETCh:P25:PVTime:TRACe[:Y]?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the n^{th} data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:P25:PVTIME:TRACE[:Y]?` might return #43204 (3204-byte data), which represents the vertical values (power) for the P25 Power vs. Time trace.

FETCH:P25:SUMMARY:LIMIT: SRA (Query Only)

Returns Limit of Symbol Rate Accuracy measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:LIMIT:SRA`

Arguments

None

Returns

might return `PASS`, `FAIL`, or `NA`.

Examples

`FETCH:P25:SUMMARY:LIMIT:SRA`

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY (Query Only)

Returns the Modulation Fidelity measurement result.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY`

Arguments

None

Examples

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY`

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY:STATUS (Query Only)

Returns the Modulation Fidelity measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY:STATUS
```

Arguments

None

Returns

PASS means the result passed.

FAIL means the result failed.

NA means there is nothing to return.

Examples

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY:STATUS might return PASS, FAIL, or NA.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:.DEVIATION:POSPEAK

Returns the Frequency Deviation, positive peak measurement results.

Conditions

Measurement views: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:.DEVIATION:POSPEAK
```

Arguments

<integer>,<integer>

Returns

Frequency Deviation, positive peak, result

Examples

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:.DEVIATION:POSPEAK <-2,-6>` indicates the coordinate value of the Frequency Deviation positive peak.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:.DEVIATION:POSPEAK:STA

Returns the status of Frequency Deviation, positive peak status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:.DEVIATION:POSPEAK:STATUS`

Arguments

None

Examples

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:.DEVIATION:POSPEAK:STATUS` might return PASS, FAIL or NA.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY (Query Only)

Returns the Operational Frequency Accuracy measurement results.

Conditions

Measurement views: P25 Summary

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY`

Arguments

None

Returns

Frequency Accuracy measurement result

Examples

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY`

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY (Query Only)

Returns the Operational Frequency Accuracy measurement results in the P25 Summary display.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY?

Arguments

None

Returns

<NRf> Returns Operational Frequency Accuracy

Examples

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY? might return 25.62, indicating the Operational Frequency Accuracy is 25.62 ppm.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY:STATUS (Query Only)

Returns the status of Frequency Accuracy measurement's result.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY:STATUS

Arguments

None

Examples

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY:STATUS might return PASS, FAIL, or NA.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK:STATUS (Query Only)

Queries the status of Frequency Deviation, negative peak result in the P25 Summary display.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK:STATUS?
```

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK:STATUS?` might return `Pass`, indicating that the Frequency Deviation for negative peak test result is Pass.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK (Query Only)

Returns the Frequency Deviation, negative peak, measurement results.

Conditions

Measurement views: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK
```

Arguments

None

Returns

Frequency Deviation measurement result

Examples

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK:STATUS (Query Only)

Queries the status of Frequency Deviation, positive peak result in the P25 Summary display.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK:STATUS?

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK:STATUS? might return Pass, indicating that the Frequency Deviation for positive peak test result is Pass.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK (Query Only)

Returns the Frequency Deviation, positive peak measurement results in the P25 Summary display.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK?

Arguments

None

Returns

<NRf>

Examples

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK?` might return `125.63`, indicating the Frequency Deviation positive peak is 125.63 Hz.

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR (Query Only)

Returns the Frequency Error measurement results.

Conditions

Measurement views: P25 Summary

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR`

Arguments

None

Returns

Frequency Error measurement result

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:SRA? (Query Only)

Returns the Symbol Rate Accuracy measurement results.

Conditions

Measurement views: P25 Summary

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:SRA?`

Arguments

None

Returns

Symbol Rate Accuracy measurement result

Examples

`FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:SRA?`

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:SRA:STATUS (Query Only)

Returns Status of Symbol Rate Accuracy measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:SRA:STATUS?

Arguments

None

Returns

PASS, FAIL or NA.

Examples

FETCH:P25:SUMMARY:MODULATION:MEASUREMENT:SRA:STATUS? might return PASS, indicating that the status is passed.

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF? (Query Only)

Returns the HCPM Pmax-off measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF?

Returns

HCPM Pmax-off measurement results.

Examples

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF? would return the HCPM Pmax-off measurement result.

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF:STATUS? (Query)

Returns HCPM Pmax-off measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCh:P25:SUMMary:POWEr:MEASurement:HCPM:MAXOFF:STATus?`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF:STATUS?` might return PASS, FAIL, or NA.

FETCH:P25:SUMMary:POWEr:MEASurement:HCPM:MAXON? (Query Only)

Returns the HCPM Pmax-on measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

`FETCH:P25:SUMMary:POWEr:MEASurement:HCPM:MAXON?`

Returns

HCPM Pmax-on measurement results.

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON?` would return HCPM Pmax-on measurement results.

FETCh:P25:SUMMary:POWEr:MEASurement:HCPM:MAXON:STATus? (Query Only)

Returns Status of HCPM Pmax-on measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCh:P25:SUMMary:POWEr:MEASurement:HCPM:MAXON:STATus?`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON:STATUS?` might return PASS, FAIL, or NA.

FETCH:P25:SUMMary:POWEr:MEASurement:HCPM:MAXSS? (Query Only)

Returns the HCPM Pss-max measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

`FETCh:P25:SUMMary:POWEr:MEASurement:HCPM:MAXSS?`

Returns

HCPM Pss-max measurement results.

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS?` would return the HCPM Pss-max measurement result.

FETCh:P25:SUMMary:POWEr:MEASurement:HCPM:MAXSs:STATus (Query Only)

Returns HCPM Pss-max measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCh:P25:SUMMary:POWEr:MEASurement:HCPM:MAXSs:STATus?`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS:STATUS?` might return PASS, FAIL, or NA.

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM? **(Query Only)**

Returns the HCPM Pss-min measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM?

Returns

HCPM Pss-min measurement results.

Examples

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM? would return the HCPM Pss-min measurement result.

FETCh:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS? **(Query Only)**

Returns status of HCPM Pss-min measurement status based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

FETCh:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS?

Arguments

None

Examples

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS? might return PASS, FAIL, or NA.

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot? (Query Only)

Returns the HCPM Offslot power results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot?`

Returns

HCPM Offslot power results.

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT?` would return the HCPM Offslot power result.

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot:STATUS? (Query Only)

Returns Status of HCPM Offslot measurement based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot:STATUS?`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT:STATUS?` might return PASS, FAIL, or NA.

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI (Query Only)

Returns P_ACP_HI value which is displayed on P25 Summary display.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI?`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI?` might return `-37.963`, indicating the `P_ACP_HI` value is `-37.96` dBm.

FETCh:P25:SUMMAry:POWEr:MEASurement:HCPM:PEAK:ACPR:LOW (Query)

Returns `P_ACP_LOW` value which is displayed on P25 Summary display.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMAry:POWEr:MEASurement:HCPM:PEAK:ACPR:LOW`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:LOW?` might return `-40.125`, indicating `P_ACP_LOW` value is `-40.13` dBm.

FETCh:P25:SUMMAry:POWEr:MEASurement:HCPM:PEAK:ACPR:MIN (Query)

Returns Min Pk ACPR value which is displayed on P25 Summary Display.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMAry:POWEr:MEASurement:HCPM:PEAK:ACPR:MIN`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN?` might return `47.96`, indicating Min Pk ACPR value is `47.96` dBm

FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN:STATUS

Returns status of Min Pk ACPR value based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN:STATUS`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN:STATUS?` might return PASS, FAIL, or NA.

FETCH:P25:SUMMARY:POWER:MEASUREMENT:RF (Query Only)

Returns RF measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:RF`

Arguments

None

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:RF`

FETCH:P25:SUMMARY:POWER:MEASUREMENT:RF:STATUS (Query Only)

Returns Status of RF measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCh:P25:SUMMary:POWEr:MEASurement:RF:STATus`

Arguments

None

Returns

PASS, FAIL, or NA.

Examples

`FETCH:P25:SUMMARY:POWER:MEASUREMENT:RF:STATUS` might return `PASS`, indicating that `PASS` is the status result of the measurement.

FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:.ACQ:COUNT (Query Only)

Returns HCPM `t_error_1` acquisition count.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

`FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:.ACQ:COUNT?`

Arguments

None

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:.ACQ:COUNT?`

FETCh:P25:SUMMary:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:ACQ:COUNT (Query Only)

Returns the HCPM `t_error_1` acquisition count in P25 Summary display.

This is applicable when phase 2 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

`FETCh:P25:SUMMArY:TRIGGer:MEASurement:HCPM:TIME:ALIGNment: TError:ONE:ACQ:COUNT?`

Arguments

None

Returns

<NR1> Range is 0 to 5

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:ACQ:COUNT` might return 1, indicating HCPM `t_error_1` acquisition count is 1.

FETCh:P25:SUMMArY:TRIGGer:MEASurement:HCPM:TIME:ALIGNment: TError:ZERO:STATus (Query Only)

Queries the status of the HCPM Time alignment's `t_error_0` measurement results in the P25 Summary display .

This is applicable when phase 2 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

`FETCh:P25:SUMMArY:TRIGGer:MEASurement:HCPM:TIME:ALIGNment:TError:ZERO:STATUS?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:STATUS?` might return Pass, indicating that the HCPM Time alignment's `t_error_0` measurement test result is Pass.

FETCh:P25:SUMMArY:TRIGGer:MEASurement:HCPM:TIME:ALIGNment: TError:ONE:STATus (Query Only)

Returns the Status of HCPM Time alignment's `t_error_1` measurement results in P25 Summary display.

This is applicable when phase 2 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:STATUS?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR: ONE:STATUS?` might return `Pass`, indicating that the HCPM Time alignment's `t_error_1` measurement test result is `Pass`.

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT (Query Only)

Returns the HCPM `t_error_0` acquisition count in P25 Summary display.

This is applicable when phase 2 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT?`

Arguments

None

Returns

<NR1> Range is 0 to 5

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT` might return `3`, indicating HCPM `t_error_0` acquisition count is `3`.

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:S(Query Only)

Returns status of HCPM Time alignment's `t_error_0` measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMAry:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:.ZERO:STATus?
```

Arguments

None

Examples

`FETCh:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:.ZERO:STATUS?` might return PASS, FAIL, or NA.

FETCh:P25:SUMMAry:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:.ACQ:COUNT?(Query Only)

Returns the HCPM Time alignment's `t_error_1` acquisition count over which the `t_error_1` average is computed.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMAry:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:.ACQ:COUNT?
```

Returns

HCPM Time alignment's `t_error_1` acquisition count.

Examples

```
FETCh:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:.ACQ:COUNT?
```

FETCh:P25:SUMMAry:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE:?(Query Only)

Returns the HCPM Time alignment's `t_error_1` measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE?
```

Returns

HCPM Time alignment's t_error_1 measurement results.

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE?
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO?

Returns the HCPM Time alignment's t_error_0 measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO?
```

Returns

HCPM Time alignment's t_error_0 measurement results.

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO?
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync? (Query Only)

Returns the HCPM Time alignment's t_obsync measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync?
```

Returns

HCPM Time alignment's t_obsync measurement results.

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync?
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync:ACQ:COUNT (Query Only)

Returns the HCPM Time alignment's tob_sync acquisition count in P25 Summary display.

This is applicable when phase 2 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync:ACQ:COUNT?

Arguments

None

Returns

<NR1> Range is 0 to 5

Examples

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync:ACQ:COUNT? might return 2, indicating HCPM Time alignment's tob_sync acquisition count is 2.

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:.ENCODER? (Query Only)

Returns the Average Transmitter Encoder Attack Time measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:.ENCODER?

Returns

Average Transmitter Encoder Attack Time measurement results.

Examples

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:.ENCODER?

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:.ENCODER:BI:STAT(Query Only)

Returns status of Average Transmitter Power Encoder Attack Time, busy/idle, measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTAck:TIME:.ENCOrder:BI:STATus?
```

Arguments

None

Returns

Average Transmitter Encoder Attack Time , busy/idle, measurement results.

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:.ENCODER:BI:STATUS?` might return PASS, FAIL, or NA.

FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTAck:TIME:ENCOrder: STATus (Query Only)

Returns the Status of Average Transmitter Encoder Attack Time measurement results in P25 Summary display.

This is applicable when phase 1 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMary:TRIGger:MEASurement:PHASe1:ATTAck:TIME:ENCOrder:STATus?
```

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS?` might return Pass, indicating that Average Transmitter Encoder Attack Time measurement test result is Pass.

FETCh:P25:SUMMAry:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER:BI (Query Only)

Returns Average Transmitter Power Attack Time, busy/idle measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

FETCh:P25:SUMMAry:TRIGger:MEASurement:PHASe1:ATTack:TIME:POWER:BI

Arguments

None

Examples

FETCh:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI

FETCh:P25:SUMMAry:TRIGger:MEASurement:PHASe1:ATTack:TIME:ACQ:COUNT(Query Only)

Returns Average Transmitter Power Attack acquisition count.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

FETCh:P25:SUMMAry:TRIGger:MEASurement:PHASe1:ATTack:TIME:ACQ:COUNT?

Arguments

None

Examples

FETCh:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT? might return PASS, FAIL, or NA.

FETCh:P25:SUMMAry:TRIGger:MEASurement:PHASe1:ATTack:TIME:ACQ:COUNT:BI(Query Only)

Returns the Average Transmitter Power Attack, busy/idle count in the P25 Summary display.

This is applicable when phase 1 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASel:ATTack:TIME:ACQ:COUNT:BI?
```

Arguments

None

Returns

<NR1>Range is 0 to 10

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI?` might return 8, indicating Average Transmitter Power Attack,busy/idle count is 8.

FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASel:ATTack:TIME:ENCoder:BI:STATus (Query Only)

Returns the Status of Average Transmitter Encoder Attack Time (Busy/Idle) measurement results in P25 Summary display.

This is applicable when phase 1 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMARY:TRIGger:MEASurement:PHASel:ATTack:TIME:ENCoder: BI:STATus?
```

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI:STATUS?` might return Pass, indicating that the Average Transmitter Encoder Attack Time (Busy/Idle) measurement test result was Pass.

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS (Query Only)

Returns the Status of Average Transmitter Encoder Attack Time measurement results in P25 Summary display.

This is applicable when phase 1 is selected as the standard in the Modulation Params tab.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS?

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS? might return Pass, indicating that Average Transmitter Encoder Attack Time measurement test result is Pass.

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER?(Query Only)

Returns the Average Transmitter Encoder Attack Time measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER?

Returns

Average Transmitter Encoder Attack Time measurement results.

Examples

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER?

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI?(Query Only)

Returns the Average Transmitter Encoder Attack Time, busy/idle, measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI?

Returns

Average Transmitter Encoder Attack Time , busy/idle, measurement results.

Examples

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI?

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER (Query Only)

Returns Average Transmitter Power Attack Time measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER

Arguments

None

Examples

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI (Query Only)

Returns Average Transmitter Power Attack Time, busy/idle measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMAry:TRIGGer:MEASurement:PHASel:ATTAck:TIME:POWER:BI
```

Arguments

None

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI
```

FETCh:P25:SUMMAry:TRIGGer:MEASurement:PHASel:ATTAck:TIME:POWER:BI:STATus(Query Only)

Returns status of Average Transmitter Power Attack Time, busy/idle, measurement results based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCh:P25:SUMMAry:TRIGGer:MEASurement:PHASel:ATTAck:TIME:POWER:BI:STATus
```

Arguments

None

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI:STATUS might return PASS, FAIL or NA.
```

FETCH:P25:SUMMAry:TRIGGer:MEASurement:PHASel:ATTAck:TIME:POWER:BI?(Query Only)

Returns the Average Transmitter Power Attack Time, busy/idle, measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMAry:TRIGGer:MEASurement:PHASel:ATTAck:TIME:POWER:BI?
```

Returns

Average Transmitter Power Attack Time, busy/idle, measurement results.

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI?
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:STATUS (Query Only)

Returns status of Average Transmitter Power Attack Time measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:STATUS
```

Arguments

None

Examples

`FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:STATUS` might return PASS, FAIL, or NA.

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER?(Query Only)

Returns the Average Transmitter Power Attack Time measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER?
```

Returns

Average Transmitter Power Attack Time measurement results.

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER?
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY (Query Only)

Returns Throughput delay measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY
```

Arguments

None

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT (Query Only)

Returns Throughput delay acquisition counts.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT
```

Arguments

None

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT?(Query Only)

Returns the Throughput delay acquisition counts over which the Throughput delay average is computed.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT?
```

Returns

Throughput delay acquisition counts.

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT?
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:STATUS (Query Only)

Returns status of Throughput delay measurement results based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:STATUS
```

Arguments

None

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:STATUS might return PASS, FAIL, or NA.
```

FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY? (Query Only)

Returns the Throughput delay measurement results.

Conditions

Measurement view: P25 Summary

Group

Fetch commands

Syntax

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY?
```

Returns

Throughput delay measurement results.

Examples

```
FETCH:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY?
```

FETCH:PERRor[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Phase error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Fetch commands

Syntax

```
FETCH:PERRor[:MEASview<y>]:FERRor?
```

Arguments

None

Returns

<freq_error>::<Nrf> is the frequency error in Hz.

Examples

FETCH:PERRor:MEASview2:FERRor? might return -10.7E+3, indicating the frequency error is -10.7 kHz for measurement view2.

FETCH:PERRor[:MEASview<y>]:PEAK? (Query only)

Returns the peak value in the Phase error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Fetch commands

Syntax

```
FETCH:PERRor[:MEASview<y>]:PEAK?
```

Related Commands

[FETCH:PERRor\[:MEASview<y>\]:PINdex?](#) (on page 1327)

Arguments

None

Returns

`<peak>::<NRf>` is the peak phase error in percent (%).

Examples

`FETCH:PERRor:MEASview2:PEAK?` might return 1.57, indicating the peak phase error value is 1.57% for measurement view 2.

FETCH:PERRor[:MEASview<y>]:PINDex? (Query only)

Returns the time at the phase error peak.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Fetch commands

Syntax

```
FETCH:PERRor[:MEASview<y>]:PINDex?
```

Related Commands

[FETCH:PERRor\[:MEASview<y>\]:PEAK?](#) (on page 1326)

Arguments

None

Returns

`<peak_time>::<NRf>` is the time at the phase error peak in symbol number.

The unit can be changed by `[SENSe]:DDEMod:TIME:UNITs` command.

Examples

`FETCH:PERRor:MEASview2:PINDex?` might return 68.000, indicating that the Phase error peak is at symbol #68 for measurement view 2.

FETCH:PERRor[:MEASview<y>]:RMS? (Query only)

Returns the RMS (Root-Mean-Square) value in the Phase error versus Time measurement.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Fetch commands

Syntax

`FETCh:PERRor[:MEASview<y>]:RMS?`

Arguments

None

Returns

`<rms>: : <NRf>` is the RMS phase error in percent (%).

Examples

`FETCh:PERRor:MEASview2:RMS?` might return 0.382, indicating the RMS Phase error value is 0.382% for measurement view 2.

FETCh:PERRor[:MEASview<y>]:TRACe? (Query only)

Returns the Phase error versus Time trace data.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Fetch commands

Syntax

`FETCh:PERRor[:MEASview<y>]:TRACe?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the phase error in degrees at the n^{th} data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:PERRor:MEASview2:TRACe?` might return `#42036xxxx...` (2036-byte data) for the Phase error versus Time Measview 2.

FETCh:PHVTime[:MEASview<y>]? (Query Only)

Returns the Phase versus Time trace data.

Conditions

Measurement views: Phase versus Time

Group

Fetch commands

Syntax

`FETCh:PHVTime[:MEASview<y>]?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the phase in degrees at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:PHVTIME:MEASview1?` might return `#3160xxxx...` (160-byte data) for the Phase versus Time trace.

FETCh:PHVTime[:MEASview<y>]:MAXimum? (Query Only)

Returns the maximum value in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Fetch commands

Syntax

`FETCh:PHVTime[:MEASview<y>]:MAXimum?`

Related Commands

[FETCh:PHVTime\[:MEASview<y>\]:MAXLocation?](#) (on page 1330)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>: : <NRf> is the maximum phase in degrees.

Examples

FETCH:PHVTIME:MEASview1:MAXIMUM? might return 153.8, indicating the maximum phase is 153.8°.

FETCh:PHVTime[:MEASview<y>]:MAXLocation? (Query Only)

Returns the time at which the phase is maximum.

Conditions

Measurement views: Phase versus Time

Group

Fetch commands

Syntax

FETCH:PHVTime[:MEASview<y>]:MAXLocation?

Related Commands

[FETCh:PHVTime\[:MEASview<y>\]:MAXimum?](#) (on page 1329)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max_time>: : <NRf> is the time in seconds at which the phase is maximum.

Examples

FETCH:PHVTIME:MEASview1:MAXLOCATION? might return 175.3E-9, indicating the I or Q level is maximum at 175.3 ns.

FETCh:PHVTime[:MEASview<y>]:MINimum? (Query Only)

Returns the minimum value in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Fetch commands

Syntax

FETCH:PHVTime[:MEASview<y>]:MINimum?

Related Commands

[FETCh:PHVTime\[:MEASview<y>\]:MINLocation?](#) (on page 1331)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min>::<NRf> is the minimum phase in degrees.

Examples

FETCh:PHVTIME:MEASview1:MINIMUM? might return -176.3, indicating the minimum phase is -176.3°.

FETCh:PHVTime[:MEASview<y>]:MINLocation? (Query Only)

Returns the time at which the phase is minimum.

Conditions

Measurement views: Phase versus Time

Group

Fetch commands

Syntax

FETCh:PHVTime[:MEASview<y>]:MINLocation?

Related Commands

[FETCh:PHVTime\[:MEASview<y>\]:MINimum?](#) (on page 1330)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min_time>::<NRf> is the time in seconds at which the phase is minimum.

Examples

FETCh:PHVTIME:MEASview1:MINLOCATION? might return 450.7E-9, indicating the phase is minimum at 450.7 ns.

FETCh:PHVTime[:MEASview<y>]:RESult? (Query Only)

Returns the Phase versus Time measurement results.

Conditions

Measurement views: Phase versus Time

Group

Fetch commands

Syntax

FETCh:PHVTime[:MEASview<y>]:RESult?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>,<max_time>,<min>,<min_time>

Where

<max>::<NRf> is the maximum phase in degrees.

<max_time>::<NRf> is the time in seconds at which the phase is maximum.

<min>::<NRf> is the minimum phase in degrees.

<min_time>::<NRf> is the time in seconds at which the phase is minimum.

Examples

FETCH:PHVTIME::MEASview1:RESULT? might return 153.8,175.3E-9,-176.3,450.7E-9, indicating the maximum phase is 153.8 ° at 175.3 ns and the minimum phase is -176.3 ° at 450.7 ns.

FETCh:PM:PNEGative? (Query Only)

Returns the negative peak phase deviation (–Pk) in the PM measurement.

Conditions

Measurement views: PM

Group

Fetch commands

Syntax

FETCh:PM:PNEGative?

Arguments

None

Returns

<–Pk>::<NRf> is the negative peak phase deviation in degrees.

Examples

FETCH:PM:PNEGATIVE? might return –23.42, indicating the positive peak phase deviation is –23.42 °.

FETCh:PM:PPOSitive? (Query Only)

Returns the positive peak phase deviation (+Pk) in the PM measurement.

Conditions

Measurement views: PM

Group

Fetch commands

Syntax

`FETCh:PM:PPOSitive?`

Arguments

None

Returns

`<+Pk>: : <NRf>` is the positive peak phase deviation in degrees.

Examples

`FETCh:PM:PPOSITIVE?` might return 26.87, indicating the positive peak phase deviation is 26.87 °.

FETCh:PM:PTPeak? (Query Only)

Returns the peak-peak phase deviation (Pk-Pk) in the PM measurement.

Conditions

Measurement views: PM

Group

Fetch commands

Syntax

`FETCh:PM:PTPeak?`

Arguments

None

Returns

`<Pk-Pk>: : <NRf>` is the peak-peak phase deviation in degrees.

Examples

`FETCh:PM:PTPEAK?` might return 46.34, indicating the peak-peak phase deviation is 46.34 °.

FETCh:PM:RESult? (Query Only)

Returns the PM measurement results.

Conditions

Measurement views: PM

Group

Fetch commands

Syntax

`FETCh:PM:RESult?`

Arguments

None

Returns

<+Pk>, <-Pk>, <RMS>, <Pk-Pk>

Where

<+Pk>: : <NRf> is the positive peak phase deviation in degrees.

<-Pk>: : <NRf> is the negative peak phase deviation in degrees.

<RMS>: : <NRf> is the RMS phase deviation in degrees.

<Pk-Pk>: : <NRf> is the peak-peak phase deviation in degrees.

Examples

FETCh:PM:RESULT? might return 22.89, -23.45, 15.12, 46.34.

FETCh:PM:RMS? (Query Only)

Returns the RMS phase deviation in the PM measurement.

Conditions

Measurement views: PM

Group

Fetch commands

Syntax

FETCh:PM:RMS?

Arguments

None

Returns

<RMS>: : <NRf> is the RMS phase deviation in degrees.

Examples

FETCh:PM:RMS? might return 15.12, indicating the RMS frequency deviation is 15.12 °.

FETCh:PNOise:ALL? (Query Only)

Returns all results of the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

FETCh:PNOise:ALL?

Arguments

None

Returns

<Cpower>, <Ferror>, <Pnoise>, <Tjitter>, <Rjitter>, <RFM>

Where

<Cpower>::<NRf> is the carrier power in dBm.

<Ferror>::<NRf> is the frequency error in Hz.

<Pnoise>::<NRf> is the RMS phase noise in degrees.

<Tjitter>::<NRf> is the total jitter in seconds.

<Rjitter>::<NRf> is the random jitter in seconds.

<RFM>::<NRf> is the residual FM in Hz.

Examples

`FETCH:PNOISE:ALL?` might return -9.455,1.235E+6,51.43,2.312E-9,4.178E-9,14.58, indicating Carrier power: -9.455 dBm, Frequency error: 1.235 MHz, RMS phase noise: 51.43 °, Total jitter: 2.312 ns, Random jitter: 4.178 ns, and Residual FM: 14.58 Hz.

FETCh:PNOise:CARRier:FERRor? (Query Only)

Returns the carrier frequency error in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

`FETCh:PNOise:CARRier:FERRor?`

Arguments

None

Returns

<NRf> Carrier frequency error in Hz.

Examples

`FETCH:PNOISE:CARRIER:FERROR?` might return 1.235E+6, indicating that the carrier frequency error is 1.235 MHz.

FETCh:PNOise:CARRier:POWer? (Query Only)

Returns the carrier power in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

`FETCh:PNOise:CARRier:POWer?`

Arguments

None

Returns

<NRf> Carrier power in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCh:PNOISE:CARRIER:POWER?` might return -9.455, indicating that the carrier power is -9.455 dBm.

FETCh:PNOise:JITTer? (Query Only)

Returns the jitter in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

`FETCh:PNOise:JITTer?`

Arguments

None

Returns

<NRf> Jitter in seconds.

Examples

`FETCh:PNOISE:JITTER?` might return 2.312E-9, indicating that the jitter is 2.312 ns.

FETCh:PNOise:RESidual:FM? (Query Only)

Returns the residual FM in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

`FETCh:PNOise:RESidual:FM?`

Arguments

None

Returns

<NRf> Residual FM in Hz.

Examples

FETCh:PNOISE:RESIDUAL:FM? might return 14.58, indicating that the residual FM is 14.58 Hz.

FETCh:PNOise:RMS:PNOise? (Query Only)

Returns the RMS phase noise in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

FETCh:PNOise:RMS:PNOise?

Arguments

None

Returns

<NRf> RMS phase noise in degrees.

Examples

FETCh:PNOISE:RMS:PNOISE? might return 51.43, indicating that the RMS phase noise is 51.43 °.

FETCh:PNOise:SPECTrum<x>:X? (Query Only)

Returns the frequencies of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

FETCh:PNOise:SPECTrum<x>:X?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x (n)> is the frequency (Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:PNOISE:SPECTRUM1:X?` might return `#516020xxxx...` (16020-byte data) for the frequencies of Trace 1.

FETCh:PNOise:SPECtrum<x>:XY? (Query Only)

Returns the frequency and phase noise pairs of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

`FETCh:PNOise:SPECtrum<x>:XY?`

Arguments

None

Returns

`#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>`

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x (n)><y (n)> is the frequency (Hz) and phase noise (dBc/Hz) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:PNOISE:SPECTRUM1:XY?` might return `#516020xxxx...` (16020-byte data) for the frequency and phase noise pairs of the Trace 1.

FETCh:PNOise:SPECtrum<x>[:Y]? (Query Only)

Returns the phase noise values of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Phase noise

Group

Fetch commands

Syntax

`FETCH:PNOISE:SPECTrum<x>[:Y]?`

Arguments

None

Returns

`#<num_digit><num_byte><y(1)><y(2)>...<y(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<y(n)>` is the phase noise (dBc/Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:PNOISE:SPECTRUM1:Y` might return `#516020xxxx...` (16020-byte data) for the phase noise values of Trace 1.

FETCH:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:HIGHer? (Query Only)

Returns the outliers value exceeding the upper limit in pulse cumulative histogram.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Fetch commands

Syntax

`FETCH:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:HIGHer?`

Arguments

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<NRf>` Number of outliers above higher limit

Examples

`FETCH:PULSE:CUMULATIVE:HISTOGRAM:MEASview1:OUTLIER:HIGHER?` might return 0.000, which is the value for the outliers that have exceeded the upper limit in the pulse cumulative histogram.

FETCH:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:LOWer? (Query Only)

Returns the outliers value below the lower limit in pulse cumulative histogram.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Fetch commands

Syntax

```
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:LOWer?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> Number of outliers below lower limit

Examples

FETCh:PULSe:CUMULATIVE:HISTOGRAM:MEASview1:OUTLIER:LOWER? might return 0.000, which is the value for the outliers below the lower limit in the pulse cumulative histogram.

FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:COUNt? (Query Only)

Returns the number of pulses in the bin in the pulse cumulative histogram.

Conditions

Measurement views: Pulse Cumulative Histogram

Group

Fetch commands

Syntax

```
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:COUNt?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> Number of pulses in the bin

Examples

FETCh:PULSe:CUMULATIVE:HISTOGRAM:MEASview1:PULSe:COUNt? might return 0 for the number of pulses in the bin.

FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:TOTal? (Query Only)

Returns the total number of pulses in the pulse cumulative histogram.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Fetch commands

Syntax

```
FETCh:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:TOTal?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> Total number of pulses

Examples

FETCH:PULSE:CUMULATIVE:HISTOGRAM:MEASview1:PULSE:TOTAL? might return 16 for total number pulses in the pulse cumulative histogram.

FETCh:PULSe:CUMulative:STATistics[:MEASview<y>]

Returns the PulseCount, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average and Standard Deviation values for the chosen measurement in the pulse cumulative statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Fetch commands

Syntax

```
FETCh:PULSe:CUMulative:STATistics[:MEASview<y>] <arg1>,<arg2>
```

Arguments

arg1 can be one of the following measurements:

```
{AVERage | PPOwer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio |
RIPple | RIPDb | DROop | DRODb | OVERshoot | OVEDb| PPPHase | PPFrequency | RMSFreqerror
| MFReqerror | RMSPherror |MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude |
IRTime | PPPD| PPFD | FABS}
```

arg2 can be one of the following statistics results:

```
{TPCounT | MAX | MAXTs | MIN | MINTs | PK2PK | AVG | SD | ALL}
```

Returns

<puls_cnt>|<max>|<max_timestamp>|<min>|<min_timestamp>|pk_pk>|std_dev>|< for one of the following selected measurements:

```
<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> |
<duty_factor_pcmt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> |
<ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq><rms_phase_err> | <rms_freq_err> |
<p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> |
<freq_dev><phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time>
```

Where

<avg_on>::<NRf> is the average power transmitted during pulse ON.

<pk_pwr>::<NRf> is the Maximum power during pulse on.

<pk_pwr>::<NRf> is the average power transmitted.

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB/-6 dB level (50%) of the user selected 100% level.

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level.

<fall>::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level.

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge.

<rep_rate>::<NRf> is the inverse of repetition interval.

<duty_factor_pcnt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage.

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period.

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top.

<ripple_db>::<NRf> is the Ripple measurement expressed in dB.

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time.

<droop_db>::<NRf> is the Droop measurement expressed in dB.

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge.

<ovrshoot_db>::<NRf> is the Over shoot measurement expressed in dB.

<p2p_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window.

<p2p_freq>::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse.

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time.

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs.Time trace.

<pp_phase>::<NRf> is the frequency difference between the current pulse and the first pulse.

<pp_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse.

<pk_phase_err>::<NRf> is the maximum phase error.

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point.

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time.

<phase_dev>::<NRf> is the difference between the maximum and minimum Phase values measured during the ON time of a pulse.

<dlt_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency.

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe.

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe.

Examples

FETCH:PULSe:CUMulative:STATistics:MEASview1 AVERage,MAX might return -1.3594852284, which is the max average value for the Average ON measurement.

FETCh:PULSe:CUMulative:STATistics[:MEASview<y>] (Query Only)

Returns the PulseCount, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average, and Standard Deviation values for the chosen measurement in the Pulse Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Fetch commands

Syntax

FETCh:PULSe:CUMulative:STATistics[:MEASview<y>]? <arg1><arg2>

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<arg1> = {AVERage | PPOWer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPPLE | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPHase | PPFRequency | RMSFreqerror | MFReqerror | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude | IRTIME | PPPD | PPFD | FABS}

<arg2> = {TPCOunt | MAX | MAXTs | MIN | MINTs | PK2PK | AVG | SD | ALL}

Returns

<puls_cnt> | <max> | <max_timestamp> | <min> | <min_timestamp> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcnt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time>

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>::<NRf> is the average power transmitted

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB /-6 dB level (50%) of the user selected 100% level

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall>::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate>::<NRf> is the inverse of repetition interval

<duty_factor_pcnt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq>::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs.Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<dlta_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

Examples

FETCH:PULSe:CUMulative:STATistics:MEASview1? AVERage,MAX might return -1.3594852284, indicating the max value for Average ON is -1.3594852284.

FETCH:PULSe:OGRAM[:MEASview<y>]:MAX:FRAME:COUNT (Query Only)

Queries the frame count value in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Fetch commands

Syntax

FETCH:PULSe:OGRAM[:MEASview<y>]:MAX:FRAME:COUNT?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> Total number of fast frames

Examples

`FETCH:PULSE:OGRAM:MEASview1:MAX:FRAME:COUNt?` might return 15, indicating the total number of fast frames in the acquisition of pulse-Ogram is 15.

FETCH:PULSE:OGRAM[:MEASview<y>]:RBW (Query Only)

Queries the resolution bandwidth value only when Frequency vs Time display is opened in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Fetch commands

Syntax

`FETCH:PULSE:OGRAM[:MEASview<y>]:RBW?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf>

Examples

`FETCH:PULSE:OGRAM:MEASview1:RBW?` might return `222.9199886322E+3`, indicating the RBW value in Pulse-Ogram is `222.9199886322E+3`.

FETCH:PULSE[:RESULT][:MEASview<y>]:ADVanced (Query Only)

Queries the PulseCount, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average, and Standard Deviation values for the chosen measurement in the Pulse Table display.

Conditions

Measurement views: Pulse Table

Group

Fetch commands

Syntax

`FETCH:PULSE[:RESULT][:MEASview<y>]:ADVanced <arg1><arg2>`

Arguments

<arg1>={Pulse_number}

<arg2>= {AVERage | PPOWer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPPlE | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPHase | PPFRequency | RMSFrequence | MFRequency | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude | TIME | IRTIME | PPPD | PPFD | FABS}

Returns

<puls_cnt> | <max> | <max_timestamp> | <min> | <min_timestamp> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcmt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time> | <time> for the given pulse number

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>::<NRf> is the average power transmitted

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB/ -6 dB level (50%) of the user selected 100% level

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall>::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate>::<NRf> is the inverse of repetition interval

<duty_factor_pcmt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq>::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs. Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<dlta_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set

Examples

FETCH:PULSE[:RESULT]:MEASview1:ADVANCED 1,AVERAge might return -1.4063608208, indicating the average ON value for the pulse number 1 is -1.4063608208.

FETCh:PULSe[:RESult][:MEASview<y>]:ADVanced:RANGe (Query only)

Queries the Pulse Count, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average, and Standard Deviation values for the selected measurement in the Pulse Table display.

Conditions

Measurement views: Pulse Table

Group

Fetch commands

Syntax

FETCH:PULSe[:RESult][:MEASview<y>]:ADVanced:RANGe <arg1><arg2><arg3>

Arguments

<arg1>={Start_Pulse_number}

<arg2>={End_Pulse_number}

<arg3>= {AVERAge | PPOWer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPple | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPHase | PPFRequency | RMSFreqerror | MFReqerror | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude | TIME | IRTIME | PPPD | PPFD | FABS}

Returns

<puls_cnt> | <max> | <max_timestamp> | <min> | <min_timestamp> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcmt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time> | <time> for the given pulse number.

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on.

<avg_tx>::<NRf> is the average power transmitted .

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB or -6 dB level (50%) of the user selected 100% level.

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% or (20% to 80%) of the user selected 100% level.

<fall> ::<NRf> is the time required for a signal to fall from 90% to 10% or (80% to 20%) of the user selected 100% level.

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge.

<rep_rate> ::<NRf> is the inverse of repetition interval.

<duty_factor_pcmt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage.

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period.

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top.

<ripple_db>::<NRf> is the Ripple measurement expressed in dB.

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse on time.

<droop_db>::<NRf> is the Droop measurement expressed in dB.

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge.

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB.

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window.

<pp_freq> ::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse.

<rms_phase_err>::<NRf> is the RMS average of the Phase versus Time trace, computed over the Measurement Time.

<rms_freq_err>::<NRf> is the RMS average of the Freq error versus Time trace.

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse.

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse.

<pk_phase_err>::<NRf> is the maximum phase error.

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point.

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time.

<phase_dev>::<NRf> is the Phase deviation difference between the maximum and minimum Phase values measured during the on time of a pulse.

<dlta_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency.

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe.

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe .

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set.

Example

FETCH:PULSE[:RESULT]:MEASview1:ADVANCED:RANGe 2048,2060,AVERage might return
 -3,23.8467659801E-3,23.8566566259E-3,23.8667335361E-3,23.8771531731E-3,
 23.8866508007E-3,23.8966420293E-3,23.9066667855E-3,23.9170398563E-3,
 23.9367540926E-3,23.9467956126E-3,23.9567346871E-3,23.9670332521E-3, 23.9866096526E-3,2,
 indicating the average ON value for the pulse number 2048 to 2060.

FETCh:PULSe[:RESult][:MEASview<y>]:ATX? (Query Only)

Returns the average transmitted power in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSe[:RESult][:MEASview<y>]:ATX?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<ATX(1)>,< ATX(2)>,...<ATX(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<ATX(n)>::<NRf> is the average transmitted power for the pulse with the number of [first_pulse_num + n - 1] in dBm.

The unit can be changed to watts by the [SENSe]:POWer:UNITs command. This measurement gives valid results only for power units (Watts, dBm, dBuW, dBW).

Examples

FETCH:PULSE:RESULT:MEASview1:ATX? might return 0,-18.57,-18.73,-18.20, -18.53 for Pulse 0 to 3.

FETCH:PULSe[:RESult][:MEASview<y>]:AVERage? (Query Only)

Returns the average on power in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSe[:RESult][:MEASview<y>]:AVERage?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,< avg(1)>,< avg(2)>,...<avg(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<avg(n)>::<NRf> is the average on power for the pulse with the number of [first_pulse_num + n - 1] in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

This measurement gives valid results only for power units (Watts, dBm, dBuW, dBW).

Examples

`FETCH:PULSE:RESULT:MEASview1:AVERAGE?` might return 0, -2.354, -2.368, -2.343, -2.358 for Pulse 0 to 3.

FETCH:PULSe[:RESult][:MEASview<y>]:DRODb? (Query Only)

Returns the droop in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCH:PULSe[:RESult][:MEASview<y>]:DRODb?`

Related Commands

[FETCH:PULSe\[:RESult\]\[:MEASview<y>\]:DROOp?](#) (on page 1350)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>, <droop(1)>, <droop(2)>, ... <droop(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<droop(n)>::<NRf>` is the droopdB for the pulse number [first_pulse_num + n - 1] in percent (%) of watts or volts.

Examples

`FETCH:PULSE:RESULT:MEASview1:DRODB?` might return 1, -0.4, 0.32, 0.2, -0.1 for Pulse 1 to 4.

FETCH:PULSe[:RESult][:MEASview<y>]:DROOp? (Query Only)

Returns the droop in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCH:PULSe[:RESult][:MEASview<y>]:DROOp?`

Related Commands

[FETCH:PULSe\[:RESult\]\[:MEASview<y>\]:DRODb?](#) (on page 1350)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<droop(1)>,<droop(2)>,...<droop(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<droop(n)>::<NRf> is the droop for the pulse number [first_pulse_num + n - 1] in percent (%) of watts or volts.

Examples

FETCH:PULSE:RESULT:MEASview1:DROOP? might return 0,-270.9E-3,-193.0E-3,-242.7E-3,-177.5E-3 for Pulse 0 to 3.

FETCh:PULSe[:RESult][:MEASview<y>]:DUTPct? (Query Only)

Returns the duty factor (%) in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCh:PULSe[:RESult][:MEASview<y>]:DUTPct?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<duty_pct(1)>,<duty_pct(2)>,...<duty_pct(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<duty_pct(n)>::<NRf> is the duty factor for the pulse with the number of [first_pulse_num + n - 1] in percent (%).

Examples

FETCH:PULSE:RESULT:MEASview1:DUTPCT? might return 0,28.94,28.96,29.00,29.01 for Pulse 0 to 3.

FETCh:PULSe[:RESult][:MEASview<y>]:DUTRatio? (Query Only)

Returns the duty factor (ratio) in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCh:PULSe[:RESult][:MEASview<y>]:DUTRatio?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<duty_ratio(1)>,<duty_ratio(2)>,...<duty_ratio(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<duty_ratio(n)>::<NRf> is the duty factor for the pulse with the number of [first_pulse_num + n - 1] (no unit).

Examples

FETCH:PULSE:RESULT:MEASview1:DUTRATIO? might return 0, 289.4E-3, 289.6E-3, 290.0E-3, 290.1E-3 for Pulse 0 to 3.

FETCh:PULSe[:RESult][[:MEASview<y>]:FABS? (Query Only)

Returns the computed absolute frequency from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCh:PULSe[:RESult][:MEASview<y>]:FABS?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<abs_freq(1)>,<abs_freq(2)>,...<abs_freq(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<abs_freq(n)>::<NR1> is the absolute frequency for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

FETCH:PULSE[:RESULT]:MEASview1:FABS? might return 1.0000000000, 919.8726400000E+6, 1.1664642560E+9, 1.1866586880E+9, 1.1867939840E+9, 1.1882243840E+9, 933.2595840000E+6, 1.1729175040E+9, 1.1818649600E+9, 1.1868037120E+9, 1.1832893440E+9, 933.4762880000E+6, 1.1805880320E+9, 1.1844794880E+9, 1.1914785280E+9, 1.1929450240E for is the number of the first pulse and the absolute frequency for each pulse.

FETCH:PULSE[:RESULT][:MEASview<y>]:FALL? (Query Only)

Returns the fall time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSE[:RESULT][:MEASview<y>]:FALL?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<fall(1)>,<fall(2)>,...<fall(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<fall(n)>::<NRf> is the fall time for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

FETCH:PULSE:RESULT:MEASview1:FALL? might return 0,110.3E-9,90.45E-9, 95.03E-9,111.9E-9 for Pulse 0 to 3.

FETCH:PULSE[:RESULT][:MEASview<y>]:FDELta? (Query Only)

Returns the computed delta frequency from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSE[:RESULT][:MEASview<y>]:FDELta?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<freq_delta(1)>,<freq_delta(2)>,...<freq_delta(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

`<freq_delta(n)>::<NRf>` is the frequency delta for the pulse with the number of `[first_pulse_num + n - 1]` in Hz.

Examples

`FETCH:PULSE:RESULT:MEASview1:FDELTA?` might return

1.0000000000, 163.6692962646, 82.8298492432, 21.8995475769, 89.2963562012, 4 for the first pulse and each pulse found.

FETCh:PULSe[:RESult][:MEASview<y>]:FRDeviation? (Query Only)

Returns the frequency deviation in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][:MEASview<y>]:FRDeviation?`

Arguments

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>, <freq_dev(1)>, <freq_dev(2)>, ... <freq_dev(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<freq_dev(n)>::<NRf>` is the frequency deviation for the pulse with the number of `[first_pulse_num + n - 1]` in Hz.

Examples

`FETCH:PULSE:RESULT:MEASview1:FRDEVIATION?` might return 1,740.6E+3, 736.5E+3, 718.3E+3, 672.2E+3 for Pulse 1 to 4.

FETCh:PULSe[:RESult][:MEASview<y>]:IRAMplitude? (Query Only)

Returns the pulse impulse response amplitude measurement in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][:MEASview<y>]:IRAMplitude?`

Arguments

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <amplitude(1)>, <amplitude(2)>, ... <amplitude(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<amplitude(n)>::<NRf> is the sidelobe level, in dB, from the mainlobe for the pulse with the number of [first_pulse_num + n - 1].

Examples

FETCH:PULSE:RESULT:MEASview1:IRAMPLITUDE? might return 1.0000000000, -45.3, -47.5, -50.2 for Pulse 1 through 3.

FETCh:PULSe[:RESult][:MEASview<y>]:IRTime? (Query Only)

Returns the impulse response time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCH:PULSe[:RESult][:MEASview<y>]:IRTime?

Returns

<first_pulse_num>, <time(1)>, <time(2)>, . . . <time(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<time(n)>::<NRf> is the sidelobe offset time from the mainlobe for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

FETCH:PULSE:RESULT:MEASview1:IRTIME? might return 1.0000000000, 806.6708687693E-9, -846.6595318168E-9, -873.3477443457E-9 for Pulse 1 through 3.

FETCh:PULSe[:RESult][:MEASview<y>]:MFReqerror? (Query Only)

Returns the maximum frequency error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCH:PULSe[:RESult][:MEASview<y>]:MFReqerror?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <max_freq_err(1)>, <max_freq_err(2)>, ... <max_freq_err(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<max_freq_err(n)>::<NRf> is the maximum frequency error for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

FETCH:PULSE:RESULT:MEASview1:MFREQERROR? might return 1, 597.5E+3, 675.8E+3, 642.8E+3, 598.2E+3 for Pulse 1 to 4.

FETCh:PULSe[:RESult][:MEASview<y>]:MPHerror? (Query Only)

Returns the maximum phase error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCH:PULSe[:RESult][:MEASview<y>]:MPHerror?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <max_phase_err(1)>, <max_phase_err(2)>, ... <max_phase_err(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<max_phase_err(n)>::<NRf> is the maximum phase error for the pulse with the number of [first_pulse_num + n - 1] in degrees.

Examples

FETCH:PULSE:RESULT:MEASview1:MPHERROR? might return 1, -9.221, -8.413, -11.853, -10.258 for Pulse 1 to 4.

FETCh:PULSe[:RESult][:MEASview<y>]:OVEDb? (Query Only)

Returns the overshoot in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][:MEASview<y>]:OVEDb?`

Related Commands

[FETCh:PULSe\[:RESult\]\[:MEASview<y>\]:OVERshoot?](#) (on page 1357)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>, <overshoot(1)>, <overshoot(2)>, ... <overshoot(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<overshoot(n)>::<NRf>` is the overshoot for the pulse with the number of `[first_pulse_num + n - 1]` in dB.

Examples

`FETCh:PULSe:RESULT:MEASview1:OVERDB?` might return `1, 1.2, 2.3, 1.0, 0.2` for Pulse 1 to 4.

FETCh:PULSe[:RESult][:MEASview<y>]:OVERshoot? (Query Only)

Returns the overshoot in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][:MEASview<y>]:OVERshoot?`

Related Commands

[FETCh:PULSe\[:RESult\]\[:MEASview<y>\]:OVEDb?](#) (on page 1356)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>, <overshoot(1)>, <overshoot(2)>, ... <overshoot(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<overshoot(n)>::<NRf>` is the overshoot for the pulse with the number of `[first_pulse_num + n - 1]` in percent (%) of watts or volts.

Examples

FETCH:PULSE:RESULT:MEASview1:OVERSHOOT? might return 1,1.2,2.3,1.0,0.2 for Pulse 1 to 4.

FETCh:PULSe[:RESult][:MEASview<y>]:PHDeviation? (Query Only)

Returns the phase deviation in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCH:PULSe[:RESult][:MEASview<y>]:PHDeviation?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<phase_dev(1)>,<phase_dev(2)>,...<phase_dev(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<phase_dev(n)>::<NRf> is the phase deviation for the pulse with the number of [first_pulse_num + n - 1] in degrees.

Examples

FETCH:PULSE:RESULT:MEASview1:PHDEVIATION? might return 1,11.658,9.640,10.509,8.272 for Pulse 1 to 4.

FETCh:PULSe[:RESult][:MEASview<y>]:PPFD? (Query Only)

Returns the computed pulse to pulse frequency difference from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCH:PULSe[:RESult][:MEASview<y>]:PPFD?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<ppfd(1)>,<ppfd(2)>,...<ppfd(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<ppfd(n)>::<NRf> is the pulse to pulse frequency difference with the number of [first_pulse_num + n - 1] in Hz.

Examples

FETCH:PULSE[:RESULT]:MEASview1:PPFD? might return 1.0000000000,"-", 246.5916160000E+6, 20.1943520000E+6, 135.2960000000E+3, 1.4304160000E+6, -254.9647520000E+6, 239.6579520000E+6, 8.9474560000E+6, 4.9386560000E+6, -3.5143840000E+6, -249.8130240000E+6, 247.1117760000E+6, 3.8915200000E+6, 6.9989120000E+6, 1.4665920000E+6 is the number of the first pulse and the pulse frequency difference for each pulse.

FETCh:PULSe[:RESult][:MEASview<y>]:PPFRequency? (Query Only)

Returns the pulse-pulse carrier frequency in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCh:PULSe[:RESult][:MEASview<y>]:PPFRequency?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<pp_freq(1)>,<pp_freq(2)>,...<pp_freq(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<pp_freq(n)>::<NRf> is the pulse-pulse carrier frequency for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

FETCH:PULSE:RESULT:MEASview1:PPFREQUENCY? might return 0,0.000,1.258E+3,-3.121E+3,1.862E+3 for Pulse 0 to 3.

FETCh:PULSe[:RESult][:MEASview<y>]:PPOWer? (Query Only)

Returns the peak power in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][:MEASview<y>]:PPOWer?`

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>, <pk_power(1)>, <pk_power(2)>, ... <pk_power(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<pk_power(n)>::<NRf>` is the peak power for the pulse with the number of [first_pulse_num + n - 1] in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

This measurement gives valid results only for power units(Watts, dBm, dBuW, dBW).

Examples

`FETCH:PULSE:RESULT:MEASview1:PPOWER?` might return 0, -2.26, -2.27, -2.23, -2.25 for Pulse 0 to 3.

FETCh:PULSe[:RESult][:MEASview<y>]:PPPD? (Query Only)

Returns the computed pulse to pulse phase difference from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][:MEASview<y>]:PPPD?`

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>, <pppd(1)>, <pppd(2)>, . . . <pppd(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<pppd(n)>::<NRf>` is the pulse to pulse phase difference with the number of [first_pulse_num + n - 1] in Hz.

Examples

`FETCH:PULSE[:RESULT]:MEASview1:PPPD?` might return 1.0000000000, "-", 96.2469482422, 24.9118175507, 5.8206896782, 16.7037734985, -151.8063964844, 100.7584228516, 36.6761512756, -3.8614616394, 12.9028282166, -150.9820556641, 130.5854492188, 9.1259155273, -7.4177660942, 6.0613451004, -142.4224853516 is the number of the first pulse and the pulse to pulse phase difference for each pulse.

FETCH:PULSE[:RESULT][:MEASview<y>]:PPPHase? (Query Only)

Returns the pulse-pulse carrier phase in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSE[:RESULT][:MEASview<y>]:PPPHase?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<pp_phase(1)>,<pp_phase(2)>,...<pp_phase(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<pp_phase(n)>::<NRf> is the pulse-pulse carrier phase for the pulse with the number of [first_pulse_num + n - 1] in degrees.

Examples

FETCH:PULSE:RESULT:MEASview1:PPPHASE? might return 0,0.000,21.66,46.76,57.56 for Pulse 0 to 3.

FETCH:PULSE[:RESULT]:MEASview<y>:RINterval? (Query Only)

Returns the repetition interval in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSE[:RESULT]:MEASview<y>:RINterval?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<rep_int(1)>,<rep_int(2)>,...<rep_int(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

`<rep_int(n)>::<NRf>` is the repetition interval for the pulse with the number of `[first_pulse_num + n - 1]` in seconds.

Examples

`FETCH:PULSE:RESULT:MEASview1:RINTERVAL?` might return `0,16.03E-6,16.08E-6,16.07E-6,16.02E-6` for Pulse 0 to 3.

FETCh:PULSe[:RESult][[:MEASview<y>]:RIPDb? (Query Only)

Returns the ripple in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][[:MEASview<y>]:RIPDb?`

Related Commands

[FETCh:PULSe\[:RESult\]\[\[:MEASview<y>\]:RIPPlE?](#) (on page 1362)

Arguments

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>,<ripple(1)>,<ripple(2)>,...<ripple(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<ripple(n)>::<NRf>` is the ripple for the pulse with the number of `[first_pulse_num + n - 1]` in dB.

Examples

`FETCH:PULSE:RESULT:MEASview1:RIPDB?` might return `1,0.4,0.32,0.2,0.1` for Pulse 1 to 4.

FETCh:PULSe[:RESult][[:MEASview<y>]:RIPPlE? (Query Only)

Returns the ripple in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCh:PULSe[:RESult][[:MEASview<y>]:RIPPlE?`

Related Commands

[FETCh:PULSe\[:RESult\]\[:MEASview<y>\]:RIPDb?](#) (on page 1362)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<ripple(1)>,<ripple(2)>,...<ripple(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<ripple(n)>::<NRf> is the volts or watts ripple for the pulse with the number of [first_pulse_num + n - 1] in percent (%).

Examples

FETCH:PULSE:RESULT:MEASview1:RIPPLE? might return 0,106.5E-3,177.6E-3, 148.3E-3,148.5E-3 for Pulse 0 to 3.

FETCh:PULSe[:RESult][:MEASview<y>]:RISE? (Query Only)

Returns the rise time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCh:PULSe[:RESult][:MEASview<y>]:RISE?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<rise(1)>,<rise(2)>,...<rise(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<rise(n)>::<NRf> is the rise time for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

FETCH:PULSE:RESULT:MEASview1:RISE? might return 0,92.94E-9,115.9E-9, 115.1E-9,97.45E-9 for Pulse 0 to 3.

FETCh:PULSe[:RESult][:MEASview<y>]:RMSFreqerror? (Query Only)

Returns the RMS frequency error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSe[:RESult][:MEASview<y>]:RMSFreqerror?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<RMS_freq_err(1)>,<RMS_freq_err(2)>,...<RMS_freq_err(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<RMS_freq_err(n)>::<NRf> is the RMS frequency error for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

FETCH:PULSE:RESULT:MEASview1:RMSFREQERROR? might return 1, 51.54E+3, 69.20E+3, 64.21E+3, 51.02E+3 for Pulse 1 to 4.

FETCH:PULSe[:RESult][:MEASview<y>]:RMSPherror? (Query Only)

Returns the RMS phase error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

```
FETCH:PULSe[:RESult][:MEASview<y>]:RMSPherror?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<RMS_phase_err(1)>,<RMS_phase_err(2)>,...<RMS_phase_err(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<RMS_phase_err(n)>::<NRf> is the RMS phase error for the pulse with the number of [first_pulse_num + n - 1] in degrees.

Examples

`FETCH:PULSE:RESULT:MEASview1:RMSPHERROR?` might return 1, 908.4E-3, 752.8E-3, 981.7E-3, 886.4E-3 for Pulse 1 to 4.

FETCH:PULSe[:RESult][:MEASview<y>]:RRATE? (Query Only)

Returns the repetition rate in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCH:PULSe[:RESult][:MEASview<y>]:RRATE?`

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>,<rep_rate(1)>,<rep_rate(2)>,...<rep_rate(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<rep_rate(n)>::<NRf>` is the repetition rate for the pulse with the number of [`first_pulse_num + n - 1`] in Hz.

Examples

`FETCH:PULSE:RESULT:MEASview1:RRATE?` might return 0, 62.50E+3, 62.52E+3, 62.51E+3, 62.49E+3 for Pulse 0 to 3.

FETCH:PULSe[:RESult][:MEASview<y>]:TIME? (Query Only)

Returns the time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

`FETCH:PULSe[:RESult][:MEASview<y>]:TIME?`

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<time(1)>,<time(2)>,...<time(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<time(n)>::<NRf> is the time for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

FETCH:PULSE:RESULT:MEASview1:TIME? might return 1, 7.937E-3, 8.436E-3, 6.504E-3, 9.876E-3 for Pulse 1 to 4.

FETCh:PULSe[:RESult][[:MEASview<y>]:WIDTh? (Query Only)

Returns the pulse width in the pulse table.

Conditions

Measurement views: Pulse table

Group

Fetch commands

Syntax

FETCh:PULSe[:RESult][[:MEASview<y>]:WIDTh?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<width(1)>,<width(2)>,...<width(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<width(n)>::<NRf> is the pulse width for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

FETCH:PULSE:RESULT:MEASview1:WIDTh? might return 0, 4.630E-6, 4.632E-6, 4.639E-6, 4.642E-6 for Pulse 0 to 3.

FETCh:PULSe:STATistics[:MEASview<y>]:ADVanced (Query Only)

Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement in Pulse Statistics display.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCh:PULSe:STATistics[:MEASview<y>]:ADVanced? <arg1>,<arg2>

Arguments

<arg1>= {AVERage | PPOwer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPple | RIPdb | DROop | DROdb | OVERshoot | OVEDb | PPPHase | PPFRequency | RMSFreqerror | MFReqerror | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude|TIME | IRTIME | PPPD| PPFD | FABS}

<arg2>={TPCOunt|MAX|MIN|PK2PK|AVG|SD|ALL}

Returns

<puls_cnt> | <max> | <min> | <pk_pk> | <avg> | <std_dev> | <all> For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcnt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time>|<time> for the given pulse number

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>:: <NRf> is the average power transmitted

<width> is the time from the rising edge to the falling edge at the -3 dB/-6 dB level (50%) of the user selected 100% level

<rise> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall> ::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate> ::<NRf> is the inverse of repetition interval

<duty_factor_pcnt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq> ::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs.Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<dlta_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set

Examples

FETCH:PULSE:STATISTICS:MEASview1:ADVANCED RISE, MAX might return 7.9786177665E-9, "-", indicating the maximum rise value is 7.9786177665E-9.

FETCh:PULSe:STATistics[:MEASview<y>]:ATX (Query Only)

Returns the average transmitted power in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCH:PULSe:STATistics[:MEASview<y>]:ATX?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<ATX_avg>, <ATX_min>, <ATX_max>

Where

<ATX_avg>::<NRf> is the average of the average transmitted power.

<ATX_min>::<NRf> is the minimum of the average transmitted power.

<ATX_max>::<NRf> is the maximum of the average transmitted power. Unit: dBm.

The unit can be changed to Watts by the [SENSe]:POWer:UNITs command. Volt is invalid in the average transmitted power measurement.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:ATX? might return -18.51, -18.74, -18.12 for the average transmitted power in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:AVERage (Query Only)

Returns the average on power in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:STATistics[:MEASview<y>]:AVERage?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<avg_avg>,<avg_min>,<avg_max>
```

Where

<avg_avg>::<NRf> is the average of the average on power.

<avg_min>::<NRf> is the minimum of the average on power.

<avg_max>::<NRf> is the maximum of the average on power. Unit: dBm.

The unit can be changed to watts by the [SENSe]:POWer:UNITs command.

Examples

FETCh:PULSe:STATISTICS:MEASVIEW2:AVERage? might return -2.35, -2.36, -2.34 for the average on power in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:DRODb (Query Only)

Returns the droop in dB in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:STATistics[:MEASview<y>]:DRODb?
```

Related Commands

[FETCh:PULSe:STATistics\[:MEASview<y>\]:DROOp?](#) (on page 1370)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<droop_avg>,<droop_min>,<droop_max>
```

Where

<droop_avg>::<NRf> is the average droop.

<droop_min>::<NRf> is the minimum droop.

<droop_max>::<NRf> is the maximum droop. Unit: in dB.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:DRODb? might return 22.67E-3, -613.5E-3, 633.8E-3 for the droop in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:DROop (Query Only)

Returns the droop in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCh:PULSe:STATistics[:MEASview<y>]:DROop?

Related Commands

[FETCh:PULSe:STATistics\[:MEASview<y>\]:DRODb?](#) (on page 1369)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<droop_avg>,<droop_min>,<droop_max>

Where

<droop_avg>::<NRf> is the average droop.

<droop_min>::<NRf> is the minimum droop.

<droop_max>::<NRf> is the maximum droop. Unit: Percent (%) by watts.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:DROop? might return 22.67E-3, -613.5E-3, 633.8E-3 for the droop in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:DUTPct (Query Only)

Returns the duty factor (%) in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:STATistics[:MEASview<y>]:DUTPct?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<duty_pct_avg>,<duty_pct_min>,<duty_pct_max>
```

Where

<duty_pct_avg>::<NRf> is the average duty factor.

<duty_pct_min>::<NRf> is the minimum duty factor.

<duty_pct_max>::<NRf> is the maximum duty factor. Unit: Percent (%).

Examples

FETCh:PULSe:STATISTICS:MEASVIEW2:DUTPct? might return 2.437,2.310,2.657 for the duty factor (%) in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:DUTRatio (Query Only)

Returns the duty factor (ratio) in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:STATistics[:MEASview<y>]:DUTRatio?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<duty_ratio_avg>,<duty_ratio_min>,<duty_ratio_max>
```

Where

<duty_ratio_avg>::<NRf> is the average duty factor.

<duty_ratio_min>::<NRf> is the minimum duty factor.

<duty_ratio_max>::<NRf> is the maximum duty factor. Unit: None.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:DUTRATIO?` might return `24.37E-3, 23.11E-3, 26.57E-3` for the duty factor (ratio) in the pulse statistics.

FETCH:PULSE:STATistics[:MEASview<y>]:FABS (Query Only)

Returns the absolute frequency in the Pulse Statistics display.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCH:PULSE:STATistics[:MEASview<y>]:FABS?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<NRf>`

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:FABS?` might return `99.9846400000E+6, 99.9846400000E+6, 99.9846400000E+6`, indicating the absolute frequency value.

FETCH:PULSE:STATistics[:MEASview<y>]:FALL (Query Only)

Returns the fall time in the pulse statistics. This command is valid when

`DISPlay:PULSE:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCH:PULSE:STATistics[:MEASview<y>]:FALL?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<fall_avg>, <fall_min>, <fall_max>`

Where

`<fall_avg>::<NRf>` is the average fall time.

`<fall_min>::<NRf>` is the minimum fall time.

<fall_max>::<NRf> is the maximum fall time. Unit: Seconds.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:FALL? might return 70.27E-9, 69.62E-9, 71.27E-9 for the fall time in the pulse statistics.

FETCH:PULSE:STATISTICS[:MEASview<y>]:FDELta (Query Only)

Return the delta frequency in the pulse statistics.

Group

Fetch commands

Syntax

FETCH:PULSE:STATISTICS[:MEASview<y>]:FDELta?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<freq_delta_avg>,<freq_delta_min>,<freq_delta_max>

Where

<freq_delta_avg>::<NRf> is the average frequency deviation.

<freq_delta_min>::<NRf> is the minimum frequency deviation.

<freq_delta_max>::<NRf> is the maximum frequency deviation. Unit: Hz.

Examples

FETCH:PULSE:STATISTICS:MEASview1:FDELta? might return 77.9785690308,-110.1940994263,287.8957519531 for the frequency delta in the pulse statistics.

FETCH:PULSE:STATISTICS[:MEASview<y>]:FRDeviation (Query Only)

Returns the frequency deviation in the pulse statistics. This command is valid when

DISPLAY:PULSE:STATISTICS[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCH:PULSE:STATISTICS[:MEASview<y>]:FRDeviation?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<freq_dev_avg>, <freq_dev_min>, <freq_dev_max>

Where

<freq_dev_avg>::<NRf> is the average frequency deviation.

<freq_dev_min>::<NRf> is the minimum frequency deviation.

<freq_dev_max>::<NRf> is the maximum frequency deviation. Unit: Hz.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:FRDEVIATION? might return 754.1E+3, 660.5E+3, 835.2E+3 for the frequency deviation in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:IRAMplitude (Query Only)

Returns the Pulse Impulse Response Amplitude measurement in the pulse statistics.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCh:PULSe:STATistics[:MEASview<y>]:IRAMplitude?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<amp_avg>, <amp_min>, <amp_max>

Where

<amp_avg>::<NRf> is the average of the impulse response amplitude.

<amp_min>::<NRf> is the minimum of the impulse response amplitude.

<amp_max>::<NRf> is the maximum of impulse response amplitude. Unit: dB.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:IRAMPLITUDE? might return -45.3, -47.1, -43.2 for the impulse response amplitude in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:IRTime (Query Only)

Returns the impulse response time in the pulse statistics.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FEtCh:PULSe:STATistics[:MEASview<y>]:IRTime?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<avg_avg>, <avg_min>, <avg_max>

Where

<avg_avg>::<NRf> is the average of the impulse response time.

<avg_min>::<NRf> is the minimum of the impulse response time.

<avg_max>::<NRf> is the maximum of impulse response time. Unit: seconds.

Examples

FEtCh:PULSe:STATISTICS:MEASVIEW2:IRTime? might return -2.35, -2.36, -2.34 for the impulse response time in the pulse statistics.

FEtCh:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMBER (Query Only)

Returns the maximum value at a certain pulse number in the pulse statistics display.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FEtCh:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMBER?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<max_pulse_no>

Where

<max_pulse_no>::<NRf> is the maximum value at a pulse number.

Examples

FEtCh:PULSe:STATISTICS:MEASview2:MAX:PULSe:NUMBER? might return 15 for the maximum pulse number is 15.

FETCH:PULSe:STATistics[:MEASview<y>]:MFRReqerror (Query Only)

Returns the maximum frequency error in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCH:PULSe:STATistics[:MEASview<y>]:MFRReqerror?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<max_freq_err_avg>`, `<max_freq_err_min>`, `<max_freq_err_max>`

Where

`<max_freq_err_avg>::<NRf>` is the average of maximum frequency error.

`<max_freq_err_min>::<NRf>` is the minimum of maximum frequency error.

`<max_freq_err_max>::<NRf>` is the maximum of maximum frequency error. Unit: Hz.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:MFRReqerror?` might return `645.0E+3, 555.6E+3, 738.8E+3` for the maximum frequency error in the pulse statistics.

FETCH:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMBER (Query Only)

Returns the minimum value at a certain pulse number in the pulse statistics.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number.

Group

Fetch commands

Syntax

`FETCH:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMBER?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<min_pulse_no>`

Where

<min_pulse_no>::<NRf> is the minimum value at a pulse number.

Examples

FETCH:PULSE:STATISTICS:MIN:PULSE:NUMBER? might return 1 for the minimum pulse number in the pulse statistics.

FETCH:PULSE:STATISTICS[:MEASview<y>]:MPHerror (Query Only)

Returns the maximum phase error in the pulse statistics. This command is valid when DISPLAY:PULSE:STATISTICS[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCH:PULSE:STATISTICS[:MEASview<y>]:MPHerror?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<max_phase_err_avg>,<max_phase_err_min>,<max_phase_err_max>

Where

<max_phase_err_avg>::<NRf> is the average of maximum phase error.

<max_phase_err_min>::<NRf> is the minimum of maximum phase error.

<max_phase_err_max>::<NRf> is the maximum of maximum phase error. Unit: Degrees.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:MPHerror? might return -11.47, -17.18, -7.61 for the maximum phase error in the pulse statistics.

FETCH:PULSE:STATISTICS[:MEASview<y>]:OVEDb (Query Only)

Returns the overshoot measurement result in dB in the pulse statistics. This command is valid when DISPLAY:PULSE:STATISTICS[:MEASview<y>]:PLOT is set to TREND or TTREnd.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:OVEDb?`

Related Commands

[FETCh:PULSe:STATistics\[:MEASview<y>\]:OVERshoot?](#) (on page 1378)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<overshoot_avg>`, `<overshoot_min>`, `<overshoot_max>`

Where

`<overshoot_avg>::<NRf>` is the average overshoot.

`<overshoot_min>::<NRf>` is the minimum overshoot.

`<overshoot_max>::<NRf>` is the maximum overshoot.

Unit: dB.

Examples

`FETCh:PULSe:STATISTICS:MEASVIEW2:OVEDb?` might return 0.3, 0.1, 0.5 for the overshoot measurement result in dB in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:OVERshoot (Query Only)

Returns the overshoot in the pulse statistics. This command is valid when

`DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND` or `TTREnd`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:OVERshoot?`

Related Commands

[FETCh:PULSe:STATistics\[:MEASview<y>\]:OVEDb?](#) (on page 1377)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<overshoot_avg>`, `<overshoot_min>`, `<overshoot_max>`

Where

`<overshoot_avg>::<NRf>` is the average overshoot.

`<overshoot_min>::<NRf>` is the minimum overshoot.

`<overshoot_max>::<NRf>` is the maximum overshoot. Unit: Percent (%) by watts or volts.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:OVERshoot?` might return 0.3, 0.1, 0.5 for the overshoot in the pulse statistics.

FETCH:PULSE:STATISTICS[:MEASview<y>]:PHDeviation (Query Only)

Returns the phase deviation in the pulse statistics. This command is valid when

`DISPLAY:PULSE:STATISTICS[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCH:PULSE:STATISTICS[:MEASview<y>]:PHDeviation?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<phase_dev_avg>`, `<phase_dev_min>`, `<phase_dev_max>`

Where

`<phase_dev_avg>::<NRf>` is the average phase deviation.

`<phase_dev_min>::<NRf>` is the minimum phase deviation.

`<phase_dev_max>::<NRf>` is the maximum phase deviation. Unit: Degrees.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:PHDeviation?` might return 11.678, 7.694, 17.374 for the phase deviation in the pulse statistics.

FETCH:PULSE:STATISTICS[:MEASview<y>]:PPFD (Query Only)

Returns the pulse-pulse frequency difference in the Pulse Statistics display.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCH:PULSE:STATISTICS[:MEASview<y>]:PPFD?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:PPFD? might return 365.4186562500E+3, -267.5911040000E+6, 247.1117760000E+6, indicating the pulse-pulse frequency difference.

FETCH:PULSe:STATistics[:MEASview<y>]:PPFrequency (Query Only)

Returns the pulse-pulse carrier frequency in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCH:PULSe:STATistics[:MEASview<y>]:PPFrequency?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<pp_freq_avg>,<pp_freq_min>,<pp_freq_max>

Where

<pp_freq_avg>::<NRf> is the average pulse-pulse carrier frequency.

<pp_freq_min>::<NRf> is the minimum pulse-pulse carrier frequency.

<pp_freq_max>::<NRf> is the maximum pulse-pulse carrier frequency. Unit: Hz.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:PPFrequency? might return 1.135E+3, 311.3E+3, -262.8E+3 for the pulse-pulse carrier frequency in the pulse statistics.

FETCH:PULSe:STATistics[:MEASview<y>]:PPower (Query Only)

Returns the peak power in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:STATistics[:MEASview<y>]:PPOWer?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<pk_power_avg>,<pk_power_min>,<pk_power_max>
```

Where

<pk_power_avg>::<NRf> is the average peak power.

<pk_power_min>::<NRf> is the minimum peak power.

<pk_power_max>::<NRf> is the maximum peak power. Unit: dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:PULSe:STATistics:MEASview2:PPOWer? might return -2.273, -2.313, -2.235 for the peak power in the pulse statistics 2.

FETCh:PULSe:STATistics[:MEASview<y>]:PPPD (Query Only)

Returns the overshoot measurement result in dB in the Pulse Statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND or TTREnd.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:STATistics[:MEASview<y>]:PPPD?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<NRf>
```

Examples

FETCh:PULSe:STATistics:MEASview2:PPPD? might return -1.1131216288, -151.8063964844, 130.5854492188, indicating the pulse-pulse phase difference in dB.

FETCh:PULSe:STATistics[:MEASview<y>]:PPPHase (Query Only)

Returns the pulse-pulse carrier phase in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND` or `TTREnd`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:PPPHase?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<pp_phase_avg>,<pp_phase_min>,<pp_phase_max>`

Where

`<pp_phase_avg>::<NRf>` is the average pulse-pulse carrier phase.

`<pp_phase_min>::<NRf>` is the minimum pulse-pulse carrier phase.

`<pp_phase_max>::<NRf>` is the maximum pulse-pulse carrier phase. Unit: Degrees.

Examples

`FETCh:PULSe:STATistics:MEASview2:PPPHase?` might return `-9.298E-3,-254.3E-3,311.7E-3` for the pulse-pulse carrier phase in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:RINterval (Query Only)

Returns the repetition interval in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:RINterval?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<rep_int_avg>,<rep_int_min>,<rep_int_max>`

Where

<rep_int_avg>::<NRf> is the average repetition interval.

<rep_int_min>::<NRf> is the minimum repetition interval.

<rep_int_max>::<NRf> is the maximum repetition interval.

Unit: Seconds.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:RINTERVAL might return 240.5E-6, 217.9E-6, 281.2E-6 for the repetition interval in the pulse statistics 2.

FETCh:PULSe:STATistics[:MEASview<y>]:RIPDb (Query Only)

Returns the ripple in dB in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCh:PULSe:STATistics[:MEASview<y>]:RIPDb?

Related Commands

[FETCh:PULSe:STATistics\[:MEASview<y>\]:RIPPlE?](#) (on page 1383)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<ripple_avg>,<ripple_min>,<ripple_max>

Where

<ripple_avg>::<NRf> is the average ripple.

<ripple_min>::<NRf> is the minimum ripple.

<ripple_max>::<NRf> is the maximum ripple.

Unit: dB.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:RIPDb? might return 160.4E-3, 83.78E-3, 287.7E-3 for the ripple in dB in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:RIPPlE (Query Only)

Returns the ripple in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCH:PULSE:STATISTICS[:MEASview<y>]:RIPPLE?
```

Related Commands

[FETCH:PULSE:STATISTICS\[:MEASview<y>\]:RIPDb?](#) (on page 1383)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<ripple_avg>,<ripple_min>,<ripple_max>
```

Where

<ripple_avg>::<NRf> is the average ripple.

<ripple_min>::<NRf> is the minimum ripple.

<ripple_max>::<NRf> is the maximum ripple. Unit: Percent (%) by watts or volts.

Examples

FETCH:PULSE:STATISTICS:MEASVIEW2:RIPPLE? might return 160.4E-3, 83.78E-3, 287.7E-3 for the ripple in the pulse statistics.

FETCH:PULSE:STATISTICS[:MEASview<y>]:RISE (Query Only)

Returns the rise time in the pulse statistics. This command is valid when

DISPLAY:PULSE:STATISTICS[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCH:PULSE:STATISTICS[:MEASview<y>]:RISE?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<rise_avg>,<rise_min>,<rise_max>
```

Where

`<rise_avg>::<NRf>` is the average rise time.
`<rise_min>::<NRf>` is the minimum rise time.
`<rise_max>::<NRf>` is the maximum rise time. Unit: Seconds.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:RISE?` might return `105.4E-9, 91.65E-9, 116.2E-9` for the rise time in the pulse statistics.

FETCH:PULSe:STATistics[:MEASview<y>]:RMSFreqerror (Query Only)

Returns the RMS frequency error in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCH:PULSe:STATistics[:MEASview<y>]:RMSFreqerror?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<RMS_freq_err_avg>, <RMS_freq_err_min>, <RMS_freq_err_max>`

Where

`<RMS_freq_err_avg>::<NRf>` is the average of RMS frequency error.
`<RMS_freq_err_min>::<NRf>` is the minimum of RMS frequency error.
`<RMS_freq_err_max>::<NRf>` is the maximum of RMS frequency error. Unit: Hz.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:RMSFreqerror?` might return `63.67E+3, 45.49E+3, 81.28E+3` for the RMS frequency error in the pulse statistics.

FETCH:PULSe:STATistics[:MEASview<y>]:RMSPherror (Query Only)

Returns the RMS phase error in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:RMSPherror?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<RMS_phase_err_avg>, <RMS_phase_err_min>, <RMS_phase_err_max>

Where

<RMS_phase_err_avg>::<NRf> is the average of RMS phase error.

<RMS_phase_err_min>::<NRf> is the minimum of RMS phase error.

<RMS_phase_err_max>::<NRf> is the maximum of RMS phase error. Unit: Degrees.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:RMSPHERROR?` might return `1.032, 604.5E-3, 1.606` for the RMS phase error in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:RRATe (Query Only)

Returns the repetition rate in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:RRATe?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<rep_rate_avg>, <rep_rate_min>, <rep_rate_max>

Where

<rep_rate_avg>::<NRf> is the average repetition rate.

<rep_rate_min>::<NRf> is the minimum repetition rate.

<rep_rate_max>::<NRf> is the maximum repetition rate. Unit: Hz.

Examples

`FETCH:PULSE:STATISTICS[:MEASview<y>]:RRATe?` might return `62.50E+3, 62.49E+3, 62.52E+3` for the repetition rate in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:WIDTh (Query Only)

Returns the pulse width in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:WIDTh?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<width_avg>`, `<width_min>`, `<width_max>`

Where

`<width_avg>::<NRf>` is the average pulse width.

`<width_min>::<NRf>` is the minimum pulse width.

`<width_max>::<NRf>` is the maximum pulse width. Unit: Seconds.

Examples

`FETCh:PULSe:STATistics[:MEASview<y>]:WIDTh?` might return `4.636E-6`, `4.630E-6`, `4.643E-6` for the pulse width in the pulse statistics.

FETCh:PULSe:STATistics[:MEASview<y>]:X? (Query Only)

Returns the horizontal values of the trace data of the Pulse Statistics measurement selected by the `DISPlay:PULSe:SElect:RESult` command.

NOTE: Select the plot type (Trend, FFT, Time Trend or Histogram) using the `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` command before executing this query.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCh:PULSe:STATistics[:MEASview<y>]:X?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

#<num_digit><num_byte><data1><data2>...data<n>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the horizontal value of the STATistics:MEASview<y> graph at the nth data point.

The unit is trace number (Plot = Trend), Hz (Plot = FFT), second (Plot = Time Trend) or current measurement unit (Plot = Histogram).

4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:PULSe:STATistics:MEASview2:X? might return #264xxxx. (64-byte data) for the STATistics:MEASview2 trace of the pulse width measurement when DISPlay:PULSe:SElect: RESult is set to WIDTH.

FETCH:PULSe:STATistics[:MEASview<y>]:XY? (Query Only)

Returns the horizontal and vertical values of the trace data of the pulse statistics measurement selected by the DISPlay:PULSe:SElect:RESult command.

NOTE: Select the plot type (Trend, FFT, Time Trend or Histogram) using the DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT command before executing this query.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

FETCH:PULSe:STATistics[:MEASview<y>]:XY?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

#<num_digit><num_byte><data1><data2>...data<n>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the horizontal value of the STATistics:MEASview<y> graph at the nth data point.

<data (n+1)> is the vertical value of the STATistics:MEASview<y> graph at the nth data point.

For horizontal values, the unit is trace number (Plot = Trend), Hz (Plot = FFT), second (Plot = Time Trend) or current measurement unit (Plot = Histogram).

For vertical values, the unit is current measurement unit (Plot = Trend or Time Trend), dB (Plot = FFT), count (Plot = Histogram)

4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:PULSE:STATISTICS:MEASview1:XY?` might return `#264xxxx...` (64-byte data) for the `STATISTICS:MEASview1` trace of the pulse width measurement when `DISPLAY:PULSE:SELECT:RESULT` is set to `WIDTH`.

FETCH:PULSE:STATISTICS[:MEASview<y>][:Y]? (Query Only)

Returns the trace data of the pulse statistics measurement selected by the `DISPLAY:PULSE:SELECT:RESULT` command.

NOTE: Select the plot type (Trend, FFT, Time Trend or Histogram) using the `DISPLAY:PULSE:STATISTICS[:MEASview<y>]:PLOT` command before executing this query.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Fetch commands

Syntax

`FETCH:PULSE:STATISTICS[:MEASview<y>][:Y]?`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the amplitude at the nth data point.

The unit is current measurement unit (Plot = Trend or Time Trend), dB (Plot = FFT), count or percent (Plot = Histogram)

4-byte little endian floating-point format specified in IEEE 488.2.

The unit of power is selected by the `[SENSe]:POWER:UNITs` command.

Examples

`FETCH:PULSE:STATISTICS:MEASVIEW2:Y?` might return `#264xxxx...` (64-byte data) for the `STATISTICS 2` trace of the pulse width measurement when `DISPLAY:PULSE:SELECT:RESULT` is set to `WIDTH`.

FETCH:PULSE:TRACE[:MEASview<y>]:X

Returns the time values of the pulse trace. Use the `DISPLAY:PULSE:SELECT:NUMBER` command to select the pulse, and the `DISPLAY:PULSE:SELECT:RESULT` command to select the measurement result.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:TRACe[:MEASview<y>]:X?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
#<num_digit><num_byte><X(1)><X(2)>...<X(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<X(n)> is the time in seconds at the nth data point,

4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:PULSe:TRACe:MEASVIEW1:X? might return #43204xxxx... (3204-byte data) for the time values of the trace in pulse trace measurement view 1.

FETCh:PULSe:TRACe[:MEASview<y>]:XY

Returns the horizontal (time) and vertical value pairs of the pulse trace. Use the DISPlay:PULSe:SElect:NUMBer command to select the pulse, and the DISPlay:PULSe:SElect:RESult command to select the measurement result.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Fetch commands

Syntax

```
FETCh:PULSe:TRACe[:MEASview<y>]:XY?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the horizontal value (time in seconds) and vertical value pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The vertical unit depends on measurement results: Hz for frequency error and deviation, degrees for phase error and deviation, otherwise dBm. The vertical unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:PULSE:TRACE:MEASVIEW1:XY? might return #43204xxxx... (3204-byte data) for the horizontal (time) and vertical value pairs of the pulse trace measurement view 1.

FETCh:PULSe:TRACe[:MEASview<y>]:Y

Returns the vertical values of the pulse trace. Use the DISPlay:PULSe:SElect:NUMBer command to select the pulse, and the DISPlay:PULSe:SElect:RESult command to select the measurement result.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Fetch commands

Syntax

FETCH:PULSe:TRACe[:MEASview<y>]:Y?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

#<num_digit><num_byte><y(1)><y(2)>...<y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the amplitude (dBm) at the nth data point,

4-byte little endian floating-point format specified in IEEE 488.2.

The unit depends on measurement results: Hz for frequency error and deviation, degrees for phase error and deviation, otherwise dBm. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:PULSE:TRACE:MEASVIEW1:Y? might return #43204xxxx... (3204-byte data) for the vertical values of the pulse trace measurement view 1.

FETCh:RFIN:IQ? (Query Only)

Returns time-domain IQ data for a specific acquisition data record. You can set a range of IQ pairs optionally. The instrument needs to be in stopped mode. If not in stopped mode, it returns the execution error (-200).

Conditions

Measurement views: All

Group

Fetch commands

Syntax

`FETCh:RFIN:IQ? <rec_ID>[,<begin_num>,<end_num>]`

Arguments

`<rec_ID>` specifies the acquisition data record ID number.

`<begin_num>` specifies the beginning number of IQ pairs.

`<end_num>` specifies the end number of IQ pairs.

Use the `FETCh:RFIN:RECOrd:IDS?` query to get the beginning and end ID's of acquisition data records.

Returns

`#<num_digit><num_byte><I(1)><Q(1)><I(2)><Q(2)>...<I(n)><Q(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<I(n)>` and `<Q(n)>` are the time-domain IQ data pair.

4-byte little endian floating-point format specified in IEEE 488.2.

To find out the range of IQ pairs, use the `FETCh:RFIN:IQ:HEADer?` query. The returned value of `<num_sample>` is the number of IQ pairs.

NOTE: Do not fetch a large number of IQ pairs because of memory limitation.

Examples

`FETCh:RFIN:IQ? 10,25,350` might return `#43848xxxx...` (3848-byte data) for the record #10, ranging from 25th to 350th IQ pair.

FETCh:RFIN:IQ:HEADer? (Query Only)

Returns the header information for a specific acquisition data record. The instrument needs to be in stopped mode. If not in stopped mode, it returns the execution error (-200).

Conditions

Measurement views: All

Group

Fetch commands

Syntax

`FETCh:RFIN:IQ:HEADer? <rec_ID>`

Arguments

`<rec_ID>` specifies the acquisition data record ID number.

Use the `FETCh:RFIN:RECOrd:IDS?` query to get the beginning and end ID's of acquisition data records.

Returns

, <sampling_freq>, <num_sample>, <center_freq>, <acq_BW>, <ref_level>, <trig_pos>, <time_stamp>, <FastFrame_ID>

Where

::<NR3> is the span in Hz.

<sampling_freq>::<NR3> is the sampling frequency in Hz.

<num_sample>::<NR3> is the number of samples.

<center_freq>::<NR3> is the center frequency in Hz.

<acq_BW>::<NR3> is the acquisition bandwidth in Hz.

<ref_level>::<NR3> is the reference level in dBm.

<trig_pos>::<NR3> is the trigger position in seconds.

<time_stamp>::<string> is the time stamp.

<FastFrame_ID>::<NR1> is the Fast Frame ID: Zero or positive number. If the Fast Frame is disabled, the ID will be negative.

Examples

FETCh:RFIN:IQ:HEADER? 10 might return 40.0E+6, 50.0E+6, 4.027E+3, 1.5E+9, 40.0E+6, 0.0, 20.242E-6, "10/31/2007 1118:32 AM", -1, indicating Span: 40 MHz, Sampling frequency: 50 MHz, Number of samples: 4027, Center frequency: 1.5 GHz, Acquisition bandwidth: 40 MHz, Reference level: 0 dBm, Trigger position: 20.242 μ s, Time stamp: 10/31/2007 1118:32 AM, and Fast Frame ID: -1.

FETCh:RFIN:IQ:SCALE? (Query Only)

Returns the internal RF linear data scaling factor contained in the .tiq file header. The scaling factor can be used to convert digital IQ output (Option 05) values into real IQ values.

Conditions

Measurement views: All

Group

Fetch commands

Syntax

FETCh:RFIN:IQ:SCALE?

Related Commands

[FETCh:RFIN:RECORD:IDS?](#) (on page 1394)

Arguments

None

Returns

<NR3> The RF linear data scaling factor.

Examples

FETCh:RFIN:IQ:SCALE? might return 19.553E-6 for the scaling factor.

FETCh:RFIN:IQ:VHEader? (Query Only)

Returns the verbose header information for a specific acquisition data record. The instrument needs to be in stopped mode. If not in stopped mode, it returns the execution error (-200).

Conditions

Measurement views: All

Group

Fetch commands

Syntax

FETCh:RFIN:IQ:VHEader? <rec_ID>

Arguments

<rec_ID> specifies the acquisition data record ID number.

Use the FETCh:RFIN:RECOrd:IDS? query to get the beginning and end ID's of acquisition data records.

Returns

,<sampling_freq>,<num_sample>,<center_freq>,<acq_BW>,<ref_level>,<trig_pos>,<time_stamp>,<FastFrame_ID>

Where

::<NR3> is the span in Hz.

<sampling_freq>::<NR3> is the sampling frequency in Hz.

<num_sample>::<NR3> is the number of samples.

<center_freq>::<NR3> is the center frequency in Hz.

<acq_BW>::<NR3> is the acquisition bandwidth in Hz.

<ref_level>::<NR3> is the reference level in dBm.

<trig_pos>::<NR3> is the trigger position in seconds.

<time_stamp>::<string> is the time stamp.

<FastFrame_ID>::<NR1> is the Fast Frame ID: Zero or positive number. If the Fast Frame is disabled, the ID will be negative.

Examples

FETCh:RFIN:IQ:VHEADER? 10 might return 110.0000000000E+6,150.0000000000E+6,4.0270000000E+3,2.7000000000E+9,110.0000000000E+6,0.0000,20.2420000000E-6, "7/9/2013 8:38:25.9305101-07:00:00",-1, indicating Span: 110 MHz, Sampling frequency: 150 MHz, Number of samples: 4027, Center frequency: 2.7 GHz, Acquisition bandwidth: 110 MHz, Reference level: 0 dBm, Trigger position: 20.242 µs, Time stamp: 10/31/2007 11:18:32 AM, Fast Frame ID: -1

FETCh:RFIN:RECOrd:IDS? (Query Only)

Returns the beginning and end ID numbers of acquisition data.

NOTE: The instrument needs to be in stopped mode. If not in stopped mode, it returns the execution error (-200).

Conditions

Measurement views: All

Group

Fetch commands

Syntax

FETCh:RFIN:RECOrd:IDS?

Arguments

None

Returns

<begin_ID>, <end_ID>

Where

<begin_ID>: : <NR1> is the beginning ID of acquisition data.

<end_ID>: : <NR1> is the end ID of acquisition data.

NOTE: "-1, -1" is returned when the span changes and the acquisition is armed, but the acquisition has not yet occurred.

Examples

FETCh:RFIN:RECORD:IDS? might return 1,147, indicating the beginning and end IDs of acquisition data are 1 and 147, respectively.

FETCh:SEM:MHITs:COUNT? (Query Only)

Returns the number of rows in the results table in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

FETCh:SEM:MHITs:COUNT?

Arguments

None

Returns

<NRf> The number of rows in the table.

Examples

FETCh:SEM:MHITs:COUNT? might return 7, indicating there are seven rows in the results table.

FETCh:SEM:MHITs<x>:AMPLitude:ABSolute? (Query Only)

Returns the absolute amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

```
FETCh:SEM:MHITs<x>:AMPLitude:ABSolute?
```

Arguments

None

Returns

<NRf> Absolute amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

FETCh:SEM:MHITs2:AMPLitude:ABSolute? might return -73.17, indicating that the absolute amplitude of signal in row 2 is -73.17 dBm.

FETCh:SEM:MHITs<x>:AMPLitude:RELative? (Query Only)

Returns the relative amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

```
FETCh:SEM:MHITs<x>:AMPLitude:RELative?
```

Arguments

None

Returns

<NRf> Relative amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

FETCh:SEM:MHITs2:AMPLitude:RELative? might return -91.81, indicating that the relative amplitude of mask hit signal in row 2 is -91.81 dBm.

FETCh:SEM:MHITs<x>:FREQuency? (Query Only)

Returns the frequency of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCH:SEM:MHITS<x>:FREQUENCY?`

Arguments

None

Returns

<NRf> Relative amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

`FETCH:SEM:MHITS4:FREQUENCY?` might return `2.235E+6`, indicating the frequency for mask hit signal in row 4 is 2.235 MHz.

FETCH:SEM:MHITS<x>:INTEG:ABSOLUTE? (Query Only)

Returns the absolute integration amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCH:SEM:MHITS<x>:INTEG:ABSOLUTE?`

Arguments

None

Returns

<NRf> Absolute integration amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

`FETCH:SEM:MHITS4:INTEG:ABSOLUTE?` might return `-75.14`, indicating that the absolute integration amplitude for mask hit signal in row 4 is -75.14 dBm.

FETCH:SEM:MHITS<x>:INTEG:RELATIVE? (Query Only)

Returns the relative integration amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:MHITs<x>:INTEg:RELative?`

Arguments

None

Returns

<NRf> Relative integration amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

`FETCh:SEM:MHITs4:INTEg:RELative?` might return `-85.14`, indicating that the relative integration amplitude for mask hit signal in row 4 is `-85.14` dBm.

FETCh:SEM:MHITs<x>:MARGin:ABSolute? (Query Only)

Returns the absolute margin for the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:MHITs<x>:MARGin:ABSolute?`

Arguments

None

Returns

<NRf> Absolute margin of the specified signal in dB.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

`FETCh:SEM:MHITs4:MARGin:ABSolute?` might return `-62.33`, indicating that the absolute margin for mask hit signal in row 4 is `-62.33` dB.

FETCh:SEM:MHITs<x>:MARGin:RELative? (Query Only)

Returns the relative margin for the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:MHITs<x>:MARGin:RELative?`

Arguments

None

Returns

`<NRf>` Relative margin of the specified signal in dB.

`<x>` specifies the row in the results table, where the range is from 1 to 12.

Examples

`FETCh:SEM:MHITs4:MARGin:RELative?` might return `-62.33`, indicating that the relative margin for mask hit signal in row 4 is `-62.33`.

FETCh:SEM:MHITs<x>:OFFSet? (Query Only)

Returns the offset for the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:MHITs<x>:OFFSet?`

Arguments

None

Returns

`<NRf>` specifies the mask hit offset.

`<x>` specifies the row in the results table, where the range is from 1 to 12.

Examples

`FETCh:SEM:MHITs4:OFFSet?` might return `BL`, indicating the offset for mask hit signal in row 4 is `BL`.

FETCh:SEM:PASS? (Query Only)

Returns the pass/fail limit test result in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:PASS?`

Arguments

None

Returns

0 (fail) or 1 (pass)

Examples

`FETCh:SEM:PASS?` might return 1, indicating that the limit test was successful.

FETCh:SEM:REF:POWer? (Query Only)

Returns the reference power level in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:REF:POWer?`

Arguments

None

Returns

`<NRf>` specifies the reference power.

Examples

`FETCh:SEM:REF:POWER?` might return `-16.92 dBm`, indicating that the reference power level is `-16.92 dBm`.

FETCh:SEM:SPECTrum:X? (Query Only)

Returns the frequencies of the spectrum trace in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:SPECTrum:X?`

Arguments

None

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the frequency (Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:SEM:SPECTRUM:X? might return #516020xxxx... (16020-byte data) for the frequencies of the spectrum trace.

FETCh:SEM:SPECTrum:XY? (Query Only)

Returns the frequency and amplitude pairs of the spectrum trace in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

FETCh:SEM:SPECTrum:XY?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the frequency (Hz) and amplitude (dBm) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:SEM:SPECTRUM:XY? might return #516020xxxx... (16020-byte data) for the frequency and amplitude pairs of the spectrum trace.

FETCh:SEM:SPECTrum[:Y]? (Query Only)

Returns the amplitude of the spectrum trace in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Fetch commands

Syntax

`FETCh:SEM:SPECTrum[:Y]?`

Arguments

None

Returns

`#<num_digit><num_byte><x(1)><x(2)>...<x(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<x(n)>` is the frequency (Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:SEM:SPECTRUM[:Y]?` might return `#516020xxxx...` (16020-byte data) for the frequencies of the spectrum trace.

FETCh:SGRam[:MEASview<y>](Query Only)

Returns trace data of a line in the spectrogram. The line is selected using the

`TRACe:SGRam[:MEASview<y>]:SElect:LINE` command.

Conditions

Measurement views: Spectrogram

Group

Fetch commands

Syntax

`FETCh:SGRam[:MEASview<y>]?`

Arguments

`<y> = 1 to 8` represents measurement index based on number of sources of connected instrument. where `MEASview` keyword is optional by default `y` is 1.

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the amplitude in dBm at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCh:SGRam:MEASview1?` might return `#43204xxxx...` (3204-byte data) for the line in the spectrogram.

FETCh:SIGNalvu:ACQuisition:COUPling?(Query Only)

Returns the coupling value of the acquisition.

Conditions

Should be connected to MSO Query

Group

Fetch commands

Syntax

```
FETCh:SIGNAlvu:ACQuisition:COUPling?
```

Arguments

None

Returns

<max>::<NRf> is the maximum phase in degrees.

Examples

FETCh:SIGNAlvu:ACQuisition:COUPling? might return 153.8, indicating the maximum phase is 153.8 °.

FETCh:SIGNAlvu:ACQuisition:MAX:RT:BW? (Query Only)

Queries the maximum real time bandwidth value of the instrument.

Conditions

Should be connected to MSO Query

Group

Fetch commands

Syntax

```
FETCh:SIGNAlvu:ACQuisition:MAX:RT:BW
```

Related Commands

```
FETCh:SIGNAlvu:ACQuisition:MAX:RT:BW?
```

Arguments

None

Returns

<max>::<NRf> is the maximum phase in degrees.

Examples

FETCh:SIGNAlvu:ACQuisition:MAX:RT:BW? might return 153.8, indicating the maximum phase is 153.8 °.

FETCh:SIGNAlvu:ACQuisition[:SOURce<x>]: DOWNconverter:INJEction:HIGHSide:MAXFreq? (Query only)

Returns the maximum range of input center frequency in case of high injection side. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to query.

Source keyword is optional, if not present Source1 will be default source.

Group

Fetch commands

Syntax

```
FETCH:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:HIGHSide:MAXFreq?
```

Related Commands

[:FETCH:SIGNALvu:ACQuisition\[:SOURce<x>\]:DOWNconverter:INJEction:HIGHSide:MINFreq?](#) (on page 1404)

Arguments

None

Returns

<max>: : <NRf> returns the maximum value of the centre frequency range in case of high injection side.

Examples

:FETCH:SIGNALvu:ACQuisition:SOURce1:DOWNconverter:INJEction:HIGHSide:MAXFreq? might return 9.5000000000E+9, indicating the maximum range of the input center frequency in case of high injection side.

FETCH:SIGNALvu:ACQuisition[:SOURce<x>]: DOWNconverter:INJEction:HIGHSide:MINFreq? (Query only)

Returns the minimum range of the input center frequency in case of high injection side. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to query.

Source keyword is optional, if not present, Source1 is default source.

Group

Fetch commands

Syntax

```
FETCH:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:HIGHSide:MINFreq?
```

Arguments

None

Returns

<max>: : <NRf> returns the minimum value of the center frequency range in case of high injection side.

Examples

:FETCH:SIGNALvu:ACQuisition:SOURce1:DOWNconverter:INJEction:HIGHSide:MINFreq? might return 2.0000000000E+9, indicating the minimum range of the input center frequency in case of high injection side.

FETCH:SIGNAlvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:LOWSide:MAXFreq? (Query only)

Returns the maximum range of the input center frequency in case of low injection side. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to query.

Source keyword is optional, if not present, Source1 will be default source.

Group

Fetch commands

Syntax

FETCH:SIGNAlvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:LOWSide:MAXFreq?

Related Commands

[FETCH:SIGNAlvu:ACQuisition\[:SOURce<x>\]:DOWNconverter:INJEction:LOWSide:MINFreq?](#) (on page 1405)

Arguments

None

Returns

<max>: : <NRf> returns the maximum value of centre frequency range in case of low injection side.

Examples

:FETCH:SIGNAlvu:ACQuisition:SOURce1:DOWNconverter:INJEction:LOWSide:MAXFreq? Might return 9.5000000000E+9, indicating the maximum range of the input center frequency in case of low injection side.

FETCH:SIGNAlvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:LOWSide:MINFreq? (Query only)

Returns the minimum range of input center frequency in case of low injection side. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to query.

Source keyword is optional, if not present, Source1 will be default source

Group

Fetch commands

Syntax

FETCH:SIGNAlvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEction:LOWSide:MINFreq?

Arguments

None

Returns

<max>: : <NRf> returns the minimum value of the centre frequency range in case of low injection side.

Examples

`:FETCh:SIGNalvu:ACQuisition:SOURce1:DOWNconverter:INJEction:LOWSide:MINFreq?` might return `2.0000000000E+9`, indicating the minimum range of the input center frequency in case of low injection side.

FETCh:SIGNalvu:ACQuisition:TERMination? (Query Only)

Queries the termination value of the acquisition.

Conditions

Should be connected to MSO Query

Group

Fetch commands

Syntax

`FETCh:SIGNalvu:ACQuisition:TERMination?`

Arguments

None

Returns

`<max>::<NRf>` is the maximum phase in degrees.

Examples

`FETCh:SIGNalvu:ACQuisition:TERMination?` might return `153.8`, indicating the maximum phase is `153.8 °`.

FETCh:SIGNalvu:ACQuisition:MATHchannels

Fetches math inputs available on the oscilloscope.

Conditions

It should be connected to MSO/LPD/DPO7 to set.

Group

Fetch commands

Syntax

`FETCh:SIGNalvu:ACQuisition:MATHchannels`

Related Commands

NA

Arguments

NA

Returns

NA

Example

`FETCh:SIGNalvu:ACQuisition:MATHchannels`, fetches math inputs available on the oscilloscope.

```
{{end}}
```

FETCh:SPECTrum[:MEASview<y>]:TRACe<x>? (Query Only)

Returns the trace data in the Spectrum measurement.

The parameter <x> = 1 to 5.

NOTE: TRACe5 (spectrogram) is valid when the spectrum and spectrogram measurements are running.

Conditions

Measurement views: Spectrum

Group

Fetch commands

Syntax

```
FETCh:SPECTrum[:MEASview<y>]:TRACe<x>?
```

Related Commands

[TRACe<x>:SPECTrum](#) (on page 2691)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude in dBm at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:SPECTRUM:MEASview1:TRACE1? might return #43204xxxx... (3204-byte data) for Trace 1 in the Spectrum measurement.

FETCh:SPURious:CARRier:POWer? (Query Only)

Returns the carrier power in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

```
FETCh:SPURious:CARRier:POWer?
```

Arguments

None

Returns

<NRf> Carrier power in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:SPURIOUS:CARRIER:POWER? might return 4.227, indicating that the carrier power is 4.227 dBm.

FETCh:SPURious:COUNT? (Query Only)

Returns the number of spurious signals in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

FETCH:SPURious:COUNT?

Arguments

None

Returns

<NRf> The number of spurious signals.

Examples

FETCH:SPURIOUS:COUNT? might return 4, indicating that the spurious count is 4.

FETCh:SPURious:PASS? (Query Only)

Returns the pass/fail limit test result in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

FETCH:SPURious:PASS?

Arguments

None

Returns

0 (fail) or 1 (pass).

Examples

`FETCH:SPURIOUS:PASS?` might return 1, indicating that the limit test was successful.

FETCh:SPURious:SPECTrum:X? (Query Only)

Returns the frequencies of the spectrum trace in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

`FETCh:SPURious:SPECTrum:X?`

Arguments

None

Returns

`#<num_digit><num_byte><x(1)><x(2)>...<x(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<x(n)>` is the frequency (Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:SPURIOUS:SPECTRUM:X?` might return `#516020xxxx...` (16020-byte data) for the frequencies of the spectrum trace in the Spurious measurement.

FETCh:SPURious:SPECTrum:XY? (Query Only)

Returns the frequency and amplitude pairs of the spectrum trace in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

`FETCh:SPURious:SPECTrum:XY?`

Arguments

None

Returns

```
#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the frequency (Hz) and amplitude (dBm) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The amplitude unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:SPURious:SPECTRum:XY? might return #516020xxxx... (16020-byte data) for the frequency and amplitude pairs of the spectrum trace in the Spurious measurement.

FETCh:SPURious:SPECTrum[:Y]? (Query Only)

Returns the amplitudes of the spectrum trace in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

```
FETCh:SPURious:SPECTrum[:Y]?
```

Arguments

None

Returns

```
#<num_digit><num_byte><y(1)><y(2)>...<y(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the amplitude (dBm) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCh:SPURious:SPECTRum:Y? might return #516020xxxx... (16020-byte data) for the amplitudes of the spectrum trace in the Spurious measurement.

FETCh:SPURious:SPUR<x>:AMPLitude:ABSolute? (Query Only)

Returns the absolute amplitude of the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Programmer Manual

WWW.TEK.COM|1410

Fetch commands

Syntax

`FETCh:SPURious:SPUR<x>:AMPLitude:ABSolute?`

Arguments

None

Returns

<NRf> Absolute amplitude of the specified spurious signal in dBm. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`FETCh:SPURIOUS:SPUR1:AMPLITUDE:ABSOLUTE?` might return `-19.782`, indicating that the absolute amplitude of Spurious #1 is `-19.782` dBm.

FETCh:SPURious:SPUR<x>:AMPLitude:RELative? (Query Only)

Returns the relative amplitude of the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

`FETCh:SPURious:SPUR<x>:AMPLitude:RELative?`

Arguments

None

Returns

<NRf> Relative amplitude of the specified spurious signal in dB. Use the `[SENSe]:SPURious:REFeRence` command to set the power reference.

Examples

`FETCh:SPURIOUS:SPUR1:AMPLITUDE:RELATIVE?` might return `-9.782`, indicating that the relative amplitude of Spurious #1 is `-9.782` ndB.

FETCh:SPURious:SPUR<x>:FREQuency:ABSolute? (Query Only)

Returns the absolute frequency of the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

`FETCh:SPURious:SPUR<x>:FREQuency:ABSolute?`

Arguments

None

Returns

<NRf> Absolute frequency of the spurious signal in Hz.

Examples

`FETCH:SPURIOUS:SPUR1:FREQUENCY:ABSOLUTE?` might return `2.235E+9`, indicating that the absolute frequency of Spurious #1 is 2.235 GHz.

FETCh:SPURious:SPUR<x>:FREQuency:RELative? (Query Only)

Returns the relative frequency of the specified spurious signal to the carrier in the Spurious measurement. This command is valid when `[SENSe]:SPURious:REFeRence` is set to `CARRier`.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

`FETCh:SPURious:SPUR<x>:FREQuency:RELative?`

Arguments

None

Returns

<NRf> Relative frequency of the spurious signal to the carrier in Hz.

Examples

`FETCH:SPURIOUS:SPUR1:FREQUENCY:RELATIVE` might return `3.634E+6`, indicating that the relative frequency of Spurious #1 is 3.634 MHz.

FETCh:SPURious:SPUR<x>:LIMit:ABSolute? (Query Only)

Returns the absolute amplitude of the limit for the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

`FETCh:SPURious:SPUR<x>:LIMit:ABSolute?`

Arguments

None

Returns

<NRf> Absolute amplitude of the limit for the specified spurious signal in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:SPURIOUS:SPUR1:LIMIT:ABSOLUTE? might return -50.0, indicating that the absolute amplitude of the limit for Spurious #1 is -50 dBm.

FETCh:SPURious:SPUR<x>:LIMit:RELative? (Query Only)

Returns the relative amplitude of the limit for the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

FETCH:SPURious:SPUR<x>:LIMit:RELative?

Arguments

None

Returns

<NRf> Relative amplitude of the limit for the specified spurious signal in dB. Use the [SENSe]:SPURious:REFerence command to set the power reference.

Examples

FETCH:SPURIOUS:SPUR1:LIMIT:RELATIVE? might return -10.0, indicating that the relative amplitude of the limit for Spurious #1 is -10 dB.

FETCh:SPURious:SPUR<x>:LIMit:VIOlation? (Query Only)

Returns whether the specified spurious signal exceeds the limit or not.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

FETCH:SPURious:SPUR<x>:LIMit:VIOlation?

Arguments

None

Returns

0 (under the limit) or 1 (over the limit).

Examples

`FETCh:SPURIOUS:SPUR1:LIMIT:VIOLATION?` might return 1, indicating that Spurious #1 exceeds the limit.

FETCh:SPURious:SPUR<x>:RANGe? (Query Only)

Returns the frequency range in which the specified spurious signal occurred.

Conditions

Measurement views: Spurious

Group

Fetch commands

Syntax

`FETCh:SPURious:SPUR<x>:RANGe?`

Arguments

None

Returns

<string> "A" to "T" representing Range A to T, respectively.

Examples

`FETCh:SPURIOUS:SPUR1:RANGE` might return "E", indicating that Spurious #1 is in Range E.

FETCh:SQQuality[:MEASview<y>]:FREQuency:DEViation? (Query only)

Returns the frequency deviation in the signal quality measurement.

This command is valid when `[SENSe]:DDEMod:MODulation:TYPE` is set to C4FM, FSK2, FSK4, FSK8, or FSK16.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:FREQuency:DEViation?`

Arguments

None

Returns

<NRf> Frequency deviation in Hz.

Examples

FETCh:SQUality:MEASview1:FREQuency:DEViation? might return 12.68E+3, indicating the frequency deviation is 12.68 kHz for measurement view1.

FETCh:SQUality[:MEASview<y>]:FREQuency:DEViation:TABLE? (Query only)

Returns the number of columns and the values in the frequency deviation table for a signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to C4FM, FSK2, FSK4, FSK8, or FSK16.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

FETCh:SQUality[:MEASview<y>]:FREQuency:DEViation:TABLE?

Arguments

None

Returns

<Dev_Num>,{<Freq_dev_Max>,<Freq_dev_Min>,<Freq_dev_Avg>}

Where

<Dev_Num>::<NR1> is the number of columns in the frequency deviation table.

= 2 (2FSK), 4 (4FSK, C4FM), 8 (8FSK), or 16 (16FSK)

<Freq_dev_Max>::<NRf> is the maximum frequency deviation in Hz.

<Freq_dev_Min>::<NRf> is the minimum frequency deviation in Hz.

<Freq_dev_Avg>::<NRf> is the average frequency deviation in Hz.

The dataset <Freq_dev_Max>,<Freq_dev_Min>,<Freq_dev_Avg> is returned for each symbol in ascending order of its level (for example, in order of symbol -3, -1, +1, and +3 for 4FSK).

Examples

`FETCh:SQQuality:MEASview1FREQuency:DEVIation:TABLE?` might return

2,1.257E+3,1.039E+3,1.162E+3,1.586E+3,1.298E+3,1.425E+3 for the frequency signal, populating the results table as follows.

Deviations	-1	+1
Maximum	1.257 kHz	1.586 kHz
Minimum	1.039 kHz	1.298 kHz
Average	1.162 kHz	1.425 kHz

`FETCh:SQQuality[:MEASview<y>]:FREQuency:ERRor? (Query only)`

Returns the frequency error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:FREQuency:ERRor?`

Arguments

None

Returns

<NRf> Frequency error in Hz.

Examples

`FETCh:SQQuality:MEASview1:FREQuency:ERRor?` might return 612.043E+3, indicating that the frequency error is 612.043 kHz for measurement view 1.

`FETCh:SQQuality[:MEASview<y>]:GAIN:IMBalance? (Query only)`

Returns the gain imbalance in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQUality[:MEASview<y>]:GAIN:IMBalance?`

Arguments

None

Returns

<NRf> Gain imbalance in dB.

Examples

`FETCh:SQUality[:MEASview1]:GAIN:IMBalance?` might return `-57.746E-3`, indicating that the gain imbalance is `-0.057746` dB for measurement view 1.

FETCh:SQUality[:MEASview<y>]:ORIGin:OFFSet? (Query only)

Returns the origin offset in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQUality[:MEASview<y>]:ORIGin:OFFSet?`

Arguments

None

Returns

<NRf> Origin offset in dB.

Examples

`FETCh:SQUality:MEASview1:ORIGin:OFFSet?` might return `-44.968`, indicating that the origin offset is `-44.968` dB for measurement view1.

FETCh:SQUality[:MEASview<y>]:PEAK:EVM? (Query only)

Returns the peak EVM (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:PEAK:EVM?`

Arguments

None

Returns

<NRf> Peak EVM in percent (%).

Examples

`FETCh:SQQuality:MEASview1:PEAK:EVM?` might return 4.276, indicating that the peak EVM is 4.276% for measurement view1.

FETCh:SQQuality[:MEASview<y>]:PEAK:EVM:DB? (Query only)

Returns the peak EVM (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:PEAK:EVM:DB?`

Arguments

None

Returns

<NRf> Peak EVM in dB.

Examples

`FETCh:SQQuality:MEASview1:PEAK:EVM:DB?` might return -27.358, indicating that the peak EVM is -27.358 dB for measurement view 1.

FETCH:SQUALity[:MEASview<y>]:PEAK:EVM:DB:OFFSet? (Query only)

Returns the peak offset EVM (dB) in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

FETCH:SQUALity[:MEASview<y>]:PEAK:EVM:DB:OFFSet?

Arguments

None

Returns

<NRf> Peak offset EVM in dB.

Examples

FETCH:SQUALity:MEASview1:PEAK:EVM:DB:OFFSet? might return -37.624, indicating the peak offset EVM is -37.624 dB for measurement view 1.

FETCH:SQUALity[:MEASview<y>]:PEAK:EVM:LOCation? (Query only)

Returns the time at which the EVM is peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

FETCH:SQUALity[:MEASview<y>]:PEAK:EVM:LOCation?

Arguments

None

Returns

<NRf> The time in symbol number at which the EVM is peak.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

FETCh:SQQuality:MEASview1:PEAK:EVM:LOCation? might return 68.000, indicating that the EVM is peak at symbol #68.000 for measurement view1.

FETCh:SQQuality[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet? (Query only)

Returns the time at which the offset EVM is peak.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

FETCh:SQQuality[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet?

Arguments

None

Returns

<NRf> The time in symbol number at which the offset EVM is peak.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

FETCh:SQQuality:MEASview1:PEAK:EVM:LOCation:OFFSet? might return 123.00, indicating that the offset EVM is peak at symbol #123 for measurement view1.

FETCh:SQQuality[:MEASview<y>]:PEAK:EVM:OFFSet? (Query only)

Returns the peak offset EVM (%) in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

```
FETCh:SQUality[:MEASview<y>]:PEAK:EVM:OFFSet?
```

Arguments

None

Returns

<NRf> Peak offset EVM in percent (%).

Examples

FETCh:SQUality:MEASview1:PEAK:EVM:OFFSet? might return 1.298, indicating the peak offset EVM is 1.298% for measurement view1.

FETCh:SQUality[:MEASview<y>]:PEAK:FERRor? (Query only)

Returns the peak FSK error in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to FSK2, FSK4, FSK8, or FSK16.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

```
FETCh:SQUality[:MEASview<y>]:PEAK:FERRor?
```

Arguments

None

Returns

<NRf> Peak FSK error in percent (%).

Examples

FETCh:SQUality:MEASview1:PEAK:FERRor? might return 9.136, indicating the peak FSK error is 9.136% for measurement view1.

FETCh:SQUality[:MEASview<y>]:PEAK:MERRor:DB? (Query only)

Returns the peak magnitude error (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

```
FETCh:SQQuality[:MEASview<y>]:PEAK:MERRor:DB?
```

Arguments

None

Returns

<NRf> Peak magnitude error in dB.

Examples

FETCh:SQQuality:MEASview1:PEAK:EVM:DB? might return -27.358, indicating that the peak EVM is -27.358 dB for measurement view1.

FETCh:SQQuality[:MEASview<y>]:PEAK:MERRor:LOCation? (Query only)

Returns the time at which the magnitude error is peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

```
FETCh:SQQuality[:MEASview<y>]:PEAK:MERRor:LOCation?
```

Arguments

None

Returns

<NRf> The time in symbol number at which the magnitude error is peak.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

`FETCH:SQUALity:MEASview1:PEAK:MERRor:LOCation?` might return 68.000, indicating that the magnitude error is peak at symbol #68 for measurement view1.

FETCH:SQUALity[:MEASview<y>]:PEAK:MERRor? (Query only)

Returns the peak magnitude error (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCH:SQUALity[:MEASview<y>]:PEAK:MERRor?`

Arguments

None

Returns

<NRF> Peak magnitude error in percent (%).

Examples

`FETCH:SQUALity:MEASview1:PEAK:MERRor?` might return 3.595, indicating that the peak magnitude error is 3.595% for measurement view1.

FETCH:SQUALity[:MEASview<y>]:PEAK:PERRor:LOCation? (Query only)

Returns the time at which the phase error is peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCH:SQUALity[:MEASview<y>]:PEAK:PERRor:LOCation?`

Arguments

None

Returns

<NRf> The time in symbol number at which the phase error is peak.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

FETCH:SQUALity:MEASview1:PEAK:PERRor:LOCation? might return 68.000, indicating that the phase error is peak at symbol #68 for measurement view1.

FETCh:SQUALity[:MEASview<y>]:PEAK:PERRor? (Query only)

Returns the peak phase error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

FETCH:SQUALity[:MEASview<y>]:PEAK:PERRor?

Arguments

None

Returns

<NRf> Peak phase error in degrees.

Examples

FETCH:SQUALity:MEASview1:PEAK:PERRor? might return 1.907, indicating that the peak phase error is 1.907 ° for measurement view1.

FETCh:SQUALity[:MEASview<y>]:QUADrature:ERRor? (Query only)

Returns the quadrature error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:QUADrature:ERRor?`

Arguments

None

Returns

<NRf> Quadrature error in degrees.

Examples

`FETCh:SQQuality:MEASview1:QUADrature:ERRor?` might return `-14.264E-3`, indicating that the quadrature error is `-0.014264°` for measurement view1.

FETCh:SQQuality[:MEASview<y>]:RHO? (Query only)

Returns the ρ (waveform quality) value in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:RHO?`

Arguments

None

Returns

<NRf> ρ value.

Examples

`FETCh:SQQuality:MEASview1:RHO?` might return `998.703E-3`, indicating that ρ is 0.998703 for measurement view1.

FETCh:SQQuality[:MEASview<y>]:RMS:EVM? (Query only)

Returns the RMS EVM (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

```
FETCh:SQQuality[:MEASview<y>]:RMS:EVM?
```

Arguments

None

Returns

<NRf> RMS EVM in percent (%).

Examples

FETCh:SQQuality:MEASview1:RMS:EVM? might return 2.417, indicating that the RMS EVM is 2.417% for measurement view 1.

FETCh:SQQuality[:MEASview<y>]:RMS:EVM:DB? (Query only)

Returns the RMS EVM (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

```
FETCh:SQQuality[:MEASview<y>]:RMS:EVM:DB?
```

Arguments

None

Returns

<NRf> RMS EVM in dB.

Examples

FETCh:SQQuality:MEASview1:RMS:EVM:DB? might return -32.356, indicating that the RMS EVM is -32.356 dB for measurement view 1.

FETCH:SQUALity[:MEASview<y>]:RMS:EVM:DB:OFFSet? (Query only)

Returns the RMS offset EVM (dB) in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

FETCH:SQUALity[:MEASview<y>]:RMS:EVM:DB:OFFSet?

Arguments

None

Returns

<NRf> RMS offset EVM in dB.

Examples

FETCH:SQUALity:MEASview1:RMS:EVM:DB:OFFSet? might return -41.276, indicating the RMS offset EVM is -41.276 dB for measurement view 1.

FETCH:SQUALity[:MEASview<y>]:RMS:EVM:OFFSet? (Query only)

Returns the RMS offset EVM (%) in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

FETCH:SQUALity[:MEASview<y>]:RMS:EVM:OFFSet?

Arguments

None

Returns

<NRf> RMS offset EVM in percent (%).

Examples

`FETCh:SQQuality:MEASview1:RMS:EVM:OFFSet?` might return 0.783, indicating the RMS offset EVM is 0.783% for measurement view 1.

FETCh:SQQuality[:MEASview<y>]:RMS:FERRor? (Query only)

Returns the RMS FSK error percent in the signal quality measurement.

This command is valid when `[SENSe]:DDEMod:MODulation:TYPE` is set to FSK2, FSK4, FSK8, or FSK16.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:RMS:FERRor?`

Arguments

None

Returns

<NRf> RMS FSK error in percent (%).

Examples

`FETCh:SQQuality:MEASview1:RMS:FERRor?` might return 1.815, indicating the RMS FSK error is 1.815% for measurement view 1.

FETCh:SQQuality[:MEASview<y>]:RMS:MER:DB? (Query only)

Returns the RMS MER (Modulation Error Ratio) in dB in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:RMS:MER:DB?`

Arguments

None

Returns

<NRf> RMS MER in dB.

Examples

`FETCh:SQQuality:MEASview1:RMS:MER:DB?` might return 27.394, indicating that the RMS MER is 27.394 dB for measurement view1.

FETCh:SQQuality[:MEASview<y>]:RMS:MERRor? (Query only)

Returns the RMS magnitude error (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQQuality[:MEASview<y>]:RMS:MERRor?`

Arguments

None

Returns

<NRf> RMS magnitude error in percent (%).

Examples

`FETCh:SQQuality:MEASview1:RMS:MERRor?` might return 1.837, indicating that the RMS magnitude error is 1.837% for measurement view 1.

FETCh:SQQuality[:MEASview<y>]:RMS:MERRor:DB? (Query only)

Returns the RMS magnitude error (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQUality[:MEASview<y>]:RMS:MERRor:DB?`

Arguments

None

Returns

<NRf> RMS MERRor in dB.

Examples

`FETCh:SQUality:MEASview1:RMS:MERRor:DB?` might return -34.706, indicating that the magnitude error is -34.706 dB for measurement view 1.

FETCh:SQUality[:MEASview<y>]:RMS:PERRor? (Query only)

Returns the RMS phase error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

`FETCh:SQUality[:MEASview<y>]:RMS:PERRor?`

Arguments

None

Returns

<NRf> RMS phase error in degrees.

Examples

`FETCh:SQUality:MEASview1:RMS:PERRor?` might return 893.472E-3, indicating that the RMS phase error is 0.893472 °.

FETCh:SQUality[:MEASview<y>]:SYMBol:LENGth? (Query only)

Returns the number of analyzed symbols.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Fetch commands

Syntax

```
FETCh:SQQuality[:MEASview<y>]:SYMBOL:LENGTH?
```

Returns

<NR1> Indicates the length of the synch word in symbols.

Examples

FETCh:SQQuality:MEASview1:SYMBOL:LENGTH? might return 3, indicating the length is three symbols for measurement view 1.

FETCh:SQQuality[:MEASview<y>]:SYMBOL:RATE? (Query only)

Returns the value of the calculated symbol rate in Hz.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

It is valid when the modulation type is 2|4|8|16FSK and [:SENSe]:DDEMod:SYMBOL:RATE:SEARCh is ON.

Group

Fetch commands

Syntax

```
FETCh:SQQuality[:MEASview<y>]:SYMBOL:RATE?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:SYMBOL:RATE:SEARCh](#) (on page 2077)

Returns

<NRf> is the calculated symbol rate in Hz.

Examples

FETCh:SQQuality:MEASview1:SYMBOL:RATE? might return 95.24E+3, indicating the calculated symbol rate is 95.24 kHz for measurement view 1.

FETCh:SQQuality[:MEASview<y>]:SYMBOL:RATE:ERRor? (Query only)

Returns the value of the symbol rate error in percent (%).

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

It is valid when the modulation type is 2|4|8|16FSK and [:SENSe]:DDEMod:SYMBOL:RATE:SEARCh is ON.

Group

Fetch commands

Syntax

```
FETCh:SQQuality[:MEASview<y>]:SYMBOL:RATE:ERRor?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:SYMBOL:RATE:SEARCh](#) (on page 2077)

Returns

<NRf> is the symbol error percent (%).

Examples

FETCh:SQQuality:MEASview1:SYMBOL:RATE:ERRor? might return -0.002, indicating that the symbol rate error is -0.002% for measurement view 1.

FETCh:TDIagram[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Trellis diagram measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Fetch commands

Syntax

```
FETCh:TDIagram[:MEASview<y>]:FERRor?
```

Arguments

None

Returns

<freq_error>::<Nrf> is the frequency error in Hz.

Examples

FETCh:TDiagram:MEASview2:FERRor? might return -10.7E+3, indicating the frequency error is -10.7 kHz.

FETCh:TDiagram[:MEASview<y>]:TRACe? (Query only)

Returns the Trellis diagram trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Fetch commands

Syntax

FETCh:TDiagram[:MEASview<y>]:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)> and <X(n)> is the phase in degrees and the time in (symbols) pair at the nth data point. The 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:TDiagram:MEASview2:FDEVIATION? might return #3160xxxx... (160-byte data) for the Trellis diagram trace.

FETCh:TOverview[:MEASview<y>] (Query Only)

Returns the trace data in the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Fetch commands

Syntax

FETCh:TOverview[:MEASview<y>]?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the amplitude in dBm at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

FETCH:TOVERVIEW:MEASVIEW1? might return #43204xxxx... (3204-byte data) for the trace in the time overview.

FETCh:TXGain:AVERage? (Query Only)

Returns the mean value of the trace.

Conditions

Measurement view: Transmission Gain

Group

Fetch commands

Syntax

FETCh:TXGain:AVERage?

Returns

<NRf> is the averaged value of the trace points in dB.

Examples

FETCH:TXGAIN:AVERAGE? might return 2.3, indicating that the mean value of the trace is 2.3 dB.

FETCh:TXGain:MAX? (Query Only)

Returns the maximum trace value.

Conditions

Measurement view: Transmission Gain

Group

Fetch commands

Syntax

FETCh:TXGain:MAX?

Returns

<NRf> is the maximum value of the trace in dB.

Examples

`FETCH:TXGAIN:MAX?` might return `-3.45`, indicating the maximum trace value is `-3.45` dB.

FETCh:TXGain:MAXLocation? (Query Only)

Returns the frequency of the maximum trace value.

Conditions

Measurement view: Transmission Gain

Group

Fetch commands

Syntax

`FETCh:TXGain:MAXLocation?`

Returns

<NRf> is the frequency at the maximum trace value.

Examples

`FETCH:TXGAIN:MAXLOCATION?` might return `1E9`, indicating the maximum trace value is at 1 GHz.

FETCh:TXGain:MIN? (Query Only)

Returns the minimum trace value.

Conditions

Measurement view: Transmission Gain

Group

Fetch commands

Syntax

`FETCh:TXGain:MIN?`

Returns

<NRf> is the frequency at the minimum trace value in dB.

Examples

`FETCH:TXGAIN:MIN?` might return `-30`, indicating the minimum trace value is `-30` dB.

FETCh:TXGain:MINLocation? (Query Only)

Returns the frequency of the minimum trace value.

Conditions

Measurement view: Transmission Gain

Group

Fetch commands

Syntax

FETCh:TXGain:MINLocation?

Returns

<Nrf> is the frequency at the minimum trace value.

Examples

FETCh:TXGAIN:MINLOCATION? might return 1E6, indicating the minimum trace value is at 1 MHz.

FETCh:TXGain:TRACe<x>? (Query Only)

Returns the trace data of the selected trace.

Conditions

Measurement view: Transmission Gain Where <x> is the trace 1, 2, or 3.

Group

Fetch commands

Syntax

FETCh:TXGain:TRACe<x>?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude in dB at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:TXGain:TRACe1? might return #43204xxxx... (3204 byte data) for Trace 1 in the measurement.

FETCh:WLAN:AD:CONStE:DATA:EVM? (Query Only)

Queries the maximum EVM value in data Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Fetch commands

Syntax

FETCh:WLAN:AD:CONStE:DATA:EVM?

Arguments

None

Returns

<NRf> = EVM value

Examples

`FETCH:WLAN:AD:CONSTE:DATA:EVM?` might return `-42.482`, indicating the EVM value present in the analysis data is `-42.482` dB.

FETCh:WLAN:AD:CONSte:DATA:EVM:PEAK? (Query Only)

Queries the EVM Peak value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:CONSte:DATA:EVM:PEAK?`

Arguments

None

Returns

<NRf> = EVM peak value

Examples

`FETCH:WLAN:AD:CONSTE:DATA:EVM:PEAK?` might return `-35.325`, indicating the EVM peak value is `-35.325` dB.

FETCh:WLAN:AD:CONSte:DATA:EVM:PEAK:SYMBol? (Query Only)

Queries the EVM peak symbol value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:CONSte:DATA:EVM:PEAK:SYMBol?`

Arguments

None

Returns

<NRf> = symbol value

Examples

`FETCH:WLAN:AD:CONSTE:DATA:EVM:PEAK:SYMBOL?` might return `6.312`, indicating the EVM peak symbol value is 6.312.

FETCH:WLAN:AD:CONStE:FERRor? (Query Only)

Queries the frequency Error value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:CONStE:FERRor?`

Arguments

None

Returns

`<NR3>=` frequency error

Examples

`FETCH:WLAN:AD:CONSTE:FERROR?` might return `3.344+3`, indicating the frequency error value is 3.344 kHz.

FETCH:WLAN:AD:CONStE:IQDC:OFFSet? (Query Only)

Queries IQ Origin Offset value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:CONStE:IQDC:OFFSet?`

Arguments

None

Returns

`<NRf> =` IQ Origin Offset value

Examples

`FETCH:WLAN:AD:CONSTE:IQDC:OFFSET?` might return `-51.841`, indicating the IQ Origin Offset value is -51.841 dB.

FETCh:WLAN:AD:EVM:TRACe? (Query Only)

Returns the EVM versus time trace data.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Fetch commands

Syntax

FETCh:WLAN:AD:EVM:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the EVM value at the nth data point in percent (%),

<data (n)> follows 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:WLAN:AD:EVM:TRACe? might return #42036xxxx... (2036-byte data), indicating the EVM versus time trace data.

FETCh:WLAN:AD:SUMMAry:AVERAge:BURSt:COUNT (Query Only)

Queries the current burst number out of the total burst in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AD:SUMMAry:AVERAge:BURSt:COUNT?

Arguments

None

Returns

<NR1>

Examples

FETCh:WLAN:AD:SUMMARY:AVERAGE:BURST:COUNT? might return 1, indicating the current burst count is 1 out of the total burst.

FETCh:WLAN:AD:SUMMary:AVERage:BURSt:TOTAL:COUNT (Query Only)

Queries the total burst count to be averaged in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AD:SUMMary:AVERage:BURSt:TOTAL:COUNT?

Arguments

None

Returns

<NR1>

Examples

FETCh:WLAN:AD:SUMMARY:AVERAGE:BURST:TOTAL:COUNT? might return 1, indicating the total burst count to be averaged is 1.

FETCh:WLAN:AD:SUMMary:ESNR (Query Only)

Returns the value of Estimated SNR value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AD:SUMMary:ESNR?

Arguments

None

Returns

<NRf>

Examples

FETCh:WLAN:AD:SUMMARY:ESNR? might return 36.856, indicating the estimated SNR value is 36.856 dB.

FETCh:WLAN:AD:SUMMary:EVM:DATA:AVERage (Query Only)

Queries the Avg EVM (Data) value in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FEtCh:WLAN:AD:SUMMArY:EVM:DATA:AVERAge?`

Arguments

None

Returns

<NRf>

Examples

`FEtCh:WLAN:AD:SUMMARY:EVM:DATA:AVERAGE?` might return `-40.7035275551`, indicating the Avg EVM (Data) value is `-40.70`.

FEtCh:WLAN:AD:SUMMArY:EVM:DATA:AVERAge:STATus (Query Only)

Queries the Avg EVM (Data) status in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FEtCh:WLAN:AD:SUMMArY:EVM:DATA:AVERAge:STATus?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not applicable.

Examples

`FEtCh:WLAN:AD:SUMMARY:EVM:DATA:AVERAGE:STATUS?` might return `PASS`, indicating the Avg EVM test as passed.

FEtCh:WLAN:AD:SUMMArY:EVM:DATA:MAX (Query Only)

Queries the maximum EVM (Data) value in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:EVM:DATA:MAX?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMARY:EVM:DATA:MAX?` might return `922.1968241036E-3`, indicating the maximum EVM (Data) value is `922.1968241036E-3`.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:CEF:EVM (Query Only)

Queries the EVM value in the CEF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:EVM:PACKet:CEF:EVM?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMARY:EVM:PACKET:CEF:EVM?` might return `6.9680400193`, indicating the EVM value in the CEF region of the packet is 6.96 dB.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:CEF:PEAK (Query Only)

Queries the peak error value at the given symbol in CEF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:EVM:PACKet:CEF:PEAK?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMARY:EVM:PACKET:CEF:PEAK?` might return `13.7763872743`, indicating the peak error at the given symbol in CEF region of the packet is 13.77 dB.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:CEF:SYMBol (Query Only)

Queries the symbol at which the peak error occurred in the CEF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:EVM:PACKet:CEF:SYMBol?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMARY:EVM:PACKET:CEF:SYMBOL?` might return `7.4020000000E+3`, indicating the peak error occurred in symbol 7.40 in the CEF region of the packet.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:DATA:EVM (Query Only)

Queries the EVM value in the DATA region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:EVM:PACKet:DATA:EVM?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:DATA:EVM?` might return `-33.5668742100`, indicating the EVM value in the DATA region of the packet is -33.56 dB.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:DATA:PEAK (Query Only)

Queries the peak error value at the given symbol in the DATA region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:DATA:PEAK?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:DATA:PEAK?` might return `-26.5964736883`, indicating the peak error value is -26.59 dB at the given symbol in DATA region of the packet.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:DATA:STATus (Query Only)

Queries the status of the DATA packet in Summary display in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:DATA:STATus?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable.

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:DATA:STATUS?` might return `PASS`, indicating the DATA packet test as passed.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:DATA:SYMBol (Query Only)

Queries the symbol at which the peak error occurred in the DATA region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:EVM:PACKet:DATA:SYMBol?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:DATA:SYMBOL?` might return `4.6610000000E+3`, indicating that the symbol peak error occurred at 4.66 in the DATA region of the packet.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:GUARd:EVM (Query Only)

Queries the EVM value in Guard region of the Packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:EVM:PACKet:GUARd:EVM?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:EVM` might return `-65.4983500315`, indicating the EVM value in the Guard region of the packet is `-65.49 dB`.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:GUARd:PEAK (Query Only)

Queries the peak error value at the given symbol in the Guard region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:GUARd:PEAK?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:PEAK?` might return `-26.5964736883`, indicating the peak error at the given symbol in the Guard region of the packet is `-26.59 dB`.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:GUARd:SYMBol (Query Only)

Queries the symbol at which the peak error occurred in the Guard region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:GUARd:SYMBol?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:SYMBOL?` might return `3.3340000000E+3`, indicating the peak error occurred at symbol 3.33 in the Guard region of the packet.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:HEADer:EVM (Query Only)

Queries the EVM value in the Header region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:HEADer:EVM?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:HEADER:EVM?` might return `-67.1981081169`, indicating the EVM value in the Header region of the packet is `-67.19 dB`.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:HEADer:PEAK (Query Only)

Queries the peak error at the given symbol in the Header region if the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:HEADer:PEAK?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:HEADER:PEAK?` might return `-60.9603086224`, indicating the peak error at the given symbol is `-60.96` dB in the Header region of the packet.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:HEADer:SYMBol (Query Only)

Queries the symbol at which the peak Error occurred in the Header region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:HEADer:SYMBol?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:HEADER:SYMBOL?` might return `3.3970000000E+3`, indicating the symbol peak error occurred is `3.397` in Header region of the packet.

FETCh:WLAN:AD:SUMMArY:EVM:PACKet:STF:EVM (Query Only)

Queries the EVM value in the STF region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:EVM:PACKet:STF:EVM?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:EVM:PACKET:STF:EVM?` might return `-22.9729890175`, indicating the EVM value in the STF region of the packet is `-22.97` dB.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:STF:PEAK (Query Only)

Queries the peak error value at the given symbol in the STF region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AD:SUMMary:EVM:PACKet:STF:PEAK?

Arguments

None

Returns

<NRf>

Examples

FETCh:WLAN:AD:SUMMARY:EVM:PACKET:STF:PEAK? might return 38.8123661280, indicating the peak error at the given symbol in the STF region of the packet is 38.81 dB.

FETCh:WLAN:AD:SUMMary:EVM:PACKet:STF:SYMBol (Query Only)

Queries the symbol at which the peak error occurred in the STF region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AD:SUMMary:EVM:PACKet:STF:SYMBol?

Arguments

None

Returns

<NRf>

Examples

FETCh:WLAN:AD:SUMMARY:EVM:PACKET:STF:SYMBOL? might return 0.0, indicating the peak error occurred at the 0.0 symbol in the STF region of the packet.

FETCh:WLAN:AD:SUMMary:FERRor:AVERage (Query Only)

Queries the Avg Frequency Error value in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:FERRor:AVERage?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:FERRor:AVERage?` might return `-114.1332879317E-3`, indicating the Avg Frequency error is `-114.1332879317E-3` ppm.

FETCH:WLAN:AD:SUMMARY:FERRor:AVERage:STATus (Query Only)

Queries the Avg Frequency error status in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:FERRor:AVERage:STATus?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not applicable.

Examples

`FETCH:WLAN:AD:SUMMARY:FERRor:AVERage:STATUS?` might return `FAIL`, indicating the Avg Frequency error test failed.

FETCH:WLAN:AD:SUMMARY:FERRor:HERTZ (Query Only)

Queries the Frequency Error value in 802.11ad Summary display in Hz.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:FERROR:HERTZ?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:FERROR:HERTZ?` might return `2.875E+3`, indicating the Frequency Error value is 2.875E+3 Hz.

FETCH:WLAN:AD:SUMMARY:FERROR:MAX (Query Only)

Queries the Max Frequency error value in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:FERROR:MAX?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:FERROR:MAX?` might return `-114.1332879317E-3`, indicating the max frequency error is -114.1332879317E-3 ppm.

FETCH:WLAN:AD:SUMMARY:FERROR:PPM (Query Only)

Queries the Frequency Error value in 802.11ad Summary display in ppm.

Conditions

Measurement view: 802.11ad Summary

Group

Programmer Manual

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:FERRor:PPM?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:FERROR:PPM?` might return `575.023E-3`, indicating the Frequency Error value is 575.023E-3 ppm.

FETCH:WLAN:AD:SUMMARY:FERRor:STATus (Query Only)

Queries the Frequency error status in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:FERRor:STATUS?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not applicable.

Examples

`FETCH:WLAN:AD:SUMMARY:FERROR:STATUS?` might return `PASS`, indicating the frequency error test passed.

FETCH:WLAN:AD:SUMMARY:IQ:GAIN:IMBALance (Query Only)

Queries IQ Gain Imbalance value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:IQ:GAIN:IMBALance?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMary:IQ:GAIN:IMBALANCE?` might return `69.2700818181E-3`, indicating IQ Gain Imbalance value is `69.2700818181E-3%`.

FETCh:WLAN:AD:SUMMary:IQ:ORIGin:OFFSet (Query Only)

Queries IQ Origin Offset value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:IQ:ORIGin:OFFSet?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMary:IQ:ORIGIN:OFFSET?` might return `-160.0000000000`, indicating the IQ Origin Offset value is `-160.0 dB`.

FETCh:WLAN:AD:SUMMary:IQ:QUADrature:ERROr (Query Only)

Queries IQ Quadrature Error value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:IQ:QUADrature:ERROr?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMARY:IQ:QUADRATURE:ERROR?` might return `-220.5967903137E-3`, indicating IQ Quadrature Error value is `-220.5967903137E-3` degrees.

FETCh:WLAN:AD:SUMMARY:PACKet:AGGRegation (Query Only)

Queries the value of Aggregation packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMARY:PACKet:AGGRegation?`

Arguments

None

Returns

<Boolean> 0,1

Examples

`FETCh:WLAN:AD:SUMMARY:PACKet:AGGREGATION?` might return `"0"`, indicating the Aggregation packet value is 0.

FETCh:WLAN:AD:SUMMARY:PACKet:BTR (Query Only)

Queries the value of Beam Tracking Request packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMARY:PACKet:BTR?`

Arguments

None

Returns

<Boolean> 0,1

Examples

`FETCH:WLAN:AD:SUMMARY:PACKET:BTR?` might return 0, indicating the Beam Tracking Request packet value is 0.

FETCH:WLAN:AD:SUMMARY:PACKET:HCS (Query Only)

Queries the value of HCS packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:PACKET:HCS?`

Arguments

None

Returns

<String>

Examples

`FETCH:WLAN:AD:SUMMARY:PACKET:HCS?` might return "1001010000001000", indicating the HCS packet value is 1001010000001000.

FETCH:WLAN:AD:SUMMARY:PACKET:LENGTH (Query Only)

Queries the value of Length packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AD:SUMMARY:PACKET:LENGTH?`

Arguments

None

Returns

<String>

Examples

`FETCH:WLAN:AD:SUMMARY:PACKET:LENGTH?` might return "1000", indicating the Length packet value is 1000.

FETCH:WLAN:AD:SUMMARY:PACKET:MCS (Query Only)

Queries the value of MCS packet information in Summary display in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

FETCH:WLAN:AD:SUMMARY:PACKET:MCS?

Arguments

None

Returns

<NR1> Range is 0 to 12

Examples

FETCH:WLAN:AD:SUMMARY:PACKET:MCS? might return 5, indicating the MCS packet value is 5.

FETCH:WLAN:AD:SUMMARY:PACKET:PPDU (Query Only)

Queries the value of Additional PPDU packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

FETCH:WLAN:AD:SUMMARY:PACKET:PPDU?

Arguments

None

Returns

<Boolean> 0,1

Examples

FETCH:WLAN:AD:SUMMARY:PACKET:PPDU? might return "0", indicating the Additional PPDU packet value is 0.

FETCH:WLAN:AD:SUMMARY:PACKET:RSSI (Query Only)

Queries the value of Last RSSI packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:PACKet:RSSI?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMARY:PACKET:RSSI?` might return "0000", indicating the Last RSSI packet value is 0000.

FETCh:WLAN:AD:SUMMary:PACKet:SCRAmbler:INITialization (Query Only)

Queries the value of Scrambler initialization packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMary:PACKet:SCRAmbler:INITialization?`

Arguments

None

Returns

<String>

Examples

`FETCh:WLAN:AD:SUMMARY:PACKET:SCRAMBLER:INITIALIZATION?` might return "0101110", indicating the Scrambler Initialization packet value is 0101110.

FETCh:WLAN:AD:SUMMary:PACKet:TAROUND (Query Only)

Queries the value of the Turnaround packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:PACKet:TAROUND?`

Arguments

None

Returns

<Boolean> 0,1

Examples

`FETCh:WLAN:AD:SUMMArY:PACKet:TAROUND?` might return "1", indicating the Turnaround packet value is 1.

FETCh:WLAN:AD:SUMMArY:PACKet:TLEN (Query Only)

Queries the value of Training Length packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:PACKet:TLEN?`

Arguments

None

Returns

<NRf>

Examples

`FETCh:WLAN:AD:SUMMArY:PACKet:TLEN?` might return 21, indicating the Training Length packet value is 21.

FETCh:WLAN:AD:SUMMArY:PACKet:TYPE (Query Only)

Queries the value of Packet Type information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:PACKet:TYPE?`

Arguments

None

Returns

<Boolean> 0,1

Examples

`FETCH:WLAN:AD:SUMMARY:PACKET:TYPE?` might return "0", indicating the Packet Type value is 0.

FETCh:WLAN:AD:SUMMArY:RCPI (Query Only)

Queries the RCPI value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:RCPI?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:RCPI?` might return `207.0000000000`, indicating the RCPI is 207.

FETCh:WLAN:AD:SUMMArY:RF:POWer (Query Only)

Queries the RF Output Power value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AD:SUMMArY:RF:POWer?`

Arguments

None

Returns

<NRf>

Examples

`FETCH:WLAN:AD:SUMMARY:RF:POWER?` might return `-6.3434391022`, indicating the RF Output Power is `-6.3434391022` dBm.

FETCH:WLAN:AY:CONStE:DATA:EVM:PEAK? (Query Only)

Query the Data Peak Error value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Fetch commands

Syntax

`FETCH:WLAN:AY:CONStE:DATA:EVM:PEAK?`

Returns

<NRf>

You must select the units in the EVM tab.

Examples

`FETCH:WLAN:AY:CONS:DATA:EVM:PEAK?` may return `-35.325`, which means `-35.325` is the Data Peak Error value.

FETCH:WLAN:AY:CONStE:DATA:EVM:PEAK:SYMBol? (Query Only)

Query the Symbol position that contains the maximum Data EVM value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Fetch commands

Syntax

`FETCH:WLAN:AY:CONStE:DATA:EVM:PEAK:SYMBol?`

Returns

<NRf>

Examples

`FETCH:WLAN:AY:CONS:DATA:EVM:PEAK:SYMB?` may return `6.312e+0003`, which indicates that the 6312 Symbol contains the maximum Data EVM value.

FETCH:WLAN:AY:CONStE:DATA:EVM? (Query Only)

Query the maximum EVM value present in the analysis data in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:CONStE:DATA:EVM?`

Returns

<NRf>

You must select the units in the EVM tab.

Examples

`FETC:WLAN:AY:CONS:DATA:EVM?` may return `-42.482`, which means the maximum EVM value in the analysis data is `-42.482`.

FETCh:WLAN:AY:CONStE:FERRor? (Query Only)

Query the Frequency Error value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:CONStE:FERRor?`

Returns

<NRf>

Units: Hz

Examples

`FETC:WLAN:AY:CONS:FERR?` may return `0.0000`, which indicates that the Frequency Error value is 0.0000 Hz.

FETCh:WLAN:AY:CONStE:FREQuency:ERROr? (Query Only)

Query the Frequency Error value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:CONStE:FREQuency:ERROr?`

Returns

<NRf>

Units: Hz

Examples

FETC:WLAN:AY:CONS:FREQ:ERRO? may return 0.0000, which means the Frequency Error value is 0.0000 Hz.

FETCh:WLAN:AY:CONStE:IQDC:OFFSet? (Query Only)

Query the IQ Origin Offset value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Fetch commands

Syntax

FETCh:WLAN:AY:CONStE:IQDC:OFFSet?

Returns

<NRf>

Units: dB

Examples

FETC:WLAN:AY:CONS:IQDC:OFFS? may return -51.841, which indicates that the IQ Origin Offset value is -51.841 dB.

FETCh:WLAN:AY:EVM:TRACe? (Query Only)

Query the EVM versus Time trace data after doing a single run.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Fetch commands

Syntax

FETCh:WLAN:AY:EVM:TRACe?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the EVM value at the n^{th} data point in percentage (%).

<data(n)> follows 4-byte little endian floating point format specified in IEEE 488.2.

Examples

FETC:WLAN:AY:EVM:TRAC? may return #42036xxxx... (2036-byte data) for the EVM versus time trace.

FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:COUNT? (Query Only)

Query the current Burst Count in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:COUNT?

Returns

<NR1>

Examples

FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:COUNT? may return 1, which indicates that the current Burst Count is 1.

FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:TOTAL:COUNT? (Query Only)

Query the Total Burst Count to be averaged.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:TOTAL:COUNT?

Returns

<NR1>

Examples

FETCH:WLAN:AY:SUMMARY:AVERAGE:BURST:TOTAL:COUNT? may return 1, which indicates that the Total Burst Count to be averaged is 1.

FETCH:WLAN:AY:SUMMARY:ESNR? (Query Only)

Query the Estimated SNR (Signal-to-Noise Ratio) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:ESNR?

Returns

<NRf>

Units: dB

Examples

FETC:WLAN:AY:SUMM:ESNR? may return 34.50, which indicates that the Estimated SNR value is 34.50 dB.

FETCh:WLAN:AY:SUMMary:EVM:DATA:AVERage? (Query Only)

Query the Average EVM (Data) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:DATA:AVERage?

Returns

<NRf>

Units: dB or % (based on the selected EVM unit)

Examples

FETC:WLAN:AY:SUMM:EVM:DATA:AVER? may return -40.7035275551, which indicates that the Average EVM (Data) value is -40.7035275551%.

FETCh:WLAN:AY:SUMMary:EVM:DATA:AVERage:STATus? (Query Only)

Query the Average EVM (Data) Status in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:DATA:AVERage:STATus?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:EVM:DATA:AVER:STAT? may return PASS, FAIL, or NA.

FETCh:WLAN:AY:SUMMary:EVM:DATA:MAX? (Query Only)

Query the Maximum EVM (Data) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:DATA:MAX?

Returns

<NRf>

Units: dB or % (based on the selected EVM unit)

Examples

FETC:WLAN:AY:SUMM:EVM:DATA:MAX? may return 922.1968241036e-3, which indicates that the Maximum EVM (Data) value is 922.1968241036e-3 dB.

FETCh:WLAN:AY:SUMMary:EVM:DATA:SIGma? (Query Only)

Query the Standard Deviation (1-Sigma) of the EVM Data.

When the EVM unit is in dB, it queries the Standard Deviation after converting evm values to the dB scale.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:DATA:SIGma?

Returns

<NRf>

Units: dB

Examples

FETC:WLAN:AY:SUMM:EVM:DATA:SIG? may return 1.8950, which indicates that the 1-Sigma EVM Data value is 1.8950 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:EVM? (Query Only)

Query the EVM value that occurs in the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:EVM?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:DATA:EVM?` may return `-33.5668742100`, which indicates that the EVM value is `-33.5668742100%`.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:PEAK? (Query Only)

Query the value of the Peak Error that occurs at the given Symbol in the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:PEAK?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:DATA:PEAK?` may return `-26.5964736883`, which indicates that the value of the Peak Error is `-26.5964736883` at the given Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:STATus? (Query Only)

Query the status of the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:STATus?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:DATA:STAT? may return PASS, FAIL, or NA.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:DATA:SYMBol?

Returns

<NRf>

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:DATA:SYMB? may return 4.6610000000e+3, which indicates that the Peak Error occurs at the 4.6610000000e+3 Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:EVM? (Query Only)

Query the EVM value in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:EVM?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:EDMG:CEF:EVM? may return 6.9680400193, which indicates that the EVM value is -6.9680400193 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:PEAK? (Query Only)

Query the Peak Error that occurs at the given Symbol in the 11ay 2.16 GHz BW and EDMG CEF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:PEAK?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:EDMG:CEF:PEAK? may return 13.7763872743, which indicates that the Peak Error value is 13.7763872743% at the given Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the 11ay 2.16 GHz BW and EDMG CEF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:SYMBol?

Returns

<NRf>

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:EDMG:CEF:SYMB? may return 7.4020000000e+3, which indicates that the Peak Error occurs at the 7.4020000000e+3 Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:EVM? (Query Only)

Query the EVM value in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:EVM?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:EDMG:STF:EVM? may return -22.9729890175, which indicates that the EVM value is -22.9729890175 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:PEAK? (Query Only)

Query the Peak Error that occurs at the given Symbol in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:PEAK?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:EDMG:STF:PEAK? may return 38.8123661280, which indicates that the Peak Error value is 38.8123661280% at the given Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:SYMBol?

Returns

<NRf>

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:EDMG:STF:SYMB? may return 0.0000, which indicates that the Peak Error occurs at the 0.0000 Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:GUARd:EVM? (Query Only)

Query the EVM value in the Guard Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:GUARd:EVM?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:GUAR:EVM? may return -65.4983500315, which indicates that the value of the EVM is -65.4983500315 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:GUARd:PEAK? (Query Only)

Query the Peak Error that occurs at the given Symbol in the Guard Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:EVM:PACKet:GUARd:PEAK?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:GUAR:PEAK?` may return `-26.5964736883`, which indicates that the value of the Peak Error is -26.5964736883 at the given Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:GUARd:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the Guard Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:EVM:PACKet:GUARd:SYMBol?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:GUAR:SYMB?` may return `3.3340000000e+3`, which indicates that the Peak Error occurs at the `3.334000000e+3` Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:HEADer:EVM? (Query Only)

Query the EVM value in the Header Region of the packet (excluding GI symbols) in the Summary display. This command is not applicable for 11ay 4.32 GHz BW and the value can be ignored.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMM:ary:EVM:PACKet:HEADer:EVM?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:HEAD:EVM? may return -67.1981081169, which indicates that the EVM value in the Header Region is -67.198108116 dB.

FETCh:WLAN:AY:SUMM:ary:EVM:PACKet:HEADer:PEAK? (Query Only)

Query the Peak Error that occurs at the given Symbol in Header Region (excluding GI symbols) of the packet in the Summary display. This command is not applicable for 11ay 4.32 GHz BW and the value can be ignored.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMM:ary:EVM:PACKet:HEADer:PEAK?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:HEAD:PEAK? may return -60.9603086224, which indicates that the Peak Error value is -60.9603086224 dB.

FETCh:WLAN:AY:SUMM:ary:EVM:PACKet:HEADer:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the Header Region of the packet (excluding GI symbols) in the Summary display. This command is not applicable for 11ay 4.32 GHz BW and the value can be ignored.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMM:ary:EVM:PACKet:HEADer:SYMBol?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:HEAD:SYMB?` may return `3.397000000e+3`, which indicates that the peak error occurs at the `3.397000000e+3` Symbol.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:A1Header:EVM? (Query)

Query the value of the Pre-EDGM1 Header-A EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:A1Header:EVM?`

Returns

`<string>`

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:PRE1E:A1H:EVM?` may return `-34.3702`, which indicates that the value of the Pre-EDGM1 Header-A EVM packet is `-34.3702` dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:CEF1:EVM? (Query Only)

Query the value of the Pre-EDMG1 CEF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:CEF1:EVM?`

Returns

`<string>`

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:PRE1E:CEF1:EVM?` may return `-34.5666`, which indicates that the value of the Pre-EDMG1 CEF EVM packet is `-34.5666` dB.

FETCH:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg: GUARd1:EVM? (Query)

Query the value of the Pre-EDMG1 EVM Guard region of the packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCH:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:GUARd1:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:PRE1ELGUAR1:EVM? may return -34.1327, which indicates that the value of the Pre-EDMG1 EVM Guard Region is -34.1327 dB.

FETCH:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg :HEADer1:EVM? (Query)

Query the value of the Pre-EDMG1 L-Header EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCH:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:HEADer1:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVMPACK:PRE1E:HEAD1:EVM? may return -34.4326, which indicates that the value of the Pre-EDMG1 L-Header EVM packet is -34.4326 dB.

FETCH:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:STF1:EVM? (Query Only)

Query the value of the Pre-EDMG1 STF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:STF1:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:PRE1E:STF1:EVM? may return -33.6325, which indicates that the value of the Pre-EDMG1 STF1 EVM packet is -33.6325 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:A2Header:EVM? (Query

Query the value of the Pre-EDMG2 EDMG Header-A EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:A2Header:EVM?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:PRE2E:A2H:EVM? may return -34.37, which indicates that the value of the Pre-EDMG2 EDMG-Header-A EVM packet is -34.37 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:CEF2:EVM? (Query Only)

Query the value of the Pre-EDMG2 CEF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:CEF2:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:PRE2E:CEF2:EVM? may return -34.5665, which indicates that the value of the Pre-EDMG2 CEF EVM packet is -34.5665 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:GUARd2:EVM? (Query)

Query the value of the Pre-EDMG2 Guard EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:GUARd2:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

FETC:WLAN:AY:SUMM:EVM:PACK:PRE2E:GUAR:EVM? may return -33.137, which indicates that the value of the Pre-EDMG2 Guard EVM packet is -33.137 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:HEADer2:EVM? (Query)

Query the value of the Pre-EDMG2 L-Header EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:HEADer2:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:PRE2E:HEAD2:EVM?` may return `-34.4321`, which indicates that the value of the Pre-EDMG2 L-Header EVM packet is -34.4321 dB.

FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg: STF2:EVM? (Query Only)

Query the value of the Pre-EDMG2 STF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:STF2:EVM?`

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

`FETC:WLAN:AY:SUMM:EVM:PACK:PRE2E:STF2:EVM?` may return `-33.6324`, which indicates that the value of the Pre-EDMG2 STF2 EVM packet is -33.6324 dB.

FETCh:WLAN:AY:SUMMary:FERRor:AVERage? (Query Only)

Query the Average Frequency Error value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:FERRor:AVERage?`

Returns

<NRf>

Units: ppm

Examples

`FETC:WLAN:AY:SUMM:FERR:AVER?` may return `-114.1332879317e-3`, which indicates that the Average Frequency Error value is -114.1332879317e-3 ppm.

FETCH:WLAN:AY:SUMMARY:FERROR:AVERAGE:STATUS? (Query Only)

Query the Average Frequency Error status in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AY:SUMMARY:FERROR:AVERAGE:STATUS?`

Returns

<string>

Examples

`FETCH:WLAN:AY:SUMMARY:FERROR:STAT?` may return PASS, FAIL, or NA.

FETCH:WLAN:AY:SUMMARY:FERROR:HERTZ? (Query Only)

Query the Frequency Error value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCH:WLAN:AY:SUMMARY:FERROR:HERTZ?`

Returns

<Nrf>

Units: Hz or kHz

Examples

`FETCH:WLAN:AY:SUMMARY:FERROR:HERTZ?` may return `2.875e+3`, which indicates that the Frequency Error value is 2.875 kHz.

FETCH:WLAN:AY:SUMMARY:FERROR:MAX? (Query Only)

Query the Maximum Frequency Error value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:FERRor:MAX?`

Returns

<NRf>

Units: ppm

Examples

`FETC:WLAN:AY:SUMM:FERR:MAX?` may return $-114.1332879317e-3$, which indicates that the Maximum Frequency Error is $-114.1332879317e-3$ ppm.

FETCh:WLAN:AY:SUMMary:FERRor:PPM? (Query Only)

Query the Frequency Error value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:FERRor:PPM?`

Returns

<NRf>

Units: ppm

Examples

`FETC:WLAN:AY:SUMM:FERR:PPM?` may return $575.023e-3$, which indicates that the Frequency Error value is $575.023e-3$ ppm.

FETCh:WLAN:AY:SUMMary:FERRor:STATus? (Query Only)

Query the Frequency Error status in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:FERRor:STATus?`

Returns

<string>

Examples

`FETC:WLAN:AY:SUMM:FERR:STAT?` may return PASS, FAIL, or NA.

FETCh:WLAN:AY:SUMMary:IQ:GAIN:IMBALance? (Query Only)

Query the IQ Gain Imbalance value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:IQ:GAIN:IMBALance?

Returns

<NRf>

Units: dB

Examples

FETC:WLAN:AY:SUMM:IQ:GAIN:IMBAL? may return 69.2700818181e-3, which indicates that the IQ Gain Imbalance value is 69.2700818181e-3 dB.

FETCh:WLAN:AY:SUMMary:IQ:ORIGin:OFFSet? (Query Only)

Query the IQ Origin Offset value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:IQ:ORIGin:OFFSet?

Returns

<NRf>

Units: dB

Examples

FETC:WLAN:AY:SUMM:IQ:ORIG:OFFS? may return -160.0000000000, which indicates that the IQ Origin Offset value is -160.0000000000 dB.

FETCh:WLAN:AY:SUMMary:IQ:QUADrature:ERROr? (Query Only)

Query the IQ Quadrature Error value (degrees) in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:IQ:QUADrature:ERROr?`

Returns

`<NRf>`

Units: degrees

Examples

`FETC:WLAN:AY:SUMM:IQ:QUAD:ERRO?` may return `-220.5967903137e-3`, which indicates that the IQ Quadrature Error value is `-220.5967903137e-3` degrees.

FETCh:WLAN:AY:SUMMary:PACKet:AGGRegation? (Query Only)

Query the value of the Aggregation packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:PACKet:AGGRegation?`

Returns

`<string>`

Examples

`FETC:WLAN:AY:SUMM:PACK:AGGR?` may return `1111`, which indicates that the Aggregation value is `1111`.

FETCh:WLAN:AY:SUMMary:PACKet:BEAMformed? (Query Only)

Query the value of the Beamformed packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:PACKet:BEAMformed?`

Returns

`<string>`

Examples

`FETC:WLAN:AY:SUMM:PACK:BEAM?` may return `0`, which indicates that the value of the Beamformed packet is `0`.

FETCh:WLAN:AY:SUMMary:PACKet:BWBitmap? (Query Only)

Query the value of the Bandwidth BitMap packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:PACKet:BWBitmap?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:PACK:BW? may return 11000000, which indicates that the value of the Bandwidth BitMap packet is 11000000.

FETCh:WLAN:AY:SUMMary:PACKet:COMPbw? (Query Only)

Query the value of the Compressed BW packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:PACKet:COMPbw?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:PACK:COMP? may return 2, which indicates that the value of the Compressed BW packet is 2.

FETCh:WLAN:AY:SUMMary:PACKet:CRC? (Query Only)

Query the value of the CRC packet information in the Summary display.

Conditions

Measurement view 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:PACKet:CRC?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:PACK:CRC? may return 0110001001011010, which indicates that the value of the CRC packet is 0110001001011010.

FETCh:WLAN:AY:SUMMary:PACKet:EDMGmcs? (Query Only)

Query the value of the EDMG MCS packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:PACKet:EDMGmcs?

Returns

<NRf>

Examples

FETC:WLAN:AY:SUMM:PACK:EDMG? may return 5, which indicates that the value of the EDMG MCS packet is 5.

FETCh:WLAN:AY:SUMMary:PACKet:LDPCcwlen? (Query Only)

Query the value of the additional LDPC CW Length packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:PACKet:LDPCcwlen?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:PACK:LDPC? may return 0, which indicates that the value of the LDPC CW Length packet is 0.

FETCh:WLAN:AY:SUMMary:PACKet:PRIMarychannel? (Query Only)

Query the value of the Primary Channel packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:PACKet:PRIMarychannel?`

Returns

<string>

Examples

`FETC:WLAN:AY:SUMM:PACK:PRIM?` may return 0, which indicates that the value of the Primary Channel packet is 0.

FETCh:WLAN:AY:SUMMary:PACKet:PSDUlen? (Query Only)

Query the Length value of the packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:PACKet:PSDUlen?`

Returns

<string>

Examples

`FETC:WLAN:AY:SUMM:PACK:PSDU?` may return 1000, which indicates that the Length value of the packet is 1000.

FETCh:WLAN:AY:SUMMary:PACKet:RSSI? (Query Only)

Query the value of the last RSSI packet information in the Summary display.

The first 2 bits of the last RSSI will fetch the Guard Interval type for EDMG (00/01/10 - Short/Normal/Long).

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:PACKet:RSSI?`

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:PACK:RSSI? may return 0000, which indicates that the last value of the RSSI packet is 0000.

FETCh:WLAN:AY:SUMMary:PACKet:SCRAmbler:INITialization? (Query Only)

Query the value of the Scrambler Initialization packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:PACKet:SCRAmbler:INITialization?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:PACK:SCRA:INIT? may return 0101110, which indicates that the value of the Scrambler Initialization packet is 0101110.

FETCh:WLAN:AY:SUMMary:PACKet:SPATialstreams? (Query Only)

Query the value of the Spatial Streams packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:PACKet:SPATialstreams?

Returns

<string>

Examples

FETC:WLAN:AY:SUMM:PACK:SPAT? may return 0, which indicates that the value of the Spatial Streams packet is 0.

FETCh:WLAN:AY:SUMMary:PACKet:STBCApplied? (Query Only)

Query the value of the STBC Applied packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:PACKet:STBCapplied?`

Returns

`<string>`

Examples

`FETC:WLAN:AY:SUMM:PACK:STBC?` may return 0, which indicates that the value of the STBC Applied packet is 0.

FETCh:WLAN:AY:SUMMary:PACKet:TRNLen ? (Query Only)

Query the value of the EDMG TRN Length packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:PACKet:TRNLen?`

Returns

`<string>`

Examples

`FETC:WLAN:AY:SUMM:PAC:TRNL?` may return 0, which indicates that the value of the EDMG TRN Length packet is 0.

FETCh:WLAN:AY:SUMMary:RCPI? (Query Only)

Query the RCPI (Received Channel Power Indicator) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

`FETCh:WLAN:AY:SUMMary:RCPI?`

Returns

`<NR1>`

Examples

FETC:WLAN:AY:SUMM:RCPI? may return 207.0000000000, which indicates that the RCPI value is 207.0000000000.

FETCh:WLAN:AY:SUMMary:RF:POWer? (Query Only)

Query the Radio Frequency (RF) Output Power value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:RF:POWer?

Returns

<NRf>

You must select the units in the Units tab.

Examples

FETC:WLAN:AY:SUMM:RF:POW? may return -6.3434391022, which indicates that the Radio Frequency Output Power value is -6.3434391022.

FETCh:WLAN:AY:SUMMary:SIG:QUALity? (Query Only)

Query the Signal Quality value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Fetch commands

Syntax

FETCh:WLAN:AY:SUMMary:SIG:QUALity?

Returns

<NRf>

Units: rho

Examples

FETC:WLAN:AY:SUMM:SIG:QUA? may return 999.6323e-3, which indicates that the Signal Quality value is 999.6323e-3 rho.

FETCh:WLAN:CONSt:e:MAGNitude? (Query Only)

Returns the magnitude data for the WLAN Constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:CONStE:MAGNitude?`

Returns

Returned data is in the form

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>` where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

`FETC:WLAN:CONS:MAGN?` might return `#510400..` (10400-byte data) for the measurement.

FETCh:WLAN:CONStE:PHASe? (Query Only)

Returns the phase values for the WLAN Constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:CONStE:PHASe?`

Returns

Returned data is in the form

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

`FETCh:WLAN:CONS:PHAS?` might return `#510400..` (10400-byte data) for the measurement.

FETCh:WLAN:CONStE:TYPE? (Query Only)

Returns the type (context) for the WLAN Constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:CONStE:TYPE?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in 16-bit little endian integers. The integers must be translated to the proper context as listed below.

Integer value Type (context):

- 1 Pilot
- 2 Data

Examples

`FETCh:WLAN:CONStE:TYPE?` might return `#41352..` (1352-byte data) for the measurement. The actual data must be decoded to the context type using the table above.

FETCh:WLAN:CONStE:VALue? (Query Only)

Returns the value (decoded symbol) for the WLAN Constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:CONStE:VALue?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in 16-bit little endian integers.

Examples

`FETCH:WLAN:CONSTE:VALUE?` might return `#41352` indicating 1352 bytes of data for the measurement.

FETCh:WLAN:CRESpOse:MAGNitude? (Query Only)

Returns the magnitude data of the WLAN Channel Response measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:CRESpOse:MAGNitude?`

Returns

Returned data is in the form

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

`FETC:WLAN:CRES:MAGN?` might return `#510400..` (10400-byte data) for the measurement.

FETCh:WLAN:CRESpOse:PHASe? (Query Only)

Returns the phase data of the WLAN Channel Response measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:CRESpOse:PHASe?`

Returns

Returned data is in the form

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

where

`<num_digit>` is the number of digits in `<num_byte>`.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

FETCH:WLAN:CRES:PHAS? might return #510400.. (10400-byte data) representing the phase data for the measurement.

FETCh:WLAN:EVM:TRACe<x>? (Query Only)

Returns the trace data for the selected WLAN EVM trace. When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbol. When <x> is 3, the parameter is Average versus Subcarrier

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:EVM:TRACe<x>?

Returns

#<num_digit><num_byte><data (1)><data (2)>..<data (n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:WLAN:EVM:TRAC2? might return #510400.. (10400-byte data) for the measurement.

FETCh:WLAN:FLATness:PASS? (Query Only)

Queries whether the average power level values of the subcarriers across the signal bandwidth on the WLAN Spectral Flatness display remain within the limits defined for a particular standard.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:FLATness:PASS?`

Returns

Returns "1" in the case that all data remains within the defined limits, and "0" otherwise.

Examples

`FETCh:WLAN:FLAT:PASS?` might return 1, which means that the average power level values of the subcarriers across the signal bandwidth remain within the defined limits.

FETCh:WLAN:FLATness:RESult? (Query Only)

Returns the summary results of each segment of the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:FLATness:RESult?`

Returns

The data is returned as 12 comma delineated text values. The specific values are :

- minimum subcarrier within segment 1
- minimum subcarrier average energy deviation from the global average within segment 1
- deviation the of minimum subcarrier average from the allowed value in segment 1
- maximum subcarrier within segment 1
- maximum subcarrier average energy deviation from the global average within segment 1
- deviation of the maximum subcarrier average from the allowed value in segment 1
- minimum subcarrier within segment 2
- minimum subcarrier average energy deviation from the global average within segment 2
- deviation the of minimum subcarrier average from the allowed value in segment 2
- maximum subcarrier within segment 2
- maximum subcarrier average energy deviation from the global average within segment 2
- deviation of the maximum subcarrier average from the allowed value in segment 2

Examples

`FETCh:WLAN:FLAT:RES?` might return

`-6.0000000000,-17.0626174659E-3,3.9829373825,12.0000000000,19.979260`, which represents the summary results of each segment of the WLAN Spectral Flatness display.

FETCh:WLAN:FLATness:TRACe<x>? (Query Only)

Returns the WLAN Spectral Flatness trace data. When <x> is 1, the parameter is Matrix (symbol deviation per subcarrier). When <x> is 2, the parameter is Average Deviation vs Subcarrier.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:FLATness:TRACe<x>?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCh:WLAN:FLAT:TRACE2? might return #510400.. (10400-byte data) for the measurement.

FETCh:WLAN:MERRor:TRACe<x>? (Query Only)

Returns the trace data for the selected WLAN Magnitude Error trace.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbol.

When <x> is 3, the parameter is Average versus Subcarrier

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:MERRor:TRACe<x>?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:WLAN:MERR:TRAC2?` might return `#510400..` (10400-byte data) for the measurement.

FETCh:WLAN:PERRor:TRACe<x>? (Query Only)

Returns the trace data for the selected WLAN Phase Error trace.

When `<x>` is 1, the parameter is Matrix.

When `<x>` is 2, the parameter is Average versus Symbol.

When `<x>` is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:PERRor:TRACe<x>?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCH:WLAN:PERR:TRAC2?` might return `#510400..` (10400-byte data) for the measurement.

FETCh:WLAN:PVTime:BURSt:POWer? (Query Only)

Returns the average power of the burst packet, in dBm, for the WLAN Power vs. Time trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:PVTime:BURSt:POWer?`

Returns

Floating point number that represents the average power of the burst packet, in dBm.

Examples

`FETCH:WLAN:PVT:BURST:POWER?` might return `-1.99`, which represents the value of the average power of the burst packet of `-1.99` dBm.

FETCH:WLAN:PVTime:BURSt:WIDTh? (Query Only)

Returns the value of the measured time width of the burst packet from Power-On to Power-Down (or end of waveform, if that occurs before Power-Down), in seconds, for the WLAN Power vs. Time trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:PVTime:BURSt:WIDTh?`

Returns

Floating point number which represents the value of the measured time width of the burst packet from Power-On to Power-Down (or end of waveform, if that occurs before Power-Down), in seconds.

Examples

`FETCH:WLAN:PVT:BURST:WIDTH?` might return `156.0000000000E-6`, which represents a width of the burst packet of `156` μ S.

FETCH:WLAN:PVTime:FALL:TIME? (Query Only)

Returns the value of the width of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:PVTime:FALL:TIME?`

Returns

Floating point number which represents the value of the width of the falling edge of the burst, in seconds.

Examples

`FETCH:WLAN:PVT:FALL:TIME?` might return `7e-6`, which indicates the width of the falling edge is `7` μ s.

FETCH:WLAN:PVTime:FALL:TIME:START? (Query Only)

Returns the value of the start time of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:PVTime:FALL:TIME:STARt?`

Returns

Floating point number which represents the value of the start time of the falling edge of the burst, in seconds.

Examples

`FETCH:WLAN:PVT:FALL:TIME:STAR?` might return $6e-6$, which indicates that the start time of the falling edge is at 6 μ s.

FETCH:WLAN:PVTime:FALL:TIME:STOP? (Query Only)

Returns the value of the stop time of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:PVTime:FALL:TIME:STOP?`

Returns

Floating point number which represents the value of the stop time of the falling edge of the burst, in seconds.

Examples

`FETCH:WLAN:PVT:FALL:TIME:STOP?` might return $7e-6$, which indicates the stop time of the falling edge is at 7 μ s.

FETCH:WLAN:PVTime:FTIME? (Query Only)

Returns the value of the width of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:PVTime:FTIME?`

Returns

Floating point number which represents the value of the width of the falling edge of the burst, in seconds.

Examples

`FETCh:WLAN:PVT:FALL:TIME?` might return $7e-6$, which indicates the width of the falling edge is 7 μ s.

FETCh:WLAN:PVTime:RISE:TIME? (Query Only)

Returns the value of the width of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:PVTime:RISE:TIME?`

Returns

Floating point number which represents the value of the width of the rising edge of the burst, in seconds.

Examples

`FETCh:WLAN:PVT:RISE:TIME?` might return $7e-6$, which indicates the width of the rising edge is 7 μ s.

FETCh:WLAN:PVTime:RISE:TIME:START? (Query Only)

Returns the value of the start time of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:PVTime:RISE:TIME:START?`

Returns

Floating point number which represents the value of the start time of the rising edge of the burst, in seconds.

Examples

`FETCh:WLAN:PVT:RISE:TIME:STAR?` might return $6e-6$, which indicates the start time of the rising edge is at 6 μ s.

FETCH:WLAN:PVTime:RISE:TIME:STOP? (Query Only)

Returns the value of the stop time of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:PVTime:RISE:TIME:STOP?`

Returns

Floating point number which represents the value of the stop time of the rising edge of the burst, in seconds.

Examples

`FETCH:WLAN:PVT:RISE:TIME:STOP?` might return $7e-6$, which indicates the stop time of the rising edge is at 7 μ s.

FETCH:WLAN:PVTime:RTIME? (Query Only)

Returns the value of the width of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:PVTime:RTIME?`

Returns

Floating point number which represents the value of the width of the rising edge of the burst, in seconds.

Examples

`FETCH:WLAN:PVT:RISE:TIME?` might return $7e-6$, which indicates the width of the rising edge is 7 μ s.

FETCH:WLAN:PVTime:TRACe:X? (Query Only)

Returns the horizontal values (time in seconds) for the WLAN Power vs. Time trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

```
FETCH:WLAN:PVTime:TRACe:X?
```

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:WLAN:PVT:TRAC:X might return #43204 (3204-byte data), which represents the time in seconds (horizontal values) for the WLAN Power vs. Time trace.

FETCH:WLAN:PVTime:TRACe:XY? (Query Only)

Returns the horizontal value (time in seconds) and vertical value (power) for the WLAN Power vs. Time trace.

<x(n)><y(n)> is the horizontal value and vertical value pair at the nth data point.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

```
FETCH:WLAN:PVTime:TRACe:XY?
```

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:WLAN:PVT:TRAC:XY? might return #43204 (3204-byte data), which represents the horizontal value (time in seconds) and vertical value (power) pair at the nth data point.

FETCH:WLAN:PVTime:TRACe[:Y]? (Query Only)

Returns the vertical values (power) for the WLAN Power vs. Time trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:PVTime:TRACe[:Y]?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`FETCh:WLAN:PVT:TRAC:Y?` might return `#43204` (3204-byte data), which represents the vertical values (power) for the WLAN Power vs. Time trace.

FETCh:WLAN:STABLE:VALUe? (Query Only)

Returns the number of bytes in the symbol table for the WLAN measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:STABle:VALUe?`

Returns

`#<num_digit><num_byte>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

Examples

`FETCh:WLAN:STABLE:VALUE?` might return `#43848` indicating that there are 3848 bytes of data in the symbol table.

FETCh:WLAN:SUMMary:BURSt:INDEX? (Query Only)

Returns the index of the analyzed packet within the analysis record.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:SUMMARY:BURSt:INDEX?`

Arguments

None

Returns

<NRf>

FETCH:WLAN:SUMMARY:BURSt:POWER? (Query Only)

Returns the average power of all symbols in the packet, including Preamble and Data segments.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:SUMMARY:BURSt:POWER?`

Arguments

None

Returns

<NRf> data in dBm.

FETCH:WLAN:SUMMARY:BURSt:POWER:CFACTOR? (Query Only)

Returns the peak-to-average burst power factor in the WLAN measurement. The ratio of the highest instantaneous signal power level to the average signal power.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:SUMMARY:BURSt:POWER:CFACTOR?`

Arguments

None

Returns

<NRf> data in dB.

FETCh:WLAN:SUMMary:CERRor? (Query Only)

Returns the symbol clock error in the WLAN measurement. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:CERRor?

Arguments

None

Returns

<NRf> data in parts per million.

FETCh:WLAN:SUMMary:CPE? (Query Only)

Returns the RMS magnitude error of the pilots over all data symbols.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:CPE?

Arguments

None

Returns

<NRf> data in percent.

FETCh:WLAN:SUMMAry:EVM:PEAK:ALL? (Query Only)

Returns the peak EVM value for all subcarriers in the WLAN measurement or for all chips depending on the selected standard.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMAry:EVM:PEAK:ALL?

Arguments

None

Returns

<NRf> data in dB.

FETCh:WLAN:SUMMAry:EVM:PEAK:CHIP:ALL? (Query Only)

Returns the chip at which the reported peak EVM value occurred. Available only for 802.11b

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMAry:EVM:PEAK:CHIP:ALL?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMAry:EVM:PEAK:CHIP:ONEKchips? (Query Only)

Returns the chip at which the reported peak EVM value over the first 1000 chips occurred.

Only available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:EVM:PEAK:CHIP:ONEKchips?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMarY:EVM:PEAK:DATA? (Query Only)

Returns the peak EVM value for the data subcarriers in the WLAN measurement. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:EVM:PEAK:DATA?

Arguments

None

Returns

<NRf> data in dB.

FETCh:WLAN:SUMMarY:EVM:PEAK:ONEKchips? (Query Only)

Returns the peak EVM value measured over the first 1000 chips. Available only for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:EVM:PEAK:ONEKchips?

Arguments

None

Returns

<NRf> data in dB.

FETCh:WLAN:SUMMary:EVM:PEAK:PILots? (Query Only)

Returns the peak EVM value for the pilots in the WLAN measurement. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:EVM:PEAK:PILots?

Arguments

None

Returns

<NRf> data in dB.

FETCh:WLAN:SUMMary:EVM:PEAK:SCARrier:ALL? (Query Only)

Returns the subcarrier on which the ALL peak EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:EVM:PEAK:SCARrier:ALL?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMary:EVM:PEAK:SCARrier:DATA? (Query Only)

Returns the subcarrier on which the DATA peak EVM value occurred. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:EVM:PEAK:SCARrier:DATA?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMarY:EVM:PEAK:SCARrier:PILots? (Query Only)

Returns the subcarrier on which the PILOT peak EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:EVM:PEAK:SCARrier:PILots?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMarY:EVM:PEAK:SYMBol:ALL? (Query Only)

Returns the symbol on which the reported EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:EVM:PEAK:SYMBol:ALL?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMary:EVM:PEAK:SYMBol:DATA? (Query Only)

Returns the symbol on which the DATA peak EVM value occurred. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:EVM:PEAK:SYMBol:DATA?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMary:EVM:PEAK:SYMBol:PILOts? (Query Only)

Returns the symbol on which the PILOT peak EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:EVM:PEAK:SYMBol:PILOts?

Arguments

None

Returns

<NR1>

FETCh:WLAN:SUMMary:EVM:RMS:ALL? (Query Only)

Returns the RMS EVM data for all subcarriers in the WLAN measurement and for all chips for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMarY:EVM:RMS:ALL?`

Arguments

None

Returns

<NRf> RMS EVM in dB

FETCh:WLAN:SUMMarY:EVM:RMS:AVERAge? (Query Only)

Returns the average RMS EVM value in the WLAN measurement over the selected number of bursts.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMarY:EVM:RMS:AVERAge?`

Arguments

None

Returns

<NRf> RMS EVM in dB

FETCh:WLAN:SUMMarY:EVM:RMS:DATA? (Query Only)

Returns the RMS EVM data for the data subcarriers in the WLAN measurement. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMarY:EVM:RMS:DATA?`

Arguments

None

Returns

Programmer Manual

WWW.TEK.COM | 1508

<NRf> RMS EVM in dB

FETCh:WLAN:SUMMary:EVM:RMS:MAXimum? (Query Only)

Returns the maximum RMS EVM value in the WLAN measurement over the selected number of bursts.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:EVM:RMS:MAXimum?

Arguments

None

Returns

<NRf> RMS EVM in dB

FETCh:WLAN:SUMMary:EVM:RMS:ONEKchips? (Query Only)

Returns the EVM RMS data for the 1k chips in the WLAN measurement measured over the first 1000 chips.

Only available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:EVM:RMS:ONEKchips?

Arguments

None

Returns

<NRf> RMS EVM in dB

FETCh:WLAN:SUMMary:EVM:RMS:PILots? (Query Only)

Returns the RMS EVM data for the pilot subcarriers in the WLAN measurement. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:SUMMARY:EVM:RMS:PILOTS?`

Arguments

None

Returns

<NRf> data in percent.

FETCH:WLAN:SUMMARY:FERROR? (Query Only)

Returns the frequency difference between the measured carrier frequency of the signal and the measurement frequency setting.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:SUMMARY:FERROR?`

Arguments

None

Returns

<NRf> data in kHz.

FETCH:WLAN:SUMMARY:HEADER? (Query Only)

Returns the received packet header information for the WLAN measurement. Applies to the 802.11b standard only.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCH:WLAN:SUMMARY:HEADER?`

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

FETCh:WLAN:SUMMary:HTSig? (Query Only)

Returns the decimal values of the received packet HT-SIGNAL. Applies to the 802.11n standard only.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:HTSig?

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

FETCh:WLAN:SUMMary:IQOFfset? (Query Only)

Returns the average magnitude of the DC subcarrier level relative to total signal power.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMary:IQOFfset?

Arguments

None

Returns

<NRf> data in dB.

FETCh:WLAN:SUMMary:LSIG? (Query Only)

Returns the decimal values of the received packet (legacy) SIGNAL symbols fields. Applies to the 802.11n standard only.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMary:LSIG?`

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

FETCh:WLAN:SUMMary:PACKet? (Query Only)

Returns the type and number of symbols, EVM-RMS and average power of the Preamble and Data portions of the packet.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMary:PACKet?`

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

FETCh:WLAN:SUMMary:PACKet:DMODulation? (Query Only)

Returns the modulation used in the Data symbols.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMary:PACKet:DMODulation?`

Returns

<string> The data modulation being used.

FETCh:WLAN:SUMMarY:PACKet:FORMat? (Query Only)

Returns the packet format setting for the WLAN measurement

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:PACKet:FORMat?

Arguments

None

Returns

<string> The packet format setting.

FETCh:WLAN:SUMMarY:PACKet:GUARd? (Query Only)

Returns the packet guard interval used by the DATA symbols. Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

FETCh:WLAN:SUMMarY:PACKet:GUARd?

Arguments

None

Returns

<NRf> The packet guard interval, 1/4 or 1/8.

FETCh:WLAN:SUMMarY:SIG? (Query Only)

Returns the decimal values of the received packet SIGNAL symbols fields. Available only for 802.11agjp.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMary:SIG?`

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

FETCh:WLAN:SUMMary:VHTSig:A? (Query Only)

Returns the decimal values of the received packet VHT-SIGNAL(A) symbols fields.

Available only for 802.11ac.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMary:VHTSig:A?`

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

FETCh:WLAN:SUMMary:VHTSig:B? (Query Only)

Returns the decimal values of the received packet VHT-SIGNAL(B) symbols fields.

Available only for 802.11ac.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Fetch commands

Syntax

`FETCh:WLAN:SUMMary:VHTSig:B?`

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

*IDN? (Query Only)

Returns the analyzer identification code.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*IDN?

Arguments

None

Returns

The analyzer identification code in the following format

```
TEKTRONIX,RSAXXXXX,<serial_number>,<firmware_version>
```

Where

TEKTRONIX indicates that the manufacturer is Tektronix.

RSAXXXXX is the model number (RSA5103B, RSA5106B, RSA5115B, or RSA5126B).

<serial_number> is the serial number.

<firmware_version> is the firmware version.

Examples

*IDN? might return the response

```
TEKTRONIX,RSA5126B,B000111,FV2.6.1500
```

INITiate:CONTInuous

Determines whether to place the analyzer in the single or the continuous acquisition mode.

Conditions

Measurement views: All

Group

Initiate commands

Syntax

```
INITiate:CONTInuous { OFF | ON | 0 | 1 }  
INITiate:CONTInuous?
```

Related Commands

[INITiate:RESume](#) (on page 1516)

[INITiate\[:IMMediate\]](#) (on page 1516)

Arguments

OFF or 0 places the analyzer in the single acquisition mode. To initiate the acquisition, use the `INITiate[:IMMediate]` command. To stop acquisition when a trigger is not present, and to avoid a 2.7 hour time-out, send the free-run trigger command, `TRIGger:SEquence:STATus 0`. Then, send the command `INITiate:CONTinuous OFF`. This sequence ensures a minimal delay before the `INIT:CONT OFF` command completes.

ON or 1 places the analyzer in the continuous acquisition mode. To initiate the acquisition, use the `INITiate[:IMMediate]` command. To stop the acquisition in the continuous mode, send the following command:
`INITiate:CONTinuous OFF`

Returns

See Arguments.

Examples

`INITIATE:CONTINUOUS ON` places the analyzer in the continuous acquisition mode.

INITiate[:IMMediate] (No Query Form)

Starts input signal acquisition.

NOTE: It is an overlapped command, which does not finish executing before the next command starts executing. Use the `*OPC(?)` and `*WAI` commands to synchronize all pending operations to the execution of this command.

Conditions

Measurement views: All

Group

Initiate commands

Syntax

`INITiate[:IMMediate]`

Related Commands

[*OPC](#) (on page 1580)

[*TRG](#) (on page 2709)

[*WAI](#) (on page 2746)

[INITiate:CONTinuous](#) (on page 1515)

Arguments

None

Examples

`INITIATE:IMMEDIATE` starts input signal acquisition.

INITiate:RESume (No Query Form)

Restarts signal processing.

Resume is only applicable when FastFrame is enabled, and when the instrument is stopped while analyzing the frames. When the instrument is stopped, measurements will finish processing and the system might stop before all of the frames of an acquisition are processed (when acquisition is stopped, the system stops as soon as all measurements say they are finished processing the current acquisition). However, the instrument saves all of the frames to the Acquisition History (Data Cache), and when INITiate:RESume is sent, it will begin processing at the first frame of the last acquisition that was not processed (the one after the last frame processed), and process all of these remaining frames before starting a new acquisition. If INITiate is sent instead, any remaining frames are discarded and a new acquisition is started immediately. If FastFrame is off, or there are no remainder frames, or the acquisition was aborted rather than stopped, then INITiate:RESume and INITiate are the same.

Conditions

Measurement views: All

FastFrame enabled

Group

Initiate commands

Syntax

INITiate:RESume

Related Commands

[*OPC](#) (on page 1580)

[*TRG](#) (on page 2709)

[*WAI](#) (on page 2746)

[INITiate:CONTinuous](#) (on page 1515)

[INITiate\[:IMMediate\]](#) (on page 1516)

Arguments

None

Examples

[INITiate:RESUME](#) (on page 1516) restarts input signal acquisition.

Input commands

INPut:CORRection:EXTernal:EDIT<x>:INTerpolation

Sets or queries the interpolation setting to use with the indicated external gain table.

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut:CORRection:EXTernal:EDIT<x>:INTerpolation { LINear | LOGarithmic }  
INPut:CORRection:EXTernal:EDIT<x>:INTerpolation
```

Related Commands

[INPut:CORRection:EXTernal:EDIT<x>:NEW](#) (on page 1518)

Arguments

LINEar select when the frequency scale of the spectrum or spurious measurements are linear.

LOGarithmic select when the frequency scale of the spectrum is logarithmic.

Examples

`INPut:CORRection:EXTernal:EDIT1:INTERpolation LINEar` uses linear interpolation when applying External correction Table one (1) to the chosen waveforms.

INPut:CORRection:EXTernal:EDIT<x>:LABEL

Sets or queries the name of the external loss table.

The parameter <x> = 1 to 3 represent the External Loss Table 1 to 3, respectively.

NOTE: This command has replaced `CALibration:CORRection:EXTernal:EDIT<x>:LABEL`

Conditions

Measurement views: All

Group

Input commands

Syntax

`INPut:CORRection:EXTernal:EDIT<x>:LABEL name`
`INPut:CORRection:EXTernal:EDIT<x>:LABEL?`

Arguments

`name::=<string>` specifies the name of the external loss table.

Examples

`INPut:CORRection:EXTernal:EDIT<x>:LABEL 'Sample Table 1'` names the External Loss Table 1 "Sample Table 1".

INPut:CORRection:EXTernal:EDIT<x>:NEW

Creates the indicated external loss table from a series of frequency and gain value pairs.

NOTE: This command has replaced `CALibration:CORRection:EXTernal:EDIT<x>:NEW`

Conditions

Measurement views: All

Group

Input commands

Syntax

`INPut:CORRection:EXTernal:EDIT<x>:NEW`
`<freq(1)>,<gain(1)>,<freq(2)>,<gain(2)>,...,<freq(n)>,<gain(n)>`

INPut:CORRection:EXTeRnal:EDIT<x>:NEW?

Related Commands

[INPut:CORRection:EXTeRnal:TYPE](#) (on page 1521)

Arguments

<freq(n)>, <gain(n)> specifies a pair of frequency (<NR3> in Hz) and gain (+ | -<NR3> in dB) in the external correction table.

NOTE: Do not include a unit suffix (such as Hz, dBm, or dB) with the arguments for this command.

The setting range is:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Loss: -50 to +30 dB. Negative values indicate loss and positive values indicate gain. Resolution is 0.1 dB.

Examples

INPut:CORRection:EXTeRnal:EDIT?:NEW 1.0E+9,-2.2,-1.5E+9,-2.3 creates the External correction Table specifying a loss of 2.2 dB at 1 GHz and a loss of 2.3 dB at 1.5 GHz.

INPut:CORRection:EXTeRnal:EDIT<x>:STATe

Determines whether to enable or disable the external loss table.

The parameter <x> = 1 to 3 represent the External Loss Table 1 to 3, respectively.

NOTE: This command has replaced CALibration:CORRection:EXTeRnal:EDIT<x>:STATe

Conditions

Measurement views: All

Group

Input commands

Syntax

INPut:CORRection:EXTeRnal:EDIT<x>:STATe { OFF | ON | 0 | 1 }
 INPut:CORRection:EXTeRnal:EDIT<x>:STATe?

Arguments

OFF or 0 disables the external loss table.

ON or 1 enables the external loss table.

NOTE: You can enable one or more tables at the same time.

Examples

INPut:CORRection:EXTeRnal:EDIT3:STATe? ON enables the External Loss Table 3.

INPut:CORRection:EXTernal:GAIN[:MAGNitude]

Sets or queries the external gain value. It can be enabled or disabled using the `INPut:CORRection:EXTernal:GAIN:STATE` command.

NOTE: This command has replaced `CALibration:CORRection:EXTernal:GAIN[:MAGNitude]`

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut:CORRection:EXTernal:GAIN[:MAGNitude] <value>
INPut:CORRection:EXTernal:GAIN[:MAGNitude]?
```

Arguments

`<value>::=<Nrf>` specifies the external gain value. Range: -50 to +30 dB.

Examples

`INPut:CORRection:EXTernal:GAIN[:MAGNitude] <value> -10` sets the external gain to -10 dB.

INPut:CORRection:EXTernal:GAIN:STATe

Determines whether to enable or disable the external gain value.

NOTE: This command has replaced `CALibration:CORRection:EXTernal:GAIN:STATe`.

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut:CORRection:EXTernal:GAIN:STATe { OFF | ON | 0 | 1 }
INPut:CORRection:EXTernal:GAIN:STATe?
```

Related Commands

[INPut:CORRection:EXTernal:GAIN\[:MAGNitude\]](#) (on page 1520)

Arguments

OFF or 0 disables the external gain value.

ON or 1 enables the external gain value.

Examples

`INPut:CORRection:EXTernal:GAIN:STATe ON` enables the external gain value.

INPut:CORRection:EXTernal:TYPE

Sets or queries the data type to use when applying the external loss table corrections.

NOTE: This command has replaced `CALibration:CORRection:EXTernal:TYPE`.

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut:CORRection:EXTernal:TYPE { TRACe | DATA }
INPut:CORRection:EXTernal:TYPE
```

Related Commands

[INPut:CORRection:EXTernal:EDIT<x>:NEW](#) (on page 1518)

Arguments

TRACe selects traces in the Spectrum, Spectrogram, Spurious, and Amplitude versus Time views. Selecting **TRACe** disables the `INPut:CORRection:EXTernal:GAIN:STATe` command.

DATA selects all acquired data. Selecting **DATA** enables the `INPut:CORRection:EXTernal:GAIN:STATe` command.

Examples

`INPUT:CORRECTION:EXTERNAL:TYPE TRACe` selects traces to apply the external loss table corrections.

INPut:{MLEVel|RLEVel}

Sets or queries the reference level.

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut:{MLEVel|RLEVel} <value>
INPut:{MLEVel|RLEVel}?
```

Arguments

`<value>::<NRf>` specifies the reference level. Range: -170 to +50 dBm.

Examples

`INPUT:RLEVEL -10` sets the reference level to -10 dBm.

INPut[:RF]:ATTenuation

Sets or queries the input attenuation. Programming a specified attenuation sets `INPut[:RF]:ATTenuation:AUTO OFF`.

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut[:RF]:ATTenuation <value>  
INPut[:RF]:ATTenuation?
```

Related Commands

[INPut\[:RF\]:ATTenuation:AUTO](#) (on page 1522)

Arguments

<value>::<NR1> specifies the input attenuation.

Range: 0 to 75 dB in 5 dB steps.

Examples

INPUT:RF:ATTENUATION 20 sets the input attenuation to 20 dB.

INPut[:RF]:ATTenuation:AUTO

Determines whether to set the input attenuation automatically or manually.

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut[:RF]:ATTenuation:AUTO { OFF | ON | 0 | 1 }  
INPut[:RF]:ATTenuation:AUTO?
```

Arguments

OFF or 0 specifies that the input attenuation is set manually. To set it, use the `INPut[:RF]:ATTenuation` command.

ON or 1 specifies that the input attenuation is set automatically according to the reference level.

Examples

INPUT:RF:ATTENUATION:AUTO ON specifies that the input attenuation is set automatically.

INPut[:RF]:ATTenuation:MONitor:STATe

Determines whether to enable or disable to monitor attenuator use.

Conditions

Measurement views: All

Group

Input commands

Syntax

```
INPut[:RF]:ATTenuation:MONitor:STATe { OFF | ON | 0 | 1 }  
INPut[:RF]:ATTenuation:MONitor:STATe?
```

Arguments

OFF or 0 disables to monitor attenuator use.

ON or 1 enables to monitor attenuator use.

Examples

INPUT:RF:ATTENUATION:MONITOR:STATE ON enables to monitor attenuator use.

INPut[:RF]:GAIN:STATe

Determines whether to enable or disable the internal preamp.

Conditions

Measurement views: All (Option 50 or 51 only)

Group

Input commands

Syntax

```
INPut[:RF]:GAIN:STATe { OFF | ON | 0 | 1 }  
INPut[:RF]:GAIN:STATe?
```

Arguments

OFF or 0 disables the internal preamp.

ON or 1 enables the internal preamp.

Examples

INPUT:RF:GAIN:STATE ON enables the internal preamp.

INPut[:RF]:PRESelector:STATe

Sets or queries the Preselector setting. The preselector uses input filters for image suppression when the span of the instrument allows for their use.

Conditions

Only available when a RSA7100A is connected with SignalVu-PC.

Group

Fetch commands

Syntax

```
INPut[:RF]:PRESelector:STATe { AUTO | ON | OFF }  
INPut[:RF]:PRESelector:STATe ?
```

Arguments

AUTO: This setting balances maximizing acquisition bandwidth with image suppression.

ON: Sets the preselector to always be on, independent of span.

OFF: Setting bypasses the preselector filters (except for the LPF, which is always present) when the span is greater than the allowed acquisition bandwidth.

Returns

See Arguments

Examples

`INPUT[:RF]:PRESELECTOR:STATE OFF` sets the preselector to OFF.

INPut:TYPE

Sets or queries the source type.

Condition

Measurement views: All

Group

Input commands

Syntax

```
INPut:TYPE <value> {RFSDdc | RFBSm | RF | IQ | DIFFiq}
INPut:TYPE?
```

Arguments

`<value>::<NRf>` specifies the source type.

Examples

`INPUT:TYPE RF` will set the source type to RF.

Memory commands

MMEMory:{AM|FM|PM}:LOAD:TRACe (No Query Form)

Loads the AM/FM/PM measurement trace data from the specified file.

Conditions

Measurement views: AM, FM, PM

Group

Mass Memory commands

Syntax

```
MMEMory:{AM|FM|PM}:LOAD:TRACe <file_name>
```

Arguments

`<file_name>::<string>` specifies the file from which to load trace data. The file extension is `.AmVsTime` (AM), `.FmVsTime` (FM), or `.PmVsTime` (PM). You can omit the extension.

Examples

`MMEMORY:AM:LOAD:TRACE "Sample1"` loads the trace data from the *Sample1.AmVsTime* file in the AM measurement.

MMEMory:{AM|FM|PM}:SHOW:TRACe<x>

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting “Show recalled trace” in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: AM, FM, PM

Group

Mass Memory commands

Syntax

```
MMEMory:{AM|FM|PM}:SHOW:TRACe<x> { OFF | ON | 0 | 1 }
MMEMory:{AM|FM|PM}:SHOW:TRACe<x>?
```

Related Commands

[MMEMory:{AM|FM|PM}:LOAD:TRACe](#) (on page 1524)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

`MMEMORY:FM:SHOW:TRACE2 ON` enables display of the recalled data loaded in Trace2.

MMEMory:{AM|FM|PM}:STORE:TRACe (No Query Form)

Stores the AM/FM/PM measurement trace data in the specified file.

Conditions

Measurement views: AM, FM, PM

Group

Mass Memory commands

Syntax

```
MMEMory:{AM|FM|PM}:STORE:TRACe <file_name>
```

Arguments

<file_name>::<string> specifies the file from which to load trace data. The file extension is .AmVsTime (AM), .FmVsTime (FM), or .PmVsTime (PM). You can omit the extension.

Examples

`MMEMORY:AM:STORE:TRACE "Sample1"` stores the trace data in the *Sample1.AmVsTime* file in the AM measurement.

MMEMory:AUDio:LOAD:FILTer (No Query Form)

Loads a user-defined audio filter from the specified file.

Conditions

Measurement views: Audio Spectrum

Group

Mass Memory commands

Syntax

```
MMEMory:AUDio:LOAD:FILTer <file_name>
```

Related Commands

[\[SENSe\]:AUDio:FILTer:SOURce?](#) (on page 2008)

Arguments

<file_name> ::= <string> specifies the filter file to load.

Examples

MMEMORY:AUDIO:LOAD:FILTER "filter4" loads the user-defined filter4 file for the measurement.

MMEMory:AVTime[:MEASview<y>]:LOAD:TRACe<x> (No Query Form)

Loads the Amplitude versus Time trace data from the specified file. The parameter <x> = 1 to 3; Trace 4 (math trace) is invalid.

Conditions

Measurement views: Amplitude versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:AVTime[:MEASview<y>]:LOAD:TRACe<x> <file_name>
```

Arguments

<file_name>:::<string> specifies the file from which to load trace data. The file extension is .AmplVsTime. You can omit the extension.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMORY:AVTIME:MEASVIEW1:LOAD:TRACE1 "Sample1" loads Trace 1 data on Amplitude versus Time Measurement View 1 from the *Sample1.AmplVsTime* file.

MMEMory:AVTime[:MEASview<y>]:SHOW:TRACe<x>

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting “Show recalled trace” in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: Amplitude versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:AVTime[:MEASview<y>]:SHOW:TRACe<x> { OFF | ON | 0 | 1 }
MMEMory:AVTime[:MEASview<y>]:SHOW:TRACe<x>?
```

Related Commands

[MMEMory:AVTime\[:MEASview<y>\]:LOAD:TRACe<x>](#) (on page 1526)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMORY:AVTIME:MEASVIEW1:SHOW:TRACE2 ON enables display of the recalled data loaded in Trace2 from Amplitude versus Time Measurement View 1.

MMEMory:AVTime[:MEASview<y>]:STORe:PLOT

Stores the Amplitude versus Time trace data in the specified file. The parameter <x> = 1 to 4; All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:AVTime[:MEASview<y>]:STORe:PLOT<file_name>
```

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .AmplVsTime. You can omit the extension.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMORY:AVTIME:MEASVIEW1:STORE:PLOT "Sample1" stores Trace 1 data from Amplitude versus Time Measurement View 1 in the *Sample1.AmplVsTime* file.

MMEMory:AVTime[:MEASview<y>]:STORE:PLOT:DONe

Stores the Amplitude versus Time trace data in the specified file. The parameter <x> = 1 to 4; All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Mass Memory commands

Syntax

MMEMory:AVTime[:MEASview<y>]:STORE:PLOT:DONe <file_name>

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .AmplVsTime. You can omit the extension.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMORY:AVTIME:MEASVIEW1:STORE:PLOT:DONe "Sample1" stores Trace 1 data from Amplitude versus Time Measurement View 1 in the *Sample1.AmplVsTime* file.

MMEMory:AVTime[:MEASview<y>]:STORE:TRACe<x> (No Query Form)

Stores the Amplitude versus Time trace data in the specified file. The parameter <x> = 1 to 4; All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Mass Memory commands

Syntax

MMEMory:AVTime[:MEASview<y>]:STORE:TRACe<x> <file_name>

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .AmplVsTime. You can omit the extension.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMORY:AVTIME:MEASVIEW1:STORE:TRACE1 "Sample1" stores Trace 1 data from Amplitude versus Time Measurement View 1 in the *Sample1.AmplVsTime* file.

MMEMory:CALibration:LOAD:CORRection:EXTernal:EDIT<x> (No Query Form)

Loads the external loss table from a specified file.

The parameter <x> = 1 to 3 represent External Loss Table 1 to 3, respectively.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:CALibration:LOAD:CORRection:EXTernal:EDIT<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file to load the external loss table from. The file extension is .csv. You can omit the extension.

Examples

MMEMORY:CALIBRATION:LOAD:CORRECTION:EXTERNAL:EDIT1 "Table1" loads the External Loss Table 1 from the *Table1.csv* file.

MMEMory:CALibration:STORe:CORRection:EXTernal:EDIT<x> (No Query Form)

Stores the external loss table to a specified file.

The parameter <x> = 1 to 3 represent External Loss Table 1 to 3, respectively.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:CALibration:STORe:CORRection:EXTernal:EDIT<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file to store the external loss table to. The file extension is .csv. You can omit the extension.

Examples

MMEMORY:CALIBRATION:STORE:CORRECTION:EXTERNAL:EDIT1 "Table1" stores the External Loss Table 1 to the *Table1.csv* file.

MMEMory:CCDF:LOAD:TRACe<x> (No Query Form)

Loads the CCDF trace data from the specified file.

Conditions

Measurement views: CCDF

Group

Mass Memory commands

Syntax

```
MMEMory:CCDF:LOAD:TRACe<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file from which to load trace data. The file extension is .CCDF. You can omit the extension.

Examples

MMEMORY:CCDF:LOAD:TRACE1 "Sample1" loads Trace 1 data from the *Sample1.CCDF* file.

MMEMory:CCDF:SHOW:TRACe<x>

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting "Show recalled trace" in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: CCDF

Group

Mass Memory commands

Syntax

```
MMEMory:CCDF:SHOW:TRACe<x> { OFF | ON | 0 | 1 } MMEMory:CCDF:SHOW:TRACe<x>?
```

Related Commands

[MMEMory:CCDF:LOAD:TRACe<x>](#) (on page 1529)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

MMEMORY:CCDF:SHOW:TRACE2 ON enables display of the recalled data loaded in Trace2.

MMEMory:CCDF:STORe:TRACe<x> (No Query Form)

Stores the CCDF trace data in the specified file.

Conditions

Measurement views: CCDF

Group

Mass Memory commands

Syntax

MMEMory:CCDF:STORe:TRACe<x> <file_name>

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .CCDF. You can omit the extension.

Examples

MMEMORY:CCDF:STORE:TRACE1 "Sample1" stores Trace 1 data in the *Sample1.CCDF* file.

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:MEASurement:UOTHer (No query form)

Loads a user-defined measurement filter from the specified file of the measurement source.

Group

Mass Memory commands

Syntax

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:MEASurement:UOTHer <file_name>

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:REFerence](#) (on page 2064)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:MEASurement](#) (on page 2063)

Arguments

<x> = 1 to 8, representing Range of Source.

<file_name>::<string> specifies the filter file to load.

Examples

MMEMORY:DDEMOD:SOURCE1:LOAD:FILTER:MEASUREMENT:UOTHER "Table2" loads User other filter from the file Table2.csv of the measurement source 1.

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:MEASurement:USER<y> (No query form)

Loads the user-defined measurement filter from the specified file of the measurement source. The parameter <y> specifies one of the User Meas Filters 1 to 3. The filter file must have a .csv file extension, though you may omit the file extension in the command line.

Group

Mass Memory commands

Syntax

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:MEASurement:USER<y> <file_name>

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:REFerence](#) (on page 2064)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:MEASurement](#) (on page 2063)

Arguments

<x> = 1 to 8, representing Range of Source.

<file_name>::<string> specifies the filter file to load.

Examples

MMEMORY:DDEMOD:SOURCE1:LOAD:FILTER:MEASUREMENT:USER1 "Table1" loads User Meas Filter 1 from the file Table1.csv of the measurement source 1.

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:REFerence:UOTHer (No query form)

Loads the specified user-defined reference filter, UOTHer, from a specified file of the measurement source.

Group

Mass Memory commands

Syntax

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:REFerence:UOTHer <file_name>

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:REFerence](#) (on page 2064)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:MEASurement](#) (on page 2063)

Arguments

<x> = 1 to 8, representing Range of Source.

<file_name>::<string> specifies the reference filter file to load. The file extension is type .csv.

Examples

MMEMORY:DDEMOD:SOURCE1:LOAD:FILTER:REFERENCE:UOTHer "FinalFilt" loads the filter file FinalFilt.csv into the filter reference UOTHer of the measurement source 1.

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:REFerence:USER<y> (No query form)

Loads the specified user-defined reference filter, USER1 | 2 | 3 from a specified file of the measurement source.

Group

Mass Memory commands

Syntax

MMEMory:DDEMod[:SOURce<x>]:LOAD:FILTer:REFerence:USER<y> <file_name>

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:REFerence](#) (on page 2064)

Arguments

<x> = 1 to 8, representing Range of Source.

<file_name>::<string> specifies the reference filter file to load. The file extension is type .csv.

Examples

MMEMORY:DDEMOD:SOURCE1:LOAD:FILTER:REFERENCE:USER2 "DUTfilt2" loads the filter file *DUTfilt2.csv* into the filter reference USER2 of the measurement source 1.

MMEMory:DDEMod[:SOURce<x>]:LOAD:SYMBOL:MAP (No query form)

Loads the specified symbol map filename of the measurement source. The setting correlates to the field, User Symbol Map (per Modulation Type) on the Advanced Params tab in the Digital Modulation settings.

Group

Mass Memory commands

Syntax

MMEMory:DDEMod[:SOURce<x>]:LOAD:SYMBOL:MAP <file_name>

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:MODulation:TYPE](#) (on page 2068)

Arguments

<x> = 1 to 8, representing Range of Source.

<file_name>::<string> specifies the symbol map file to load. The file extension is type .txt.

Examples

MMEMORY:DDEMOD:SOURCE1:LOAD:SYMBOL:MAP "C:\usymmap.txt" identifies the file to load for the symbol map of the measurement source 1.

MMEMory:DPX:LOAD:TRACe<x> (No Query Form)

Loads the DPX spectrum trace data from the specified file.

The parameter <x> = 1, 2, 3, or 5; TRACe4 (math trace) is invalid.

Conditions

Measurement views: DPX spectrum

Group

Mass Memory commands

Syntax

MMEMory:DPX:LOAD:TRACe<x> <file_name>

Arguments

<file_name>::<string> specifies the file from which to load trace data. The file extension is .dpt. You can omit the extension.

Examples

MMEMORY:DPX:LOAD:TRACE1 "Sample1" loads Trace 1 data from the *Sample1.dpt* file.

MMEMory:DPX:SHOW:TRACe<x>

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting “Show recalled trace” in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: DPX spectrum

Group

Mass Memory commands

Syntax

```
MMEMory:DPX:SHOW:TRACe<x> { OFF | ON | 0 | 1 }  
MMEMory:DPX:SHOW:TRACe<x>?
```

Related Commands

[MMEMory:DPX:LOAD:TRACe<x>](#) (on page 1533)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

MMEMORY:DPX:SHOW:TRACE2 ON enables display of the recalled data loaded in Trace2.

MMEMory:DPX:STORe:TRACe<x>

Stores the DPX spectrum trace data in the specified file. The parameter <x> = 1 to 5; All traces are valid.

Conditions

Measurement views: DPX spectrum

Group

Mass Memory commands

Syntax

```
MMEMory:DPX:STORe:TRACe<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .dpt. You can omit the extension.

Examples

MMEMORY:DPX:STORE:TRACE1 "Sample1" stores Trace 1 data in the *Sample1.dpt* file.

MMEMory:DPX:TDM:FREQuency:TXBer:LOAD:PATTern (No Query Form)

Loads the Tx BER User data pattern from the specified file.

Conditions

Measurement views: DPX:Frequency

Group

Mass Memory commands

Syntax

MMEMory:DPX:TDM:FREQuency:TXBer:LOAD:PATtern <file_name>

Related Commands

[\[SENSe\]:DPX:TDM:FREQuency:TXBer:PATtern](#) (on page 2099)

[\[SENSe\]:DPX:TDM:FREQuency:TXBer:PATtern:REPeat](#) (on page 2100)

Arguments

<file_name>::<string> that specifies the file (path) from which to load the User data pattern. The file type containing the data pattern must be in CSV format. See the instrument Help for details on creating a user pattern file.

Examples

MMEMORY:DPX:TDM:FREQUENCY:TXBER:LOAD:PATTERN "C:\RSA5100B_Files\Example_Files\SampleUserPattern.csv" loads the user pattern defined in *SampleUserPattern.csv*.

MMEMory:EMC:ACCEssory<x>:LOAD:TABLE (No Query Form)

Loads the loss table of the specified accessory from the specified file in the EMC view.

<x> = <NR1> 1 to 6

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

MMEMory:EMC:ACCEssory<x>:LOAD:TABLE <file name>

Arguments

<file name> = <String> specifies the file to load the loss table with extension as .emcemi

Returns

None

Examples

MMEMory:EMC:ACCEssory1:LOAD:TABLE "C:\SignalVu-PC_Files\table.csv" loads the loss table for accessory 1 from the table .csv file.

MMEMory:EMC:ACCEssory<x>:STORe:TABLE (No Query Form)

Stores the loss table of the specified accessory into the specified file in the EMC view.

<x> = <NR1> 1 to 6

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

```
MMEMory:EMC:ACCEssory<x>:STORe:TABLE <file name>
```

Arguments

<file name> = <String> specifies the file to store the loss table with extension as .csv

Returns

None

Examples

MMEMory:EMC:ACCEssory2:STORe:TABLE "C:\SignalVu-PC Files\sample.csv" stores the loss table for the accessory 2 in the sample.csv file.

MMEMory:EMC:AMBIent:TRACe:FILE (No Query Form)

Recalls the ambient trace from the file in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

```
MMEMory:EMC:AMBIent:TRACe:FILE <file name>
```

Arguments

<file name> = <String> specifies the file with extension as .emcemi to recall the ambient trace.

Returns

None

Examples

MMEMORY:EMC:AMBIENT:TRACE:FILE "C:\SignalVu-PC Files\ambient.emcemi" recalls the ambient trace from the ambient.emcemi file.

MMEMory:EMC:AMBIent:TRACe:SHOW (No Query Form)

Sets or queries to enable or disable show recalled trace checkbox of ambient trace in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Programmer Manual

Mass Memory commands

Syntax

```
MMEMory:EMC:AMBIent:TRACe:SHOW {0 | OFF | 1 | ON}  
MMEMory:EMC:AMBIent:TRACe:SHOW?
```

Arguments

0 or OFF disable the show recalled trace check box of ambient trace

1 or ON enable the show recalled trace check box of ambient trace

Returns

<Boolean> 0,1

Examples

MMEMORY:EMC:AMBIENT:TRACE:SHOW? might return 1, indicating that the show recalled trace check box of ambient trace is enabled.

MMEMory:EMC:AMBIent:TRACe:STORe (No Query Form)

Stores the ambient trace into the specified file in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

```
MMEMory:EMC:AMBIent:TRACe:STORe <file name>
```

Arguments

<file name> = <String> specifies the file to store the ambient trace with extension as .emcemi

Returns

None

Examples

MMEMORY:EMC:AMBIENT:TRACE:STORE "C:\SignalVu-PC Files\ambient.emcemi" stores the ambient trace in the ambient.emcemi file.

MMEMory:EMC:MATH:TRACe:FILE (No Query Form)

Recalls the math trace from the file in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

MMEMory:EMC:MATH:TRACe:FILE <file name>

Arguments

<file name> = <String> specifies the file with extension as .emcemi to recall the math trace.

Returns

None

Examples

MMEMORY:EMC:MATH:TRACE:FILE "C:\SignalVu-PC Files\math.emcemi" recalls the math trace from the math.emcemi file.

MMEMory:EMC:MATH:TRACe:SHOW

Sets or queries to enable and disable the show recalled trace check box of math trace in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

MMEMory:EMC:MATH:TRACe:SHOW {0 | OFF | 1 | ON}
MMEMory:EMC:MATH:TRACe:SHOW?

Arguments

0 or OFF disable the show recalled trace check box of math trace

1 or ON enable the show recalled trace check box of math trace

Returns

<Boolean> 0,1

Examples

MMEMORY:EMC:MATH:TRACE:SHOW might return 0, indicating that show recalled trace check box of math trace is disabled.

MMEMory:EMC:MATH:TRACe:STORe (No Query Form)

Stores the math trace into the specified file in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

MMEMory:EMC:MATH:TRACe:STORe <file name>

Arguments

<file name> = <String> specifies the file to store the math trace with extension as .emcemi

Returns

None

Examples

MMEMORY:EMC:MATH:TRACE:STORE "C:\SignalVu-PC Files\math.emcemi" stores the math trace in the math.emcemi file.

MMEMory:EMC:RANGe:LOAD:TABLE (No Query Form)

Loads the Ranges table from the specified file in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

MMEMory:EMC:RANGe:LOAD:TABLE <file name>

Arguments

<file name> = <String> specifies the file to load the range table with extension as .csv

Returns

None

Examples

MMEMORY:EMC:RANGE:LOAD:TABLE "C:\SignalVu-PC Files\table.csv" loads the ranges table from the table.csv file.

MMEMory:EMC:RANGe:STORe:TABLE (No Query Form)

Stores the Ranges table into the specified file in the EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

MMEMory:EMC:RANGe:STORe:TABLE <file name>

Arguments

<file name> = <String> specifies the file to store the range table with extension as .csv

Returns

None

Examples

`MMEMORY:EMC:RANGE:STORE:TABLE "C:\SignalVu-PC Files\sample.csv"` stores the ranges table in the sample.csv file.

MMEMory:EMC:RECAI:TRACe<x>:FILE (No Query Form)

Recalls the specified trace from the file in EMC view.

<x> = <NR1> Either 1,2,3,4,5 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

`MMEMory:EMC:RECAI:TRACe<x>:FILE <file name>`

Arguments

<file name> = <String> specifies the file with extension as .emcemi to recall the trace.

Returns

None

Examples

`MMEMory:EMC:RECAI:TRACe1:FILE "C:\SignalVu-PC Files\sampletrace.emcemi"` recalls the trace 1 from the sampletrace.emcemi file.

MMEMory:EMC:RECAI:TRACe<x>:SHOW (No Query Form)

Sets or queries to show or hide the specified recalled trace in EMC view.

<x> = <NR1> Either 1,2,3,4,5 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

`MMEMory:EMC:RECAI:TRACe<x>:SHOW {0 | OFF | 1 | ON}`

`MMEMory:EMC:RECAI:TRACe<x>:SHOW?`

Arguments

0 or OFF disables the show check box and hides the recalled trace

1 or ON enables the show check box and displays the recalled trace

Returns

<Boolean> 0,1

Examples

`MMEMory:EMC:RECA11:TRACe2:SHOW` might return 0, indicating recalled trace 2 is hidden.

MMEMory:EMC:REPOrt:GENerate:FINAI (No Query Form)

Generates the report and saves the report file in the specified format under specified location in EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

`MMEMory:EMC:REPOrt:GENerate:FINAI <file_name>`

Arguments

`<file name>` = <String> specifies the file and format to store the report.

Returns

None

Examples

`MMEMORY:EMC:REPORT:GENERATE:FINAL "C:\SignalVu-PC Files\report.pdf"` generates and stores the report in pdf format with file named report.pdf.

MMEMory:EMC:REPOrt:HISTory:DElete:ALL (No Query Form)

Deletes all the saved test results in history list of report setup in EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

`MMEMory:EMC:REPOrt:HISTory:DElete:ALL`

Arguments

None

Returns

None

Examples

`MMEMORY:EMC:REPORT:HISTORY:DELETE:ALL` deletes all the saved test results in the history list of report setup.

MMEMory:EMC:REPOrt:SAVE:RUN (No Query Form)

Saves the test results and adds to the history list of report setup in EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

```
MMEMory:EMC:REPOrt:SAVE:RUN
```

Arguments

None

Returns

None

Examples

MMEMORY:EMC:REPORT:SAVE:RUN saves the test results and adds to the history list.

MMEMory:EMC:SCAN:TRACe<x>:STORe (No Query Form)

Stores the specified live scan trace into the specified file in the EMC view.

<x> = <NR1> Trace number

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

```
MMEMory:EMC:SCAN:TRACe<x>:STORe <file name>
```

Arguments

<file name> = <String> specifies the file to store the scan trace with extension as .emcemi

Returns

None

Examples

MMEMory:EMC:SCAN:TRACe1:STORe "C:\SignalVu-PC Files\sample.emcemi" stores the scan trace 1 in the sample.emcemi file.

MMEMory:EMC:SPOT:TRACe<x>:STORe (No Query Form)

Stores the specified live spot trace into the specified file in the EMC view.

<x> = <NR1> Trace number

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

```
MMEMory:EMC:SPOT:TRACe<x>:STORe <file name>
```

Arguments

<file name> = <String> specifies the file to store the spot trace with extension as .emcemi

Returns

None

Examples

MMEMory:EMC:SPOT:TRACe2:STORe "C:\SignalVu-PC Files\trace.emcemi" stores the spot trace 2 in the trace.emcemi file.

[MMEMory:{FSETtling|PSETtling}:LOAD:TRACe<x>

Loads the Frequency or Phase Settling Time trace data from the specified file. The parameter <x> = 1 or 2; only Trace1 and Trace2 are used for settling time measurements.

Conditions

Measurement views: Frequency or Phase Settling

Group

Mass Memory commands

Syntax

```
[MMEMory:{FSETtling|PSETtling}:LOAD:TRACe<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file from which to load trace data.

Examples

MMEMORY:PSETTLING:LOAD:TRACE1 "Wfm1" loads Trace1 data from the Wfm1 file.

[MMEMory:{FSETtling|PSETtling}:SHOW:TRACe<x>

Enables display of a recalled Frequency or Phase Settling trace file in Trace<x>. The result is the same as selecting "Show recalled trace" in the Trace control panel.

Conditions

Measurement views: Frequency and Phase Settling

Group

Mass Memory commands

Syntax

```
[MMEMory:{FSETtling|PSETtling}:SHOW:TRACe<x> { OFF | ON | 0 | 1 }
[MMEMory:{FSETtling|PSETtling}:SHOW:TRACe<x>?
```

Related Commands

[\[MMEMory:{FSETtling|PSETtling}:LOAD:TRACe<x>](#) (on page 1543)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

MMEMORY:PSETTLING:SHOW:TRACE1 ON enables display of the recalled data loaded in Trace1.

[MMEMory:{FSETtling|PSETtling}:STORE:TRACe<x>

Stores the Frequency or Phase Settling trace data in the specified file. The parameter <x> = 1 or 2; only Trace1 and Trace2 are used for Frequency and Phase Settling.

Conditions

Measurement views: Phase noise

Group

Mass Memory commands

Syntax

```
[MMEMory:{FSETtling|PSETtling}:STORE:TRACe<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file in which to store trace data.

Examples

MMEMORY:PNOISE:STORE:TRACE1 "TRACE1" stores Trace 1 data in the TRACE1 file.

MMEMory:FVTime[:MEASview<y>]:LOAD:TRACe (No Query Form)

Loads the Frequency versus Time trace data from the specified file.

Conditions

Measurement views: Frequency versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:FVTime[:MEASview<y>]:LOAD:TRACe <file_name>
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<file_name>::<string>` specifies the file from which to load trace data. The file extension is `.FreqVsTime`. You can omit the extension.

Examples

`MMEMORY:FVTIME:MEASview1:LOAD:TRACE"Sample1"` loads the Frequency versus Time trace data from the *Sample1.FreqVsTime* file.

MMEMory:FVTIME[:MEASview<y>]:SHOW:TRACe<x>

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting "Show recalled trace" in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: Frequency versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:FVTIME[:MEASview<y>]:SHOW:TRACe<x> { OFF | ON | 0 | 1 }
MMEMory:FVTIME:SHOW:TRACe<x>?
```

Related Commands

[MMEMory:FVTime\[:MEASview<y>\]:LOAD:TRACe](#) (on page 1544)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

`MMEMORY:FVTIME:MEASview1:SHOW:TRACE2 ON` enables display of the recalled data loaded in Trace2.

MMEMory:FVTime[:MEASview<y>]:STORe:TRACe (No Query Form)

Stores the Frequency versus Time trace data in the specified file.

Conditions

Measurement views: Frequency versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:FVTime[:MEASview<y>]:STORe:TRACe <file_name>
```

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<file_name>::<string>` specifies the file in which to store trace data. The file extension is `.FreqVsTime`. You can omit the extension.

Examples

`MMEMORY:FVTIME:MEASview1:STORE:TRACE"Sample1"` stores the Frequency versus Time trace data in the *Sample1.FreqVsTime* file.

MMEMory:IQVTime[:MEASVIEW<y>]:LOAD:TRACe:I (No Query Form)

Loads I trace data from the specified file.

Conditions

Measurement views: RF I&Q versus Time

Group

Mass Memory commands

Syntax

`MMEMory:IQVTime[:MEASVIEW<y>]:LOAD:TRACe:I <file_name>`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`<file_name>::<string>` specifies the file from which to load trace data. The file extension is `.RFIQVsTime`. You can omit the extension.

Examples

`MMEMORY:IQVTIME:MEASVIEW1:LOAD:TRACe:I "Sample1"` loads the I trace data from the *Sample1.RFIQVsTime* file.

MMEMory:IQVTime[:MEASVIEW<y>]:LOAD:TRACe:Q (No Query Form)

Loads Q trace data from the specified file.

Conditions

Measurement views: RF I&Q versus Time

Group

Mass Memory commands

Syntax

`MMEMory:IQVTime[:MEASVIEW<y>]:LOAD:TRACe:Q <file_name>`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`<file_name>::<string>` specifies the file from which to load trace data. The file extension is `.RFIQVsTime`. You can omit the extension.

Examples

`MMEMORY:IQVTIME:MEASVIEW1:LOAD:TRACe:Q "Sample2"` loads the I trace data from the *Sample2.RFIQVsTime* file.

MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe:I

Enables display of a recalled trace file in Trace. The result is the same as selecting “Show recalled trace” in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: RF I&Q versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe:I { OFF | ON | 0 | 1 }
MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe:I?
```

Related Commands

[MMEMory:IQVTime\[:MEASVIEW<y>\]:LOAD:TRACe:I](#) (on page 1546)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

MMEMORY:IQVTIME:MEASVIEW1:SHOW:TRACE:I ON enables display of the recalled data loaded in the Trace.

MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe<x>:Q

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting “Show recalled trace” in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: RF I&Q versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe<x>:Q { OFF | ON | 0 | 1 }
MMEMory:IQVTIME[:MEASVIEW<y>]:SHOW:TRACe<x>:Q?
```

Related Commands

[MMEMory:IQVTIME\[:MEASVIEW<y>\]:SHOW:TRACe<x>:Q](#) (on page 1547)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

`MMEMORY:IQVTIME:MEASVIEW1:SHOW:TRACE3:Q ON` enables display of the recalled data loaded in Trace3.

MMEMory:IQVTime[:MEASVIEW<y>]:STORE:TRACe:I (No Query Form)

Stores I trace data in the specified file.

Conditions

Measurement views: RF I&Q versus Time

Group

Mass Memory commands

Syntax

`MMEMory:IQVTime[:MEASVIEW<y>]:STORE:TRACe:I <file_name>`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<file_name>::<string>` specifies the file in which to store trace data. The file extension is .RFIQVsTime. You can omit the extension.

Examples

`MMEMORY:IQVTIME:MEASVIEW1:STORE:TRACE:I"Sample1"` stores the I trace data in the *Sample1.RFIQVsTime* file.

MMEMory:IQVTime[:MEASVIEW<y>]:STORE:TRACe:Q (No Query Form)

Stores Q trace data in the specified file.

Conditions

Measurement views: RF I&Q versus Time

Group

Mass Memory commands

Syntax

`MMEMory:IQVTime[:MEASVIEW<y>]:STORE:TRACe:Q <file_name>`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<file_name>::<string>` specifies the file in which to store trace data. The file extension is .RFIQVsTime. You can omit the extension.

Examples

`MMEMORY:IQVTIME:MEASVIEW1:STORE:TRACE:Q "Sample2"` stores the Q trace data in the *Sample2.RFIQVsTime* file.

MMEMory:LOAD:IQ (No Query Form)

Loads time domain IQ waveform into the acquisition memory from a file.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:LOAD:IQ <file_name>
```

Arguments

<file_name>::<string> specifies the file to load IQ data from. The file extension .tiq is for non-multichannel tiq files and .tiqm for multichannel tiq files. You can omit the extension.

Examples

```
MMEMORY:LOAD:IQ "IQ1" loads IQ data from the IQ1.tiq file.
```

MMEMory:LOAD:STaTe (No Query Form)

Loads the instrument setup from a specified file for the currently selected view.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:LOAD:STaTe <file_name>
```

Arguments

<file_name>::<string> specifies the file to load the instrument setup from. The file extension is .setup. You can omit the extension.

Examples

```
MMEMORY:LOAD:STATE "STATE1" loads the instrument setup from the STATE1.setup file.
```

MMEMory:LOAD:TRACe (No Query Form)

Loads the trace data from a specified file for the currently selected view.

Conditions

Measurement views (See the table below)

Group

Mass Memory commands

Syntax

MMEMory:LOAD:TRACe <file_name>

Related Commands

[MMEMory:STORe:TRACe](#) (on page 1573)

Arguments

<file_name>::<string> specifies the file to load the trace data from. The file extension is named for the measurement view as shown in the following table. The trace file is not available in some views which are indicated by "NA" in the file extension column.

For the views that allow multiple-trace display, select the trace to load or store using the command listed in the trace selection column in the following table. You can load the specified trace with any trace data that you saved in the view if the traces have the same units. For example, you can load Trace 2 with Trace 1 data that you saved.

Trace file extension and trace selection command

Display group	Measurement view	File extension	Trace selection
General signal viewing	Spectrum	Specan	TRACe<x>:SPECtrum:SElect
	DPX spectrum	dpt	TRACe<x>:DPX:SElect
	Amplitude versus Time	AmplVsTime	TRACe<x>:AVTime:SElect
	Frequency versus Time	FreqVsTime	NA
	Phase versus Time	PhaseVsTime	NA
	RF I&Q versus Time	RFIQVsTime	NA
	Spectrogram	Sogram	NA
	Time overview	NA	NA
General purpose analog modulation (Option 21 only)	AM	AmVsTime	NA
	FM	FmVsTime	NA
	PM	PmVsTime	NA

Display group	Measurement view	File extension	Trace selection
General purpose digital modulation (Option 21 only)	Constellation	NA	NA
	Demodulated I & Q versus Time	NA	NA
	Eye Diagram	NA	NA
	EVM versus Time	NA	NA
	Frequency Deviation versus Time	NA	NA
	Magnitude error versus Time	NA	NA
	Phase error versus Time	NA	NA
	Signal quality	NA	NA
	Symbol table	NA	NA
	Trellis Diagram	NA	NA
RF measurements	CCDF	CCDF	TRACe<x>:CCDF:SElect
	Channel power and ACPR	NA	NA
	MCPR	NA	NA
	Occupied Bandwidth	NA	NA
	Phase noise (Option 11 only)	PhaseNoise	TRACe<x>: {FSETtling PSETtling}:SElect
	Spurious	NA	NA
Pulsed RF	Pulse statistics	NA	NA
	Pulse table	NA	NA
	Pulse trace	NA	NA

Examples

MMEMORY:LOAD:TRACE "TRACE1" loads the trace data from the TRACE1 .Specan file when the spectrum view is selected.

MMEMory:LTE:ACLR:LOAD:TABLE (No Query Form)

Loads the LTE ACLR table containing the limits for enabled ranges from the specified .cvs file.

Conditions

Measurement view: LTE ACLR

Group

Mass Memory commands

Syntax

```
MMEMemory:LTE:ACLR:LOAD:TABLE <string>
```

Arguments

<file_name>::<string> specifies the file from which to load the LTE ACLR table. The file extension is `.csv`. You can omit the extension.

Examples

MMEMemory:LTE:ACLR:LOAD:TABLE "Table1" loads the LTE ACLR table from the *Table1.csv* file.

MMEMemory:LTE:ACLR:STORe:TABLE (No Query Form)

Stores the LTE ACLR table containing the limits for enabled ranges in a specified `.csv` file, allowing you to export the file into Microsoft Excel or other database system.

Conditions

Measurement view: LTE ACLR

Group

Mass Memory commands

Syntax

```
MMEMemory:LTE:ACLR:STORe:TABLE <string>
```

Arguments

<file_name>::<string> specifies the file in which to store the LTE ACLR table.

The file extension is `.csv`. You can omit the extension.

Examples

MMEMemory:LTE:ACLR:STORe:TABLE "Table1" stores the LTE ACLR table in the *Table1.csv* file.

MMEMemory:MAPit:LOAD (No Query Form)

Loads the MapIt measurement results from the specified file.

Conditions

Measurement views: Spectrum, DPX, Spectrogram, Amplitude vs Time, Channel Power, Occupied Bandwidth

Group

Mass Memory commands

Syntax

```
MMEMemory:MAPit:LOAD <filename>
```

Arguments

<filename>::<string> the name of the file from which to load the MapIt data.

Examples

MMEMORY:MAPIT:LOAD "C:\SignalVu-PC files\MapIt_results1" Loads the MapIt measurement results in the MapIt_results1 file from the C:SignalVu-PC files folder.

MMEMory:MAPit:STORe (No Query Form)

Save the selected MapIt measurement results to a file. The results to save are selected by the <result_index>. The saved files are compressed .zip files.

Conditions

Measurement views: Spectrum, DPX, Spectrogram, Amplitude vs Time, Channel Power, Occupied Bandwidth

Group

Mass Memory commands

Syntax

```
MMEMory:MAPit:STORe <filename>, <result_index> [,<result_index>]
```

Arguments

<filenam>::<string> the name of the file in which to store the MapIt measurement results.

<result_index>::<Nrf>. The 1-based index of the MapIt result to load. See the MapIt editor for the list of results. index 1 is the first result at the top of the list.

Examples

```
MMEMORY:MAPIT:STORE ??
```

MMEMory:MAPit:STORe:ALL (No Query Form)

Saves all of the MapIt measurement results from memory to the specified file.

Conditions

Measurement views: Spectrum, DPX, Spectrogram, Amplitude vs Time, Channel Power, Occupied Bandwidth

Group

Mass Memory commands

Syntax

```
MMEMory:MAPit:STORe:ALL <filename>
```

Arguments

<filename>::<string> the name of the file in which to store the MapIt measurement results.

Examples

MMEMORY:MAPIT:STORE:ALL "C:\SignalVu-PC files\MapIt_results1" stores the MapIt measurement results in the MapIt_results1 file in the C:SignalVu-PC files folder.

MMEMory:NOISe:GAIN:LOAD:TRACe (No Query Form)

Loads the Noise Gain trace data from the specified file.

Conditions

Measurement view: Gain

Group

Mass Memory commands

Syntax

```
MMEMemory:NOISE:GAIN:LOAD:TRACe <file_name>
```

Related Commands

[MMEMemory:NOISE:GAIN:STORe:TRACe](#) (on page 1554)

Arguments

<file_name> = the file from which to load trace data.

Examples

MMEMemory:NOISE:GAIN:LOAD:TRACE trace1 will load the trace1 data file.

MMEMemory:NOISE:GAIN:SHOW:TRACe

Show or hide the Noise Gain trace from the specified file.

Conditions

Measurement view: Gain display

Group

Mass Memory commands

Syntax

```
MMEMemory:NOISE:GAIN:SHOW:TRACe { OFF | ON | 0 | 1 }  
MMEMemory:NOISE:GAIN:SHOW:TRACe
```

Arguments

OFF or 0 sets the trace to hide from the specified file.

ON or 1 sets the trace to show from the specified file.

Returns

0 means the trace is hidden.

1 means the trace is showing.

Examples

MMEMemory:NOISE:GAIN:SHOW:TRACE? might return 1, indicating that the trace is set to show from the specified file.

MMEMemory:NOISE:GAIN:STORe:TRACe (No Query Form)

Stores the Noise Gain trace data in the specified file.

Conditions

Measurement view: Gain display

Group

Mass Memory commands

Syntax

`MMEMory:NOISe:GAIN:STORe:TRACe <file_name>`

Related Commands

[MMEMory:NOISe:GAIN:LOAD:TRACe](#) (on page 1553)

Arguments

`<file_name>` = the file in which to store trace data.

Examples

`MMEMORY:NOISE:GAIN:STORE:TRACE`

MMEMory:Noise:LOAD:ENRCALibration (No Query Form)

Loads the specified Noise Figure ENR table.

Conditions

Measurement view: Noise display

Group

Mass Memory commands

Syntax

`MMEMory:Noise:LOAD:ENRCALibration <filename>`

Arguments

`<file_name>` = the file from which to load ENR calibration data.

Examples

`MMEMORY:NOISE:LOAD:ENRCALIBRATION`

MMEMory:Noise:LOAD:FREQTABLE (No Query Form)

Loads the specified Noise Figure Frequency table.

Conditions

Measurement view: Noise display

Group

Mass Memory commands

Syntax

`MMEMory:Noise:LOAD:FREQTABLE <filename>`

Arguments

`<filename>` = the file from which to load the frequency table data.

Examples

```
MMEMORY:NOISE:LOAD:FREQTABLE
```

MMEMory:Noise:STORe:ENRCALibration (No Query Form)

Saves the Noise Figure ENR table to the specified location.

Conditions

Measurement view: Noise display

Group

Mass Memory commands

Syntax

```
MMEMory:Noise:STORe:ENRCALibration <filename>
```

Arguments

<filename> = the file in which to store ENR calibration data.

Examples

```
MMEMORY:NOISE:STORE:ENRCALIBRATION
```

MMEMory:Noise:STORe:FREQTABLE (No Query Form)

Saves the Noise Figure Frequency table to the specified location.

Conditions

Measurement view: Noise display

Group

Mass Memory commands

Syntax

```
MMEMory:Noise:STORe:FREQTABLE <filename>
```

Arguments

<filename> = the file in which to store the frequency table data.

Examples

```
MMEMORY:NOISE:STORE:FREQTABLE
```

MMEMory:OFDM:CONSte:LOAD:TRACe (No Query Form)

Loads the OFDM constellation trace data from the specified file.

Conditions

Measurement views: OFDM

Group

Mass Memory commands

Syntax

`MMEMory:OFDM:CONStE:LOAD:TRACe <file_name>`

Arguments

`<file_name>::<string>` specifies the file from which to load the trace data.

Examples

`MMEMORY:OFDM:CONSTE:LOAD:TRACE "Sample1"` loads the trace data from the file with the OFDM Constellation measurement.

MMEMory:OFDM:CONStE:SHOW:TRACe

Enables the display of a recalled trace.

Conditions

Measurement views: OFDM

Group

Mass Memory commands

Syntax

`MMEMory:OFDM:CONStE:SHOW:TRACe{ OFF | ON | 0 | 1 }`
`MMEMory:OFDM:CONStE:SHOW:TRACe?`

Arguments

`OFF` or `0` disables display of the recalled trace.

`ON` or `1` enables display of the recalled trace.

Examples

`MMEMORY:OFDM:CONSTE:SHOW:TRACE ON` enables the display of the recalled data loaded in the trace.

MMEMory:OFDM:CONStE:STORe:TRACe (No Query Form)

Stores the OFDM constellation measurement trace data in the specified file.

Conditions

Measurement views: OFDM

Group

Mass Memory commands

Syntax

`MMEMory:OFDM:CONStE:STORe:TRACe <file_name>`

Arguments

`<file_name>::<string>` specifies the file in which to store the trace data.

Examples

`MMEMORY:OFDM:CONSTE:STORE:TRACE "Sample1"` stores the trace data in the Sample1 file in the OFDM Constellation measurement.

MMEMory:PHVTime[:MEASVIEW<y>]:LOAD:TRACe (No Query Form)

Loads the Phase versus Time trace data from the specified file.

Conditions

Measurement views: Phase versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:PHVTime[:MEASVIEW<y>]:LOAD:TRACe <file_name>
```

Arguments

<file_name>::<string> specifies the file from which to load trace data. The file extension is .PhaseVsTime. You can omit the extension.

Examples

MMEMORY:PHVTIME:MEASVIEW1:LOAD:TRACE "Sample1" loads the Phase versus Time trace data from the *Sample1.PhaseVsTime* file.

MMEMory:PHVTime[:MEASview<y>]:SHOW:TRACe

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting "Show recalled trace" in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: Phase versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:PHVTime[:MEASview<y>]:SHOW:TRACe { OFF | ON | 0 | 1 }
MMEMory:PHVTime:SHOW:TRACe?
```

Related Commands

[MMEMory:PHVTime\[:MEASview<y>\]:LOAD:TRACe](#) (on page 1558)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

MMEMORY:PHVTIME:MEASview1:SHOW:TRACE ON enables display of the recalled data loaded in the Trace.

MMEMory:PHVTime[:MEASVIEW<y>]:STORe:TRACe (No Query Form)

Stores the Phase versus Time trace data in the specified file.

Conditions

Measurement views: Phase versus Time

Group

Mass Memory commands

Syntax

```
MMEMory:PHVTime[:MEASVIEW<y>]:STORe:TRACe <file_name>
```

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .PhaseVsTime. You can omit the extension.

Examples

MMEMORY:PHVTIME:MEASVIEW1:STORE:TRACE "Sample1" stores the Phase versus Time trace data in the *Sample1.PhaseVsTime* file.

MMEMory:PNOise:LOAD:TRACe<x> (No Query Form)

Loads the Phase Noise trace data from the specified file. The parameter <x> = 1 or 2; only Trace1 and Trace2 are used for Phase Noise measurement.

Conditions

Measurement views: Phase noise

Group

Mass Memory commands

Syntax

```
MMEMory:PNOise:LOAD:TRACe<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file from which to load trace data.

Examples

MMEMORY:PNOISE:LOAD:TRACE1 "Wfm1" loads Trace1 data from the Wfm1 file.

MMEMory:PNOise:SHOW:TRACe<x>

Enables display of a recalled Phase Noise trace file in Trace<x>. The result is the same as selecting "Show recalled trace" in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: Phase noise

Group

Mass Memory commands

Syntax

```
MMEMory:PNOise:SHOW:TRACe<x> { OFF | ON | 0 | 1 }  
MMEMory:PNOise:SHOW:TRACe<x>?
```

Related Commands

[MMEMory:PNOise:LOAD:TRACe<x>](#) (on page 1559)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

MMEMORY:PNOISE:SHOW:TRACE1 ON enables display of the recalled data loaded in Trace1.

MMEMory:PNOise:STORe:TRACe<x> (No Query Form)

Stores the Phase Noise trace data in the specified file. The parameter <x> = 1 or 2; only Trace1 and Trace2 are used for Phase Noise measurement.

Conditions

Measurement views: Phase noise

Group

Mass Memory commands

Syntax

```
MMEMory:PNOise:STORe:TRACe<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file in which to store trace data.

Examples

MMEMORY:PNOISE:STORE:TRACE1 "WFM1" stores Trace 1 data in the WFM1 file.

MMEMory:SEM:LOAD:TABLE (No Query Form)

Loads the Spectral Emissions Mask table containing the limits for enabled ranges from the specified file.

Conditions

Measurement views: Spectral Emissions Mask

Group

Mass Memory commands

Syntax

```
MMEMory:SEM:LOAD:TABLE <file_name>
```


Arguments

`<file_name>::<string>` specifies the file to load the SEM table from. The file extension is **.csv**. You can omit the extension.

Examples

`MMEMORY:SEM:LOAD:TABLE "Table1"` loads the SEM table from the *Table1.csv* file.

MMEMory:SEM:STORe:TABLE (No Query Form)

Stores the Spectral Emissions Mask table containing the limits for enabled ranges in a specified file in the CSV format, allowing you to export the file into Microsoft Excel or other database systems.

Conditions

Measurement views: Spectral Emissions Mask

Group

Mass Memory commands

Syntax

`MMEMory:SEM:STORe:TABLE <file_name>`

Arguments

`<file_name>::<string>` specifies the file to store the SEM table in. The file extension is **.csv**. You can omit the extension.

Examples

`MMEMORY:SEM:STORe:TABLE "Table1"` stores the SEM table in the *Table1.csv* file.

MMEMory:SGRam[:MEASview<y>]:LOAD:TRACe (No Query Form)

Loads the Spectrogram trace data from the specified file. No trace number is needed or allowed.

Conditions

Measurement views: Spectrogram

Group

Mass Memory commands

Syntax

`MMEMory:SGRam[:MEASview<y>]:LOAD:TRACe <file_name>`

Arguments

`<y> = 1 to 8` represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

`<file_name>::<string>` specifies the file from which to load trace data. The file extension is **.sogram**. You can omit the extension.

Examples

`MMEMory:SGRam:MEASview1:LOAD:TRACe5 "Spec2"` loads Trace5 data from the file *Spec2.sogram*.

MMEMory:SGRam[:MEASview<y>]:SHOW:TRACe

Enables display of a recalled trace file in Trace. The result is the same as selecting “Show recalled trace” in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: Spectrogram

Group

Mass Memory commands

Syntax

```
MMEMory:SGRam[:MEASview<y>]:SHOW:TRACe { OFF | ON | 0 | 1 }
MMEMory:SGRam[:MEASview<y>]:SHOW:TRACe?
```

Related Commands

[MMEMory:SGRam\[:MEASview<y>\]:LOAD:TRACe](#) (on page 1561)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Returns

{ OFF | ON | 0 | 1 }

Examples

MMEMory:SGRam:MEASview1:SHOW:TRACe ON enables display of the recalled data loaded in Trace.

MMEMory:SGRam[:MEASview<y>]:STORe:TRACe (No Query Form)

Stores the Spectrogram trace data in the specified file. No trace number is needed or allowed.

NOTE: Only valid when the spectrum or spectrogram measurements are running.

Conditions

Measurement views: Spectrogram

Group

Mass Memory commands

Syntax

```
MMEMory:SGRam[:MEASview<y>]:STORe:TRACe <file_name>
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<file_name>::<string> specifies the file in which to store trace data. The file extension is .sogram. You can omit the extension.

Examples

`MMEMory:SGRam:MEASview1:STORe:TRACe "Spec2"` stores Trace data in the *Spec2.sogram* file.

MMEMory:SGRam[:MEASview<y>]:STORe:PLOT

Stores the spectrogram plot data into a specified location and file.

Conditions

Measurement views: Spectrogram

Group

Mass Memory commands

Syntax

`MMEMory:SGRam[:MEASview<y>]:STORe:PLOT <file_name>`

Arguments

`<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

`<file_name>` = `<String>` specifies the file location and file name to which the plot to be saved.

Returns

None

Examples

`MMEMory:SGRam:MEASview1:STORe:PLOT "C:\SignalVu-PC Files\Sample1.Specan"` saves the plot in Sample1.Specan file.

MMEMory:SGRam[:MEASview<y>]:STORe:PLOT:DONe (Query only)

Determines whether the spectrogram plot data is saved or not saved.

Conditions

Measurement views: Spectrogram

Group

Mass Memory commands

Syntax

`MMEMory:SGRam[:MEASview<y>]:STORe:PLOT:DONe?`

Arguments

`<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

`<Boolean>` 0, 1

1 indicates the spectrogram plot data is saved.

0 indicates the spectrogram plot data is not saved.

Examples

MMEMory:SGRam:MEASview1:STORe:PLOT:DONe? might return 1, indicating the spectrogram plot data is saved.

MMEMory:SPECTrum:MEASview<y>:LOAD:TRACe (No Query Form)

Loads the spectrum trace data from the specified file.

The parameter <x> = 1 to 4; Trace 5 (spectrogram) is not valid.

Conditions

Measurement views: Spectrum

Group

Mass Memory commands

Syntax

MMEMory:SPECTrum:MEASview<y>:LOAD:TRACe <file_name>

Arguments

<file_name>::<string> specifies the file from which to load trace data. The file extension is .Specan. You can omit the extension.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMory:SPECTrum:MEASview2:LOAD:TRACe "C:\SignalVu-PC Files\Sample1.Specan" loads Trace 1 data from Sample1.Specan file

MMEMory:SPECTrum[:MEASview<y>]:SHOW:TRACe<x>

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting "Show recalled trace" in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views: Spectrum

Group

Mass Memory commands

Syntax

MMEMory:SPECTrum[:MEASview<y>]:SHOW:TRACe<x> { OFF | ON | 0 | 1 }
MMEMory:SPECTrum[:MEASview<y>]:SHOW:TRACe<x>?

Related Commands

[MMEMory:SPECTrum\[:MEASview<y>\]:LOAD:TRACe](#) (on page 1564)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMORY:SPECTRUM:MEASVIEW2:SHOW:TRACE2 ON enables display of the recalled data loaded in Trace2.

MMEMory:SPECTrum[:MEASview<y>]:STORe:PLOT (No Query Form)

Stores the spectrum plot data into a specified location and file.

Conditions

Measurement view: Spectrum

Group

Mass Memory commands

Syntax

MMEMory:SPECTrum[:MEASview<y>]:STORe:PLOT <file_name>

Arguments

<file_name> = <String> specifies the file location and file name to which the plot to be saved.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

None

Examples

MMEMORY:SPECTRUM:MEASVIEW2:STORE:PLOT "C:\SignalVu-PC Files\Sample1.Specan" saves the plot in Sample1.Specan file

MMEMory:SPECTrum[:MEASview<y>]:STORe:PLOT:DONe (Query Only)

Determines whether the spectrum plot data is saved or not saved.

Conditions

Measurement view: Spectrum

Group

Mass Memory commands

Syntax

MMEMory:SPECTrum[:MEASview<y>]:STORe:PLOT:DONe?

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<Boolean> 0, 1

1 indicates the spectrum plot data is saved

0 indicates the spectrum plot data is not saved

Examples

MMEMORY:SPECTRUM:MEASVIEW2:STORE:PLOT:DONE might return 1, indicating the spectrum plot data is saved

MMEMory:SPECTrum[:MEASview<y>]:STORE:TRACe (No Query Form)

Stores the spectrum trace data in the specified file. The parameter <x> = 1 to 5; All traces are valid.

NOTE: TRACe5 (spectrogram) is valid when the spectrum and spectrogram measurements are running.

Conditions

Measurement views: Spectrum

Group

Mass Memory commands

Syntax

MMEMory:SPECTrum[:MEASview<y>]:STORE:TRACe <file_name>

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .Specan. You can omit the extension.

The file extension is named for the measurement view as shown in the table (Click here for Trace file extension and trace selection command) The trace file is not available in some views which are indicated by "NA" in the file extension column. For the views that allow multiple-trace display, select the trace to load or store using the command listed in the trace selection column.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

MMEMORY:SPECTRUM:MEASview2:STORE:TRACE "TRACE1" stores the trace data in the TRACE1.Specan file when the spectrum view is selected.

MMEMory:SPURious:LOAD:TABLE (No Query Form)

Loads the spurious table containing the limits for enabled ranges from the specified file.

Conditions

Measurement views: Spurious

Group

Mass Memory commands

Syntax

MMEMory:SPURious:LOAD:TABLE <file_name>

Arguments

`<file_name>::<string>` specifies the file to load the spurious table from. The file extension is `.csv`. You can omit the extension.

Examples

`MMEMORY:SPURIOUS:LOAD:TRACE1 "Table1"` loads the spurious table from the *Table1.csv* file.

MMEMory:SPURious:RECALL:TRACe (No Query Form)

Recalls the spurious trace data from the specified file and trace number.

Conditions

Measurement view: Spurious Display

Group

Mass Memory commands

Syntax

`MMEMory:SPURious:RECALL:TRACe <x> <file_name>`

Arguments

`<x> = 1,2,3,4` is the trace `<file_name> = <String>` specifies the file location and file name to which the trace data to be Recalled

Returns

None

Examples

`MMEMORY:SPURIOUS:RECALL:TRACE "C:\SignalVu-PC Files\Sample1.spurious"` recalls the Trace 3 data from the *Sample1.spurious* file.

MMEMory:SPURious:SHOW:TRACe (No Query Form)

Displays the spurious trace data from the specified file and trace number.

Conditions

Measurement view: Spurious Display

Group

Mass Memory commands

Syntax

`MMEMory:SPURious:SHOW:TRACe <x> <file_name>`

Arguments

`<x> = 1,2,3,4` is the trace

`<file_name> = <String>` specifies the file location and file name to which the trace data to be displayed.

Returns

None

Examples

`MMEMORY:SPURIOUS:SHOW:TRACE "C:\SignalVu-PC Files\Sample1.spurious"` displays the Trace 2 data from Sample1.spurious file.

MMEMory:SPURious:STORe:TABLE (No Query Form)

Stores the spurious table containing the limits for enabled ranges in a specified file in the CSV (Comma Separated Values) format, allowing you to export the file into Microsoft Excel or other database systems.

Conditions

Measurement views: Spurious

Group

Mass Memory commands

Syntax

`MMEMory:SPURious:STORe:TABLE <file_name>`

Arguments

`<file_name>::<string>` specifies the file to store the spurious table in. The file extension is .csv. You can omit the extension.

Examples

`MMEMORY:SPURIOUS:STORE:TABLE "Table1"` stores the spurious table in the *Table1.csv* file.

MMEMory:SPURious:STORe:TRACe (No Query Form)

Stores the specified spurious trace data into a specified location and file.

Conditions

Measurement view: Spurious Display

Group

Mass Memory commands

Syntax

`MMEMory:SPURious:STORe:TRACe <x> <file_name>`

Arguments

`<x> = 1,2,3,4` is the trace

`<file_name> = <String>` specifies the file location and file name to which the trace data to be saved.

Returns

None

Examples

`MMEMORY:SPURIOUS:STORE:TRACE "C:\SignalVu-PC Files\Sample1.spurious"` saves the Trace 1 data in Sample1.spurious file.

MMEMory:STORe:IQ (No Query Form)

Saves time-domain IQ waveform in the acquisition memory to a specified file.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:STORe:IQ <file_name>
```

Arguments

<file_name>::<string> specifies the file to save IQ data.

The file extension .tiq is for non-multichannel setup and .tiqm for multichannel setup. You can omit the extension.

Examples

MMEMORY:STORE:IQ "IQ1" saves IQ data to the *IQ1.tiq* file.

MMEMory:STORe:IQ:CSV (No Query Form)

Saves time-domain IQ waveform in the acquisition memory to a specified file in the CSV (Comma Separated Values) format, allowing you to export the file into Microsoft Excel or other database systems.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:STORe:IQ:CSV <file_name>
```

Arguments

<file_name>::<string> specifies the file to save IQ data. The file extension is .csv. You can omit the extension.

Examples

MMEMORY:STORE:IQ:CSV "IQ2" saves IQ data to the *IQ2.csv* (less *t eq*) file.

MMEMory:STORe:IQ:MAT (No Query Form)

Saves time-domain IQ waveform in the acquisition memory to a specified file in the MATLAB format, allowing you to export the file into the MATLAB technical computing environment.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:STORe:IQ:MAT <file_name>
```

Arguments

<file_name>::<string> specifies the file to save IQ data. The file extension is .mat. You can omit the extension.

Examples

MMEMORY:STORE:IQ:MAT "IQ3" saves IQ data to the *IQ3.mat* file.

MMEMory:STORe:IQ:SELEct:DATA

Sets or queries the data type stored when saving acquisition data files.

Conditions

Measurement views

Group

Mass Memory commands

Syntax

```
MMEMory:STORe:IQ:SELEct:DATA { IQ | SPECTra | ALL }
```

NOTE: Although the command includes IQ as part of the command, the command applies to all the data stored in the file, not only IQ data.

Arguments

IQ specifies that IQ data be saved in the data file.

SPECTra specifies that DPX spectra be saved in the data file.

ALL specifies that both IQ and DPX spectra be saved in the data file.

Examples

MMEMORY:STORE:IQ:SELECT:DATA SPECTRA sets the data type to DPX Spectra.

MMEMory:STORe:IQ:SELEct:FRAMes

Sets or queries which frames are saved when saving TIQ acquisition data files.

Conditions

Measurement views

Group

Mass Memory commands

Syntax

```
MMEMory:STORe:IQ:SELEct:FRAMes { ACQuisition | HISTory | SELEcted | ALL }
```

Arguments

ACQuisition saves the entire acquisition that contains the current frame.

HISTory saves the current frame.

SElected saves only selected frames.

ALL saves all acquired frames.

MMEMory:STORe:IQ:SELEct:LENGth

Sets or queries what portion of each record is saved when saving acquisition data.

Conditions

Measurement views

Group

Mass Memory commands

Syntax

```
MMEMory:STORe:IQ:SELEct:LENGth { ENTire | LENGth }  
MMEMory:STORe:IQ:SELEct:LENGth?
```

Arguments

ENTire saves the entire record

LENGth saves the portion of the record being analyzed.

MMEMory:STORe:MSTate (No Query Form)

Stores the measurement parameters to a specified file in the ASCII text format for the currently selected view, allowing you to export the file into other applications.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMory:STORe:MSTate <file_name>
```

Arguments

<file_name>::<string> specifies the file to store the measurement parameters. The file extension is .txt. You can omit the extension.

Examples

MMEMORY:STORE:MSTATE "MSTATE1" stores the measurement parameters to the *MSTATE1.txt* file.

MMEMory:STORe:RESults (No Query Form)

Stores the measurement results including measurement parameters and trace data to a specified file in the CSV (Comma Separated Values) format for the currently selected view, allowing you to export the file into Microsoft Excel or other database systems.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMemory:STORe:RESuLts <file_name>
```

Arguments

<file_name>::<string> specifies the file to store the measurement results.

The file extension is .csv. You can omit the extension.

Examples

MMEMORY:STORE:RESULTS "RESULT1" stores the measurement results to the *RESULT1.csv* file.

MMEMemory:STORe:SCReen (No Query Form)

Stores the current display as a bitmap image file in one of several standard formats. When no format is specified, the system uses the default, .png.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMemory:STORe:SCReen <file_name>{ .bmp | .jpg | .png }
```

Arguments

<file_name>::<string> specifies the file to store the screen image.

Examples

MMEMORY:STORE:SCREEN "RESULT1.png" stores the current screen image into the file *RESULT1.png*.

MMEMemory:STORe:STATe (No Query Form)

Stores the instrument setup to a specified file for the currently selected view.

Conditions

Measurement views: All

Group

Mass Memory commands

Syntax

```
MMEMemory:STORe:STATe <file_name>
```

Arguments

<file_name>::<string> specifies the file to store the instrument setup. The file extension is setup. You can omit the extension.

Examples

MMEMORY:STORE:STATE "STATE1" stores the instrument setup in the *STATE1.setup* file.

MMEMory:STORe:TRACe (No Query Form)

Stores the trace data in a specified file for the currently selected view.

Conditions

Measurement views (See [MMEMory:LOAD:TRACe](#) (on page 1549).)

Group

Mass Memory commands

Syntax

MMEMory:STORe:TRACe <file_name>

Related Commands

[MMEMory:IQVTIME:SHOW:TRACe:I](#) (on page 1546)

Arguments

<file_name>::<string> specifies the file to store the trace data in.

The file extension is named for the measurement view as shown in the table in [MMEMory:LOAD:TRACe](#). The trace file is not available in some views which are indicated by "NA" in the file extension column. For the views that allow multiple-trace display, select the trace to load or store using the command listed in the trace selection column.

Examples

MMEMORY:STORE:TRACE "TRACE1" stores the trace data in the *TRACE1.Specan* file when the spectrum view is selected.

MMEMory:TOVerview[:MEASview<y>]:LOAD:TRACe1 (No Query Form)

Loads the trace data from a specified file into Trace1. Refer to [MMEMory:LOAD:TRACe](#) (on page 1549) for the correct file extensions for each trace type.

Conditions

Measurement views

Group

Mass Memory commands

Syntax

MMEMory:TOVerview[:MEASview<y>]:LOAD:TRACe1 <file_name>

Related Commands

[MMEMory\[:MEASview<y>\]:STORe:TRACe](#) (on page 1573)

Arguments

<file_name>::<string> specifies the file path and name to load the trace data from. The file extension is named for the measurement view. See the table in [MMEMory:LOAD:TRACe](#).

Most trace file types are compatible with only one Measurement view.

Examples

`MMEMORY:TOVERVIEW:MEASVIEW1:LOAD:TRACE1 "TrialB"` loads the trace data from the file *TRIALB.TOV* when the spectrum view is selected.

MMEMory:TOVerview[:MEASview<y>]:SHOW:TRACe1

Enables display of a recalled trace file in Trace<x>. The result is the same as selecting “Show recalled trace” in the Recall traces dialog box or selecting Show in the Trace Overview display.

Conditions

Measurement views

Group

Mass Memory commands

Syntax

```
MMEMory:TOVerview[:MEASview<y>]:SHOW:TRACe1 { OFF | ON | 0 | 1 }  
MMEMory:TOVerview[:MEASview<y>]:SHOW:TRACe1?
```

Related Commands

[MMEMory:TOVerview\[:MEASview<y>\]:LOAD:TRACe1](#) (on page 1573)

Arguments

OFF or 0 disables display of the recalled trace.

ON or 1 enables display of the recalled trace.

Examples

`MMEMORY:TOVERVIEW:MEASVIEW1:SHOW:TRACE1 ON` enables display of the recalled data loaded in Trace2.

MMEMory:TOVerview[:MEASview<y>]:STORe:TRACe1 (No Query Form)

Stores the trace data for Trace1 into the specified file.

Conditions

Measurement views

Group

Mass Memory commands

Syntax

```
MMEMory:TOVerview[:MEASview<y>]:STORe:TRACe1 <file_name>
```

Related Commands

[MMEMory\[:MEASview<y>\]:STORe:TRACe](#) (on page 1573)

Arguments

<file_name>::<string> specifies the file to store the trace data in.

The file extension is named for the measurement view as shown in the table (See [MMEMory:LOAD:TRACe](#) (on page 1549).) The trace file is not available in some views which are indicated by "NA" in the file extension column. For the views that allow multiple-trace display, select the trace to load or store using the command listed in the trace selection column.

Examples

`MMEMory:TOVERVIEW:MEASVIEW1:STORE:TRACE1 "TrialB"` stores the Trace1 data into the file *TRIALB.TOV* when a spectrum view is selected.

MMEMory:TXGain:LOAD:TRACe<x> (No Query Form)

Load the specified saved trace from a file.

Conditions

Measurement view: Transmission Gain Where <x> is the trace 1, 2, or 3.

Group

Mass Memory commands

Syntax

`MMEMory:TXGain:LOAD:TRACe<x> <file_name>`

Arguments

`<file_name>::<string>` specifies the file from which to load trace data.

Examples

`MMEMory:TXGain:LOAD:TRACe1 "sample1"` loads the trace data from the sample1.tgt file.

MMEMory:TXGain:SHOW:TRACe<x>

Displays a saved trace instead of a live trace.

Conditions

Measurement view: Transmission Gain Where <x> is the trace 1, 2, or 3.

Group

Mass Memory commands

Syntax

`MMEMory:TXGain:SHOW:TRACe<x> { OFF | ON | 0 | 1 }`
`MMEMory:TXGain:SHOW:TRACe<x>?`

Arguments

`OFF` or `0` disables display of the recalled trace. `ON` or `1` enables display of the recalled trace.

Returns

`OFF` or `0` means that display of the recalled trace is disabled. `ON` or `1` means that display of the recalled trace is enabled.

Examples

`MMEMory:TXGain:SHOW:TRACe2 ON` enables display of the recalled data loaded in Trace 2.

MMEMory:TXGain:STORe:TRACe<x> (No Query Form)

Saves the selected trace to a file for later recall and analysis.

Conditions

Measurement view: Transmission Gain Where <x> is the trace 1, 2, or 3.

Group

Mass Memory commands

Syntax

```
MMEMory:TXGain:STORe:TRACe<x> <file_name>
```

Arguments

<file_name>::<string> specifies the file in which to store trace data. The file extension is .tgt. You can omit the extension.

Examples

MMEMory:TXGain:STORe:TRACe1 "Sample1" stores Trace 1 data in the Sample1.tgt file.

MMEMory:WLAN:AD:SUMMARY:LIMIt:TABLE:LOAD (No Query Form)

Loads the Summary Limit table containing the limits for enabled ranges from the specified file in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Mass Memory commands

Syntax

```
MMEMory:WLAN:AD:SUMMARY:LIMIt:TABLE:LOAD <file name>
```

Arguments

<file name>= <String> specifies the file to load the Summary Limit table from the file extension as .csv

Returns

None

Examples

MMEMORY:WLAN:AD:SUMMARY:LIMIT:TABLE:LOAD "Table1" loads the Summary Limit table from the Table1 .csv file.

MMEMory:WLAN:AD:SUMMARY:LIMIt:TABLE:SAVE (No Query Form)

Stores the Summary Limit table containing the limits for enabled ranges in a specified file in the csv format, allowing you to export the file into Microsoft Excel or other database systems in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Mass Memory commands

Syntax

```
MMEMemory:WLAN:AD:SUMMARY:LIMIT:TABLE:SAVE <file_name>
```

Arguments

<file_name>=<string> specifies the file to store the SEM table in the file extension as .csv.

Returns

None

Examples

MMEMemory:WLAN:AD:SUMMARY:LIMIT:TABLE:SAVE "Table1" stores the SEM table in the *Table1.csv* file.

MMEMemory:WLAN:AY:SUMMARY:LIMIT:TABLE:LOAD (No Query Form)

Loads the Summary Limit Table containing limits for enabled ranges from the specified .csv file.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Mass memory commands

Syntax

```
MMEMemory:WLAN:AY:SUMMARY:LIMIT:TABLE:LOAD <file_name>
```

Arguments

<file_name>::=<string> specifies the file to load the Summary Limit Table from a .csv file.

NOTE: You can omit the file extension.

Examples

MMEMemory:WLAN:AY:SUMMARY:LIMIT:TABLE:LOAD "Table1" loads the Summary Limit Table from file *Table1.csv*.

MMEMemory:WLAN:AY:SUMMARY:LIMIT:TABLE:SAVE (No Query Form)

Stores the Summary Limit Table containing limits for enabled ranges in a specified .csv file, allowing you to export the file into Microsoft Excel or other database systems.

This command will save both enabled and disabled entities.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Mass memory commands

Syntax

MMEMory:WLAN:AY:SUMMary:LIMIt:TABLe:SAVe <file_name>

Arguments

<file_name>::=<string> specifies the .csv file to store the SEM table.

NOTE: You can omit the file extension.

Examples

MMEM:WLAN:AY:SUMM:LIMI:TABL:SAVE "Table2" stores the SEM table in the file *Table2.csv*.

MMEMory:WLAN:CRESPonse:LOAD:TRACe<x> (No Query Form)

Loads the selected WLAN Channel Response trace data from the specified file.

<x> is the selected trace, 1 or 2. 1 is the magnitude trace. 2 is the phase trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Mass Memory commands

Syntax

MMEMory:WLAN:CRESPonse:LOAD:TRACe<x> <QString>

Arguments

Quoted string that specifies the file from which to load trace data.

Examples

MMEMORY:WLAN:CRESPONSE:LOAD:TRACE2 "Sample1" loads the WLAN Channel Response trace data from the Sample1 file into Trace 2 (phase trace).

MMEMory:WLAN:CRESPonse:SHOW:TRACe<x>

Enables the display of a recalled WLAN Channel Response trace.

<x> is the selected trace, 1 or 2. 1 is the magnitude trace. 2 is the phase trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Mass Memory commands

Syntax

MMEMory:WLAN:CRESPonse:SHOW:TRACe<x> {0|1|OFF|ON}

MMEMory:WLAN:CRESPonse:SHOW:TRACe<x>?

Arguments

ON or 1 turns on the display of a recalled trace.

OFF or 0 turns off the display of a recalled trace.

Examples

MMEMORY:WLAN:CRESPONSE:SHOW:TRACE2 ON turns on the display of recalled trace 2.

MMEMory:WLAN:CRESpense:STORe:TRACe<x> (No Query Form)

Stores the WLAN Channel Response measurement trace data in the specified file.

<x> is the selected trace, 1 or 2. 1 is the magnitude trace. 2 is the phase trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Mass Memory commands

Syntax

MMEMory:WLAN:CRESpense:STORe:TRACe<x> <QString>

Arguments

Quoted string that specifies the file in which to store the trace data.

Examples

MMEMORY:OFDM:CRESPONSE:STORE:TRACE2 "Sample1" stores the trace data from Trace 2 into the Sample1 file.

TEST

Resets the trigger system and places all trigger sequences in the idle state. Any actions related to the trigger system that are in progress, such as a sweep or acquiring a measurement is also aborted.

To start data acquisition, use the INITiate commands.

Conditions

Measurement views: All

Group

Abort commands

Syntax

TEST

Related Commands

[INITiate:CONTInuous](#) (on page 1515)

[INITiate:RESume](#) (on page 1516)

Arguments

None

Examples

TEST resets the trigger system and stops data acquisition.

*OPC

Generates the operation complete message in the Standard Event Status Register (SESR) when all pending operations finish. The *OPC? query places the **ASCII** character "1" into the output queue when all pending operations are finished. The *OPC? response is not available to read until all pending operations finish.

The *OPC command allows you to synchronize the operation of the analyzer with your application program. Refer to [Synchronizing execution](#) (on page 2755) for the details.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*OPC
*OPC?

Arguments

None

*OPT? (Query Only)

Returns a list of options installed in your analyzer.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*OPT?

Arguments

None

Returns

The numbers of all the options installed in the analyzer, separated by commas. If no options have been installed, 0 is returned. The following table lists the options for the RSA Series analyzers.

Instrument options

Option	Description
09	Enhanced real time
10	Audio analysis

Option	Description
11	Phase noise and jitter measurement
12	Settling time measurement (frequency and phase)
21	General purpose modulation analysis
22	Flexible OFDM analysis
23	WLAN 802.11a/b/g/j/p analysis
24	WLAN 802.11n analysis
25	WLAN 802.11ac analysis
B25	25 MHz real-time capture bandwidth
B40	40 MHz real-time capture bandwidth
B85	85 MHz real-time capture bandwidth
B16x	165 MHz real-time capture bandwidth
50	1 MHz to 3/6.2 GHz pre-amplifier (RSA5103B/RSA5106B only)
51	1 MHz to 315/26.5 GHz pre-amplifier (RSA5115B/RSA5126B only)
53	Memory 4 GB acquisition memory total
56	Removable hard disk drive (not compatible with Option 59)
59	Internal hard disk drive, incompatible with Option 56
65	Digital I and Q outputs
66	Zero-span output
6566	Digital I and Q outputs and Zero-span output
PFR	Precision frequency reference
PFR50	Precision frequency reference and internal preamp (RSA5103B/RSA5126B only)
SSD	Includes additional solid-state drive for units equipped with Option 56. Minimum disk capacity is 480 GB. The Microsoft Windows 7 operating system and instrument software is preinstalled.

Examples

*OPT? might return 10,21,22, indicating that Option 10, 21, and 22 are currently installed in the analyzer.

Output commands

OUTPut:ETHernet:ADDRESS

Sets or queries the IPv4 address that is used to connect with the client PC for 40 GbE streaming.

Conditions

Only valid for RSA7100A instruments with option STREAMNL-SVPC installed.

Group

Output commands

Syntax

```
OUTPut:ETHernet:ADDRESS "###.###.###.###"  
OUTPut:ETHernet:ADDRESS?
```

Related Commands

Arguments

"###.###.###.###" is a 12 digit IPv4 address.

Returns

"###.###.###.###" is the 12 digit IPv4 address.

Examples

OUTPUT:ETHERNET:ADDRESS 063.111.011.222 sets the IPv4 address to the given address.

OUTPut:ETHernet:ENABLE

Sets or queries the status of 40 Gb Ethernet streaming.

Conditions

Only valid for RSA7100A instruments with option STREAMNL-SVPC installed.

Group

Output commands

Syntax

```
OUTPut:ETHernet:ENABLE {1 | 0}  
OUTPut:ETHernet:ENABLE?
```

Related Commands

Arguments

1 sets the device to streaming.

0 sets the device to not stream.

Returns

1 indicates that the device is currently streaming.

0 indicates that the device is not streaming.

Examples

`OUTPUT:ETHERNET:ENABLE 1` sets the device to stream through 40 GbE.

OUTPut:ETHerneT:PORT

Sets or queries the port number that is used to connect with the client PC when using 40 GbE.

Conditions

Only valid for RSA7100A instruments with option STREAMNL-SVPC installed.

Group

Output commands

Syntax

```
OUTPut:ETHerneT:PORT <NR1>
OUTPut:ETHerneT:PORT?
```

Related Commands

Arguments

<NR1> is an integer based value with a range between 1 and 65535.

Returns

Integer based value with a range between 1 and 65535.

Examples

`OUTPUT:ETHERNET:PORT?` might return 22, indicating that port 22 is being used to connect with the client PC.

OUTPut:IF:{BANDwidth|BWIDth}

Sets or queries the IF output filter when `OUTPut:IF[:STATe]` is set to ON.

Conditions

Measurement views: All (Option 05 only)

Group

Output commands

Syntax

```
OUTPut:IF:{BANDwidth|BWIDth} { FLATtop | GAUSSian }
OUTPut:IF:{BANDwidth|BWIDth}?
```

Arguments

`FLATtop` selects the flattop filter.

`GAUSSian` selects the Gaussian filter.

Examples

`OUTPUT:IF:BANDWIDTH GAUSSIAN` selects the Gaussian filter for the IF output.

OUTPut:IF[:STATe]

Determines whether to turn on or off the 500 MHz IF Out on the rear panel.

Conditions

Measurement views: All (Option 05 only)

Group

Output commands

Syntax

```
OUTPut:IF[:STATe] { OFF | ON | 0 | 1 }  
OUTPut:IF[:STATe] ?
```

Related Commands

[OUTPut:IF:{BANDwidth|BWIDth}](#) (on page 1583)

Arguments

OFF or 0 turns off IF Out.

ON or 1 turns on IF Out.

Examples

OUTPUT:IF:STATE ON turns on IF Out.

OUTPut:IQ:SOURce

Sets or queries the IQ data transfer state via the LVDS card in the CTRL7100A with option 05.

Conditions

Measurement views: All (Option 05 only for RSA7100A)

Group

Output commands

Syntax

```
OUTPut:IQ:SOURce { OFF | NORMAl | CTP }  
OUTPut:IQ:SOURce ?
```

Arguments

OFF sets the IQ data transfer via LVDS to Off. This means that no streaming of data is occurring.

NORMAl sets the IQ data transfer via LVDS to On. This means that streaming of data, if available, is occurring.

CTP sets the IQ data transfer via LVDS to Test (Count Pattern). This means the system is validating that the LVDS system connections are correct by sending a known counting pattern from the CTRL7100A LVDS card to the receiving LVDS card. Check the counting pattern on the receiving end to verify valid data transfer.

Examples

OUTPUT:IQ:SOURCE? might return NORMAL, indicating that IQ data transfer via LVDS is set to On and occurring if data is available.

OUTPut:IQ[:STATe]

Determines whether to enable or disable the digital IQ output data stream from the rear panel connectors.

Conditions

Measurement views: All (Option 05 only)

Group

Output commands

Syntax

```
OUTPut:IQ[:STATe] { 0 | 1 | OFF | ON }  
OUTPut:IQ[:STATe] ?
```

Arguments

OFF or 0 disables the digital IQ output.

ON or 1 enables the digital IQ output.

At *RST, this value is set to OFF.

Examples

OUTP:IQ:STAT ON enables the digital IQ output.

OUTP:IQ:STAT? may return OFF or 0, which means the digital IQ output is disabled.

OUTPut:NOISe[:STATe]

Determines whether to turn on or off the +28 V DC Out on the rear panel.

Conditions

Measurement views: All

Group

Output commands

Syntax

```
OUTPut:NOISe[:STATe] { OFF | ON | 0 | 1 }  
OUTPut:NOISe[:STATe] ?
```

Arguments

OFF or 0 turns off +28 V DC Out.

ON or 1 turns on +28 V DC Out.

Examples

OUTPUT:NOISE:STATE ON turns on +28 V DC Out.

OUTPut:TGen:BRIDge:MODE

Sets or queries the tracking generator bridge mode.

Conditions

Requires Option 04 in a RSA500A series or RSA600A series instrument.

Group

Output commands

Syntax

```
OUTPut:TGen:BRIDge:MODE { REFeRence | CROSSover | REFLection| DISabled }  
OUTPut:TGen:BRIDge:MODE
```

Arguments

Returns

Examples

```
OUTPUT:TGEN:BRIDGE:MODE
```

OUTPut:TGen:ENABLE

Sets or queries the power state of the tracking generator.

Conditions

Requires Option 04 in a RSA500A series or RSA600A series instrument.

Group

Output commands

Syntax

```
OUTPut:TGen:ENABLE { OFF | ON | 0 | 1 }  
OUTPut:TGen:ENABLE?
```

Arguments

Returns

Examples

```
OUTPUT:TGEN:ENABLE
```

OUTPut:TGen:FREQuency

Sets or queries the tracking generator frequency in Hz. The spectrum analyzer center frequency will also be set to match (track) the tracking generator frequency.

Conditions

Requires Option 04 in a RSA500A series or RSA600A series instrument.

Group

Output commands

Syntax

```
OUTPut:TGen:FREQuency <value>  
OUTPut:TGen:FREQuency?
```

Arguments

Returns

Examples

```
OUTPUT:TGEN:FREQUENCY
```

OUTPut:TGen:INSTalled? (Query Only)

Queries for the presence of the tracking generator hardware.

Conditions

Requires Option 04 in a RSA500A series or RSA600A series instrument.

Group

Output commands

Syntax

```
OUTPut:TGen:INSTalled?
```

Returns

Examples

```
OUTPUT:TGEN:INSTALLED?
```

OUTPut:TGen:LEVel

Sets or queries the tracking generator output level in dBm.

Conditions

Requires Option 04 in a RSA500A series or RSA600A series instrument.

Group

Output commands

Syntax

```
OUTPut:TGen:LEVel <value>  
OUTPut:TGen:LEVel?
```

Related Commands

Arguments

Returns

Examples

```
OUTPUT:TGEN:LEVEL
```

OUTPut:USERapi:ENABLE

Sets or queries the status for streaming API.

Conditions

Only valid for RSA7100A instruments with option CUSTOM-APINL-SVPC installed.

Group

Output commands

Syntax

```
OUTPut:USERapi:ENABLE {1 | 0}  
OUTPut:USERapi:ENABLE?
```

Related Commands

Arguments

1 sets the device to streaming.

0 sets the device to not stream.

Returns

1 indicates that the device is currently streaming.

0 indicates that the device is not streaming.

Examples

OUTPUT:USERAPI:ENABLE 0 sets the device to not stream through API.

OUTPut:ZS:{BANDwidth|BWIDth}

Sets or queries the resolution bandwidth RBW filter for the Zero Span output on the rear panel connector.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS:{BANDwidth|BWIDth} <value>  
OUTPut:ZS:{BANDwidth|BWIDth}?
```

Arguments

<value>::<NRf> specifies the resolution bandwidth.

OUTPut:ZS:{BANDwidth|BWIDth}:AUTO

Determines whether to set the Zero Span resolution bandwidth manually or automatically.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS:{BANDwidth|BWIDth}:AUTO { OFF | ON | 0 | 1 }
OUTPut:ZS:{BANDwidth|BWIDth}:AUTO?
```

Arguments

OFF or 0 manually sets the Zero Span output.

ON or 1 automatically sets the Zero Span output.

Examples

OUTPUT:ZS:BANDWIDTH:AUTO ON specifies that the Zero Span output will be set automatically.

OUTPut:ZS:{BANDwidth|BWIDth}:STATe

Sets or queries the state of the resolution bandwidth filter for the output connector on the rear panel.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS:{BANDwidth|BWIDth}:STATe { Auto | Manual | None }
OUTPut:ZS:{BANDwidth|BWIDth}:STATe?
```

Arguments

Auto sets the resolution bandwidth filter to automatic mode.

Manual sets the resolution bandwidth filter to manual mode.

None bypasses the resolution bandwidth filter.

OUTPut:ZS:DELaY? (Query Only)

Queries the delay from the input connector to the Zero Span output. The delay includes the propagation time through the entire system including filters and digital processing.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS:DELaY?
```

Arguments

None

Returns

<NRf> The actual delay of the signal through the system.

OUTPut:ZS:FILTeR:STATe

Sets or queries the signal path of the filter to the Zero Span output.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS:FILTeR:STATe { AUTO | HIGH | LOW }  
OUTPut:ZS:FILTeR:STATe?
```

Arguments

AUTO The filter path is calculated internally.

HIGH Uses the high-band 10 MHz filter.

LOW Uses the low-band 100 kHz filter.

OUTPut:ZS[:STATe]

Determines whether to enable or disable the Zero Span output from the rear panel connector.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS[:STATe] { OFF | ON | 0 | 1 }  
OUTPut:ZS[:STATe] ?
```

Arguments

OFF or **0** disables the Zero Span output

ON or **1** enables the Zero Span output

Examples

OUTPUT:ZS:STATE ON enables on the Zero Span output.

OUTPut:ZS:VOLTage

Sets or queries the voltage level at the Zero Span output on the rear panel connector.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS:VOLTage <value>  
OUTPut:ZS:VOLTage?
```

Arguments

<value>: : <NRf> voltage level at the Zero Span output connector.

OUTPut:ZS:VOLTage:AUTO

Sets or queries or queries how the output voltage is referenced.

Conditions

Measurement views: DPX, Spectrum

Group

Output commands

Syntax

```
OUTPut:ZS:VOLTage:AUTO { OFF | ON | 0 | 1 }  
OUTPut:ZS:VOLTage:AUTO?
```

Arguments

ON or 1 sets the output voltage referenced to 1.0 V.

OFF or 0 allows users to scale down the output voltage from 0.5 V to 1.0 V.

Read commands

READ:ACPower? (Query Only)

Returns the Channel power and ACPR measurement results for all available channels.

Conditions

Measurement views: Channel power and ACPR

Group

Read commands

Syntax

```
READ:ACPower?
```

Arguments

None

Returns

```
<chan_power>,<acpr_lower(1)>,<acpr_upper(1)>,  
<acpr_lower(2)>,<acpr_upper(2)>,...  
<acpr_lower(n)>,<acpr_upper(n)>
```

Where

<chan_power> is the average power of the main channel as the power reference in dBm. The unit can be changed by the [SENSe]:POWer:UNITs command.

<acpr_lower(n)> is the ACPR for the lower channel #n in dB.

<acpr_upper(n)> is the ACPR for the upper channel #n in dB.

The number of n depends on the setting of the [SENSe]:ACPower:CHANnel:PAIRs command.

Examples

READ:ACPOWER? might return 4.227,-28.420,-23.847,-22.316,-29.225, indicating

(average power of the main channel) = 4.227 dBm,

(ACPR for the lower channel 1) = -28.420 dB,

(ACPR for the upper channel 1) = -23.847 dB,

(ACPR for the lower channel 2) = -22.316 dB, and

(ACPR for the upper channel 2) = -29.225 dB.

READ:ACPower:CHANnel:POWer? (Query Only)

Returns the average power of the main channel (power reference) in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Read commands

Syntax

READ:ACPower:CHANnel:POWer?

Arguments

None

Returns

<chan_power>::<NRf> is the average power of the main channel in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:ACPOWER:CHANNEL:POWER? might return 4.227, indicating that the average power of the main channel is 4.227 dBm.

READ:ACPower:SPECTrum? (Query Only)

Returns spectrum trace data of the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Read commands

Syntax

READ:ACPower:SPECTrum?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the spectrum trace data in dBm for the point n, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:ACPOWER:SPECTRUM? might return #43204xxxx... (3204-byte data) for the spectrum trace data of the Channel power and ACPR measurement.

READ:{AM|FM|PM}? (Query Only)

Returns the trace data in the AM/FM/PM measurement.

Conditions

Measurement views: AM, FM, PM

Group

Read commands

Syntax

READ:{AM|FM|PM}?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the modulation factor in percent (AM), frequency deviation in Hz (FM), or phase deviation in degrees (PM) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:AM might return #3156xxxx... (156-byte data) for the AM measurement trace.

READ:AM:AMIndex? (Query Only)

Returns the modulation index which is (positive peak modulation factor - negative peak modulation factor)/2, returned as a percentage (%).

Conditions

Measurement views: AM

Group

Read commands

Syntax

READ:AM:AMIndex?

Arguments

None

Returns

<value>::<NRf> the modulation index.

Examples

READ:AM:AMINDEX? might return 36.48, indicating the modulation index is 36.48%.

READ:AM:AMNegative? (Query Only)

Returns the negative peak modulation factor (-AM) in the AM measurement.

Conditions

Measurement views: AM

Group

Read commands

Syntax

READ:AM:AMNegative?

Arguments

None

Returns

<-AM>::<NRf> is the negative peak modulation factor in percent (%).

Examples

READ:AM:AMNEGATIVE? might return -23.4, indicating the negative peak modulation factor is -23.4%.

READ:AM:AMPositive? (Query Only)

Returns the positive peak modulation factor (+AM) in the AM measurement.

Conditions

Measurement views: AM

Group

Read commands

Syntax

READ:AM:AMPositive?

Arguments

None

Returns

<+AM> : : <NRf> is the positive peak modulation factor in percent (%).

Examples

READ:AM:AMPOSITIVE? might return 43.8, indicating the positive peak modulation factor is 43.8%.

READ:AM:RESult? (Query Only)

Returns the AM measurement results.

Conditions

Measurement views: AM

Group

Read commands

Syntax

READ:AM:RESult?

Arguments

None

Returns

<+AM>,<-AM>,<Total AM>

Where

<+AM> : : <NRf> is the positive peak modulation factor in percent (%).

<-AM> : : <NRf> is the negative peak modulation factor in percent (%).

<Total AM> : : <NRf> is the (peak to peak modulation factor)/2 in percent (%).

Examples

READ:AM:RESULT? might return 62.63,-50.89,56.76.

READ:AUDio:FERRor? (Query Only)

Returns the carrier frequency error in the audio measurement. This command is only available for FM and PM measurements.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:FERRor?

Arguments

None

Returns

<value> ::= <NRf> the carrier frequency error.

Examples

READ:AUDIO:FERROR? might return 419.9529809622 indicating that the audio frequency error is approximately 420 Hz.

READ:AUDio:FREQuency? (Query Only)

Returns the audio frequency.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:FREQuency?

Arguments

None

Returns

<value> ::= <NRf> the audio frequency.

Examples

READ:AUDIO:FREQUENCY? might return 5.8239462705E+3 indicating that the audio frequency is 5.824 kHz.

READ:AUDio:HARMonic:COUNT? (Query Only)

Returns the number of harmonics in the audio spectrum measurement. The number of harmonics appear in the results table in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Read commands

Syntax

READ:AUDio:HARMonic:COUNT?

Related Commands

[READ:AUDio:NHARmonic:COUNT?](#) (on page 1600)

Arguments

None

Returns

<count> ::= <NR1> the number of harmonics in the measurement view.

Examples

READ:AUDio:HARMONIC:COUNT? might return 3 indicating that there are three harmonics in the measurement.

READ:AUDio:HARMonic<x>:AMPLitude? (Query Only)

Returns the amplitude of the specified harmonic in the audio spectrum measurement.

The value <x> represents the specific harmonic, from 1 to the value specified by the **CALCulate:AUDio:HARMonic:HNUMber** command.

Conditions

Measurement views: Audio Spectrum

Group

Read commands

Syntax

READ:AUDio:HARMonic<x>:AMPLitude?

Related Commands

[CALCulate:AUDio:HARMonic:HNUMber](#) (on page 394)

Arguments

None

Returns

<value> ::= <NRf> the amplitude of the specified harmonic in dBc.

Examples

READ:AUDio:HARMonic3:AMPLitude? might return -2.861 indicating that amplitude of the third harmonic is -2.86 dBc.

READ:AUDio:HARMonic<x>:FREQuency? (Query Only)

Returns the frequency of the specified harmonic in the audio spectrum measurement.

The value <x> represents the specific harmonic, from 1 to the value specified by the **CALCulate:AUDio:HARMonic:HNUMber** command.

Conditions

Measurement views: Audio Spectrum

Group

Read commands

Syntax

`READ:AUDio:HARMonic<x>:FREQuency?`

Related Commands

[CALCulate:AUDio:HARMonic:HNUMber](#) (on page 394)

Arguments

None

Returns

`<value> ::= <NRF>` the frequency of the specified harmonic.

Examples

`READ:AUDio:HARMonic3:FREQuency?` might return `17.4718007813E+3` indicating that the frequency of the third harmonic is 17.472 kHz.

READ:AUDio:HNOise? (Query Only)

Returns the difference between the current RMS modulation value and the reference value.

This information is only available when the Hum & Noise is measurement is enabled; see the `[SENSe]:AUDio:HNOise:ENABle` command. The reference value is stored after capturing the reference by pressing the Capture Reference button or by enabling the `[SENSe]:AUDio:HNOise:REFerence` command.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

`READ:AUDio:HNOise?`

Related Commands

[\[SENSe\]:AUDio:HNOise:ENABle](#) (on page 2010)

[\[SENSe\]:AUDio:HNOise:REFerence](#) (on page 2010)

Arguments

None

Returns

`<value> ::= <NRF>` specifies the difference between the Hum & Noise reference and the actual signal in dB.

Examples

READ:AUDIO:HNOISE? might return 0.00 dB indicating that there is no difference between the Hum & Noise reference and the actual signal.

READ:AUDio:HNREference? (Query Only)

Returns the Hum and Noise RMS modulation reference value.

The value is stored after capturing the reference by pressing the Capture Reference button or by enabling the [SENSe]:AUDio:HNOise:REference command. This information is only available when the Hum & Noise measurement is enabled; see the [SENSe]:AUDio:HNOise:ENABle command.

For AM signal types, the reference represents modulation depth. For FM signal types, the reference represents frequency deviation. For PM signal types the reference represents phase. For Direct signal types the reference represents power.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:HNREference?

Related Commands

[\[SENSe\]:AUDio:HNOise:ENABle](#) (on page 2010)

[\[SENSe\]:AUDio:HNOise:REference](#) (on page 2010)

Arguments

None

Returns

<value> ::= <Nrf> the Hum & Noise reference frequency.

Examples

READ:AUDIO:HNREFERENCE? might return 20.581121E+3 indicating that the Hum & Noise reference frequency is 20.58 kHz.

READ:AUDio:HPTPeak? (Query Only)

Returns the half peak-to-peak modulation excursion (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:HPTPeak?

Arguments

None

Returns

<value> ::= <NRF> specifies the half peak modulation excursion.

Examples

READ:AUDIO:HPTPEAK? might return 125.28231E+3 indicating that the half peak modulation excursion is 125.28 kHz.

READ:AUDio:MODDist? (Query Only)

Returns the modulation distortion for the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:MODDist?

Arguments

None

Returns

<value> ::= <NRf> specifies the modulation distortion.

Examples

READ:AUDIO:MODDIST? might return 98.6282113 indicating that the modulation distortion is 98.628%.

READ:AUDio:NHARmonic:COUNt? (Query Only)

Returns the number of non-harmonics in the audio spectrum measurement.

The number of non-harmonics appear in the results table in the audio spectrum view.

Conditions

Measurement views: Audio Spectrum

Group

Read commands

Syntax

READ:AUDio:NHARmonic:COUNt?

Related Commands

[READ:AUDio:HARMonic:COUNt?](#) (on page 1596)

Arguments

None

Returns

`<count> ::= <NR1>` the number of non-harmonics in the measurement view.

Examples

`READ:AUDIO:NHARMONIC:COUNT?` might return 7 indicating that there are seven harmonics in the measurement.

READ:AUDio:NHARmonic<x>:AMPLitude? (Query Only)

Returns the amplitude of the specified non-harmonic in the audio spectrum measurement.

The value `<x>` represents the specific non-harmonic, from 1 to the value specified by the `CALCulate:AUDio:HARMonic:NHNumber` command.

Conditions

Measurement views: Audio Spectrum

Group

Read commands

Syntax

`READ:AUDio:NHARmonic<x>:AMPLitude?`

Related Commands

[CALCulate:AUDio:HARMonic:NHNumber](#) (on page 394)

Arguments

None

Returns

`<value> ::= <NRf>` the amplitude of the specified non-harmonic in dBc.

Examples

`READ:AUDio:NHARMonic3:AMPLitude?` might return -2.861 indicating that amplitude of the third non-harmonic is -2.86 dBc.

READ:AUDio:NHARmonic<x>:FREQuency? (Query Only)

Returns the frequency of the specified non-harmonic in the audio spectrum measurement.

The value `<x>` represents the specific non-harmonic, from 1 to the value specified by the `CALCulate:AUDio:HARMonic:NHNumber` command.

Conditions

Measurement views: Audio Spectrum

Group

Read commands

Syntax

READ:AUDio:NHARmonic<x>:FREQuency?

Related Commands

[CALCulate:AUDio:HARMonic:NHNumber](#) (on page 394)

Arguments

None

Returns

<value> ::= <NRF> the frequency of the specified non-harmonic.

Examples

READ:AUDio:NHARmonic3:FREQuency? might return 17.4718007813E+3 indicating that the frequency of the third non-harmonic is 17.472 kHz.

READ:AUDio:PNEGative? (Query Only)

Returns the minus peak modulation excursion (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:PNEGative?

Arguments

None

Returns

Examples

READ:AUDio:PNEGATIVE? might return -196.04321E+3 indicating that the minus peak modulation excursion is -196.04 kHz.

READ:AUDio:POWer? (Query Only)

Returns the carrier power or signal power depending the signal type.

If the signal type is Direct, the returned value is the average power of the input signal. If the signal type is AM, FM, or PM, the returned value is the carrier power; the average power of the carrier signal with the modulation removed.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:POWer?

Arguments

None

Returns

<value> ::= <NRf> specifies the carrier or signal power in dBm.

Examples

READ:AUDIO:POWER? might return -22.231123 indicating that the carrier power is -22.23 dBm.

READ:AUDio:PPOSitive? (Query Only)

Returns the positive peak modulation excursion (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:PPOSitive?

Arguments

None

Returns

<value> ::= <NRf> specifies the positive peak modulation excursion.

Examples

READ:AUDIO:PPOSITIVE? might return 215.04321E+3 indicating that the positive peak modulation excursion is -215.04 kHz.

READ:AUDio:RMS? (Query Only)

Returns the RMS modulation excursion for the audio measurement (where the modulation excursion depends on the signal type).

For AM signal types, the modulation excursion is “% Modulation Depth.” For FM signal types, the modulation excursion is “Frequency Deviation.” For PM signal types, the modulation excursion is “Phase Deviation.” For Direct signal types, there is no modulation excursion; it is actually “signal excursion.”

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:RMS?

Arguments

None

Returns

<value> ::= <NRf> specifies the RMS modulation excursion.

Examples

READ:AUDIO:RMS? might return 20.575039E+3 indicating that RMS modulation excursion is 20.575 kHz.

READ:AUDio:SINad? (Query Only)

Returns the signal-to-noise and distortion for the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:SINad?

Arguments

None

Returns

<value> ::= <NRf> specifies the RMS modulation excursion.

Examples

READ:AUDIO:SINAD? might return 176.229024E-3 indicating that the signal-to-noise and distortion for the audio measurement is 0.18 dB.

READ:AUDio:SNOise? (Query Only)

Returns the signal level to noise level with the harmonic distortion and non-harmonic distortion components removed.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:SNOise?

Arguments

None

Returns

<value> ::= <NRf> specifies the signal level to noise level.

Examples

READ:AUDIO:SNOISE? might return -12.8156364 indicating the signal level to noise level is -12.82 dB.

READ:AUDio:SPECTrum:TRACe<x>? (Query Only)

Returns the audio spectrum trace data for the audio measurement.

The <x> represents trace 1 for this measurement. No other traces are supported.

Conditions

Measurement views: Audio Spectrum

Group

Read commands

Syntax

READ:AUDio:SPECTrum:TRACe<x>?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)> . . . <data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating point format specified in IEEE.488.2.

Examples

READ:AUDio:SPECTrum:TRACe1? might return #516004xxxx ... (16004 byte data) for the audio measurement.

READ:AUDio:THDist? (Query Only)

Returns the percentage of the total harmonic distortion in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:THDist?

Related Commands

[READ:AUDio:THDist:DB?](#) (on page 1606)

Arguments

None

Returns

<value> ::= <Nrf> specifies the percentage of the total harmonic distortion.

Examples

READ:AUDIO:THDIST? might return 53.332921, indicating the percentage of total harmonic distortion is 53.333%.

READ:AUDio:THDist:DB? (Query Only)

Returns the total harmonic distortion in dB in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:THDist:DB?

Related Commands

[READ:AUDio:THDist?](#) (on page 1605)

Arguments

None

Returns

<value> ::= <Nrf> specifies the total harmonic distortion in dB.

Examples

READ:AUDIO:THDIST:DB? might return -5.46009, indicating that the total harmonic distortion is -5.46 dB.

READ:AUDio:TNHDist? (Query Only)

Returns the percentage of the total non-harmonic distortion in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:TNHDist?

Related Commands

[READ:AUDio:TNHDist:DB?](#) (on page 1607)

Arguments

None

Returns

<value> ::= <NRf> specifies the percentage of the total non-harmonic distortion.

Examples

READ:AUDIO:TNHDIST? might return 297.332921, indicating the percentage of total non-harmonic distortion is 297.333%.

READ:AUDio:TNHDist:DB? (Query Only)

Returns the total non-harmonic distortion in dB in the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Read commands

Syntax

READ:AUDio:TNHDist:DB?

Related Commands

[READ:AUDio:TNHDist?](#) (on page 1606)

Arguments

None

Returns

<value> ::= <NRf> specifies the total non-harmonic distortion in dB.

Examples

READ:AUDIO:TNHDIST:DB? might return 9.46009, indicating that the total harmonic distortion is 9.46 dB.

READ:AVTime[:MEASview<y>]:AVERage? (Query Only)

Returns the RMS (root-mean-square) value for the selected trace in the Amplitude versus Time measurement. Select the trace using the TRACe<x>:AVTime[:MEASview<y>]:SELEct command.

Conditions

Measurement views: Amplitude versus Time

Group

Programmer Manual

WWW.TEK.COM|1607

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:AVERage?`

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<avg>: :<NRf> is the RMS amplitude in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:AVTIME:MEASVIEW1:AVERAGE?` might return `-2.53`, indicating the RMS amplitude is -2.53 dBm on Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:{FIRST|SECond|THIRd|FOURth}? (Query Only)

Returns the trace data in the Amplitude versus Time measurement.

The mnemonics FIRST, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the `TRACe<x>:AVTime[:MEASview<y>]` command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:{FIRST|SECond|THIRd|FOURth}?`

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude in dBm at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:AVTIME:MEASVIEW1:FIRST?` might return `#3156xxxx...` (156-byte data) for Trace 1 on Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MAXimum? (Query Only)

Returns the maximum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:MAXimum?`

Related Commands

[READ:AVTime\[:MEASview<y>\]:MAXLocation?](#) (on page 1609)

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

`<max>: : <NRf>` is the maximum Amplitude in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:AVTIME:MEASVIEW1:MAXIMUM?` might return `-2.84`, indicating the maximum amplitude is -2.84 dBm for Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MAXLocation? (Query Only)

Returns the time at which the amplitude is maximum for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:MAXLocation?`

Related Commands

[READ:AVTime\[:MEASview<y>\]:MAXimum?](#) (on page 1612)

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

`<max_time>::<NRf>` is the time at the maximum in seconds.

Examples

`READ:AVTIME:MEASVIEW1:MAXLOCATION?` might return 25.03E-9, indicating the amplitude is maximum at 25.03 ns on Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MINimum? (Query Only)

Returns the minimum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACE<x>:AVTime[:MEASview<y>]:SElect` command.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:MINimum?`

Related Commands

[READ:AVTime\[:MEASview<y>\]:MINLocation?](#) (on page 1609)

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

`<min>::<NRf>` is the minimum amplitude in dBm. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:AVTIME:MEASVIEW1:MINIMUM?` might return -57.64, indicating the minimum amplitude is -57.64 dBm on Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MINLocation? (Query Only)

Returns the time at which the amplitude is minimum for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACE<x>:AVTime[:MEASview<y>]:SElect` command.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:MINLocation?`

Related Commands

[READ:AVTime\[:MEASview<y>\]:MINimum?](#) (on page 1610)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<min_time>::<NRf> is the time at the minimum in seconds.

Examples

READ:AVTIME:MEASVIEW1:MINLOCATION? might return 450.7E-9, indicating the amplitude is minimum at 450.7 ns on Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:RESult? (Query Only)

Returns the measurement results for the selected trace in the Amplitude versus Time measurement. Select the trace using the TRACe<x>:AVTime[:MEASview<y>]:SElect command.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

READ:AVTime[:MEASview<y>]:RESult?

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>,<max_time>,<min>,<min_time>,<rms>

Where

<max>::<NRf> is the maximum amplitude in dBm.

<max_time>::<NRf> is the time at the maximum in seconds.

<min>::<NRf> is the minimum amplitude in dBm.

<min_time>::<NRf> is the time at the minimum in seconds.

<rms>::<NRf> is the RMS amplitude in dBm.

The unit of amplitude can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:AVTIME:MEASVIEW1:RESULT? might return

-2.68,48.62E-6,-82.47,22.11E-6,-8.24, indicating that the maximum amplitude is -2.68 dBm at 48.62 μ s, the minimum amplitude is -82.47 dBm at 22.11 μ s, and the RMS amplitude is -8.24 dBm on Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:AVERage:{FIRSt|SECond|THIRd|FOURth}?

Returns the RMS (root-mean-square) value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

The mnemonics `FIRSt`, `SECond`, `THIRd`, and `FOURth` represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the `TRACe<x>:AVTime[:MEASview<y>]` command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:AVERage:{FIRSt|SECond|THIRd|FOURth}?`

Related commands

[READ:AVTime\[:MEASview<y>\]:MINimum:{FIRSt|SECond|THIRd|FOURth}?](#) (on page 1614)

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is 1

Returns

`<avg>: :<NRf>` is the RMS amplitude in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:AVTIME:MEASVIEW1:AVERAGE:FIRST?` might return -2.53, indicating the RMS amplitude is -2.53 dBm on Trace1 for Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MAXimum:{FIRSt|SECond|THIRd|FOURth}?

Returns the maximum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

The mnemonics `FIRSt`, `SECond`, `THIRd`, and `FOURth` represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the `TRACe<x>:AVTime[:MEASview<y>]` command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:MAXimum:{FIRSt|SECond|THIRd|FOURth}?`

Related commands

[READ:AVTime\[:MEASview<y>\]:MAXLocation:{FIRSt|SECond|THIRd|FOURth}?](#)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>: : <NRf> is the maximum Amplitude in dBm.

The unit can be changed by the [:SENSe]:POWer:UNITs command.

Examples

READ:AVTIME:MEASVIEW1:MAXIMUM:FIRST? might return -2.84, indicating the maximum amplitude is -2.84 dBm on Trace1 for Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MAXLocation:{FIRSt|SECond|THIRd|FOURth}?

Returns the time at which the amplitude is maximum for the selected trace in the Amplitude versus Time measurement. Select the trace using the TRACE<x>:AVTime[:MEASview<y>]:SElect command.

The mnemonics FIRSt, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the TRACE<x>:AVTime[:MEASview<y>] command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

READ:AVTime[:MEASview<y>]:MAXLocation:{FIRSt|SECond|THIRd|FOURth}?

Related commands

[READ:AVTime\[:MEASview<y>\]:MAXimum:{FIRSt|SECond|THIRd|FOURth}?](#) (on page 1612)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>: : <NRf> is the maximum Amplitude in dBm.

Examples

READ:AVTIME:MEASVIEW1:MAXLOCATION:FIRST? might return 25.03E-9, indicating the amplitude is maximum at 25.03 ns on Trace1 for Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MINimum:{FIRSt|SECond|THIRd|FOURth}?

Returns the minimum value for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

The mnemonics `FIRSt`, `SECond`, `THIRd`, and `FOURth` represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the `TRACe<x>:AVTime[:MEASview<y>]` command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:MINimum:{FIRSt|SECond|THIRd|FOURth}?`

Related commands

[READ:AVTime\[:MEASview<y>\]:MINLocation:{FIRSt|SECond|THIRd|FOURth}?](#) (on page 1614)

Arguments

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is 1

Returns

`<min>::<NRf>` is the minimum amplitude in dBm. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:AVTIME:MEASVIEW1:MINIMUM:FIRST?` might return `-57.64`, indicating the minimum amplitude is -57.64 dBm on Trace1 for Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:MINLocation:{FIRSt|SECond|THIRd|FOURth}?

Returns the time at which the amplitude is minimum for the selected trace in the Amplitude versus Time measurement. Select the trace using the `TRACe<x>:AVTime[:MEASview<y>]:SElect` command.

The mnemonics `FIRSt`, `SECond`, `THIRd`, and `FOURth` represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the `TRACe<x>:AVTime[:MEASview<y>]` command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

`READ:AVTime[:MEASview<y>]:MINLocation:{FIRSt|SECond|THIRd|FOURth}?`

Related commands

[READ:AVTime\[:MEASview<y>\]:MINimum:{FIRSt|SECond|THIRd|FOURth}? \(on page 1614\)](#)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<min>::<NRf> is the minimum amplitude in dBm. The unit can be changed by the [:SENSe]:POWer:UNITs command.

Examples

READ:AVTIME:MEASVIEW1:MINLOCATION:FIRST? might return 450.7E-9, indicating the amplitude is minimum at 450.7 ns on Trace1 for Amplitude versus Time Measurement View 1.

READ:AVTime[:MEASview<y>]:RESult:{FIRSt|SECond|THIRd|FOURth}?

Returns the measurement results for the selected trace in the Amplitude versus Time measurement. Select the trace using the TRACe<x>:AVTime[:MEASview<y>]:SELEct command.

The mnemonics FIRSt, SECond, THIRd, and FOURth represent Trace 1, Trace 2, Trace 3, and Math trace, respectively. The traces can be specified by the TRACe<x>:AVTime[:MEASview<y>] command subgroup.

Conditions

Measurement views: Amplitude versus Time

Group

Read commands

Syntax

READ:AVTime[:MEASview<y>]:RESult:{FIRSt|SECond|THIRd|FOURth}?

Related commands

[READ:AVTime\[:MEASview<y>\]:MINimum:{FIRSt|SECond|THIRd|FOURth}? \(on page 1614\)](#)

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<max>,<max_time>,<min>,<min_time>,<rms>

Where

<max>::<NRf> is the maximum amplitude in dBm.

<max_time>::<NRf> is the time at the maximum in seconds.

<min>::<NRf> is the minimum amplitude in dBm.

<min_time>::<NRf> is the time at the minimum in seconds.

<rms>::<NRf> is the RMS amplitude in dBm.

The unit of amplitude can be changed by the [:SENSe]:POWer:UNITs command.

Examples

`READ:AVTIME:MEASVIEW1:RESULT:FIRST?` might return `-2.68,48.62E-6,-82.47,22.11E-6,-8.24`, indicating that the maximum amplitude is -2.68 dBm at 48.62 μ s, the minimum amplitude is -82.47 dBm at 22.11 μ s, and the RMS amplitude is -8.24 dBm on Trace1 for Amplitude versus Time Measurement View 1.

READ:BIBEmissions:FTX? (Query Only)

Returns the band number corresponding to the transmitted FTX detected in the Bluetooth InBand Emission display.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Read commands

Syntax

`READ:BIBEmissions:FTX?`

Arguments

None

Returns

`<value> ::= <NR1>` the band number.

Examples

`READ:BIBEMISSIONS:FTX?` might return 39, indicating the band number corresponding to transmitted FTX.

READ:BIBEmissions:POWer? (Query Only)

Returns all channel power results from the Bluetooth InBand Emission display.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Read commands

Syntax

`READ:BIBEmissions:POWer?`

Arguments

None

Returns

`<Band0_power>,<Band1_power>,<Band2_power>,. . . <Band78_power>`

Where:

`Bandx_power` is the integrated power in that band. All power values are in dBm

Examples

`READ:BIBEMISSIONS:POWER?` might return `4.227,-28.420,-23.847, . . . ,-29.225`, indicating: (integrated power for Band 0) = 4.227 dBm,
(Integrated power for Band 1) = -28.420 dBm,
(Integrated power for Band 2) = -23.847 dBm, and
(Integrated power for Band 78) = -29.225 dBm.

READ:BIBEmissions:RESUltS:STATUs? (Query Only)

Returns the Pass/Fail result status of the Bluetooth InBand Emission display.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Read commands

Syntax

`READ:BIBEmissions:RESUltS:STATUs?`

Arguments

None

Examples

`READ:BIBEMISSIONS:RESULTS:STATUS?` returns the Pass/Fail status result on the display.

READ:BLUEtooth:CONStE:FERRor? (Query Only)

Queries the frequency error in Hz in the Bluetooth Constellation. The frequency error is the difference between the measured carrier frequency of the signal and the user-selected center frequency.

Conditions

Measurement views: Bluetooth Constellation

Group

Read commands

Syntax

`READ:BLUEtooth:CONStE:FERRor?`

Arguments

None

Returns

`<freq_error> ::= <NRf>` the frequency error.

Examples

`READ:BLUEtooth:CONStE:FERRor?` might return `-10.7E+3`, which is a frequency error of -10.7 kHz.

READ:BLUEtooth:CONSt:TRACe? (Query Only)

Queries the Bluetooth Constellation trace data.

Conditions

Measurement views: Bluetooth Constellation

Group

Read commands

Syntax

READ:BLUEtooth:CONSt:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><I (1)><Q1><I (2)><Q2> . . . <I (n)><Qn>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<I (n)> and <Qn> are the normalized I- and Q-coordinate values at the nth data point. 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:BLUEtooth:CONSt:TRACe? might return #43848xxxx . . . (3848-byte data) for Bluetooth Constellation trace.

READ:BLUEtooth:EDIagram:FDEViation? (Query Only)

Returns the frequency deviation vs. time trace data with the X values in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Read commands

Syntax

READ:BLUEtooth:EDIagram:FDEViation?

Arguments

None

Returns

#<num_digits><num_bytes><Y (1)><X (1)><Y (2)><X (2)> . . . <Y (n)><X (n)>

Where

<num_digits> is the number of bytes in <num_bytes>.

<num_bytes> is the number of bytes of data that follow.

<Y(1)> and <X(1)> are the normalized I- and Q-coordinate values at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

READ:BLUEtooth:EDIagram:FDEVIiation? might return #3160xxxx... (160-byte data) for the frequency deviation versus time trace.

READ:BLUEtooth:EDIagram:FERRor? (Query Only)

Returns the frequency error in the Bluetooth eye diagram measurement.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Read commands

Syntax

READ:BLUEtooth:EDIagram:FERRor?

Arguments

None

Returns

<freq_error> ::= <NRf> the frequency error in Hz.

Examples

READ:BLUEtooth:EDIagram:FERRor? might return -10.7E+3, indicating the frequency error is -10.7 kHz.

READ:BLUEtooth:EDIagram:HORiz:SCALE? (Query Only)

Returns the value of the horizontal scale in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Read commands

Syntax

READ:BLUEtooth:EDIagram:HORiz:SCALE?

Arguments

None

Returns

<value> ::= <NR3> the horizontal scale value.

Examples

READ:BLUETOOTH:EDIAGRAM:HORIZ:SCALE? might return 2 indicating the horizontal scale value is 2 symbols.

READ:BLUEtooth:EDlagram:I? (Query Only)

Returns the I vs. time trace in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Read commands

Syntax

READ:BLUEtooth:EDIagram:I?

Arguments

None

Returns

#<num_digits><num_bytes><Y(1)><X(1)><Y(2)><X(2)> . . . <Y(n)><X(n)>

Where

<num_digits> is the number of bytes in <num_bytes>.

<num_bytes> is the number of bytes of data that follow.

<Y(1)> and <X(1)> are the normalized I- and Q-coordinate values at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

READ:BLUEtooth:EDIagram:I? might return #3160xxxx... (160-byte data) for the I vs. time trace.

READ:BLUEtooth:EDlagram:Q? (Query Only)

Returns the Q vs. time trace in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth eye diagram.

Group

Read commands

Syntax

READ:BLUEtooth:EDIagram:Q?

Arguments

None

Returns

#<num_digits><num_bytes><Y(1)><X(1)><Y(2)><X(2)> . . . <Y(n)><X(n)>

Where

<num_digits> is the number of bytes in <num_bytes>.

<num_bytes> is the number of bytes of data that follow.

<Y(1)> and <X(1)> are the normalized I- and Q-coordinate values at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

READ:BLUEtooth:EDIagram:Q? might return #3160xxxx... (160-byte data) for the Q vs. time trace.

READ:BLUEtooth:FDVTime:TRACe? (Query Only)

Returns the Bluetooth Frequency Deviation vs. Time trace data.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUEtooth:FDVTime:TRACe?

Arguments

None

Returns

#<num_digits><num_bytes><data(1)><data(2)> . . . <data(n)>

Where

.<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the frequency deviation in Hz at the nth datapoint. The 4-byte little endian floating point format is specified in IEEE 488.2.

Examples

READ:BLUEtooth:FDVTime:TRACe? might return #3160xxxx... (160-byte data) for the trace.

READ:BLUEtooth:FREQuency:ERROr? (Query Only)

Returns the frequency error from the Bluetooth Constellation diagram.

Conditions

Measurement views: Bluetooth Constellation

Group

Read commands

Syntax

READ:BLUEtooth:FREQuency:ERROr?

Arguments

None

Returns

<NR3>, the frequency error value in Hz.

Examples

READ:BLUETOOTH:FREQUENCY:ERROR? might return 0.0000, indicating the frequency error is 0.0000 Hz.

READ:BLUETOOTH:FREQUENCY:ERROR:TYPE

Returns the frequency error type in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Read commands

Syntax

READ:BLUETOOTH:FREQUENCY:ERROR:TYPE

Arguments

None

Returns

1 indicates the error is automatically detected.

0 indicates the error is not automatically detected.

Examples

READ:BLUETOOTH:FREQUENCY:ERROR:TYPE might return 1, indicating the frequency error is automatically detected.

READ:BLUETOOTH:FREQUENCY:OFFSET:DRIFT:F1FZero? (Query Only)

Returns the drift in frequency offset ($f_1 - f_0$ – the frequency offset calculated in the first interval in the payload – the frequency offset calculated in the preamble) in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUETOOTH:FREQUENCY:OFFSET:DRIFT:F1FZero?

Arguments

None

Returns

<NR3> the drift in frequency offset ($f_1 - f_0$ – the frequency offset calculated in the first interval in the payload – the frequency offset calculated in the preamble)

Examples

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:F1FZero? might return -207.6465301514 indicating the drift in frequency offset ($f_1 - f_0$ – the frequency offset calculated in the first interval in the payload – the frequency offset calculated in the preamble).

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5? (Query Only)

Returns the maximum drift of the frequency offset in payload intervals spaced 50 μ s away in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5?

Arguments

None

Returns

<NR3> the maximum drift of the frequency offset in payload intervals spaced 50 μ s away.

Examples

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNF5? might return -207.6465301514, indicating the maximum drift of the frequency offset in payload intervals spaced 50 μ s away.

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5:INTERval? (Query Only)

Returns the interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFN5:INTERval?

Arguments

None

Returns

<NR1> interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred.

Examples

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNF5:INTERval? might return 16, indicating the interval at which the maximum drift of frequency offset in a duration of 50 μ s occurred. Here 16 refers to the 16th interval and that the drift of frequency offset calculated in the 16th interval from that calculated in the 11th interval is the maximum among those calculated 50 μ s away.

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO? (Query Only)

Returns the maximum drift of the frequency offset of the intervals in the payload from the preamble packet in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO?

Arguments

None

Returns

<NR3> the maximum drift of frequency offset calculated in payload intervals from the offset calculated in the preamble.

Examples

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZero? might return -207.6465301514, indicating that the maximum drift of frequency offset calculated in payload intervals from the offset calculated in the preamble is -207.6465301515 Hz.

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO:INTERval? (Query Only)

Returns the interval (n) at which the maximum drift $f_n - f_0$ occurred in the Bluetooth Frequency Deviation vs. Time display. (The $f_n - f_0$ indicates the drift of the frequency offset calculated in each payload interval from the offset calculated in the preamble.)

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUEtooth:FREQuency:OFFSet:DRIFt:FNFZERO:INTERval?

Arguments

None

Returns

<NR1> the interval at which the maximum drift ($f_n - f_0$) occurred.

Examples

`READ:BLUEtooth:FREQuency:OFFSet:DRIFT:FNFZero:INTERval?` might return 16, indicating that at the 16th payload interval, the maximum drift occurred. $f(16) - f(0)$ is the maximum drift among all $f(n) - f(0)$.

READ:BLUEtooth:FREQuency:OFFSet:MAX? (Query Only)

Returns the maximum frequency offset in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.

Conditions

Measurement views: Frequency Deviation vs. Time, CF Offset

Group

Read commands

Syntax

`READ:BLUEtooth:FREQuency:OFFSet:MAX?`

Arguments

None

Returns

<NR3> the maximum frequency offset value.

Examples

`READ:BLUEtooth:FREQuency:OFFSet:MAX?` might return -189.4632263184, the frequency offset value.

READ:BLUEtooth:FREQuency:OFFSet:MAX:INTERval? (Query Only)

Returns the maximum frequency offset interval in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

`READ:BLUEtooth:FREQuency:OFFSet:MAX:INTERval?`

Arguments

None

Returns

<NR1> the maximum frequency offset interval.

Examples

READ:BLUEtooth:FREQuency:OFFSet:MAX:INTERval? might return 271, indicating that the maximum drift $f(n) - f(0)$ occurred at the 271st payload interval.

READ:BLUEtooth:FREQuency:OFFSet:PREAmble? (Query Only)

Returns the offset calculated in the preamble region in the Frequency Deviation vs. Time and the Center Frequency Offset and Drift displays.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUEtooth:FREQuency:OFFSet:PREAmble?

Arguments

None

Returns

<NR3> the offset calculated in the preamble region.

Examples

READ:BLUEtooth:FREQuency:OFFSet:PREAmble? might return 106.4204711914, indicating the offset calculated in the preamble region.

READ:BLUEtooth:MODUlation:CHARacteristics:AVErage:F? (Query Only)

Returns the average frequency value when the selected test pattern is Other in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUEtooth:MODUlation:CHARacteristics:AVErage:F?

Arguments

None

Returns

<NRf> the average frequency.

Examples

READ:BLUetooth:MODUlation:CHARacteristics:AVerage:F? might return 140.8309531250E+3, the average frequency value.

READ:BLUetooth:MODUlation:CHARacteristics:AVerage:F2F1ratio? (Query Only)

Returns the average ratio value for the high and low frequency deviation in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUetooth:MODUlation:CHARacteristics:AVerage:F2F1ratio?

Arguments

None

Returns

<NR1> the average ratio value.

Examples

READ:BLUetooth:MODUlation:CHARacteristics:AVerage:F2F1ratio? might return ????, the average ratio value.

READ:BLUetooth:MODUlation:CHARacteristics:AVerage:FONE? (Query Only)

Returns the average frequency deviation for the low deviation pattern in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

READ:BLUetooth:MODUlation:CHARacteristics:AVerage:FONE?

Arguments

None

Examples

`READ:BLUEtooth:MODUlation:CHARacteristics:AVerage:FONE?` might return `139.8309531250E+3`, the average frequency deviation for the low deviation pattern.

READ:BLUEtooth:MODUlation:CHARacteristics:AVerage:FTWO? (Query Only)

Returns the average frequency deviation for the high deviation pattern in the Bluetooth Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Read commands

Syntax

`READ:BLUEtooth:MODUlation:CHARacteristics:AVerage:FTWO?`

Arguments

None

Examples

`READ:BLUEtooth:MODUlation:CHARacteristics:AVerage:FTWO?` might return `139.8309531250E+3`, the average frequency deviation for the high deviation pattern.

READ:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:COUNT? (Query Only)

Returns the number of packets analyzed to obtain average drift results from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUEtooth:SUMMARY:FREQuency:OFFSet:DRIFT:COUNT?`

Arguments

None

Returns

`<NR1>` the number of packets analyzed.

Examples

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:COUNT?` might return `8`, the number of packets analyzed.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:F1FZero? (Query Only)

Returns the drift f1–f0 from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:F1FZero?

Arguments

None

Returns

<NRf> the drift f1–f0 value.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:F1FZERO? might return 2.846E+3 indicating that the drift f1-f0 value is 2.846 kHz.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:F1FZero:STATus? (Query Only)

Returns the Pass/Fail drift f1–f0 result status in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:F1FZero:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:F1FZERO:STATUS? might return PASS, FAIL, or NA indicating whether the drift f1–f0 is within the specified limit.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5? (Query Only)

Returns the maximum drift of the fn–fn-5 value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5?

Arguments

None

Returns

<NRf> the fn–fn-5 value.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFN5? might return 2.846E+3 indicating that the maximum drift fn–fn-5 value in the preamble region is -2.846 kHz.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5:STATus? (Query Only)

Returns the Pass/Fail status of the maximum fn–fn-5 drift in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFN5:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFN5:STATUS? might return PASS, FAIL, or NA indicating whether the maximum drift fn–fn-5 is within the specified limit.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero? (Query Only)

Returns the maximum drift $f_n - f_0$ from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero?

Arguments

None

Returns

<NRf> the $f_n - f_0$ value.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFZERO? might return 4.846E+3 indicating that the drift $f_n - f_0$ value in the preamble region is 4.846 kHz.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero:STATUs? (Query Only)

Returns the Pass/Fail result status of the $f_n - f_0$ maximum drift in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:FNFZero:STATUs?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:FNFZERO:STATUS? might return PASS, FAIL, or NA indicating whether the maximum drift $f_n - f_0$ is within the specified limit.

READ:BLUetooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded:CODing:SCHEme (Query Only)

Returns the offset drift coding scheme value (LE Coded) in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUetooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded:CODing:SCHEme?

Arguments

None

Returns

<NR1> 2 or 8

Where 2 is data at 500 Kb/s and 8 is 125 Kb/s

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:CODING:SCHEME might return "8", indicating the offset drift coding scheme value is 8.

READ:BLUetooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded:F0FThree (Query Only)

Returns the Drift value f0-f3 for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUetooth:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECoded:F0FThree?

Arguments

None

Returns

<NRf> Maximum Frequency value in kHz

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F0FTHREE might return 207.2 kHz, indicating the f0-f3 drift value is 207.2 kHz.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:F0FThree:STATus (Query Only)

Returns the Drift value Status of f0-f3 for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:F0FThree:STATus?

Arguments

None

Returns

<String> PASS , FAIL or NA

PASS indicates that the test passed

FAIL indicates that the test failed

NA indicates that the test is not Applicable

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F0FTHREE:STATUS might return Pass, indicating the Drift value Status of f0-f3 was Pass.

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:F1FFour (Query Only)

Returns the Drift value of f1-f4 for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:FREQuency:OFFSet:DRIFt:LECoded:F1FFour?

Arguments

None

Returns

<Nrf> Maximum Frequency value in kHz

Examples

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F1FFOUR` might return `-10.22 kHz`, indicating the f1-f4 drift value is -10.22 kHz.

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F1FFOUR:STATUS (Query Only)

Returns the Drift value Status of f1-f4 for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F1FFOUR:STATUS?`

Arguments

None

Returns

`<String>` PASS , FAIL or NA

PASS indicates that the test passed

FAIL indicates that the test failed

NA indicates that the test is not Applicable

Examples

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:F1FFOUR:STATUS` might return `Pass`, indicating the Drift value Status of f1-f4 was Pass.

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3 (Query Only)

Returns the Drift value of fn-f(n-3) for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3?`

Arguments

None

Returns

`<NRf>` Maximum Frequency value in kHz

Examples

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3` might return `-10.42 kHz`, indicating the `fn-f(n-3)` drift value is `-10.42 kHz`.

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3:STATUS (Query Only)

Returns the Drift value Status of `fn-f(n-3)` for LE Coded in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3:STATUS?`

Arguments

None

Returns

`<String>` PASS , FAIL or NA

PASS indicates that the test passed

FAIL indicates that the test failed

NA indicates that the test is not Applicable

Examples

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:DRIFT:LECODED:FNFN3:STATUS` might return `Pass`, indicating the Drift value Status of `fn-f(n-3)` was `Pass`.

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX? (Query Only)

Returns the maximum frequency offset present in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX?`

Arguments

None

Returns

<NRf> the maximum frequency offset value in the packet.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX? might return 7.446E+3, indicating that the maximum frequency offset value in the packet is 7.446 kHz.

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX:STATUS? (Query Only)

Returns the Pass/Fail result status of the frequency offset maximum in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX:STATUS?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:MAX:STATUS? might return PASS, FAIL, or NA, indicating whether the maximum frequency offset in the packet is within the specified limit.

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:PREAMBLE? (Query Only)

Returns the frequency offset value in the preamble region from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:PREAMBLE?

Arguments

None

Returns

<NRf> the frequency offset value in the preamble region.

Examples

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:PREAMBLE?` might return `3.546E+3`, indicating that the frequency offset value in the preamble region is 3.546 kHz.

READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:PREAMBLE:STATUS? (Query Only)

Returns the Pass/Fail result status of the frequency offset in the preamble region.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:PREAMBLE:STATUS?`

Arguments

None

Returns

`<string>` the Pass/Fail result status.

Examples

`READ:BLUETOOTH:SUMMARY:FREQUENCY:OFFSET:PREAMBLE:STATUS?` might return `PASS`, `FAIL`, or `NA`, indicating whether the frequency offset in the preamble region is within the specified limit.

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS: AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT? (Query Only)

Returns the number of packets analyzed out of 10 packets for ΔF_{avg} from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT?`

Arguments

None

Returns

`<NR1>` the number of packets analyzed.

Examples

`READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT?`
might return 3, indicating that three packets were analyzed.

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT? (Query Only)

Returns the number of packets analyzed out of 10 packets for the $\Delta F1_{avg}$ from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT?`

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

`READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:F:MAX:PERCENTAGE:COUNT?`
might return 6 indicating that six packets were analyzed.

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE? (Query Only)

Returns the percentage of the $\Delta F2_{max\%}$ values that are above the specified limit.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE?`

Arguments

None

Returns

<NRf> the number of packets analyzed.

Examples

`READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE?` might return 99.2 indicating that 99.2% of the $\Delta F2$ maximum values are above the specified limit.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics: AVErage:DELTA:FTWO:MAX:PERCentage:COUNT? (Query Only)

Returns the number of packets analyzed out of 10 packets for delta F2 average from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:DELTA:FTWO:MAX:PERCentage:COUNT?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE:COUNT?
might return 6 indicating that six packets were analyzed.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics: AVErage:DELTA:FTWO:MAX:PERCentage:STATUS? (Query Only)

Returns the Pass/Fail result status of the $\Delta F2Max\%$ field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:DELTA:FTWO:MAX:PERCentage:STATUS?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:DELTA:FTWO:MAX:PERCENTAGE:STATUS?
might return PASS, FAIL, or NA indicating the Pass/Fail status of the $\Delta F2Max\%$ field in the Bluetooth summary.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:F2F1ratio? (Query Only)

Returns the ratio of the $\Delta F2_{avg}$ to $\Delta F1_{avg}$ from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:F2F1ratio?

Arguments

None

Returns

<Nrf> the value of the $\Delta F1_{avg}$ to $\Delta F2_{avg}$ ratio.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F2F1RATIO? might return 225.12E+3, indicating the average ratio is 22.5.12 kHz.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:F2F1ratio:STATus? (Query Only)

Returns the Pass/Fail results status of the $\Delta F2_{avg}/\Delta F1_{avg}$ field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:F2F1ratio:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F2F1RATIO:STATUS? might return PASS, FAIL, or NA, indicating the Pass/Fail result status of the $\Delta F2_{avg}/\Delta F1_{avg}$ field.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVERage:F? (Query Only)

Returns the ΔF_{avg} value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVERage:F?

Arguments

None

Returns

<NRf> the ΔF_{avg} value.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:F? might return 2.8723E+3, indicating the ΔF_{avg} is 2.8723 kHz.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVERage:FONE? (Query Only)

Returns the delta F1 average value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVERage:FONE?

Arguments

None

Returns

<NRf> the delta F1 value.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FONE? might return 155.3672E+3, indicating the delta F1 average is 155.3672 kHz.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics: AVErage:FONE:STATus? (Query Only)

Returns the Pass/Fail results status of the delta F1 average from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:FONE:STATus?

Arguments

None

Returns

<string> the Pass/Fail results status.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FONE:STATUS? might return PASS, FAIL, or NA, indicating whether the delta F1 average is within the limit.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics: AVErage:FTW0? (Query Only)

Returns the delta F2 average value from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:AVErage:FTW0?

Arguments

None

Returns

<NRf> the delta F1 value.

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:AVERAGE:FTW0? might return 225.12E+3, indicating that the delta F2 value is 225.12 kHz.

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:INDEX (Query Only)

Returns the Modulation index value in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:MODUlation:CHARacteristics:INDEX?

Arguments

None

Returns

<String>

Examples

READ:BLUETOOTH:SUMMARY:MODULATION:CHARACTERISTICS:INDEX might return "Stable", indicating the status of modulation index is Stable.

READ:BLUetooth:SUMMary:OUTPut:POWER:AVErage? (Query Only)

Returns the average output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:OUTPut:POWER:AVErage?

Arguments

None

Returns

<NRf> the average output power value in dBm.

Examples

READ:BLUETOOTH:SUMMARY:OUTPUT:POWER:AVERAGE? might return -29.1 indicating that the average output power is -29.1 dBm.

READ:BLUEtooth:SUMMary:OUTPut:POWER:AVErage:STATus? (Query Only)

Returns the Pass/Fail results status of the average output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:OUTPut:POWER:AVErage:STATus?

Arguments

None

Returns

<string> the Pass/Fail results status.

Examples

READ:BLUETOOTH:SUMMARY:OUTPUT:POWER:AVERAGE:STATUS? might return PASS, FAIL, or NA indicating whether the average output power is within the specified limit.

READ:BLUEtooth:SUMMary:OUTPut:POWER:COUNT? (Query Only)

Returns the number of packets analyzed out of 10 packets for the calculation of the output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:OUTPut:POWER:COUNT?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

READ:BLUETOOTH:SUMMARY:OUTPUT:POWER:COUNT? might return 6 indicating that six packets were analyzed.

READ:BLUetooth:SUMMary:OUTPut:POWER:EDR:COUNt? (Query Only)

Returns the number of packets analyzed out of 10 packets for calculation of the output power for EDR from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:OUTPut:POWER:EDR:COUNt?

Arguments

None

Returns

<NR1> the number of packets analyzed.

Examples

READ:BLUETOOTH:SUMMARY:OUTPUT:POWER:EDR:COUNT? might return 6 indicating that six packets were analyzed.

READ:BLUetooth:SUMMary:OUTPut:POWER:EDR:DPSK? (Query Only)

Returns the power in the DPSK portion of the EDR burst from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:OUTPut:POWER:EDR:DPSK?

Arguments

None

Returns

<NRf> the power in the DPSK portion of the EDR burst.

Examples

READ:BLUETOOTH:SUMMARY:OUTPUT:POWER:EDR:DPSK? might return -29.2, indicating that the average output power is -29.2 dBm.

READ:BLUEtooth:SUMMary:OUTPut:POWER:EDR:GPSK? (Query Only)

Returns the power in the GFSK portion of the EDR burst from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:OUTPut:POWER:EDR:GPSK?

Arguments

None

Returns

<NRf> the power in the GFSK portion of the EDR burst.

Examples

READ:BLUEtooth:SUMMary:OUTPut:POWER:EDR:GPSK? might return -29.1, indicating that the average output power is -29.1 dBm.

READ:BLUEtooth:SUMMary:OUTPut:POWER:PEAK? (Query Only)

Returns the peak output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:OUTPut:POWER:PEAK?

Arguments

None

Returns

<NRf> the peak output power value in dBm.

Examples

READ:BLUEtooth:SUMMary:OUTPut:POWER:PEAK? might return -29.3, indicating that the peak output power is -29.3 dBm.

READ:BLUetooth:SUMMary:OUTPut:POWEr:PEAK:STATus? (Query Only)

Returns the Pass/Fail results status of the peak output power from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:OUTPut:POWEr:PEAK:STATus?

Arguments

None

Returns

<string> the Pass/Fail result status.

Examples

READ:BLUETOOTH:SUMMARY:OUTPUT:POWER:PEAK:STATUS? might return PASS, FAIL, or NA, indicating whether the peak output power is within the specified limit.

READ:BLUetooth:SUMMary:PACKet:BDR:CRc? (Query Only)

Returns the Basic Rate value of the CRC field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:PACKet:BDR:CRc?

Arguments

None

Returns

<string> the value of the CRC field.

Examples

FETCH:BLUetooth:SUMMARY:PACKet:BDR:CRc? might return "0x9DB0" indicating the value of the CRC field in hexadecimal.

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:ARQN? (Query Only)

Returns the value of ARQN field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:ARQN?

Arguments

None

Returns

<NR2> the value of the ARQN field.

Examples

FETCH:BLUEtooth:SUMMary:PACKet:BDR:HEADer:ARQN? might return 0.000000, indicating the value of the flow field.

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:FLOW? (Query Only)

Returns the value of Flow field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:FLOW?

Arguments

None

Returns

<NR2> the flow value.

Examples

FETCH:BLUEtooth:SUMMary:PACKet:BDR:HEADer:FLOW? might return 1.000000, indicating the value of the flow field.

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:HEC? (Query Only)

Returns the value of HEC field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:HEC?

Arguments

None

Returns

<string> the value of the HEC field.

Examples

FETCH:BLUEtooth:SUMMary:PACKet:BDR:HEADer:HEC? might return "00110010" indicating the value of the HEC field in binary.

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:LT:ADDRess? (Query Only)

Returns the LT address from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:LT:ADDRess?

Arguments

None

Returns

<string> the LT address.

Examples

FETCH:BLUEtooth:SUMMary:PACKet:BDR:HEADer:LT:ADDR? might return "101" indicating the LT address in binary.

READ:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:SN (Query Only)

Returns the SN value (1 bit) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:SN?

Arguments

None

Returns

<Boolean> 0, 1

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:SN might return 1, indicating the value of SN is "1".

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:SEQN? (Query Only)

Returns the value of SEQN field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BDR:HEADer:SEQN?

Arguments

None

Returns

<NR2> the value of the SEQN field.

Examples

FETCH:BLUEtooth:SUMMary:PACKet:BDR:HEADer:SEQN? might return 1.000000 indicating the value of the flow field.

READ:BLUetooth:SUMMary:PACKet:BDR:HEADer:TYPE? (Query Only)

Returns the value of Type field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:PACKet:BDR:HEADer:TYPE?

Arguments

None

Returns

<string> the value of the type field.

Examples

FETCH:BLUetooth:SUMMary:PACKet:BDR:HEADer:TYPE? might return "00001111" indicating the type field in binary.

READ:BLUetooth:SUMMary:PACKet:BDR:PAYLoad:LENgth? (Query Only)

Returns the Basic Rate payload length from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUetooth:SUMMary:PACKet:BDR:PAYLoad:LENgth?

Arguments

None

Returns

<string> the value of the payload length.

Examples

FETCH:BLUetooth:SUMMary:PACKet:BDR:PAYLoad:LENgth? might return "0101010011" indicating the payload length value in binary.

READ:BLUEtooth:SUMMary:PACKet:BDR:PREAmble? (Query Only)

Returns the preamble of the Basic Rate packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BDR:PREAmble?

Arguments

None

Returns

<string> the preamble of the packet.

Examples

FETCH:BLUEtooth:SUMMary:PACKet:BDR:PREAmble? might return "0101" indicating the preamble is 0101 in binary.

READ:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD? (Query Only)

Returns the sync word from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD?

Arguments

None

Returns

<string> the sync word.

Examples

FETCH:BLUEtooth:SUMMary:PACKet:BDR:SYNC:WORD? might return "0x4F36F2CEE85390CB" indicating the sync word in hexadecimal format.

READ:BLUEtooth:SUMMary:PACKet:BDR:TYPE? (Query Only)

Returns the packet type of the Basic Rate signal from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUEtooth:SUMMary:PACKet:BDR:TYPE?`

Arguments

None

Returns

<string> the packet type.

Examples

`FETCH:BLUEtooth:SUMMary:PACKet:BDR:TYPE?` might return "DH5" indicating that the DH5 packet is being analyzed.

READ:BLUEtooth:SUMMary:PACKet:BLE:ACCEss:ADDRes? (Query Only)

Returns the 32-bit Access Address from the Bluetooth Summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUEtooth:SUMMary:PACKet:BLE:ACCEss:ADDRes?`

Arguments

None

Returns

<string> the 32-bit Access Address.

Examples

`READ:BLUETOOTH:SUMMARY:PACKET:BLE:ACCESS:ADDRESS?` might return "0x71764129" indicating the Access Address in hexadecimal.

READ:BLUEtooth:SUMMary:PACKet:BLE:CRC? (Query Only)

Returns the value of the CRC field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:PACKET:BLE:CRC?

Arguments

None

Returns

<string> the value of the CRC field.

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:CRC? might return "0x9DB0" indicating value CRC field in hexadecimal.

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:CHANNEL:SELECT (Query Only)

Returns the channel selected under decoded packet information section in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:CHANNEL:SELECT?

Arguments

None

Returns

<String> 0 or 1 or -1 or "-"

0 and 1 represents valid

-1 represents invalid

"-" represents NIL

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:CHANNEL:SELECT might return 1, indicating the selected channel is valid.

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LENGTH? (Query Only)

Returns the value of the PDU length field from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LENGTH?

Arguments

None

Returns

<string> the value of the length field.

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LENGTH? might return "100101" indicating value length field in binary.

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LLID (Query Only)

Returns the LLID value (2 bits) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LLID?

Arguments

None

Returns

<String> Either 00,01,10,11

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:LLID might return 01, indicating the value of LLID is "01".

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:MD (Query Only)

Returns the MD value (1 bit) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:MD?`

Arguments

None

Returns

<Boolean> 0, 1

Examples

`READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:MD` might return 1, indicating the value of MD is "1".

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:NESN (Query Only)

Returns the NESN value (1 bit) under decoded packet information when the packet type is "OTHERS" for Low Energy in Bluetooth Summary display.

Conditions

Measurement view: Bluetooth Summary display

Group

Read commands

Syntax

`READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:NESN?`

Arguments

None

Returns

<Boolean> 0, 1

Examples

`READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:NESN` might return 1, indicating the value of NESN is "1".

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:RX:ADDRESS? (Query Only)

Returns the PDU Rx address from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:RX:ADDRESS?

Arguments

None

Returns

<string> the Rx address.

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:RX:ADDRESS? might return 0.00000000 indicating Rx Address.

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:TX:ADDRESS? (Query Only)

Returns the PDU Tx address from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:TX:ADDRESS?

Arguments

None

Returns

<string> the Tx address.

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:TX:ADDRESS? might return 0.00000000 indicating Tx Address.

READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:TYPE? (Query Only)

Returns the PDU packet type from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUEtooth:SUMMary:PACKet:BLE:PDU:HEADer:TYPE?`

Arguments

None

Returns

<string> the PDU type.

Examples

`READ:BLUETOOTH:SUMMARY:PACKET:BLE:PDU:HEADER:TYPE?` might return "0010" indicating the PDU type in binary.

READ:BLUEtooth:SUMMary:PACKet:BLE:PREAmble? (Query Only)

Returns the preamble of the BLE packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUEtooth:SUMMary:PACKet:BLE:PREAmble?`

Arguments

None

Returns

<string> the preamble of the packet.

Examples

`READ:BLUETOOTH:SUMMARY:PACKET:BLE:PREAMBLE?` might return "01010101" indicating the preamble is 01010101 in binary.

READ:BLUEtooth:SUMMary:PACKet:BLE:TYPE? (Query Only)

Returns the packet type from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Read commands

Syntax

`READ:BLUEtooth:SUMMary:PACKet:BLE:TYPE?`

Arguments

None

Returns

<string> the BLE packet type.

Examples

READ:BLUETOOTH:SUMMARY:PACKET:BLE:TYPE? might return "BLE_TEST" indicating the BLE test signal is being analyzed.

READ:CCDF? (Query Only)

Returns the CCDF measurement results.

Conditions

Measurement views: CCDF

Group

Read commands

Syntax

READ:CCDF?

Arguments

None

Returns

<avg_ampl>,<avg_ccdf>,<crest_factor>,<ampl_10>,<ampl_1>,<ampl_p1>,<ampl_p01>,<ampl_p001>,<ampl_p0001>

Where

<avg_ampl> is the average amplitude in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

<avg_ccdf> is the average CCDF in percent.

<crest_factor> is the crest factor in dB.

<ampl_10> is the amplitude at CCDF of 10% in dB.

<ampl_1> is the amplitude at CCDF of 1% in dB.

<ampl_p1> is the amplitude at CCDF of 0.1% in dB.

<ampl_p01> is the amplitude at CCDF of 0.01% in dB.

<ampl_p001> is the amplitude at CCDF of 0.001% in dB.

<ampl_p0001> is the amplitude at CCDF of 0.0001% in dB.

Examples

READ:CCDF? might return -33.35,35.8,9.75,3.88,7.07,8.50,9.25,9.72,9.74, indicating
(average amplitude) = -33.35 dBm,
(average CCDF) = 35.8%,

(crest factor) = 9.75 dB,
 (amplitude at CCDF of 10%) = 3.88 dB,
 (amplitude at CCDF of 1%) = 7.07 dB,
 (amplitude at CCDF of 0.1%) = 8.50 dB,
 (amplitude at CCDF of 0.01%) = 9.25 dB,
 (amplitude at CCDF of 0.001%) = 9.72 dB, and
 (amplitude at CCDF of 0.0001%) = 9.74 dB.

READ:CCDF:{FIRSt|SECond|THIRd}:X? (Query Only)

Returns the horizontal values of the specified trace in the CCDF measurement. The mnemonics FIRSt, SECond, and THIRd represent Trace 1, Trace 2, and Gaussian reference curve, respectively.

NOTE: This query is invalid when [SENSe]:CCDF:TIME:TYPE is set to CONTInuous or TOTal.

Conditions

Measurement views: CCDF

Group

Read commands

Syntax

READ:CCDF:{FIRSt|SECond|THIRd}:X?

Related Commands

[READ:CCDF:{FIRSt|SECond|THIRd}\[:Y\]? \(on page 1661\)](#)

Arguments

None

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the horizontal value (dB) of the CCDF graph at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:CCDF:FIRSt:X might return #41024xxxx... (1024-byte data) for the horizontal values of Trace 1.

READ:CCDF:{FIRSt|SECond|THIRd}:XY? (Query Only)

Returns the horizontal and vertical value pairs of the specified trace in the CCDF measurement.

The mnemonics FIRSt, SECond, and THIRd represent Trace 1, Trace 2, and Gaussian reference curve, respectively.

NOTE: This query is invalid when [SENSe]:CCDF:TIME:TYPE is set to CONTInuous or TOTal.

Conditions

Measurement views: CCDF

Group

Read commands

Syntax

READ:CCDF:{FIRSt|SECond|THIRd}:XY?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the horizontal value (dB) and vertical value (%) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:CCDF:FIRSt:XY? might return #41024xxxx... (1024-byte data) for the horizontal and vertical value pairs of Trace 1.

READ:CCDF:{FIRSt|SECond|THIRd}[:Y]? (Query Only)

Returns the vertical values of the specified trace in the CCDF measurement.

The mnemonics FIRSt, SECond, and THIRd represent Trace 1, Trace 2, and Gaussian reference curve, respectively.

NOTE: This query is invalid when [SENSe]:CCDF:TIME:TYPE is set to CONTInuous or TOTal.

Conditions

Measurement views: CCDF

Group

Read commands

Syntax

READ:CCDF:{FIRSt|SECond|THIRd}[:Y]?

Arguments

None

Returns

#<num_digit><num_byte><y(1)><y(2)>...<y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y (n)> is the vertical value (%) of the CCDF graph at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:CCDF:FIRST:Y might return #41024xxxx... (1024-byte data) for the vertical values of Trace 1.

READ:CONSte[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in Hz. The frequency error is the difference between the measured carrier frequency of the signal and the user selected center frequency of the analyzer.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Read commands

Syntax

READ:CONSte[:MEASview<y>]:FERRor?

Related Commands

READ:EVM[:MEASview<y>]:FERRor?

Arguments

None

Returns

<freq_error>::<NRf> which is the frequency error in Hz.

Examples

READ:CONSte:MEASview2:FERRor? might return -10.7E+3, which is a frequency error of -10.7 kHz for measview 2 of constellation.

READ:CONSte[:MEASview<y>]:RESults? (Query only)

Returns the constellation measurement results of EVM RMS, peak, and location displayed on the bottom of the screen.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Read commands

Syntax

```
READ:CONStE[:MEASview<y>]:RESults?
```

Arguments

None

Returns

For modulation types 2|4|8|16FSK or C4FM:

```
FSK_deviation_Avg_Leftmost, FSK_deviation_Avg_Rightmost
```

Where

`FSK_deviation_Avg_Leftmost` is the average FSK deviation of the left-most symbol in Hz.

`FSK_deviation_Avg_Rightmost` is the average FSK deviation of the right-most symbol in Hz.

For all other valid modulation types:

```
<EVM_RMS>, <EVM_peak>, <location>
```

Where

`<EVM_RMS>::<NRf>` is the RMS EVM in percent (%).

`<EVM_peak>::<NRf>` is the peak EVM in percent (%).

`<location>::<NRf>` is the peak location in symbol number.

The time unit can be changed by the `[SENSE]:DDEMod:TIME:UNITs` command.

Examples

`READ:CONStE:MEASview2:RESults?` might return 2.841,3.227,68.000, indicating that the RMS EVM is 2.841% and the peak EVM is 3.227% at symbol #68 for measview 2 of constellation.

READ:CONStE[:MEASview<y>]:TRACe? (Query only)

Returns the constellation trace data.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Read commands

Syntax

```
READ:CONStE[:MEASview<y>]:TRACe?
```

Arguments

None

Returns

#<num_digit><num_byte><I (1)><Q (1)><I (2)><Q (2)>...<I (n)><Q (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<I (n)> and <Q (n)> are the normalized I- and Q-coordinate values at the nth data point. 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:CONSTE:MEASview2:TRACE? might return #43848xxxx... (3848-byte data) for the constellation trace data for measview 2 of constellation.

READ:DDEMod[:MEASview<y>]:STABLE? (Query only)

Returns the symbol table data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Symbol table

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Symbol table).

Group

Read commands

Syntax

READ:DDEMod[:MEASview<y>]:STABLE?

Arguments

None

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the symbol table data for the point n, \4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:DDEMod:MEASview1:STABLE? might return #3512xxxx... (512-byte data) for the symbol Table measurement view1.

READ:DIQVtime[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Demod I&Q versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Read commands

Syntax

```
READ:DIQVtime[:MEASview<y>]:FERRor?
```

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:DIQVtime:MEASview1:FERROR? might return -10.7E+3, indicating the frequency error is -10.7 kHz measurement view 1.

READ:DIQVtime[:MEASview<y>]:I? (Query only)

Returns the I versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Read commands

Syntax

```
READ:DIQVtime[:MEASview<y>]:I?
```

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the I level in volts at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:DIQVtime:MEASview1:I? might return #3160xxxx... (160-byte data) for the I versus Time trace measurement view 1.

READ:DIQVtime[:MEASview<y>]:Q? (Query only)

Returns the Q versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Read commands

Syntax

READ:DIQVtime[:MEASview<y>]:Q?

Arguments

None

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the Q level in volts at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:DIQVtime:MEASview1:Q? might return #3160xxxx... (160-byte data) for the Q versus Time trace measurement view 1.

READ:DPX:DDENsity? (Query Only)

Returns the calculated density for the selected region in the DPXogram measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:DDENsity?

Arguments

None

Returns

<NR1> value.

Examples

READ:DPX:DDENSITY? might return a DPX signal density value of 24.4802413393.

READ:DPX:DGRam:LINE:COUNT? (Query Only)

Returns the number of lines in the DPXogram measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:DGRam:LINE:COUNT?

Arguments

None

Returns

<NR1> number of lines in the measurement.

Examples

READ:DPX:DGRAM:LINE:COUNT? might return 40 indicating that there were 40 lines in the measurement.

READ:DPX:DGRam:TIME[:SCALE]:OFFSet? (Query Only)

Returns the time scale offset in the DPXogram measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:DGRam:TIME[:SCALE]:OFFSet?

Arguments

None

Returns

<string> The time offset in the DPXogram measurement in seconds.

Examples

READ:DPX:DGRAM:TIME[:SCALE]:OFFSET? might return "0.000 s" indicating that the time scale offset was 0.000 s.

READ:DPX:RESults:TRACe<x>? (Query Only)

Acquires a waveform and then returns waveform data of the specified trace <x> in the DPX spectrum measurement, where x is 1 to 6. The traces 1 to 4 are in the standard form. Trace 5 is the bitmap trace and its data is returned in a binary block. Trace 6 is the DPXogram trace on DPX spectrum plots. Trace 7 is the Ogram line in the DPXogram display.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:RESults:TRACe<x>?

Arguments

<NR1>

Returns

For traces 1 to 4 or 6:

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude of the trace sample at the nth data point.

<data(n)> is in the 4-byte little endian floating-point format specified in IEEE 488.2.

The format is a binary block of 32 bit floating point values. Each value ranges from 0 to 1.0, where 1.0 represents 100%.

Examples

READ:DPX:RESULTS:TRACE1? might return #42004xxxx... (2004-byte of data) for the waveform data of trace one (1).

READ:DPX:TRACe:AVERage? (Query Only)

Acquires a waveform and then returns waveform data of the average trace in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:TRACe:AVERAge?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the waveform data of the average trace for the point n in dBm, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:DPX:TRACE:AVERAGE? might return #42004xxxx... (2004-byte data) for the waveform data of the average trace.

READ:DPX:TRACe:BITMap? (Query Only)

Acquires a waveform and then returns trace waveform data of the bitmap trace in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:TRACe:BITMap?

Arguments

None

Returns

The format is a binary block of 32 bit floating point values. Each value ranges from 0 to 1.0, where 1.0 represents 100%.

Examples

READ:DPX:TRACE:BITMAP? might return #42004xxxx... (2004-byte data) for the waveform data of the bitmap trace.

READ:DPX:TRACe:MATH? (Query Only)

Returns waveform data of the math trace in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:TRACe:MATH?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the waveform data of the math trace for the point n in dBm, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:DPX:TRACe:MATH? might return #42004xxxx... (2004-byte data) for the waveform data of the math trace.

READ:DPX:TRACe:MAXimum? (Query Only)

Returns waveform data of the maximum trace in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:TRACe:MAXimum?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the waveform data of the maximum trace for the point n in dBm, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:DPX:TRACE:MAXIMUM? might return #42004xxxx... (2004-byte data) for the waveform data of the maximum trace.

READ:DPX:TRACe:MINimum? (Query Only)

Returns waveform data of the minimum trace in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Read commands

Syntax

READ:DPX:TRACe:MINimum?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the waveform data of the minimum trace for the point n in dBm. 4-byte little endian floating-point format specified in IEEE 488.2. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:DPX:TRACE:MINIMUM? might return #42004xxxx... (2004-byte data) for the waveform data of the minimum trace.

READ:EDlagram[:MEASview<y>]:FDEViation? (Query only)

Returns the frequency deviation versus Time trace data with the X values.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Group

Read commands

Syntax

READ:EDlagram[:MEASview<y>]:FDEViation?

Returns

#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)> and <X(n)> is frequency deviation in Hz and time (symbols) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:EDIagram:MEASview2:FDEviation? might return #3160xxxx... (160-byte data) for the frequency deviation versus Time trace for measview2 of the Eye diagram.

READ:EDIagram[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the eye diagram measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Read commands

Syntax

READ:EDIagram[:MEASview<y>]:FERRor?

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:EDIagram:MEASview2:FERRor? might return -10.7E+3, indicating the frequency error is -10.7 kHz for measview2 of the Eye diagram.

READ:EDIagram[:MEASview<y>]:I? (Query only)

Returns the I versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Read commands

Syntax

READ:EDIagram[:MEASview<y>]:I?

Arguments

None

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y (n)><X (n)> is the I level (normalized) and time (symbols) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:EDiagram:MEASview2:I? might return #3160xxxx... (160-byte data) for the I versus Time trace for measview2 of the Eye diagram.

READ:EDiagram[:MEASview<y>]:Q? (Query only)

Returns the Q versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Read commands

Syntax

READ:EDiagram[:MEASview<y>]:Q?

Arguments

None

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y (n)><X (n)> is the Q level (normalized) and time (symbols) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:EDiagram:MEASview2:Q? might return #3160xxxx... (160-byte data) for the Q versus Time trace for measview2 of the Eye diagram.

READ:EMC:COUNT? (Query Only)

Returns the total numbers of spots detected in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:COUNT?

Arguments

None

Returns

<NR1>

Examples

READ:EMC:COUNT? might return 12, indicating that 12 spots are detected.

READ:EMC:EMISSION:RESULTS:STATUS? (Query Only)

Returns the status of the emission results in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:EMISSION:RESULTS:STATUS?

Arguments

None

Returns

<String> either PASS or FAIL

Examples

READ:EMC:EMISSION:RESULTS:STATUS? might return FAIL, indicating that the status of emission results is failed.

READ:EMC:SPOT<x>:AMBlent:AMPLitude? (Query Only)

Returns the amplitude of the selected spot in ambient trace of EMC View.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:AMBIent:AMPLitude?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT1:AMBIent:AMPLitude? might return 52.612, indicating that amplitude of spot 1 in ambient trace is 52.61 dBuV.

READ:EMC:SPOT<x>:AMBIent:DELTA? (Query Only)

Returns the Delta value of the selected spot in ambient trace of EMC View.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:AMBIent:DELTA?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT<x>:AMBIent:DELTA? might return 3.3614, indicating that delta value of spot 2 in the ambient trace is 3.36 dBuV.

READ:EMC:SPOT<x>:AMBIent:PASS? (Query Only)

Returns the status of the selected spot in ambient trace in EMC view. The default status is THRE.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:AMBIent:PASS?

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

Where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

READ:EMC:SPOT3:AMBIent:PASS? might return THRE, indicating that the spot 3 of ambient trace is failing by crossing Threshold.

READ:EMC:SPOT<x>:FREQuency? (Query Only)

Returns the frequency of the specified spot in EMC View.

<x> = <NR1> Indicates the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:FREQuency?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT2:FREQuency? might return 366.12500000E+3, indicating the frequency of spot 2 is 366.125 kHz.

READ:EMC:SPOT<x>:PASS? (Query Only)

Returns the overall status of the specified spot in EMC view. The default status is THRE.

<x> = <NR1> Indicates the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

`READ:EMC:SPOT<x>:PASS?`

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

Where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

`READ:EMC:SPOT1:PASS?` might return OLIM, indicating that spot 1 is failing by crossing the Over Limit.

READ:EMC:SPOT<x>:RANGe? (Query Only)

Returns the range of the selected spot in EMC View.

<x> = <NR1> Indicates the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

`READ:EMC:SPOT<x>:RANGe?`

Arguments

None

Returns

<String> from A to T

Examples

`READ:EMC:SPOT1:RANGe?` might return "B", indicating that the range of spot 1 is "B".

READ:EMC:SPOT<x>:RECAIl:AMPLitude? (Query Only)

Returns the amplitude of the specified spot in the recalled trace of EMC View.

<x> = Indicates the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:RECALL:AMPLitude?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT1:RECALL:AMPLitude? might return 23.598, indicating that amplitude of spot 1 in the recalled trace is 23.59 dBuV.

READ:EMC:SPOT<x>:RECALL:DELTA? (Query Only)

Returns the Delta value of the selected spot in recalled trace of EMC View.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:RECALL:DELTA?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT2:RECALL:DELTA? might return 5.5878, indicating that delta value of spot 2 in the recalled trace is 5.58 dBuV.

READ:EMC:SPOT<x>:RECALL:PASS? (Query Only)

Returns the status of the specified spot in recalled trace in EMC view. The default status is THRE.

<x> = the spot number

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

```
READ:EMC:SPOT<x>:RECALL:PASS?
```

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

Where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

READ:EMC:SPOT<x>:RECALL:PASS? might return OMAR, indicating that the spot 1 of recalled trace is failing by crossing Margin.

READ:EMC:SPOT<x>:SCAN<y>:AMPLitude? (Query Only)

Returns the amplitude of the specified spot with respect to specified scan detector in the results table.

<x> = the spot number

<y> = the scan detector number (either 1 or 2)

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

```
READ:EMC:SPOT<x>:SCAN<y>:AMPLitude?
```

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT1:SCAN1:AMPLitude? might return 20.6209, indicating that amplitude of spot 1 for scan detector 1 is 20.62 dBuV.

READ:EMC:SPOT<x>:SCAN<y>:DELTA? (Query Only)

Returns the Delta value of the specified spot with respect to the specified scan detector in the results table.

<x> = the spot number

<y> = the scan detector number (either 1 or 2)

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:SCAN<y>:DELTA?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT2:SCAN1:DELTA might return 3.6209, indicating that delta value of spot 2 for scan detector 1 is 3.62 dBuV.

READ:EMC:SPOT<x>:SCAN<y>:PASS? (Query Only)

Returns the status of the specified spot based on the specified scan detector in EMC view. The default status is THRE.

<x> = the spot number

<y> = the scan detector number (either 1 or 2)

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:SCAN<y>:PASS?

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

Where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

READ:EMC:SPOT2:SCAN1:PASS? might return THRE, indicating that spot 2 of scan detector 1 is failing by crossing the threshold.

READ:EMC:SPOT<x>:SPOT<y>:AMPLitude? (Query Only)

Returns the amplitude of the specified spot with respect to specified spot detector in the results table.

<x> = the spot number

<y> = the spot detector number (either 1, 2, or 3)

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:SPOT<y>:AMPLitude?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT1:SPOT1:AMPLitude? might return 18.365, indicating that the amplitude of spot 1 for spot detector 1 is 18.36 dBuV.

READ:EMC:SPOT<x>:SPOT<y>:DELTA? (Query Only)

Returns the Delta value of the specified spot with respect to specified spot detector in the results table.

<x> = the spot number

<y> = the spot detector number (either 1, 2, or 3)

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:SPOT<y>:DELTA?

Arguments

None

Returns

<NRf>

Examples

READ:EMC:SPOT2:SPOT1:DELTA? might return 2.2578, indicating that delta value of spot 2 for spot detection 1 is 2.25 dBuV.

READ:EMC:SPOT<x>:SPOT<y>:PASS? (Query Only)

Returns the status of the specified spot based on the specified spot detector in EMC view. The default status is THRE.

<x> = the spot number

<y> = the spot detector number (either 1, 2, or 3)

Conditions

Measurement view: EMC - EMI Display

Group

Read commands

Syntax

READ:EMC:SPOT<x>:SPOT<y>:PASS?

Arguments

None

Returns

<String> Either OLIM, OMAR or THRE

Where

OLIM = Over Limit

OMAR = Over Margin

THRE = Threshold

Examples

READ:EMC:SPOT1:SPOT2:PASS? might return OMAR, indicating that the spot 1 of spot detector 2 is failing by crossing the Margin.

READ:EVM[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the EVM versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Programmer Manual

Read commands

Syntax

READ:EVM:[MEASVIEW<y>]:FERRor?

Arguments

None

Returns

<freq_error>::<Nrf> is the frequency error in Hz.

Examples

READ:EVM:MEASVIEW2:FERROR? might return $-10.7\text{E}+3$, indicating the frequency error is -10.7 kHz for measview2 of EVM.

READ:EVM[:MEASview<y>]:PEAK? (Query only)

Returns the peak value in the EVM versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Read commands

Syntax

READ:EVM[:MEASview<y>]:PEAK?

Related Commands

[READ:EVM\[:MEASview<y>\]:PINDEX?](#) (on page 1683)

Arguments

None

Returns

<peak>::<Nrf> is the peak EVM value in percent (%).

Examples

READ:EVM:MEASview2:PEAK? might return 1.32, indicating the peak EVM value is 1.32% for measview2 of EVM.

READ:EVM[:MEASview<y>]:PINDEX? (Query only)

Returns the time at the EVM peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Read commands

Syntax

```
READ:EVM[:MEASview<y>]:PINDEX?
```

Related Commands

[READ:EVM\[:MEASview<y>\]:PEAK?](#) (on page 1683)

Arguments

None

Returns

<peak_time>::<NRf> is the time at the EVM peak in symbol number. The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

READ:EVM:MEASview2:PINDEX? might return 68.000, indicating that the EVM peak is at symbol #68 for measview2 of EVM.

READ:EVM[:MEASview<y>]:RMS? (Query only)

Returns the RMS (Root-Mean-Square) value in the EVM versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Read commands

Syntax

```
READ:EVM[:MEASview<y>]:RMS?
```

Arguments

None

Returns

<rms>::<NRf> is the RMS EVM value in percent (%).

Examples

READ:EVM:MEASview2:RMS? might return 0.582, indicating the RMS EVM value is 0.582% for measview2 of EVM.

READ:EVM[:MEASview<y>]:TRACe? (Query only)

Returns the EVM versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Read commands

Syntax

READ:EVM[:MEASview<y>]:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the EVM versus Time trace data for the point n in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:EVM:MEASVIEW2:TRACE? might return #42036xxxx... (2036-byte data) for the EVM versus Time measview2.

READ:FDVTime[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Frequency deviation versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Read commands

Syntax

READ:FDVTime:MEASview<y>:FERRor?

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:FDVTime:MEASview2:FERROR? might return $-10.7E+3$, indicating the frequency error is -10.7 kHz.

READ:FDVTime[:MEASview<y>]:TRACe? (Query only)

Returns the Frequency deviation versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Read commands

Syntax

READ:FDVTime:MEASview<y>:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the Frequency deviation versus Time trace data for the point n in Hz, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:FDVTime:MEASview2:TRACE? might return #3160xxxx... (160-byte data) for the Frequency deviation versus Time measview 2.

READ:{FM|PM}:FERRor? (Query only)

Returns the frequency error in the Frequency modulation and Phase modulation measurements.

Conditions

Measurement views: Frequency and Phase modulation

Group

Read commands

Syntax

READ:{FM|PM}:FERRor?

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:FM:FERRor? might return -10.7E+3, indicating the frequency error is -10.7 kHz.

READ:FM:PHALf? (Query Only)

Returns the half peak-peak frequency deviation (Pk-Pk/2) in the FM measurement.

Conditions

Measurement views: Frequency deviation versus Time

Group

Read commands

Syntax

READ:FM:PHALf?

Arguments

None

Returns

<Pk-Pk/2>::<NRf> is the half peak-peak frequency deviation in Hz.

Examples

READ:FM:PHALf? might return 628.9E+3, indicating the half peak-peak frequency deviation is 628.9 kHz.

READ:FM:PNEGative? (Query Only)

Returns the negative peak frequency deviation (-Pk) in the FM measurement.

Conditions

Measurement views: FM

Group

Read commands

Syntax

READ:FM:PNEGative?

Arguments

None

Returns

`<-Pk> : : <NRf>` is the negative peak frequency deviation in Hz.

Examples

`READ:FM:PNEGATIVE?` might return `-495.6E+3`, indicating the negative peak frequency deviation is `-495.6 kHz`.

READ:FM:PPOSitive? (Query Only)

Returns the positive peak frequency deviation (+Pk) in the FM measurement.

Conditions

Measurement views: FM

Group

Read commands

Syntax

`READ:FM:PPOSitive?`

Arguments

None

Returns

`<+Pk> : : <NRf>` is the positive peak frequency deviation in Hz.

Examples

`READ:FM:PPOSITIVE?` might return `763.2E+3`, indicating the positive peak frequency deviation is `763.2 kHz`.

READ:FM:PTPeak? (Query Only)

Returns the peak-peak frequency deviation (Pk-Pk) in the FM measurement.

Conditions

Measurement views: FM

Group

Read commands

Syntax

`READ:FM:PTPeak?`

Arguments

None

Returns

`<Pk-Pk> : : <NRf>` is the peak-peak frequency deviation in Hz.

Examples

READ:FM:PTPEAK? might return 1.258E+6, indicating the peak-peak frequency deviation is 1.258 MHz.

READ:FM:RESult? (Query Only)

Returns the FM measurement results.

Conditions

Measurement views: FM

Group

Read commands

Syntax

READ:FM:RESult?

Arguments

None

Returns

<+Pk>,<-Pk>,<RMS>,<Pk-Pk>,<Pk-Pk/2>

Where

<+Pk>: :<NRf> is the positive peak frequency deviation in Hz.

<-Pk>: :<NRf> is the negative peak frequency deviation in Hz.

<RMS>: :<NRf> is the RMS frequency deviation in Hz.

<Pk-Pk>: :<NRf> is the peak-peak frequency deviation in Hz.

<Pk-Pk/2>: :<NRf> is the half peak-peak frequency deviation in Hz.

Examples

READ:FM:RESULT? might return 763.2E+3,-494.6E+3,271.2E+3,1.258E+6,628.9E+3.

READ:FM:RMS? (Query Only)

Returns the RMS frequency deviation in the FM measurement.

Conditions

Measurement views: FM

Group

Read commands

Syntax

READ:FM:RMS?

Arguments

None

Returns

<RMS>: : <NRf> is the RMS frequency deviation in Hz.

Examples

READ:FM:RMS? might return 271.2E+3, indicating the RMS frequency deviation is 271.2 kHz.

READ:{FSETtling|PSETtling}:FTTime? (Query Only)

Returns the settling time from the trigger position in seconds. The settling time is measured from the trigger point (see :FETCh:FSETtling:TRIGger:TIME).

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:FTTime?

Arguments

None

Returns

<value>: : <NRf> is the settling time in seconds.

Examples

READ:FSETTLING:FTTIME? might return 44.8300E-6, indicating the settling time is 44.83 μ s.

READ:{FSETtling|PSETtling}:MASK[:PASS]? (Query Only)

Returns whether the input signal passes the mask test.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:MASK[:PASS]?

Arguments

None

Returns

0 is returned if the signal fails the mask test.

1 is returned if the signal passes the mask test.

Examples

READ:FSETTLING:MASK:PASS? might return 1, indicating the signal passed (did not exceed the mask limits).

READ:{FSETtling|PSETtling}:SETTled:FREQuency? (Query Only)

Returns the frequency at which the signal is considered settled.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:SETTled:FREQuency?

Arguments

None

Returns

<value>: : <Nrf> is the frequency at which the signal is settled.

Examples

READ:FSETTLING:SETTLED:FREQUENCY? might return 2.44838E+9, indicating the input signal frequency at the point where the signal is considered settled is 2.44838 GHz.

READ:{FSETtling|PSETtling}:SETTled[:PASS]? (Query Only)

Returns whether the input signal is settled with the tolerance range.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:SETTled[:PASS]?

Arguments

None

Returns

0 is returned if the signal is not settled within the tolerance range.

1 is returned if the signal is settled within the tolerance range.

Examples

READ:FSETTLING:SETTLED:PASS? might return 1, indicating the signal is settled within the tolerance range.

READ:{FSETtling|PSETtling}:SETTled:TIME? (Query Only)

Returns the settled time in seconds. The settled time is measured from the measurement start point.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

```
READ:{FSETtling|PSETtling}:SETTled:TIME?
```

Arguments

None

Returns

<value>: : <NRf> is the settled time in seconds.

Examples

READ:FSETTLING:SETTLED:TIME? might return 299.830000E-6, indicating the settled time is 299.83 μ s.

READ:{FSETtling|PSETtling}:SLMSd[:PASS]? (Query Only)

Returns whether the input signal is settled within the specified tolerance and the signal is settled longer than the Minimum Settled Duration ([SENSe]:{FSETtling|PSETtling}:SDURation:MINimum).

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

```
READ:{FSETtling|PSETtling}:SLMSd[:PASS]?
```

Arguments

None

Returns

0 is returned if the signal is not settled within the tolerance range and minimum settled duration..

1 is returned if the signal is settled within the tolerance range and minimum settled duration.

Examples

READ:FSETTLING:SLMSD:PASS? might return 1, indicating the signal is settled within the tolerance range and the minimum settled duration.

READ:{FSETtling|PSETtling}:START:TIME? (Query Only)

Returns the start time for the measurement in seconds. The start time is measured from the start of the analysis period.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

`READ:{FSETtling|PSETtling}:START:TIME?`

Arguments

None

Returns

`<value>::<NRf>` is the time in seconds when the measurement started.

Examples

`READ:FSETTLING:START:TIME?` might return `251.4300E-6`, indicating the measurement started 251.43 μ s after the beginning of the analysis period.

READ:{FSETtling|PSETtling}:TIME? (Query Only)

Returns the settling time in seconds. The settling time is measured from the start time (see [:FETCH:FSETtling:START:TIME](#) (on page 1202)).

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

`READ:{FSETtling|PSETtling}:TIME?`

Arguments

None

Returns

`<value>::<NRf>` is the settling time in seconds.

Examples

`READ:FSETTLING:TIME?` might return `48.4000E-6`, indicating the settling time is 48.4 μ s.

READ:{FSETtling|PSETtling}:TRACe<x>:X? (Query Only)

Returns the Frequency or Phase values of the specified trace.

The parameter `<x>` = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:TRACe<x>:X?

Arguments

None

Returns

#<num_digit><num_byte><y(1)><y(2)>...<y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the frequency (Hz) or phase (degrees) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:FSETTLING:TRACE1:X? might return #574232xxxx... (74232-byte data) for the frequency values of Trace 1.

READ:{FSETtling|PSETtling}:TRACe<x>:XY? (Query Only)

Returns the time and frequency or phase value pairs of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:TRACe<x>:XY?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the time and frequency or phase value pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:FSETTLING:TRACE2:XY? might return #574232xxxx... (74232-byte data) for the time and frequency pairs of the Trace 2.

READ:{FSETtling|PSETtling}:TRACe<x>[:Y]? (Query Only)

Returns the frequency or phase values of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:TRACe<x>[:Y]?

Arguments

None

Returns

#<num_digit><num_byte><y(1)><y(2)>...<y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the frequency or phase value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:FSETTLING:TRACE1:Y? might return #575148xxxx... (75148-byte data) for the frequency values of Trace 1.

READ:{FSETtling|PSETtling}:TRIGger:TIME? (Query Only)

Returns the time when the trigger occurred in seconds.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

READ:{FSETtling|PSETtling}:TRIGger:TIME?

Arguments

None

Returns

<value>: :<NRf> is the time in seconds after the measurement start point when the trigger occurred.

Examples

`READ:FSETTLING:TRIGGER:TIME?` might return `2.255E-6`, indicating the time when the trigger occurred 255 μ s after the start of the measurement.

READ:{FSETtling|PSETtling}:VALue? (Query Only)

Returns the settled value in Hz for Frequency Settling and in degrees for Phase Settling.

Conditions

Measurement views: Frequency and Phase Settling

Group

Read commands

Syntax

`READ:{FSETtling|PSETtling}:VALue?`

Arguments

None

Returns

`<value>::<NRf>` is the settling value in Hz for Frequency Settling and in degrees for Phase Settling.

Examples

`READ:FSETTLING:VALUE?` might return `2.44838155E+9`, indicating the settled frequency is 2.44838 GHz.

READ:FSETtling:ERRor? (Query Only)

Returns the settled error in Hz in Frequency Settling. Only for Frequency Settling Time measurement. In Frequency Settling:

When Target Reference is set to Auto, Settled Error = 0.

Conditions

Measurement views: Frequency Settling

Group

Read commands

Syntax

`READ:FSETtling:ERRor?`

Arguments

None

Returns

`<value>::<NRf>` returns the settled error in Hz.

When Target Reference is set to Auto, Settled Error = 0.

When Target Reference is set to Meas Freq:

Settled Error = Settled Frequency – (Measurement Frequency + Offset)

Examples

READ:FSETTLING:ERROR? might return 0, indicating the Target Reference is set to Auto.

READ:FVTime[:MEASview<y>]? (Query Only)

Returns the Frequency versus Time trace data.

Conditions

Measurement views: Frequency versus Time

Group

Read commands

Syntax

READ:FVTime[:MEASview<y>]?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the frequency drift data for the point n in Hz, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:FVTIME:MEASview1? might return #3156xxxx... (156-byte data) for the Frequency versus Time trace.

READ:FVTime[:MEASview<y>]:MAXimum? (Query Only)

Returns the maximum value in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Read commands

Syntax

READ:FVTime[:MEASview<y>]:MAXimum?

Related Commands

[READ:FVTime\[:MEASview<y>\]:MAXLocation?](#) (on page 1698)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>::<NRf> is the maximum frequency drift in Hz.

Examples

READ:FVTIME:MEASview1:MAXIMUM? might return 2.625E+6, indicating the maximum frequency drift is 2.625 MHz.

READ:FVTime[:MEASview<y>]:MAXLocation? (Query Only)

Returns the time at which the frequency drift is maximum.

Conditions

Measurement views: Frequency versus Time

Group

Read commands

Syntax

READ:FVTime[:MEASview<y>]:MAXLocation?

Related Commands

[READ:FVTime\[:MEASview<y>\]:MAXimum?](#) (on page 1697)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max_time>::<NRf> is the time in seconds at which the frequency drift is maximum.

Examples

READ:FVTIME:MEASview1:MAXLOCATION? might return 25.03E-9, indicating the frequency drift is maximum at 25.03 ns.

READ:FVTime[:MEASview<y>]:MINimum? (Query Only)

Returns the minimum value in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Read commands

Syntax

READ:FVTime[:MEASview<y>]:MINimum?

Related Commands

[READ:FVTime\[:MEASview<y>\]:MINLocation?](#) (on page 1699)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min>::<NRf> is the minimum frequency drift in Hz.

Examples

READ:FVTIME:MEASview1:MINIMUM? might return -6.618E+6, indicating the minimum frequency drift is -6.618 MHz.

READ:FVTime[:MEASview<y>]:MINLocation? (Query Only)

Returns the time at which the frequency drift is minimum.

Conditions

Measurement views: Frequency versus Time

Group

Read commands

Syntax

READ:FVTime[:MEASview<y>]:MINLocation?

Related Commands

[READ:FVTime\[:MEASview<y>\]:MINimum?](#) (on page 1698)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min_time>::<NRf> is the time in seconds at which the frequency drift is minimum.

Examples

READ:FVTIME:MEASview1:MINLOCATION? might return 450.7E-9, indicating the frequency drift is minimum at 450.7 ns.

READ:FVTime[:MEASview<y>]:RESult? (Query Only)

Returns the Frequency versus Time measurement results.

Conditions

Measurement views: Frequency versus Time

Group

Read commands

Syntax

READ:FVTime[:MEASview<y>]:RESult?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>,<max_time>,<min>,<min_time>

Where

<max>::<NRf> is the maximum frequency drift in Hz.

<max_time>::<NRf> is the time in seconds at which the frequency drift is maximum.

<min>::<NRf> is the minimum frequency drift in Hz.

<min_time>::<NRf> is the time in seconds at which the frequency drift is minimum.

Examples

READ:FVTIME:MEASview1:RESULT? might return 2.625E+6,25.03E-9,-6.618E+6,450.7E-9, indicating the maximum frequency drift is 2.625 MHz at 25.03 ns and the minimum frequency drift is -6.618 MHz at 450.7 ns.

READ:IQVTime[:MEASview<y>]:I? (Query Only)

Returns the I versus Time trace data.

Conditions

Measurement views: RF I & Q versus Time

Group

Read commands

Syntax

READ:IQVTime[:MEASview<y>]:I?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the I level data for the point n in volts, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:IQVTIME:MEASview1:I? might return #3160xxxx... (160-byte data) for the I versus Time trace.

READ:IQVTime[:MEASview<y>]:MAXimum? (Query Only)

Returns the maximum value in the RF I & Q versus Time measurement.

Conditions

Measurement views: RF I & Q versus Time

Group

Read commands

Syntax

READ:IQVTime[:MEASview<y>]:MAXimum?

Related Commands

[READ:IQVTime\[:MEASview<y>\]:MAXLocation?](#) (on page 1701)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>: :<NRf> is the maximum I or Q level in volts.

Examples

READ:IQVTIME:MEASview1:MAXIMUM? might return 1.214, indicating the maximum I or Q level is 1.214 V.

READ:IQVTime[:MEASview<y>]:MAXLocation? (Query Only)

Returns the time at which the I or Q level is maximum.

Conditions

Measurement views: RF I & Q versus Time

Group

Read commands

Syntax

READ:IQVTime[:MEASview<y>]:MAXLocation?

Related Commands

[READ:IQVTime\[:MEASview<y>\]:MAXimum?](#) (on page 1701)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max_time>: :<NRf> is the time in seconds at which the I or Q level is maximum.

Examples

READ:IQVTIME:MEASview1:MAXLOCATION? might return $175.3\text{E}-9$, indicating the I or Q level is maximum at 175.3 ns.

READ:IQVTime[:MEASview<y>]:MINimum? (Query Only)

Returns the minimum value in the RF I & Q versus Time measurement.

Conditions

Measurement views: RF I & Q versus Time

Group

Read commands

Syntax

`READ:IQVTime[:MEASview<y>]:MINimum?`

Related Commands

[READ:IQVTime\[:MEASview<y>\]:MINLocation?](#) (on page 1702)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

`<min>::<NRf>` is the minimum I or Q level in volts.

Examples

`READ:IQVTIME:MEASview1:MINIMUM?` might return $-370.5\text{E}-3$, indicating the minimum I or Q level is -370.5 mV.

READ:IQVTime[:MEASview<y>]:MINLocation? (Query Only)

Returns the time at which the I or Q level is minimum.

Conditions

Measurement views: RF I & Q versus Time

Group

Read commands

Syntax

`READ:IQVTime[:MEASview<y>]:MINLocation?`

Related Commands

[READ:IQVTime\[:MEASview<y>\]:MINimum?](#) (on page 1702)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min_time>::<Nrf> is the time in seconds at which the I or Q level is minimum.

Examples

READ:IQVTime:MEASview1:MINLOCATION? might return 450.7E-9, indicating the I or Q level is minimum at 450.7 ns.

READ:IQVTime[:MEASview<y>]:Q? (Query Only)

Returns the Q versus Time trace data.

Conditions

Measurement views: IQ versus Time

Group

Read commands

Syntax

READ:IQVTime[:MEASview<y>]:Q?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the Q level data for the point n in volts, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:IQVTime:MEASview1:Q? might return #3160xxxx... (160-byte data) for the Q versus Time trace.

READ:IQVTime[:MEASview<y>]:RESult? (Query Only)

Returns the RF I & Q versus Time measurement results.

Conditions

Measurement views: RF I & Q versus Time

Group

Read commands

Syntax

READ:IQVTime[:MEASview<y>]:RESult?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>, <max_time>, <min>, <min_time>

Where

<max>: : <NRf> is the maximum I or Q level in volts.

<max_time>: : <NRf> is the time in seconds at which the I or Q level is maximum.

<min>: : <NRf> is the minimum I or Q level in volts.

<min_time>: : <NRf> is the time in seconds at which the I or Q level is minimum.

Examples

READ:IQVTIME:MEASview1:RESULT? might return 1.214, 175.3E-9, -370.5E-3, 450.7E-9, indicating the maximum I or Q level is 1.214 V at 175.3 ns and the minimum I or Q level is -370.5 mV at 450.7 ns.

READ:LTE:ACLR:MHITS:COUNT? (Query Only)

Returns the number of rows in the results table of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Read commands

Syntax

READ:LTE:ACLR:MHITS:COUNT?

Returns

<NR1>

Examples

READ:LTE:ACLR:MHITS:COUNT? might return 7, indicating there are seven rows in the results table.

READ:LTE:ACLR:MHITS<x>:BANDwidth? (Query Only)

Returns the bandwidth value of the channel (row) of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is the row number in the LTE ACLR display results table.

Group

Read commands

Syntax

READ:LTE:ACLR:MHITS<x>:BANDwidth?

Returns

<NR3>

Examples

`READ:LTE:ACLR:MHITS1:BANDWIDTH?` might return `4.515000000E+6`, which indicates a bandwidth for channel 1 (row 1) of 4.515 MHz.

READ:LTE:ACLR:MHITS<x>:CHANnel:NAME? (Query Only)

Returns the channel name of the specified index in the results table of the LTE ACLR display. The minimum index will be 1 and the maximum index will be the count of the channels in the results table.

Conditions

Measurement view: LTE ACLR

The parameter <x> is a positive integer and represents the row number in the LTE ACLR display results table.

Group

Read commands

Syntax

`READ:LTE:ACLR:MHITS<x>:CHANnel:NAME?`

Returns

<string>

Examples

`READ:LTE:ACLR:MHITS2:CHANNEL:NAME?` might return "B", which is the name of channel 2 (row 2).

READ:LTE:ACLR:MHITS<x>:FREQuency:OFFSet? (Query Only)

Returns the frequency offset of the channel of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is a positive integer and represents the row number in the LTE ACLR display results table.

Group

Read commands

Syntax

`READ:LTE:ACLR:MHITS<x>:FREQuency:OFFSet?`

Returns

<NR3>

Examples

`READ:LTE:ACLR:MHITS1:FREQUENCY:OFFSET?` might return `5.000000000E+6`, which indicates the frequency offset of channel 1 (row 1) is 5 MHz.

READ:LTE:ACLR:MHITS<x>:INTeg:LOWEr:ABSolute? (Query Only)

Returns the lower absolute value of the channel of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is the row number in the LTE ACLR display results table.

Group

Read commands

Syntax

READ:LTE:ACLR:MHITS<x>:INTEg:LOWEr:ABSolute?

Returns

<NRf>

Examples

READ:LTE:ACLR:MHITS1:INTEg:LOWEr:ABSolute? might return -53.3921980303 which indicates lower absolute value of channel 1 (row 1) is -53.3921980303 dBm.

NOTE: The actual units depends on the choice made from the units tab of the Analysis control panel.

READ:LTE:ACLR:MHITS<x>:INTEg:LOWEr:RELative? (Query Only)

Returns the lower relative value of the channel of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is the row number in the LTE ACLR display results table.

Group

Read commands

Syntax

READ:LTE:ACLR:MHITS<x>:INTEg:LOWEr:RELative?

Returns

<NRf>

Examples

READ:LTE:ACLR:MHITS1:INTEg:LOWEr:RELATIVE? might return -53.3921980303, which indicates lower relative value of channel 1 (row 1) is -53.3921980303 dB.

READ:LTE:ACLR:MHITS<x>:INTEg:UPPEr:ABSolute? (Query Only)

Returns the upper absolute value of the channel of the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> is a positive integer and represents the row number in the LTE ACLR display results table.

Group

Read commands

Syntax

READ:LTE:ACLR:MHITS<x>:INTEg:UPPER:ABSolute?

Returns

<NRf>

Examples

READ:LTE:ACLR:MHITS1:INTEG:UPPER:ABSOLUTE? might return -53.3921980303, which indicates upper absolute value of channel 1 (row 1) is -53.3921980303 dBm.

NOTE: The actual units depends on the choice made from the units tab of the Analysis control panel.

READ:LTE:ACLR:REFErence:POWer? (Query Only)

Returns the reference power level in the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Read commands

Syntax

READ:LTE:ACLR:REFErence:POWer?

Returns

<NRf>

Examples

READ:LTE:ACLR:REFERENCE:POWER? might return -16.92, indicating that the reference power level is -16.92 dBm.

READ:LTE:ACLR:RESUltS:STATUs? (Query Only)

Returns the pass or fail status of the LTE ACLR display measurement.

Conditions

Measurement view: LTE ACLR

Group

Read commands

Syntax

READ:LTE:ACLR:RESUltS:STATUs?

Returns

0 means measurement status is FAIL.

1 means measurement status is PASS.

Examples

READ:LTE:ACLR:RESULTS:STATUS? might return 1, indicating that the LTE ACLR measurement status is PASS.

READ:LTE:ACLR:SPECTrum:X? (Query Only)

Returns the frequency of the spectrum trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Read commands

Syntax

READ:LTE:ACLR:SPECTrum:X?

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the frequency (Hz) at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:LTE:ACLR:SPECTRUM:X? might return #516020xxxx... (16020-byte data) for the frequencies of the spectrum trace.

READ:LTE:ACLR:SPECTrum:XY? (Query Only)

Returns the frequency and amplitude pairs of the spectrum trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Read commands

Syntax

READ:LTE:ACLR:SPECTrum:XY?

Returns

#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the frequency (Hz) and amplitude (dBm) pair at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:LTE:ACLR:SPECTRUM:XY?` might return `#516020xxxx...` (16020-byte data) for the frequency and amplitude pairs of the spectrum trace.

READ:LTE:ACLR:SPECTrum:Y? (Query Only)

Returns the amplitude of the spectrum trace in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Read commands

Syntax

`READ:LTE:ACLR:SPECTrum:Y?`

Returns

`#<num_digit><num_byte><y(1)><y(2)>...<y(n)>`

Where,

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<y(n)>` is the frequency (Hz) at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:LTE:ACLR:SPECTRUM:Y?` might return `#516020xxxx...` (16020-byte data) for the amplitude of the spectrum trace.

READ:LTE:CHSPpectrum:OBW? (Query Only)

Returns the Occupied Bandwidth (Hz) of the LTE Channel Spectrum measurement view.

Conditions

Measurement view: LTE Channel Spectrum

Group

Read commands

Syntax

`READ:LTE:CHSPpectrum:OBW?`

Returns

`<NR3>`

Examples

`READ:LTE:CHSPECTRUM:OBW?` might return `1.0851851250E+6`, indicating the occupied Bandwidth is 1.09 MHz.

READ:LTE:CHSPectrum:POWer:CHANnel? (Query Only)

Returns the Channel Power value in LTE Channel Spectrum display. The result will be in dBm (by default) or in the units chosen from the Units tab of the Analysis Control panel.

Conditions

Measurement view: LTE Channel Spectrum

Group

Read commands

Syntax

```
READ:LTE:CHSPectrum:POWer:CHANnel?
```

Returns

<NRf>

Examples

READ:LTE:CHSPECTRUM:POWER:CHANNEL? might return -14.9248560147, indicating that the Channel Power is -14.92 dBm.

READ:LTE:CHSPectrum:SPECTrum? (Query Only)

Returns spectrum trace data of the LTE Channel Spectrum measurement.

Conditions

Measurement view: LTE Channel Spectrum

Group

Read commands

Syntax

```
READ:LTE:CHSPectrum:SPECTrum?
```

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude in dBm at the nth data point, 4-byte little endian floating point format specified in IEEE 488.2.

Examples

READ:LTE:CHSPECTRUM:SPECTRUM? might return #43204 xxxx... (3204-byte data) for the spectrum trace data of the LTE Channel Spectrum measurement.

READ:LTE:CONSte:CELL:ID? (Query Only)

Queries the Cell ID value LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Read commands

Syntax

`READ:LTE:CONStE:CELL:ID?`

Returns

<NR1>

Examples

`READ:LTE:CONStE:CELL:ID?` might return 112, indicating CELLID measurement number is 112.

READ:LTE:CONStE:FREQuency:ERRor? (Query Only)

Queries Frequency Error value in Hz for the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Read commands

Syntax

`READ:LTE:CONStE:FREQuency:ERRor?`

Returns

<NRf>

Examples

`READ:LTE:CONStE:FREQUENCY:ERROR?` might return -71.9780578613, indicating frequency error value is -71.9780578613 Hz.

READ:LTE:CONStE:GROUp:ID? (Query Only)

Queries the Group ID value for the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Read commands

Syntax

`READ:LTE:CONStE:GROUp:ID?`

Returns

<NR1>

Examples

READ:LTE:CONStE:GRouP:ID? might return 160, indicating Group ID measurement number is 160.

READ:LTE:CONStE:SECTor:ID? (Query Only)

Queries the Sector ID value for the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Read commands

Syntax

READ:LTE:CONStE:SECTor:ID?

Returns

<NRf>

Examples

READ:LTE:CONStE:SECTOR:ID? might return 2, indicating the Sector ID value is 2.

READ:LTE:PVTime:OFFSlot:POWer? (Query Only)

Returns the TOff power measurement value in dBm/MHz for the LTE Power vs Time display.

Conditions

Measurement view: LTE Power vs Time

Group

Read commands

Syntax

READ:LTE:PVTime:OFFSlot:POWer?

Returns

<NRf>

Examples

READ:LTE:PVTIME:OFFSLOT:POWER? might return -76.11514587403, indicating the offslot power is -76.11514 dBm/MHz.

READ:LTE:PVTime:RESUltS:STATus

Returns the pass or fail status for the LTE Power vs Time measurement.

Conditions

Measurement view: LTE Power vs Time

Group

Read commands

Syntax

`READ:LTE:PVTime:RESUlts:STATus`

Returns

0: means measurement status is FAIL.

1: means measurement status is PASS.

Examples

`READ:LTE:PVTIME:RESULTS:STATUS` might return 1, indicating the measurement status is PASS.

READ:LTE:PVTime:TRACe:X? (Query Only)

Returns the horizontal values (time in seconds) for the LTE Power vs. Time trace.

Conditions

Measurement view: LTE Power vs Time

Group

Read commands

Syntax

`READ:LTE:PVTime:TRACe:X?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where,

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:LTE:PVTIME:TRACE:X?` might return `#43204` (3204-byte data), which represents the time in seconds (horizontal values).

READ:LTE:PVTime:TRACe:XY? (Query Only)

Returns the horizontal value (time in seconds) and vertical value (power) for the LTE Power vs. Time trace.

Conditions

Measurement view: LTE Power vs Time

Group

Read commands

Syntax

`READ:LTE:PVTime:TRACe:XY?`

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:LTE:PVTIME:TRACE:XY? might return #43204 (3204-byte data), which represents the horizontal value (time in seconds) and vertical value (power) pair at the nth data point.

READ:LTE:PVTime:TRACe:Y? (Query Only)

Returns the vertical values (power) for the LTE Power vs. Time trace.

Conditions

Measurement view: LTE Power vs Time

Group

Read commands

Syntax

READ:LTE:PVTime:TRACe:Y?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where,

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:LTE:PVTIME:TRACE:Y? might return #43204 (3204-byte data), which represents the vertical values (power).

READ:MCPower:ADJacent:CHANnels? (Query Only)

Returns the power of adjacent channels in order of increasing frequency.

Conditions

Measurement views: MCPR

Group

Read commands

Syntax

READ:MCPower:ADJacent:CHANnels?

Arguments

None

Returns

<acpr_lower(n)>, ...<acpr_lower(2)>, <acpr_lower(1)>,
<acpr_upper(1)>, <acpr_upper(2)>, ...<acpr_upper(n)>

Where

<acpr_lower(n)> is the ACPR for the lower channel #n in dB.

<acpr_upper(n)> is the ACPR for the upper channel #n in dB.

To add a pair of upper and lower adjacent channels, use the [SENSe]:MCPower:CHANnel:ADJacent:ADD command.

Examples

READ:MCPOWER:ADJACENT:CHANNELS? might return

-4.420, -4.847, -4.316, -4.225, indicating

(ACPR for the lower channel 2) = -4.420 dB,

(ACPR for the lower channel 1) = -4.847 dB,

(ACPR for the upper channel 1) = -4.316 dB, and

(ACPR for the upper channel 2) = -4.225 dB.

READ:MCPower:CHANnel:POWer? (Query Only)

Returns the reference power in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Read commands

Syntax

READ:MCPower:CHANnel:POWer?

Arguments

None

Returns

<ref_power>: <NRf> is the reference power in dBm. The unit can be changed by the [SENSe]:POWer:UNITs command.

To select the power reference, use the [SENSe]:MCPower:RChannels commands.

Examples

READ:MCPOWER:CHANNEL:POWER? might return 4.227, indicating that the reference power is 4.227 dBm.

READ:MCPower:MAIN:CHANnels? (Query Only)

Returns the power of main channels in order of increasing frequency.

Conditions

Measurement views: MCPR

Group

Read commands

Syntax

`READ:MCPower:MAIN:CHANnels?`

Related Commands

[\[SENSe\]:MCPower:CHANnel:MAIN:\[BANDwidth|BWIDth\]](#) (on page 2207)

[\[SENSe\]:MCPower:CHANnel:MAIN:COUNt](#) (on page 2207)

[\[SENSe\]:MCPower:CHANnel:MAIN:INACtive](#) (on page 2207)

[\[SENSe\]:MCPower:CHANnel:MAIN:SPACing](#) (on page 2208)

Arguments

None

Returns

`<power_main(1)>, <power_main(2)>, ... <power_main(n)>`

Where

`<power_main(n)>` is the power of main channel #n in dBm. The unit can be changed by the `[SENSe]:POWer:UNITs` command.

To specify the main channels, use the `[SENSe]:MCPower:CHANnel:MAIN` commands.

Examples

`READ:MCPOWER:MAIN:CHANNELS?` might return

`-2.420, -2.847, -2.316, -2.225`, indicating

(power of the main channel 1) = -2.420 dBm,

(power of the main channel 2) = -2.847 dBm,

(power of the main channel 3) = -2.316 dBm, and

(power of the main channel 4) = -2.225 dBm.

READ:MCPower:SPECTrum? (Query Only)

Returns spectrum trace data of the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Read commands

Syntax

`READ:MCPower:SPECTrum?`

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the spectrum trace data in dBm for the point n, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:MCPOWER:SPECTRUM? might return #43204xxxx... (3204-byte data) for the spectrum trace data of the MCPR measurement.

READ:MERRor[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Magnitude error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Read commands

Syntax

READ:MERRor[:MEASview<y>]:FERRor?

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:MERRor:MEASview2:FERRor? might return -10.7E+3, indicating the frequency error is -10.7 kHz.

READ:MERRor[:MEASview<y>]:PEAK? (Query only)

Returns the peak value in the Magnitude error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Read commands

Syntax

```
READ:MERRor[:MEASview<y>]:PEAK?
```

Related Commands

[READ:MERRor\[:MEASview<y>\]:PINdex?](#) (on page 1718)

Arguments

None

Returns

<peak>::<NRf> is the peak magnitude error value in percent (%).

Examples

READ:MERRor:MEASview2:PEAK? might return 1.57, indicating the peak magnitude error is 1.57%.

READ:MERRor[:MEASview<y>]:PINdex? (Query only)

Returns the time at the Magnitude error peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Read commands

Syntax

```
READ:MERRor[:MEASview<y>]:PINdex?
```

Related Commands

[READ:MERRor\[:MEASview<y>\]:PEAK?](#) (on page 1717)

Arguments

None

Returns

<peak_time>::<NRf> is the time at the Magnitude error peak in symbol number. The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

READ:MERRor:MEASview2:PINdex? might return 68.000, indicating that the Magnitude error peak is at symbol #68.

READ:MERRor[:MEASview<y>]:RMS? (Query only)

Returns the RMS (Root-Mean-Square) value in the Magnitude error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time.

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Read commands

Syntax

READ:MERRor[:MEASview<y>]:RMS?

Arguments

None

Returns

<rms>::<NRf> is the RMS magnitude error value in percent (%).

Examples

READ:MERRor:MEASview2:RMS? might return 0.382, indicating the RMS MERRor value is 0.382%.

READ:MERRor[:MEASview<y>]:TRACe? (Query only)

Returns the Magnitude error versus Time trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Read commands

Syntax

READ:MERRor[:MEASview<y>]:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the Magnitude error versus Time trace data for the point n in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:MERRor:MEASview2:TRACe? might return #42036xxxx... (2036-byte data) for the Magnitude error versus Time measview 2.

READ:NOISe:TABLE:VALue? (Query Only)

Returns the noise table data. A total of 7 values per frequency (28 bytes per frequency) is returned. The number of frequencies returned depends on the settings.

Conditions

Measurement view: Noise display

Group

Read commands

Syntax

READ:NOISe:TABLE:VALue?

Returns

Returns an array of floats (size of 4 bytes each) defined as:

- First frequency gain, noise figure, noise factor, y factor, noise temperature, power hot, power cold
- Second frequency gain, noise figure, noise factor, y factor, noise temperature, power hot, power cold

Examples

READ:NOISe:TABLE:VALue?

READ:OBWidth:BOBW:XDBBandwidth? (Query Only)

Returns the difference between the higher and lower frequency points corresponding to the value where it is X dB less from the value at the center frequency.

Set the measurement direction using the appropriate inward or outward command before issuing this command.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Read commands

Syntax

READ:OBWidth:BOBW:XDBBandwidth?

Related Commands

[READ:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth?](#) (on page 1721)

[READ:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth?](#) (on page 1723)

Arguments

None

Returns

<value> ::= <NRf> the X dBm bandwidth in Hz.

Examples

READ:OBWIDTH:BOBW:XDBBANDWIDTH? might return 89.12000E+3, indicating the difference between the higher and lower frequency points is 89.12 kHz.

READ:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth? (Query Only)

Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured inwards (coming from the ends to the center frequency).

Conditions

Measurement views: Bluetooth 20 dB Bandwith

Group

Read commands

Syntax

READ:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth?

Related Commands

[READ:OBWidth:BOBW:XDBBANDwidth?](#) (on page 1720)

[READ:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency?](#) (on page 1722)

Arguments

None

Returns

<value> ::= <NRf> the input X dBm value in Hz.

Examples

READ:OBWIDTH:BOBW:XDBMBANDWIDTH:IN:BANDWIDTH? might return 1.2518400000E+6, indicating that the bandwidth corresponding to the input XdBm vaue is 1.2518 MHz measured in the inward direction.

READ:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the inward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Read commands

Syntax

`READ:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency?`

Related Commands

[READ:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency?](#) (on page 1722)

Arguments

None

Returns

`<value> ::= <NRf>` the left frequency in Hz.

Examples

`READ:OBWIDTH:BOBW:XDBMBANDWIDTH:IN:LEFT:FREQUENCY?` might return `2.401E+9`, indicating that the frequency corresponding to the X dbm value to the left of the center frequency is 2.401 GHz.

READ:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the inward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Read commands

Syntax

`READ:OBWidth:BOBW:XDBMbandwidth:IN:RIGHT:FREQuency?`

Related Commands

[READ:OBWidth:BOBW:XDBMbandwidth:IN:LEFT:FREQuency?](#) (on page 1721)

Arguments

None

Returns

`<value> ::= <NRf>` the right frequency in Hz.

Examples

`READ:OBWIDTH:BOBW:XDBMBANDWIDTH:IN:RIGHT:FREQUENCY?` might return `2.445E+9` indicating that the frequency corresponding to the Xdbm value to the right of the center the frequency is 2.445 GHz.

READ:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth? (Query Only)

Returns the difference between the higher and lower frequency points corresponding to the value which it is the X dBm value measured outwards (from the center frequency to the ends).

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Read commands

Syntax

READ:OBWidth:BOBW:XDBMbandwidth:OUT:BANDwidth?

Related Commands

[READ:OBWidth:BOBW:XDBBANDwidth?](#) (on page 1720)

[READ:OBWidth:BOBW:XDBMbandwidth:IN:BANDwidth?](#) (on page 1721)

Arguments

None

Returns

<value> ::= <NRf> the input X dBm value in Hz.

Examples

READ:OBWIDTH:BOBW:XDBMBANDWIDTH:OUT:BANDWIDTH? might return 1.2518400000E+6 indicating that the bandwidth corresponding to the output XdBm vaue is 1.2518 MHz measured in the outward direction.

READ:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the left of the center frequency measured in the outward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Read commands

Syntax

READ:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency?

Related Commands

[READ:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency?](#) (on page 1724)

Arguments

None

Returns

<value> ::= <NRf> the left frequency in Hz.

Examples

READ:OBWIDTH:BOBW:XDBMBANDWIDTH:OUT:LEFT:FREQUENCY? might return 2.401E+9 indicating that the frequency corresponding to the X dbm value to the left of the center frequency is 2.401 Hz.

READ:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency? (Query Only)

Returns the frequency corresponding to the X dBm value to the right of the center frequency measured in the outward direction.

Conditions

Measurement views: Bluetooth 20 dB Bandwidth

Group

Read commands

Syntax

READ:OBWidth:BOBW:XDBMbandwidth:OUT:RIGHT:FREQuency?

Related Commands

[READ:OBWidth:BOBW:XDBMbandwidth:OUT:LEFT:FREQuency?](#) (on page 1723)

Arguments

None

Returns

<value> ::= <NRf> the Right frequency in Hz.

Examples

READ:OBWIDTH:BOBW:XDBMBANDWIDTH:OUT:RIGHT:FREQUENCY? might return 2.445E+9 indicating that the frequency corresponding to the XdBm value to the right of the center the frequency is 2.445 GHz.

READ:OBWidth:FREQuency:ERRor? (Query Only)

Returns the frequency error in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:FREQuency:ERRor?

Arguments

None

Returns

`<freq_error>::<NRf>` is the frequency error in Hz.

Examples

`READ:OBWIDTH:FREQUENCY:ERROR?` might return `-10.7E+3`, indicating the frequency error is -10.7 kHz.

READ:OBWidth:OBWidth:BANDwidth? (Query Only)

Returns the occupied bandwidth in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

[READ:OBWidth:OBWidth:BANDwidth?](#) (on page 1725)

Arguments

None

Returns

`<OBW>::<NRf>` is the occupied bandwidth in Hz.

Examples

`READ:OBWIDTH:OBWIDTH:BANDWIDTH?` might return `4.0E+6`, indicating the occupied bandwidth is 4 MHz.

READ:OBWidth:OBWidth:LEFT:FREQuency? (Query Only)

Returns the left (lower) frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

`READ:OBWidth:OBWidth:LEFT:FREQuency?`

Related Commands

[READ:OBWidth:OBWidth:RIGHT:FREQuency?](#) (on page 1727)

Arguments

None

Returns

<OBW_left_freq>::<NRf> is the left frequency in Hz.

Examples

READ:OBWIDTH:OBWIDTH:LEFT:FREQUENCY?

READ:OBWidth:OBWidth:LEFT:LEVel? (Query Only)

Returns the level at the left frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:OBWidth:LEFT:LEVel?

Related Commands

[READ:OBWidth:OBWidth:RIGHT:LEVel?](#) (on page 1727)

Arguments

None

Returns

<OBW_left_level>::<NRf> is the level at the left frequency in dB.

Examples

READ:OBWIDTH:OBWIDTH:LEFT:LEVEL? might return -23.5, indicating the level at the left frequency is -23.5 dB.

READ:OBWidth:OBWidth:POWer? (Query Only)

Returns the reference power in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:OBWidth:POWer?

Arguments

None

Returns

<OBW_ref_power>::<NRf> is the reference power in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:OBWIDTH:OBWIDTH:POWER? might return -10.0, indicating the reference power is -10 dBm.

READ:OBWidth:OBWidth:RIGHT:FREQuency? (Query Only)

Returns the right (higher) frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:OBWidth:RIGHT:FREQuency?

Related Commands

[READ:OBWidth:OBWidth:LEFT:FREQuency?](#) (on page 1725)

Arguments

None

Returns

<OBW_right_freq>::<NRf> is the right frequency in Hz.

Examples

READ:OBWIDTH:OBWIDTH:RIGHT:FREQUENCY? might return 1.502E+9, indicating the right frequency is 1.502 GHz.

READ:OBWidth:OBWidth:RIGHT:LEVel? (Query Only)

Returns the level at the right frequency of the occupied bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:OBWidth:RIGHT:LEVel?

Related Commands

[READ:OBWidth:OBWidth:LEFT:LEVel?](#) (on page 1726)

Arguments

None

Returns

`<OBW_right_level>::<NRf>` is the level at the right frequency in dB.

Examples

`READ:OBWIDTH:OBWIDTH:RIGHT:LEVEL?` might return `-23.5`, indicating the level at the right frequency is -23.5 dB.

READ:OBWidth:SPECTrum? (Query Only)

Returns spectrum trace data of the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

`READ:OBWidth:SPECTrum?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the amplitude in dBm at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:OBWIDTH:SPECTRUM?` might return `#43204xxxx...` (3204-byte data) for the spectrum trace data of the Occupied Bandwidth measurement.

READ:OBWidth:XDBBandwidth:BANDwidth? (Query Only)

Returns the x dB bandwidth in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

`READ:OBWidth:XDBBandwidth:BANDwidth?`

Arguments

None

Returns

<xdB BW>: : <NRf> is the x dB bandwidth in Hz.

Examples

READ:OBWidth:XDBBandwidth:BANDWIDTH? might return 2.0E+6, indicating the x dB bandwidth is 2 MHz.

READ:OBWidth:XDBBandwidth:LEFT:FREQUENCY? (Query Only)

Returns the left (lower) frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:XDBBandwidth:LEFT:FREQUENCY?

Related Commands

[READ:OBWidth:XDBBandwidth:RIGHT:FREQUENCY?](#) (on page 1730)

Arguments

None

Returns

<xdB BW_left_freq>: : <NRf> is the left frequency in Hz.

Examples

READ:OBWidth:XDBBandwidth:LEFT:FREQUENCY? might return 1.498E+9, indicating the left frequency is 1.498 GHz.

READ:OBWidth:XDBBandwidth:LEFT:LEVEL? (Query Only)

Returns the level at the left frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:XDBBandwidth:LEFT:LEVEL?

Related Commands

[READ:OBWidth:XDBBandwidth:RIGHT:LEVEL?](#) (on page 1731)

Arguments

None

Returns

<xdB BW_left_level>::<NRf> is the level at the left frequency in dB.

Examples

READ:OBWidth:XDBBandwidth:LEFT:LEVEL? might return -23.5, indicating the level at the left frequency is -23.5 dB.

READ:OBWidth:XDBBandwidth:POWer? (Query Only)

Returns the reference power in the x dB bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:XDBBandwidth:POWer?

Arguments

None

Returns

<xdB BW_ref_power>::<NRf> is the reference power in dBm. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:OBWidth:XDBBandwidth:POWER? might return -10.0, indicating the reference power is -10 dBm.

READ:OBWidth:XDBBandwidth:RIGHT:FREQuency? (Query Only)

Returns the right (higher) frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:XDBBandwidth:RIGHT:FREQuency?

Related Commands

[READ:OBWidth:XDBBandwidth:LEFT:FREQuency?](#) (on page 1729)

Arguments

None

Returns

<xdbBW_right_freq>::<NRf> is the right frequency in Hz.

Examples

READ:OBWIDTH:XDBBANDWIDTH:RIGHT:FREQUENCY? might return 1.502E+9, indicating the right frequency is 1.502 GHz.

READ:OBWidth:XDBBandwidth:RIGHT:LEVel? (Query Only)

Returns the level at the right frequency of the x dB bandwidth.

Conditions

Measurement views: Occupied Bandwidth

Group

Read commands

Syntax

READ:OBWidth:XDBBandwidth:RIGHT:LEVel?

Related Commands

[READ:OBWidth:XDBBandwidth:LEFT:LEVel?](#) (on page 1729)

Arguments

None

Returns

<xdbBW_right_level>::<NRf> is the level at the right frequency in dB.

Examples

READ:OBWIDTH:XDBBANDWIDTH:RIGHT:LEVEL? might return -23.5, indicating the level at the right frequency is -23.5 dB.

READ:OFDM:APOWer? (Query Only)

Returns the average power in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:APOWer?

Arguments

None

Returns

<apower>: : <NRf> the average power in dB.

Examples

READ:OFDM:APOWER? might return -23.4584459235 indicating the average power is -23.46 dB.

READ:OFDM:APOWer:PEAK? (Query Only)

Returns the peak-to-average power in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:APOWer:PEAK?

Arguments

None

Returns

<apower_peak>: : <NRf> is the peak-to-average power in dBm.

Examples

READ:OFDM:APOWER:PEAK? might return 10.4140096289, indicating that peak-to-average power is 10.41 dBm.

READ:OFDM:CONStE:MAGNitude? (Query Only)

Returns the constellation magnitude data for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:CONStE:MAGNitude?

Related Commands

[READ:OFDM:CONStE:PHASe?](#) (on page 1733)

[READ:OFDM:CONStE:TYPE?](#) (on page 1733)

[READ:OFDM:CONStE:VALue?](#) (on page 1734)

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:OFDM:CONStE:MAGNItUDE? might return #510400xxxx... (10400-byte data) for the measurement.

READ:OFDM:CONStE:PHASe? (Query Only)

Returns the constellation phase data for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:CONStE:PHASe?

Related Commands

[READ:OFDM:CONStE:MAGNItUDE?](#) (on page 1732)

[READ:OFDM:CONStE:TYPE?](#) (on page 1733)

[READ:OFDM:CONStE:VALue?](#) (on page 1734)

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:OFDM:CONStE:PHASe? might return #510400xxxx... (10400-byte data) for the measurement.

READ:OFDM:CONStE:TYPE? (Query Only)

Returns the constellation context value of the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:CONStE:TYPE?
```

Related Commands

[READ:OFDM:CONStE:MAGNitude?](#) (on page 1732)

[READ:OFDM:CONStE:PHASe?](#) (on page 1733)

[READ:OFDM:CONStE:VALue?](#) (on page 1734)

Arguments

None

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in 16-bit little endian integers. The integers must be translated to the proper context as listed below.

Integer value	Type (context)
0	Pilot
1	Data
2	Unused or Null

Examples

READ:OFDM:CONStE:TYPE? might return #41352 (1352-byte data) for the measurement. The actual data must be decoded to the context type using the table above.

READ:OFDM:CONStE:VALue? (Query Only)

Returns the constellation value of the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:CONStE:VALue?

Related Commands

[READ:OFDM:CONStE:MAGNitude?](#) (on page 1732)

[READ:OFDM:CONStE:PHASe?](#) (on page 1733)

[READ:OFDM:CONStE:TYPE?](#) (on page 1733)

Arguments

None

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point in 16-bit little endian integers.

Examples

READ:OFDM:CONStE:VALUE? might return #41352, indicating 1352 bytes of data for the measurement.

READ:OFDM:CPE? (Query Only)

Returns the Common Pilot Error magnitude for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:CPE?

Arguments

None

Returns

<NRf> the RMS magnitude error in percent.

Examples

READ:OFDM:CPE? might return 3.7868041505, indicating that the CPE is 3.787%.

READ:OFDM:CRESPonse:MAGNitude? (Query Only)

Returns the channel response magnitude data for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:CRESPonse:MAGNitude?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:OFDM:CRESPONSE:MAGNITUDE? might return #3804xxxx. . . (804 byte data) for the measurement.

READ:OFDM:CRESPonse:PHASe? (Query Only)

Returns the channel response phase data for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:CRESPonse:PHASe?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:OFDM:CRESPONSE:PHASE? might return #3804xxxx. . . (804 byte data) for the measurement.

READ:OFDM:EVM:PEAK:DECibel:ALL? (Query Only)

Returns the peak EVM data for all subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:EVM:PEAK:DECibel:ALL?
```

Arguments

None

Returns

<NRf> data in dB.

Examples

READ:OFDM:EVM:PEAK:DECIBEL:ALL? might return -20.1872549032 indicating the data is -20.19 dB for the measurement.

READ:OFDM:EVM:PEAK:DECibel:DATA? (Query Only)

Returns the peak EVM data for the data subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:EVM:PEAK:DECibel:DATA?
```

Arguments

None

Returns

<NRf> data in dB.

Examples

READ:OFDM:EVM:PEAK:DECIBEL:DATA? might return -20.1872549032 indicating the data is -20.19 dB for the measurement.

READ:OFDM:EVM:PEAK:DECibel:PILots? (Query Only)

Returns the peak EVM data for the pilot subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:EVM:PEAK:DECibel:PILOTS?
```

Arguments

None

Returns

<NRf> data in dB.

Examples

READ:OFDM:EVM:PEAK:DECIBEL:PILOTS? might return -20.2872549032 indicating the data is -20.29 dB for the measurement.

READ:OFDM:EVM:PEAK:PERCent:ALL? (Query Only)

Returns the peak EVM data for all subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:EVM:PEAK:PERCent:ALL?
```

Arguments

None

Returns

<NRf> data in percent.

Examples

READ:OFDM:EVM:PEAK:PERCENT:ALL? might return 19.3223863840, indicating the data is 19.322% for the measurement.

READ:OFDM:EVM:PEAK:PERCent:DATA? (Query Only)

Returns the peak EVM data for the data subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Programmer Manual

Read commands

Syntax

`READ:OFDM:EVM:PEAK:PERCent:DATA?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`READ:OFDM:EVM:PEAK:PERCENT:DATA?` might return `19.3223863840` indicating the data is 19.322% for the measurement.

READ:OFDM:EVM:PEAK:PERCent:PILots? (Query Only)

Returns the peak EVM data for the pilot subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

`READ:OFDM:EVM:PEAK:PERCent:PILots?`

Arguments

None

Returns

<NRf> data in percent.

Examples

`READ:OFDM:EVM:PEAK:PERCENT:PILOTS?` might return `10.8543863840`, indicating the data is 10.854% for the measurement.

READ:OFDM:EVM:PEAK:SCARrier:ALL? (Query Only)

Returns the peak EVM data for all subcarriers at the subcarrier level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

`READ:OFDM:EVM:PEAK:SCARrier:ALL?`

Arguments

None

Returns

<NR1>

Examples

READ:OFDM:EVM:PEAK:SCARRIER:ALL? might return 99.00000, indicating the data is 99 for the measurement.

READ:OFDM:EVM:PEAK:SCARrier:DATA? (Query Only)

Returns the peak EVM data for the data subcarriers at the subcarrier level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:PEAK:SCARrier:DATA?

Arguments

None

Returns

<NR1>

Examples

READ:OFDM:EVM:PEAK:SCARRIER:DATA? might return 99.00000, indicating the data is 99 for the measurement.

READ:OFDM:EVM:PEAK:SCARrier:PILots? (Query Only)

Returns the peak EVM data for the pilot subcarriers at the subcarrier level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:PEAK:SCARrier:PILots?

Arguments

None

Returns

<NR1>

Examples

`READ:OFDM:EVM:PEAK:SCARRIER:PILOTS?` might return `88.00000`, indicating the data is 88 for the measurement.

READ:OFDM:EVM:PEAK:SYMBOL:ALL? (Query Only)

Returns the peak EVM data for all subcarriers at the symbol level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

`READ:OFDM:EVM:PEAK:SYMBOL:ALL?`

Arguments

None

Returns

<NR1>

Examples

`READ:OFDM:EVM:PEAK:SYMBOL:ALL?` might return `2.00000`, indicating the data is 2 for the measurement

READ:OFDM:EVM:PEAK:SYMBOL:DATA? (Query Only)

Returns the peak EVM data for the data subcarriers at the symbol level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

`READ:OFDM:EVM:PEAK:SYMBOL:DATA?`

Arguments

<NR1>

Returns

Examples

`READ:OFDM:EVM:PEAK:SYMBOL:DATA?` might return `2.00000`, indicating the data is 2 for the measurement

READ:OFDM:EVM:PEAK:SYMBOL:PILOTS? (Query Only)

Returns the peak EVM data for the pilot subcarriers at the symbol level in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:PEAK:SYMBOL:PILOTS?

Arguments

<NR1>

Returns

Examples

READ:OFDM:EVM:PEAK:SYMBOL:PILOTS? might return 1.00000, indicating the data is 1 for the measurement

READ:OFDM:EVM:RMS:DECibel:ALL? (Query Only)

Returns the RMS EVM data for all subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:RMS:DECibel:ALL?

Arguments

None

Returns

<NRf> data in dB.

Examples

READ:OFDM:EVM:RMS:DECIBEL:ALL? might return -26.9012093267 indicating the data is -26.90 for the measurement.

READ:OFDM:EVM:RMS:DECibel:DATA? (Query Only)

Returns the RMS EVM data for the data subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:RMS:DECibel:DATA?

Arguments

None

Returns

<NRf> data in dB.

Examples

READ:OFDM:EVM:RMS:DECIBEL:DATA? might return -26.8477116269 indicating the data is -26.85 for the measurement.

READ:OFDM:EVM:RMS:DECibel:PILots? (Query Only)

Returns the RMS EVM data for the pilot subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:RMS:DECibel:PILots?

Arguments

None

Returns

<NRf> data in dB.

Examples

READ:OFDM:EVM:RMS:DECIBEL:PILOTS? might return -33.0589143032 indicating the data is -33.06 dB.

READ:OFDM:EVM:RMS:PERCent:ALL? (Query Only)

Returns the peak RMS data for all subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:RMS:PERCent:ALL?

Arguments

None

Returns

<NRf> data in percent.

Examples

READ:OFDM:EVM:RMS:PERCENT:ALL? might return 225.0743627548, indicating the data is 225.074% for the measurement.

READ:OFDM:EVM:RMS:PERCent:DATA? (Query Only)

Returns the peak RMS data for the data subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:RMS:PERCent:DATA?

Arguments

None

Returns

<NRf> data in percent.

Examples

READ:OFDM:EVM:RMS:PERCENT:DATA? might return 260.6973409653, indicating that the data is 260.697% for the measurement.

READ:OFDM:EVM:RMS:PERCent:PILots? (Query Only)

Returns the peak RMS data for the pilot subcarriers in the OFDM measurement as a percent.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:RMS:PERCent:PILots?

Arguments

None

Returns

<NRf> data in percent.

Examples

READ:OFDM:EVM:RMS:PERCENT:PILOTS? might return 210.8103863840, indicating the data is 210.810% for the measurement.

READ:OFDM:EVM:TRACe<x>? (Query Only)

Returns the EVM trace data for the OFDM measurement.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbols.

When <x> is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:EVM:TRACe<x>?

Arguments

None

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:OFDM:EVM:TRACE2? might return #252xxxx. . . (52 byte data) for the Average versus Symbols measurement.

READ:OFDM:FERRor? (Query Only)

Returns the Frequency error reading for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:FERRor?

Arguments

None

Returns

<NRf> frequency error.

Examples

READ:OFDM:FERROR? might return 82.8617142098E+3, indicating the frequency error was 82.86 kHz.

READ:OFDM:FLATness:PASS? (Query Only)

Queries whether the average power level values of subcarriers across the signal bandwidth on the OFDM Spectral Flatness display remain within the limits defined for a particular standard.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Read commands

Syntax

READ:OFDM:FLATness:PASS?

Returns

Returns "1" in the case that all data remains within the defined limits, and "0" otherwise.

Examples

READ:OFDM:FLAT:PASS? might return 1, which means that the average power level values of subcarriers across the signal bandwidth remain within the defined limits.

READ:OFDM:FLATness:RESult? (Query Only)

Returns the summary results of each segment of the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Read commands

Syntax

READ:OFDM:FLATness:RESult?

Returns

The data is returned as 12 comma delineated text values. The specific values are :

- minimum subcarrier within segment 1
- minimum subcarrier average energy deviation from the global average within segment 1
- deviation the of minimum subcarrier average from the allowed value in segment 1
- maximum subcarrier within segment 1

- maximum subcarrier average energy deviation from the global average within segment 1
- deviation of the maximum subcarrier average from the allowed value in segment 1
- minimum subcarrier within segment 2
- minimum subcarrier average energy deviation from the global average within segment 2
- deviation the of minimum subcarrier average from the allowed value in segment 2
- maximum subcarrier within segment 2
- maximum subcarrier average energy deviation from the global average within segment 2
- deviation of the maximum subcarrier average from the allowed value in segment 2

Examples

`READ:OFDM:FLAT:RES?` might return might return

`-6.0000000000,-17.0626174659E-3,3.9829373825,12.0000000000,19.9792608`, which represents the summary results of each segment of the OFDM Spectral Flatness display.

READ:OFDM:FLATness:TRACe<x>? (Query Only)

Returns the OFDM Spectral Flatness trace data. When <x> is 1, the parameter is Matrix (symbol deviation per subcarrier). When <x> is 2, the parameter is Average Deviation vs Subcarrier.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Read commands

Syntax

`READ:OFDM:FLATness:TRACe<x>?`

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where:

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:OFDM:FLAT:TRACE2?` might return `#510400..` (10400-byte data) which represents the data for the Average Deviation vs. Subcarrier trace.

READ:OFDM:GAIN:IMBalance? (Query Only)

Returns the gain imbalance for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:GAIN:IMBalance?

Arguments

None

Returns

<NRf> gain imbalance in dB.

Examples

READ:OFDM:GAIN:IMBALANCE? might return $-57.746\text{E}-3$ indicating that the gain imbalance is -0.057746 dB.

READ:OFDM:IQ:ORIGin:OFFSet? (Query Only)

Returns the IQ origin offset for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:IQ:ORIGin:OFFSet?

Arguments

None

Returns

<NRf> gain imbalance in dB.

Examples

READ:OFDM:IQ:ORIGIN:OFFSET? might return -53.47017 , indicating that the IQ origin offset is -53.47 dB.

READ:OFDM:MERRor:TRACe<x>? (Query Only)

Returns the magnitude error trace data for the OFDM measurement.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbols.

When <x> is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

`READ:OFDM:MERRor:TRACe<x>?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:OFDM:MERROR:TRACE2` might return `#3108xxxx. . .` (108-byte data) for the average versus symbols trace measurement.

READ:OFDM:PACKet:DIRection? (Query Only)

Returns the direction of the packet in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

`READ:OFDM:PACKet:DIRection?`

Arguments

None

Returns

One of the following values.

UP specifies that the packet is in the up direction.

DOWN specifies that the packet is in the down direction.

BOTH specifies that the packet is both directions.

Examples

`READ:OFDM:PACKET:DIRECTION?` might return `DOWN`, indicating that the packet was in the down direction.

READ:OFDM:PERRor:TRACe<x>? (Query Only)

Returns the phase error trace data for the OFDM measurement.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbols.

When <x> is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:PERROr:TRACe<x>?
```

Arguments

None

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:OFDM:PERROr:TRACE2 might return #3100xxxx. . . (100-byte data) for the average versus symbols trace measurement.

READ:OFDM:POWer:TRACe<x>? (Query Only)

Returns the power trace data for the OFDM measurement.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbols.

When <x> is 3, the parameter is Average versus Subcarrier.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:POWer:TRACe<x>?
```

Arguments

None

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:OFDM:POWER:TRACE2 might return #296xxxx. . . (96-byte data) for the average versus symbols trace measurement.

READ:OFDM:QUADrature:OFFSet? (Query Only)

Returns the quadrature offset in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:QUADrature:OFFSet?
```

Arguments

None

Returns

<NRf> quadrature offset in degrees.

Examples

READ:OFDM:QUADRATURE:OFFSET? might return -99.9, indicating that the offset is -99°.

READ:OFDM:SCARriers? (Query Only)

Returns the number of subcarriers in the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

```
READ:OFDM:SCARriers?
```

Arguments

None

Returns

<NR1> number of subcarriers.

Examples

READ:OFDM:SCARRIERS? might return 200.0000, indicating that there are 200 subcarriers in the measurement.

READ:OFDM:SCARriers:SPACing? (Query Only)

Returns the subcarrier spacing for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:SCARriers:SPACing?

Arguments

None

Returns

<NRf> subcarrier spacing.

Examples

READ:OFDM:SCARRIERS:SPACING? might return 90.000E+3, indicating that the subcarrier spacing is 90.000 kHz.

READ:OFDM:STABLE:VALUe? (Query Only)

Returns the number of bytes in the symbol table for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:STABLE:VALUe?

Arguments

None

Returns

#<num_digit><num_byte>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

Examples

READ:OFDM:STABLE:VALUE? might return #43848, indicating that there are 3848 bytes in the symbol table.

READ:OFDM:SYMBOL:CERRor? (Query Only)

Returns the symbol clock error for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:SYMBOL:CERRor?

Arguments

None

Returns

<NRf> symbol clock error in ppm.

Examples

READ:OFDM:SYMBOL:CERROR? might return 422.7135479929, indicating that the symbol clock error was 422.714 ppm.

READ:OFDM:SYMBOL:COUNt? (Query Only)

Returns the number of symbols for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Read commands

Syntax

READ:OFDM:SYMBOL:COUNt?

Arguments

None

Returns

<NR1> number of symbols in the measurement.

Examples

READ:OFDM:SYMBOL:COUNT? might return 25.00000, indicating that there were 25 symbols for the measurement.

READ:P25:CONSte:FERRor? (Query Only)

Returns the frequency error in Hz. The frequency error is the difference between the measured carrier frequency of the signal and the user-selected center frequency of the analyzer.

When Frequency Error is in Auto mode, this query returns the frequency error value. When in Manual mode, it returns the frequency offset.

Conditions

Measurement view: P25 Constellation

Group

Read commands

Syntax

READ:P25:CONSte:FERRor?

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:P25:CONSte:FERRor? might return $-10.7\text{E}+3$, which is a frequency error of -10.7 kHz.

READ:P25:EDIagram:FDEVIation? (Query Only)

Returns the Frequency Deviation vs Time trace data with the X values.

Conditions

Measurement view: P25 Eye Diagram

Group

Read commands

Syntax

READ:P25:EDIagram:FDEVIation?

Returns

#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)> and <X(n)> are the frequency deviation in Hz and time (symbols) coordinate pair at the nth data point. 4-byte little endian floating point format specified in IEEE 488.2.

Examples

READ:P25:EDIAGRAM:FDEVIATION? might return #3160xxxx... (160-byte data) for the Frequency Deviation vs Time trace.

READ:P25:EDIagram:FERRor? (Query Only)

Returns the frequency error in Hz. The frequency error is the difference between the measured carrier frequency of the signal and the user-selected center frequency of the analyzer.

Conditions

Measurement view: P25 Eye Diagram

Group

Read commands

Syntax

READ:P25:EDIagram:FERRor?

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:P25:EDIAGRAM:FERROR? might return $-10.7\text{E}+3$, which is a frequency error of -10.7 kHz.

READ:P25:PVTime:BURSt:POWer? (Query Only)

Returns the average power of the burst packet, in dBm, for the P25 Power vs. Time trace.

Conditions

Measurement view: P25 Power vs. Time

Group

Read commands

Syntax

READ:P25:PVTime:BURSt:POWer?

Returns

Floating point number that represents the average power of the burst packet, in dBm.

Examples

READ:P25:PVTIME:BURST:POWER? might return -1.99 , which represents the value of the average power of the burst packet of -1.99 dBm.

READ:P25:PVTime:FALL:TIME? (Query Only)

Queries the value of the width of the falling edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Read commands

Syntax

READ:P25:PVTime:FALL:TIME?

Related Commands

[READ:P25:PVTime:FTIME?](#) (on page 1756)

Returns

Floating point number which represents the value of the width of the falling edge of the burst, in seconds.

Examples

READ:P25:PVTIME:FALL:TIME? might return $7e-6$, which indicates the width of the falling edge is 7 μ s.

READ:P25:PVTime:FTIME? (Query Only)

Queries the value of the width of the falling edge, in seconds.

Conditions

Measurement view: P25 Power vs. Time

Group

Read commands

Syntax

READ:P25:PVTime:FTIME?

Related Commands

[READ:P25:PVTime:FALL:TIME?](#) (on page 1755)

Returns

Floating point number which represents the value of the width of the falling edge of the burst, in seconds.

Examples

READ:P25:PVTIME:FTIME? might return $7e-6$, which indicates the width of the falling edge is 7 μ s.

READ:P25:PVTime:TRACe:X? (Query Only)

Returns the horizontal values (time in seconds) for the P25 Power vs. Time trace.

Conditions

Measurement view: P25 Power vs. Time

Group

Read commands

Syntax

READ:P25:PVTime:TRACe:X?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:P25:PVTIME:TRACE:X? might return #43204 (3204-byte data), which represents the value of the time in seconds (horizontal values) for the P25 Power vs. Time trace.

READ:P25:PVTime:TRACe:XY? (Query Only)

Returns the horizontal value (time in seconds) and vertical value (power) for the P25 Power vs. Time trace <x(n)><y(n)> is the horizontal value and vertical value pair at the nth data point.

Conditions

Measurement view: P25 Power vs. Time

Group

Read commands

Syntax

READ:P25:PVTime:TRACe:XY?

Related Commands

[READ:P25:PVTime:TRACe:X?](#) (on page 1756)

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:P25:PVTIME:TRACE:XY? might return #43204 (3204-byte data), which represents the horizontal value (time in seconds) and vertical value (power) pair at the nth data point.

READ:P25:SUMMAry:LIMIt:SRA (Query Only)

Returns Limit of Symbol Rate Accuracy measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:LIMIT:SRA`

Arguments

None

Returns

might return PASS, FAIL or NA.

Examples

`READ:P25:SUMMARY:LIMIT:SRA`

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY? (Query Only)

Returns the Modulation Fidelity measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY?`

Arguments

None

Returns

Modulation Fidelity measurement result

Examples

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY?`

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY:STATUS (Query Only)

Returns the Modulation Fidelity measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY:STATUS?`

Arguments

None

Examples

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FIDELITY:STATUS?` might return PASS, FAIL, or NA.

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY (No Query Form)

Returns the Frequency Accuracy measurement's result.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY`

Arguments

None

Examples

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY`

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY? (Query Only)

Returns the Operational Frequency Accuracy measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY?`

Arguments

None

Returns

Frequency Accuracy measurement result

Examples

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY?

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY:STATUS (Query Only)

Returns the status of Frequency Accuracy measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY:STATUS?

Arguments

None

Examples

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ACCURACY:STATUS? might return PASS, FAIL, or NA.

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK

Returns the Frequency Deviation and negative peak measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK

Arguments

<integer, integer>

Returns

Frequency Deviation, negative peak, result

Examples

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK <2, 6> indicates the coordinate value of the Frequency Deviation negative peak.

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK:STATUS

Returns the Status of Frequency Deviation, negative peak status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK:STATUS?

Arguments

<Integer, Integer>

Examples

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:NEGPEAK:STATUS? might return PASS, FAIL, or NA.

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK

Returns the Frequency Deviation, positive peak, measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK

Arguments

<integer, integer>

Returns

Frequency Deviation, positive peak, result

Examples

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK <-2, -6> indicates the coordinate value of the Frequency Deviation positive peak.

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK:STATUS

Returns the status of Frequency Deviation, positive peak status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK:STATUS?`

Arguments

None

Examples

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:DEVIATION:POSPEAK:STATUS?` might return PASS, FAIL, or NA.

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR

Returns the Frequency Error measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR?`

Arguments

None

Returns

Frequency Error measurement result

Examples

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR?`

READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR (Query Only)

Returns the Frequency Error measurement's result.

Conditions

Measurement views: P25 Summary

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR`

Arguments

None

Examples

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:FREQUENCY:ERROR`

READ:P25:SUMMARY:MODULATION:MEASUREMENT:SRA

Returns the Symbol Rate Accuracy measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:SRA`

Arguments

None

Returns

Symbol Rate Accuracy measurement result

Examples

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:SRA?`

READ:P25:SUMMARY:MODULATION:MEASUREMENT:SRA:STATUS (Query Only)

Returns Status of Symbol Rate Accuracy measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:MODULATION:MEASUREMENT:SRA:STATUS`

Arguments

None

Returns

Might return PASS, FAIL or NA.

Examples

```
READ:P25:SUMMARY:MODULATION:MEASUREMENT:SRA:STATUS
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF (Query Only)

Returns HCPM Pmax-off measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF:STATUS? (Query Only)

Returns HCPM Pmax-off measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF:STATUS?
```

Arguments

None

Examples

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF:STATUS? might return PASS, FAIL, or NA.

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF? (Query Only)

This command returns the HCPM Pmax-off measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF?
```

Returns

HCPM Pmax-off measurement results

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXOFF?
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON (Query Only)

Returns HCPM Pmax-on measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON:STATUS (Query Only)

Returns Status of HCPM Pmax-on measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON:STATUS
```

Arguments

None

Examples

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON:STATUS` might return PASS, FAIL, or NA.

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON? (Query Only)

This command returns the HCPM Pmax-on measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON?
```

Returns

HCPM Pmax-on measurement results

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXON?
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSs (Query Only)

Returns HCPM Pss-max measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSs
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS:STATUS (Query Only)

Returns HCPM Pss-max measurement status.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS:STATUS?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS:STATUS? might return PASS, FAIL, or NA.
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS? (Query Only)

Returns the HCPM Pss-max measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS?
```

Returns

HCPM Pss-on measurement results

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MAXSS?
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM (Query Only)

Returns HCPM Pss-min measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS? (Query Only)

Returns Status of HCPM Pss-min measurement results based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM:STATUS? might return PASS, FAIL, or NA.
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM? (Query Only)

Returns the HCPM Pss-min measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM?
```

Returns

HCPM Pss-min measurement results

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:MINIMUM?
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot (Query Only)

Returns HCPM Offslot measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT
```

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot:STATUS? (Query Only)

Returns Status of HCPM Offslot measurement based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSlot:STATUS?
```

Arguments

None

Examples

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:OFFSLOT:STATUS?` might return PASS, FAIL, or NA.

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI (Query Only)

Returns P_ACP_HI value which is displayed on P25 Summary display.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI?`

Arguments

None

Examples

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:HI?` might return `-37.963`, indicating P_ACP_HI value is -37.96 dBm.

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:LOW (Query Only)

Returns P_ACP_LOW value which is displayed on P25 Summary display.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:LOW?`

Arguments

None

Examples

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:LOW?` might return `-40.125`, indicating P_ACP_LOW value is -40.13 dBm.

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN (Query Only)

Returns Min Pk ACPR value which is displayed on P25 Summary Display.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN?`

Arguments

None

Examples

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN?` might return `47.96`, indicating Min Pk ACPR value is 47.96 dBm

READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN:STATUS(Query Only)

Returns Status of Min Pk ACPR value based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN:STATUS`

Arguments

None

Examples

`READ:P25:SUMMARY:POWER:MEASUREMENT:HCPM:PEAK:ACPR:MIN:STATUS` might return PASS, FAIL or NA.

READ:P25:SUMMARY:POWER:MEASUREMENT:RF:STATUS (Query Only)

Returns status of RF measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWEr:MEASurement:RF:STATus?
```

Arguments

None

Examples

`READ:P25:SUMMARY:POWER:MEASUREMENT:RF:STATUS?` might return PASS, FAIL, or NA.

READ:P25:SUMMARY:POWEr:MEASurement:RF (Query Only)

Returns RF measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:POWEr:MEASurement:RF
```

Arguments

None

Examples

```
READ:P25:SUMMARY:POWER:MEASUREMENT:RF
```

READ:P25:SUMMARY:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE (Query Only)

Returns HCPM Time alignment's t_error_1 measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGger:MEASurement:HCPM:TIME:ALIGNment:TERRor:ONE
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:ACQ:COUNT? (Query Only)

Returns the HCPM Time alignment's t_error_1 acquisition count over which the t_error_1 averaging is done.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:ACQ:COUNT?
```

Returns

HCPM Time alignment's t_error_1 acquisition count over which the t_error_1 averaging is done.

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:ACQ:COUNT?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:STATUS (Query Only)

Returns status of HCPM Time alignment's t_error_1 measurement results based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:STATUS?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE:STATUS? might return PASS, FAIL, or NA.
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE?(Query Only)

Returns the HCPM Time alignment `t_error_1` measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE?`

Returns

HCPM Time alignment `t_error_1` measurement results.

Examples

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ONE?`

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO(Query Only)

Returns HCPM Time alignment's `t_error_0` measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO?`

Arguments

None

Examples

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO?`

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT?(Query Only)

Returns the HCPM Time alignment's `t_error_0` acquisition count over which the `t_error_0` averaging is done.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT?
```

Returns

HCPM Time alignment's t_error_0 acquisition count.

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:ACQ:COUNT?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:STATUS (Query Only)

Returns status of HCPM Time alignment's t_error_0 measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:STATUS?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO:STATUS? might return  
PASS, FAIL or NA.
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO? (Query Only)

Returns the HCPM Time alignment's t_error_0 measurement results over which the t_error_0 averaging is done.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO?
```

Returns

HCPM Time alignment's t_error_0 measurement results over which the t_error_0 averaging is done.

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TERROR:ZERO?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync (Query Only)

Returns HCPM Time alignment's t_obsync measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSYNC?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT (Query Only)

Returns Average Transmitter Power Attack acquisition count.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT?
```


READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNment:TOBSync? (Query Only)

Returns the HCPM Time alignment's t_obsync measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNment:TOBSync?

Returns

HCPM Time alignment's t_obsync measurement results.

Examples

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSYNC?

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT (Query Only)

Returns Average Transmitter Power Attack acquisition count.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT?

Arguments

None

Examples

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT?

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI (Query Only)

Returns Average Transmitter Power Attack, busy/idle measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync:ACQ:COUNT (Query Only)

Returns HCPM Time alignment's t_obsync acquisition counts.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync:ACQ:COUNT?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:HCPM:TIME:ALIGNMENT:TOBSync:ACQ:COUNT?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODer:BI:STATus (Query Only)

Returns status of Average Transmitter Power Encoder Attack Time measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODer:BI:STATus?
```

Arguments

None

Examples

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:BI:STATUS?` might return PASS, FAIL, or NA.

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI?(Query Only)

Returns the Average Transmitter Power Attack time busy/idle acquisition count over which the Phase 1 Attack time averaging is done.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI?`

Returns

Average Transmitter Power Attack, busy/idle, measurement results.

Examples

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ACQ:COUNT:BI?`

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS (Query Only)

Returns Status of Average Transmitter Encoder Attack Time measurement results based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS?`

Arguments

None

Examples

`READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODER:STATUS?` might return PASS, FAIL, or NA.

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODer? (Query Only)

Returns the Average Transmitter Encoder Attack Time measurement results

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODer?

Returns

Average Transmitter Encoder Attack Time measurement results.

Examples

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:ENCODer?

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER (Query Only)

Returns Average Transmitter Power Attack Time measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER?

Arguments

None

Examples

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER?

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI (Query Only)

Returns Average Transmitter Power Attack Time, busy/idle measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI:STATUS (Query Only)

Returns Status of Average Transmitter Power Attack Time, busy/idle measurement results based on the Limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI:STATUS?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI:STATUS? might return PASS, FAIL or NA.
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI? (Query Only)

Returns the Average Transmitter Power Attack Time, busy/idle measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI?
```

Returns

Average Transmitter Power Attack Time, busy/idle, measurement results.

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:BI?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:STATUS (Query Only)

Returns Status of Average Transmitter Power Attack Time measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:STATUS?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER:STATUS? might return PASS, FAIL or NA.
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER? (Query Only)

Returns the Average Transmitter Power Attack Time measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER?
```

Returns

Average Transmitter Power Attack Time measurement results.

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:ATTACK:TIME:POWER?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUput:DELAy (Query Only)

Returns Throughput delay measurement results.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT (Query Only)

Returns Throughput delay acquisition counts.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT? (Query Only)

Returns the Throughput delay acquisition counts over which the Throughput delay averaging is done.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT?
```

Returns

Throughput delay acquisition counts

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:ACQ:COUNT?
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:STATUS (Query Only)

Returns Status of Throughput delay measurement results based on the limit.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:STATUS?
```

Arguments

None

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY:STATUS? might return PASS, FAIL, or NA.
```

READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY? (Query Only)

Returns the Throughput delay measurement results.

Conditions

Measurement view: P25 Summary

Group

Read commands

Syntax

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY?
```

Returns

Throughput delay measurement results.

Examples

```
READ:P25:SUMMARY:TRIGGER:MEASUREMENT:PHASE1:THRUPUT:DELAY?
```


READ:PERRor[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Phase error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Read commands

Syntax

```
READ:PERRor[:MEASview<y>]:FERRor?
```

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:PERRor:MEASview2:FERRor? might return -10.7E+3, indicating the frequency error is -10.7 kHz for measurement view 2.

READ:PERRor[:MEASview<y>]:PEAK? (Query only)

Returns the peak value in the Phase error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Read commands

Syntax

```
READ:PERRor[:MEASview<y>]:PEAK?
```

Related Commands

[READ:PERRor\[:MEASview<y>\]:PINdex?](#) (on page 1786)

Arguments

None

Returns

<peak>: :<NRf> is the peak phase error in percent (%).

Examples

READ:PERRor:MEASview2:PEAK? might return 1.57, indicating the peak phase error value is 1.57% for measurement view 2.

READ:PERRor[:MEASview<y>]:PINdex? (Query only)

Returns the time at the phase error peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Read commands

Syntax

READ:PERRor[:MEASview<y>]:PINdex?

Related Commands

[READ:PERRor\[:MEASview<y>\]:PEAK?](#) (on page 1785)

Arguments

None

Returns

<peak_time>: :<NRf> is the time at the phase error peak in symbol number. The unit can be changed by [SENSe]:DDEMod:TIME:UNITs command.

Examples

READ:PERRor:MEASview2:PINdex? might return 68.000, indicating that the phase error peak is at symbol #68 for measurement view 2.

READ:PERRor[:MEASview<y>]:RMS (Query only)

Returns the RMS (Root-Mean-Square) value in the Phase error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Read commands

Syntax

`READ:PERRor[:MEASview<y>]:RMS?`

Arguments

None

Returns

`<rms>::<NRf>` is the RMS phase error in percent (%).

Examples

`READ:PERRor:MEASview2:RMS?` might return 0.382, indicating the RMS PERRor value is 0.382% for measurement view 2.

READ:PERRor[:MEASview<y>]:TRACe? (Query only)

Returns the Phase error versus Time trace data.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Read commands

Syntax

`READ:PERRor[:MEASview<y>]:TRACe?`

Arguments

None

Returns

`#<num_digit><num_byte><data(1)><data(2)>...<data(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<data(n)>` is the phase error versus Time trace data for the point n in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:PERRor:MEASview2:TRACe?` might return `#42036xxxx...` (2036-byte data) for the Phase error versus Time measview 2.

READ:PHVTime[:MEASview<y>]? (Query Only)

Returns the Phase versus Time trace data.

Conditions

Measurement views: Phase versus Time

Group

Read commands

Syntax

```
READ:PHVTime[:MEASview<y>]?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the phase in degrees at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:PHVTIME:MEASview1? might return #3160xxxx... (160-byte data) for the Phase versus Time trace.

READ:PHVTime[:MEASview<y>]:MAXimum? (Query Only)

Returns the maximum value in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Read commands

Syntax

```
READ:PHVTime[:MEASview<y>]:MAXimum?
```

Related Commands

[READ:PHVTime\[:MEASview<y>\]:MAXLocation?](#) (on page 1789)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>: : <NRf> is the maximum phase in degrees.

Examples

READ:PHVTIME:MEASview1:MAXIMUM? might return 153.8, indicating the maximum phase is 153.8 °.

READ:PHVTime[:MEASview<y>]:MAXLocation? (Query Only)

Returns the time at which the phase is maximum.

Conditions

Measurement views: Phase versus Time

Group

Read commands

Syntax

READ:PHVTime[:MEASview<y>]:MAXLocation?

Related Commands

[READ:PHVTime\[:MEASview<y>\]:MAXimum?](#) (on page 1788)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max_time>::<NRf> is the time in seconds at which the phase is maximum.

Examples

READ:PHVTIME:MEASview1:MAXLOCATION? might return 175.3E-9, indicating the I or Q level is maximum at 175.3 ns.

READ:PHVTime[:MEASview<y>]:MINimum? (Query Only)

Returns the minimum value in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Read commands

Syntax

READ:PHVTime[:MEASview<y>]:MINimum?

Related Commands

[READ:PHVTime\[:MEASview<y>\]:MINLocation?](#) (on page 1790)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min>::<NRf> is the minimum phase in degrees.

Examples

READ:PHVTIME:MEASview1:MINIMUM? might return -176.3, indicating the minimum phase is -176.3°.

READ:PHVTime[:MEASview<y>]:MINLocation? (Query Only)

Returns the time at which the phase is minimum.

Conditions

Measurement views: Phase versus Time

Group

Read commands

Syntax

READ:PHVTime[:MEASview<y>]:MINLocation?

Related Commands

[READ:PHVTime\[:MEASview<y>\]:MINimum?](#) (on page 1789)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<min_time>::<NRf> is the time in seconds at which the phase is minimum.

Examples

READ:PHVTIME:MEASview1:MINLOCATION? might return 450.7E-9, indicating the phase is minimum at 450.7 ns.

READ:PHVTime[:MEASview<y>]:RESult? (Query Only)

Returns the Phase versus Time measurement results.

Conditions

Measurement views: Phase versus Time

Group

Read commands

Syntax

READ:PHVTime[:MEASview<y>]:RESult?

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

<max>,<max_time>,<min>,<min_time>

Where

<max>::<NRf> is the maximum phase in degrees.

<max_time>::<NRf> is the time in seconds at which the phase is maximum.

<min>::<NRf> is the minimum phase in degrees.

<min_time>::<NRf> is the time in seconds at which the phase is minimum.

Examples

READ:PHVTIME:MEASview1:RESULT? might return 153.8,175.3E-9,-176.3,450.7E-9, indicating the maximum phase is 153.8 ° at 175.3 ns and the minimum phase is -176.3 ° at 450.7 ns.

READ:PM:PNEGative? (Query Only)

Returns the negative peak phase deviation (-Pk) in the PM measurement.

Conditions

Measurement views: PM

Group

Read commands

Syntax

READ:PM:PNEGative?

Arguments

None

Returns

<-Pk>::<NRf> is the negative peak phase deviation in degrees.

Examples

READ:PM:PNEGATIVE? might return -23.42, indicating the positive peak phase deviation is -23.42 °.

READ:PM:PPOSitive? (Query Only)

Returns the positive peak phase deviation (+Pk) in the PM measurement.

Conditions

Measurement views: PM

Group

Read commands

Syntax

READ:PM:PPOSitive?

Arguments

None

Returns

`<+Pk> : : <NRf>` is the positive peak phase deviation in degrees.

Examples

`READ:PM:PPOSITIVE?` might return `26.87`, indicating the positive peak phase deviation is 26.87° .

READ:PM:PTPeak? (Query Only)

Returns the peak-peak phase deviation (Pk-Pk) in the PM measurement.

Conditions

Measurement views: PM

Group

Read commands

Syntax

`READ:PM:PTPeak?`

Arguments

None

Returns

`<Pk-Pk> : : <NRf>` is the peak-peak phase deviation in degrees.

Examples

`READ:PM:PTPEAK?` might return `46.34`, indicating the peak-peak phase deviation is 46.34° .

READ:PM:RESult? (Query Only)

Returns the PM measurement results.

Conditions

Measurement views: PM

Group

Read commands

Syntax

`READ:PM:RESult?`

Arguments

None

Returns

`<+Pk>, <-Pk>, <RMS>, <Pk-Pk>`

Where

`<+Pk> : : <NRf>` is the positive peak phase deviation in degrees.

<-Pk>: : <NRf> is the negative peak phase deviation in degrees.

<RMS>: : <NRf> is the RMS phase deviation in degrees.

<Pk-Pk>: : <NRf> is the peak-peak phase deviation in degrees.

Examples

READ:PM:RESULT? might return 22.89, -23.45, 15.12, 46.34.

READ:PM:RMS? (Query Only)

Returns the RMS phase deviation in the PM measurement.

Conditions

Measurement views: PM

Group

Read commands

Syntax

READ:PM:RMS?

Arguments

None

Returns

<RMS>: : <NRf> is the RMS phase deviation in degrees.

Examples

READ:PM:RMS? might return 15.12, indicating the RMS frequency deviation is 15.12 °.

READ:PNOise:ALL? (Query Only)

Returns all results of the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:ALL?

Arguments

None

Returns

<Cpower>, <Ferror>, <Pnoise>, <Tjitter>, <Rjitter>, <RFM>

Where

<Cpower>::<NRf> is the carrier power in dBm.

<Ferror>::<NRf> is the frequency error in Hz.

<Pnoise>::<NRf> is the RMS phase noise in degrees.

<Tjitter>::<NRf> is the total jitter in seconds.

<Rjitter>::<NRf> is the random jitter in seconds.

<RFM>::<NRf> is the residual FMin Hz.

Examples

READ:PNOISE:ALL? might return -9.455,1.235E+6,51.43,2.312E-9,4.178E-9,14.58, indicating

Carrier power: -9.455 dBm,

Frequency error: 1.235 MHz,

RMS phase noise: 51.43 °,

Total jitter: 2.312 ns,

Random jitter: 4.178 ns, and

Residual FM: 14.58 Hz.

READ:PNOise:CARRier:FERRor? (Query Only)

Returns the carrier frequency error in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:CARRier:FERRor?

Arguments

None

Returns

<NRf> Carrier frequency error in Hz.

Examples

READ:PNOISE:CARRIER:FERROR? might return 1.235E+6, indicating that the carrier frequency error is 1.235 MHz.

READ:PNOise:CARRier:POWer? (Query Only)

Returns the carrier power in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:CARRier:POWer?

Arguments

None

Returns

<NRf> Carrier power in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:PNOISE:CARRIER:POWER? might return -9.455, indicating that the carrier power is -9.455 dBm.

READ:PNOise:JITTer? (Query Only)

Returns the jitter in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:JITTer?

Arguments

None

Returns

<NRf> Jitter in seconds.

Examples

READ:PNOISE:JITTER? might return 2.312E-9, indicating that the jitter is 2.312 ns.

READ:PNOise:RESidual:FM? (Query Only)

Returns the residual FM in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:RESidual:FM?

Arguments

None

Returns

<NRf> Residual FM in Hz.

Examples

READ:PNOISE:RESIDUAL:FM? might return 14.58, indicating that the residual FM is 14.58 Hz.

READ:PNOise:RMS:PNOise? (Query Only)

Returns the RMS phase noise in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:RMS:PNOise?

Arguments

None

Returns

<NRf> RMS phase noise in degrees.

Examples

READ:PNOISE:RMS:PNOISE? might return 51.43, indicating that the RMS phase noise is 51.43 °.

READ:PNOise:SPECTrum<x>:X? (Query Only)

Returns the frequencies of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:SPECTrum<x>:X?

Arguments

None

Returns

```
#<num_digit><num_byte><x(1)><x(2)>...<x(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the frequency (Hz) at the nth point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:PNOISE:SPECTRUM1:X? might return #516020xxxx... (16020-byte data) for the frequencies of Trace 1.

READ:PNOise:SPECtrum<x>[:Y]? (Query Only)

Returns the phase noise values of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

```
READ:PNOise:SPECtrum<x>[:Y]?
```

Arguments

None

Returns

```
#<num_digit><num_byte><y(1)><y(2)>...<y(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the phase noise (dBc/Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:PNOISE:SPECTRUM1:Y might return #516020xxxx... (16020-byte data) for the phase noise values of Trace 1.

READ:PNOise:SPECtrum<x>:XY? (Query Only)

Returns the frequency and phase noise pairs of the specified trace.

The parameter <x> = 1 and 2, representing Trace 1 and Trace 2, respectively.

Conditions

Measurement views: Phase noise

Group

Read commands

Syntax

READ:PNOise:SPECTrum<x>:XY?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)><y(n)> is the frequency (Hz) and phase noise (dBc/Hz) pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:PNOISE:SPECTRUM1:XY? might return #516020xxxx... (16020-byte data) for the frequency and phase noise pairs of the Trace 1.

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:HIGHer? (Query Only)

Returns the outliers value exceeding the upper limit in pulse cumulative histogram.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Read commands

Syntax

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:HIGHer?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<Nrf> Number of outliers above higher limit

Examples

READ:PULSE:CUMULATIVE:HISTOGRAM:MEASview1:OUTLIER:HIGHER? might return 0.000, which is the value for the outliers that have exceeded the upper limit in the pulse cumulative histogram.

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:LOWer? (Query Only)

Returns the outliers value below the lower limit in pulse cumulative histogram.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Read commands

Syntax

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:LOWer?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> Number of outliers below lower limit

Examples

READ:PULSe:CUMULATIVE:HISTOGRAM:MEASview1:OUTLIER:LOWER? might return 0.000, which is the value for the outliers below the lower limit in the pulse cumulative histogram.

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:COUNt? (Query Only)

Returns the current events and status conditions for the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Read commands

Syntax

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:EVENTs?

Arguments

None

Returns

<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}

Where <ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description of the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report".

Examples

READ:PULSe:CUMulative:HISTogram:MEASview1:EVENTS might return 0, "No events to report".

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:TOTal? (Query Only)

Returns the total number of pulses in the pulse cumulative histogram.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Read commands

Syntax

READ:PULSe:CUMulative:HISTogram[:MEASview<y>]:PULse:TOTal?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> Total number of pulses

Examples

READ:PULSE:CUMULATIVE:HISTOGRAM:MEASview1:PULSE:TOTAL? might return 16 for total number pulses in the pulse cumulative histogram.

READ:PULSe:CUMulative:STATistics[:MEASview<y>] (Query Only)

Returns the PulseCount, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average and Standard Deviation values for the selected measurement in pulse cumulative statistics.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Read commands

Syntax

READ:PULSe:CUMulative:STATistics[:MEASview<y>]? <arg1><arg2>

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<arg1> = {AVERage| PPOWer| ATX| WIDTH| RISE| FALL| RINTerval| RRATe|DUTPct| DUTRatio| RIPPlE| RIPDb| DROOp| DRODb| OVERshoot| OVEDb|PPPHase| PPFRequency| RMSFReqerror| MFReqerror| RMSPHerror| MPHerror|FRDeviation| FDELta| PHDeviation| IRAMplitude| IRTIME| PPPD| PPFd| FABS}

<arg2> = {TPCOunt | MAX | MAXTs | MIN | MINTs | PK2PK | AVG | SD | ALL}

Returns

<puls_cnt> | <max> | <max_timestamp> | <min> | <min_timestamp> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcnt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <delta_freq> | <imp_resp_amp> | <imp_resp_time>

where

<avg_on>::<NRf> is the average power transmitted during pulse on

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>::<NRf> is the average power transmitted

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB / -6 dB level (50%) of the user selected 100% level

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall>::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate>::<NRf> is the inverse of repetition interval

<duty_factor_pcnt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq>::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs. Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<delta_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

Examples

READ:PULSe:CUMulative:STATistics:MEASview1? AVERage, MAX might return -1.3594852284, indicating the max value for Average ON is -1.3594852284.

READ:PULSe:OGRAM[:MEASview<y>]:MAX:FRAME:COUNt (Query Only)

Returns the frame count value in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Read commands

Syntax

READ:PULSe:OGRAM[:MEASview<y>]:MAX:FRAME:COUNt?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf>

Examples

READ:PULSe:OGRAM:MEASview1:MAX:FRAME:COUNt? might return 20, indicating the total number of fast frames in the acquisition of Pulse-Ogram is 20.

READ:PULSe:OGRAM[:MEASview<y>]:RBW (Query Only)

Returns the resolution bandwidth value only when Frequency vs Time display is opened in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Read commands

Syntax

READ:PULSe:OGRAM[:MEASview<y>]:RBW?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf>

Examples

READ:PULSe:OGRAM:MEASview1:RBW? might return 222.9199886322E+3, indicating the RBW value is 222.9199886322E+3 in Pulse-Ogram.

READ:PULSe[:RESult][:MEASview<y>]:ADVanced (Query Only)

Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement in pulse table.

Conditions

Measurement views: All

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:ADVanced <arg1>,<arg2>

Arguments

arg1 can be one of the following measurements:

{AVERage| PPOWer| ATX|WIDTH| RISE| FALL| RINTerval| RRATe|DUTPct| DUTRatio|RIPple| RIPDb| DROop| DRODb| OVERshoot|OVEDb| PPPHase| PPFrequency| RMSFreqerror| MFRreqerror|RMSPherror| MPHerror| FRDeviation| FDELta| PHDeviation|IRAMplitude|IRTime|PPPD|PPFD|FABS}

arg2 can be one of the following statistics results:

{TPCOunt|MAX|MAXTs|MIN|MINTs|PK2PK|AVG|SD|ALL}

Returns

<puls_cnt> | <max> | <min> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements, where

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcnt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time>|<time> for the given pulse number

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>:: <NRf> is the average power transmitted

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB / -6 dB level (50%) of the user selected 100% level

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall> ::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate> ::<NRf> is the inverse of repetition interval

<duty_factor_pcnt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq> ::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs.Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<dlt_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set.

Examples

READ:PULSe:RESult:MEASview2:ADVanced AVERage, MAX might return -1.3594852284 for Average ON value in pulse cumulative statistics

READ:PULSe[:RESult][:MEASview<y>]:ADVanced:RANGe (Query only)

Queries the Pulse Count, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average, and Standard Deviation values for the select measurement in the Pulse Table display.

Conditions

Measurement views: Pulse Table

Group

Fetch commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:ADVanced:RANGe <arg1><arg2><arg3>
```

Arguments

<arg1>={Start_Pulse_number}

<arg2>={End_Pulse_number}

<arg3>= {AVERage | PPOWer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPPlE | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPHase | PPFRequency | RMSFreqerror | MFReqerror | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude|TIME | IRTIME | PPPD| PPFD | FABS}

Returns

<puls_cnt> | <max> | <max_timestamp> | <min> | <min_timestamp> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcmt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time>|<time> for the given pulse number.

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on.

<avg_tx>:: <NRf> is the average power transmitted.

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB or -6 dB level (50%) of the user selected 100% level.

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% or (20% to 80%) of the user selected 100% level.

<fall> ::<NRf> is the time required for a signal to fall from 90% to 10% or (80% to 20%) of the user selected 100% level.

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge.

<rep_rate> ::<NRf> is the inverse of repetition interval.

<duty_factor_pcmt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage.

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period.

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top.

<ripple_db>::<NRf> is the Ripple measurement expressed in dB.

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time.

<droop_db>::<NRf> is the Droop measurement expressed in dB.

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge.

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB.

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window.

<pp_freq> ::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse.

<rms_phase_err>::<NRf> is the RMS average of the Phase versus Time trace, computed over the Measurement Time.

<rms_freq_err>::<NRf> is the RMS average of the Freq error versus Time trace.

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse.

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse.

<pk_phase_err>::<NRf> is the maximum phase error.

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point.

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time.

<phase_dev>::<NRf> is the Phase deviation difference between the maximum and minimum Phase values measured during the On time of a pulse.

<dlt_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency.

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe.

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe.

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set.

Example

READ:PULSE[:RESULT]:MEASview1:ADVANCED:RANGE 2048,2060,AVERage might return

-3,23.8467659801E-3,23.8566566259E-3,23.8667335361E-3,23.8771531731E-3,23.8866508007E-3,23.89664
indicating the average ON value for the pulse number from 2048 to 2060.

READ:PULSe:STATistics[:MEASview<y>]:ADVanced (Query Only)

Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement in Pulse Statistics display.

Conditions

Measurement views: Pulse Statistics

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:ADVanced <arg1>,<arg2>

READ:PULSe:STATistics[:MEASview<y>]:AD;Vanced?

Arguments

<arg1> = {AVERage | PPOwer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPple | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPhase | PPFrequency | RMSFreqerror | MFReqerror | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude|TIME | IRTIME | PPPD| PPFD | FABS}

<arg2> = {TPCCount | MAX | MIN | PK2PK | AVG | SD | ALL}

Returns

<puls_cnt> | <max> | <min> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcnt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlt_freq> | <imp_resp_amp> | <imp_resp_time>|<time> for the given pulse number

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>::<NRf> is the average power transmitted

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB / -6 dB level (50%) of the user selected 100% level

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall>::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate>::<NRf> is the inverse of repetition interval

<duty_factor_pcnt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq>::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<dlta_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set

Examples

READ:PULSE:STATISTICS:MEASview1:ADVANCED RISE, MAX might return 7.9786177665E-9, "-", indicating the maximum rise value is 7.9786177665E-9.

READ:PULSe[:RESult][:MEASview<y>]:ATX (Query Only)

Returns the average transmitted power in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:ATX?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<ATX(1)>,< ATX(2)>,...<ATX(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<ATX(n)>::<NRf> is the average transmitted power for the pulse with the number of [first_pulse_num + n - 1] in dBm.

The unit can be changed to watts by the [SENSe]:POWer:UNITs command.

This measurement gives valid results only for power units (Watts, dBm, dBuW, dBW).

Examples

READ:PULSe:RESult:MEASview2:ATX? might return 0, -18.57, -18.73, -18.20, -18.53 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:AVERage (Query Only)

Returns the average on power in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:AVERage?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<avg(1)>,< avg(2)>,...<avg(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<avg(n)>::<NRf> is the average on power for the pulse with the number of [first_pulse_num + n - 1] in dBm.

The unit can be changed by the [\[SENSe\]:POWer:UNITs](#) (on page 2287) command.

This measurement gives valid results only for power units (Watts, dBm, dBuW, dBW).

Examples

READ:PULSe:RESult:MEASview2:AVERage? might return 0, -2.354, -2.368, -2.343, -2.358 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:DRODb (Query Only)

Returns the droop in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:DRODb?

Related Commands

[READ:PULSe\[:RESult\]\[:MEASview<y>\]:DROOp?](#) (on page 1809)

Arguments

None

Returns

<first_pulse_num>, <droop(1)>, <droop(2)>, ... <droop(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<droop(n)>::<NRf> is the droopdB for the pulse number [first_pulse_num + n - 1] in percent (%) of watts or volts.

Examples

READ:PULSe:RESult:MEASview2:DRODb? might return 1, -0.4, 0.32, 0.2, -0.1 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:DROOp (Query Only)

Returns the average on power in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:DROOp?

Related Commands

[READ:PULSe\[:RESult\]\[:MEASview<y>\]:DRODb?](#) (on page 1809)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <droop(1)>, <droop(2)>, ... <droop(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<droop(n)>::<NRf> is the droop for the pulse number [first_pulse_num + n - 1] in percent (%) of watts or volts.

Examples

READ:PULSe:RESult:MEASview2:DROOp? might return 0, -270.9E-3, -193.0E-3, -242.7E-3, -177.5E-3 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:DUTPct (Query Only)

Returns the duty factor (%) in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:DUTPct?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <duty_pct(1)>, <duty_pct(2)>, ... <duty_pct(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<duty_pct(n)>::<NRf> is the duty factor for the pulse with the number of [first_pulse_num + n - 1] in percent (%).

Examples

READ:PULSe:RESult:MEASview2:DUTPct? might return 0, 28.94, 28.96, 29.00, 29.01 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:DUTRatio (Query Only)

Returns the duty factor (ratio) in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:DUTRatio?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<duty_ratio(1)>,<duty_ratio(2)>,... <duty_ratio(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<duty_ratio(n)>::<NRf> is the duty factor for the pulse with the number of [first_pulse_num + n - 1] (no unit).

Examples

READ:PULSe:RESult:MEASview2:DUTRatio? might return 0,289.4E-3,289.6E-3, 290.0E-3,290.1E-3 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:FABS (Query Only)

Returns the computed absolute frequency from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:FABS?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<abs_freq(1)>,<abs_freq(2)>,...<abs_freq(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<abs_freq(n)>::<NR1> is the absolute frequency for the pulse with the number of [first_pulse_num + n — 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:FABS? might return 1.0000000000, 919.8726400000E+6, 1.1664642560E+9, 1.1866586880E+9, 1.1867939840E+9, 1.1882243840E+9, 933.2595840000E+6, 1.1729175040E+9, 1.1818649600E+9, 1.1868037120E+9, 1.1832893440E+9, 933.4762880000E+6, 1.1805880320E+9, 1.1844794880E+9, 1.1914785280E+9, 1.1929450240E for is the number of the first pulse and the absolute frequency for each pulse.

READ:PULSe[:RESult][:MEASview<y>]:FALL (Query Only)

Returns the fall time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:FALL?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<fall(1)>,<fall(2)>,...<fall(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<fall(n)>::<NRf> is the fall time for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

READ:PULSe:RESult:MEASview2:FALL? might return 0,110.3E-9,90.45E-9, 95.03E-9,111.9E-9 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:FDELta (Query Only)

Returns the computed delta frequency from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:FDELta?

Arguments

None

Returns

<first_pulse_num>,<freq_delta(1)>,<freq_delta(2)>,...<freq_delta(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<freq_delta(n)>::<NRf> is the frequency delta for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:FDELta? might return

1.0000000000,163.6692962646,82.8298492432,21.8995475769,
89.2963562012,48.1314239502,144.1430664063,52.5188140869,
19.9404506683,287.8957519531,110.4534988403,-110.1940994263,
73.9322433472,115.7962646484,164.6119384766,-42.2758331299, 223.0057525635,28.680925 for the
first pulse and each pulse found.

READ:PULSe[:RESult][:MEASview<y>]:FRDeviation (Query Only)

Returns the frequency deviation in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:FRDeviation?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<freq_dev(1)>,<freq_dev(2)>,...<freq_dev(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<freq_dev(n)>::<NRf> is the frequency deviation for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:FRDeviation? might return 1,740.6E+3,736.5E+3,718.3E+3,672.2E+3 for
Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:IRAMplitude (Query Only)

Returns the pulse impulse response amplitude in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:IRAMplitude?

Returns

<first_pulse_num>,<amplitude(1)>,<amplitude(2)>,...<amplitude(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<amplitude(n)>::<NRf> is the sidelobe level, in dB, from the mainlobe for the pulse with the number of [first_pulse_num + n - 1].

Examples

READ:PULSe:RESult:MEASview2:IRAMplitude? might return 1.0000000000,-45.3,-47.5,-50.2 for Pulse 1 through 3.

READ:PULSe[:RESult][:MEASview<y>]:IRTime (Query Only)

Returns the impulse response time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:IRTime?

Returns

<first_pulse_num>,<time(1)>,<time(2)>,...<time(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<time(n)>::<NRf> is the sidelobe offset time from the mainlobe for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

READ:PULSe:RESult:MEASview2:IRTime? might return 1.0000000000,806.6708687693E-9,-846.6595318168E-9,-873.3477443457E-9 for Pulse 1 to 3.

READ:PULSe[:RESult][:MEASview<y>]:MFReqerror (Query Only)

Returns the maximum frequency error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:MFRqerror?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<max_freq_err(1)>,<max_freq_err(2)>,...<max_freq_err(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<max_freq_err(n)>::<NRf> is the maximum frequency error for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:MFRqerror? might return 1, 597.5E+3, 675.8E+3, 642.8E+3, 598.2E+3 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:MPHerror (Query Only)

Returns the maximum phase error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:MPHerror?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<max_phase_err(1)>,<max_phase_err(2)>,...<max_phase_err(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<max_phase_err(n)>::<NRf> is the maximum phase error for the pulse with the number of [first_pulse_num + n - 1] in degrees.

Examples

READ:PULSe:RESult:MEASview2:MPHerror? might return 1, -9.221, -8.413, -11.853, -10.258 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:OVERDb (Query Only)

Returns the overshoot in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:OVERDb?
```

Related Commands

[READ:PULSe\[:RESult\]\[:MEASview<y>\]:OVERshoot?](#) (on page 1816)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<overshoot(1)>,<overshoot(2)>,...<overshoot(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<overshoot(n)>::<NRf> is the overshoot for the pulse with the number of [first_pulse_num + n - 1] in dB.

Examples

READ:PULSe:RESult:MEASview2:OVERDb? might return 1,1.2,2.3,1.0,0.2 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:OVERshoot (Query Only)

Returns the overshoot in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:OVERshoot?
```

Related Commands

[READ:PULSe\[:RESult\]\[:MEASview<y>\]:OVERDb?](#) (on page 1815)

Arguments

None

Returns

```
<first_pulse_num>,<overshoot(1)>,<overshoot(2)>,...<overshoot(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

`<overshoot(n)>::<NRf>` is the overshoot for the pulse with the number of `[first_pulse_num + n - 1]` in percent (%) of watts or volts.

Examples

`READ:PULSe:RESult:MEASview2:OVERshoot?` might return `1,1.2,2.3,1.0,0.2` for Pulse 1 through 4.

READ:PULSe[:RESult][:MEASview<y>]:PHDeviation (Query Only)

Returns the phase deviation in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

`READ:PULSe[:RESult][:MEASview<y>]:PHDeviation?`

Arguments

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<first_pulse_num>,<phase_dev(1)>,<phase_dev(2)>,...<phase_dev(n)>`

Where

`<first_pulse_num>::<NR1>` is the first pulse number.

`<phase_dev(n)>::<NRf>` is the phase deviation for the pulse with the number of `[first_pulse_num + n - 1]` in degrees.

Examples

`READ:PULSe:RESult:MEASview2:PHDeviation?` might return `1,11.658,9.640,10.509,8.272` for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:PPFD (Query Only)

Returns the computed pulse to pulse frequency difference from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

`READ:PULSe[:RESult][:MEASview<y>]:PPFD`

Arguments

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <ppfd(1)>, <ppfd(2)>, ...<ppfd(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<ppfd(n)>::<NRf> is the pulse to pulse frequency difference with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:PPFD? might return 1.0000000000, "-", 246.5916160000E+6, 20.1943520000E+6, 135.2960000000E+3, 1.4304160000E+6, -254.9647520000E+6, 239.6579520000E+6, 8.9474560000E+6, 4.9386560000E+6, -3.5143840000E+6, -249.8130240000E+6, 247.1117760000E+6, 3.8915200000E+6, 6.9989120000E+6, 1.4665920000E+6 is the number of the first pulse and the pulse frequency difference for each pulse.

READ:PULSe[:RESult][:MEASview<y>]:PPFRequency (Query Only)

Returns the pulse-pulse carrier frequency in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:PPFRequency?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <pp_freq(1)>, <pp_freq(2)>, ...<pp_freq(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<pp_freq(n)>::<NRf> is the pulse-pulse carrier frequency for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:PPFRequency? might return 0, 0.000, 1.258E+3, -3.121E+3, 1.862E+3 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:PPOWer (Query Only)

Returns the peak power in the pulse table.

Conditions

Measurement views: Pulse table

Group

Programmer Manual

WWW.TEK.COM | 1818

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:PPOWer?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <pk_power(1)>, <pk_power(2)>, ... <pk_power(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<pk_power(n)>::<NRf> is the peak power for the pulse with the number of [first_pulse_num + n - 1] in dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

This measurement gives valid results only for power units(Watts, dBm, dBuW, dBW).

Examples

READ:PULSe:RESult:MEASview2:PPOWer? might return 0, -2.26, -2.27, -2.23, -2.25 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:PPPD (Query Only)

Returns the computed pulse to pulse phase difference from the carrier in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:PPPD
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <pppd(1)>, <pppd(2)>, ... <pppd(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<pppd(n)>::<NRf> is the pulse to pulse phase difference with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:PPPD? might return 1.0000000000, "-", 96.2469482422, 24.9118175507, 5.8206896782, 16.7037734985, -151.8063964844, 100.7584228516, 36.6761512756, -3.8614616394, 12.9028282166, -150.9820556641, 130.5854492188, 9.1259155273, -7.4177660942, 6.0613451004, -142.4224853516 is the number of the first pulse and the pulse to pulse phase difference for each pulse.

READ:PULSe[:RESult][:MEASview<y>]:PPPHase (Query Only)

Returns the pulse-pulse carrier phase in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:PPPHase?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>, <pp_phase(1)>, <pp_phase(2)>, ... <pp_phase(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<pp_phase(n)>::<NRf> is the pulse-pulse carrier phase for the pulse with the number of [first_pulse_num + n - 1] in degrees.

Examples

READ:PULSe:RESult:MEASview2:PPPHase? might return 0, 0.000, 21.66, 46.76, 57.56 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:RINTerval (Query Only)

Returns the repetition interval in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:RINTerval?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<rep_int(1)>,<rep_int(2)>,...<rep_int(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<rep_int(n)>::<NRf> is the repetition interval for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

READ:PULSe:RESult:MEASview2:RINTerval? might return 0,16.03E-6,16.08E-6, 16.07E-6,16.02E-6 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:RIPDb (Query Only)

Returns the ripple in dB in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:RIPDb?

Related Commands

[READ:PULSe\[:RESult\]\[:MEASview<y>\]:RIPple?](#) (on page 1822)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<ripple(1)>,<ripple(2)>,...<ripple(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<ripple(n)>::<NRf> is the ripple for the pulse with the number of [first_pulse_num + n - 1] in dB.

Examples

READ:PULSe:RESult:MEASview2:RIPDb? might return 1,0.4,0.32,0.2,0.1 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:RISE (Query Only)

Returns the rise time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:RISE?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<rise(1)>,<rise(2)>,...<rise(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<rise(n)>::<NRf> is the rise time for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

READ:PULSe:RESult:MEASview2:RISE? might return 0, 92.94E-9, 115.9E-9, 115.1E-9, 97.45E-9 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:RIPPlE (Query Only)

Returns the ripple in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

```
READ:PULSe[:RESult][:MEASview<y>]:RIPPlE?
```

Related Commands

[READ:PULSe\[:RESult\]\[:MEASview<y>\]:RIPDb?](#) (on page 1821)

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<first_pulse_num>,<ripple(1)>,<ripple(2)>,...<ripple(n)>
```

Where

<first_pulse_num>::<NR1> is the first pulse number.

<ripple(n)>::<NRf> is the watt or voltage ripple for the pulse with the number of [first_pulse_num + n - 1] in percent (%).

Examples

READ:PULSe:RESult:MEASview2:RIPPlE? might return 0,106.5E-3,177.6E-3, 148.3E-3,148.5E-3 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:RMSFreqerror (Query Only)

Returns the RMS frequency error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:RMSFreqerror?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<RMS_freq_err(1)>,<RMS_freq_err(2)>,...<RMS_freq_err(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<RMS_freq_err(n)>::<NRf> is the RMS frequency error for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:RMSFreqerror? might return 1,51.54E+3, 69.20E+3,64.21E+3,51.02E+3 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:RMSPherror (Query Only)

Returns the RMS phase error in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:RMSPherror?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<RMS_phase_err(1)>,<RMS_phase_err(2)>,...<RMS_phase_err(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<RMS_phase_err(n)>::<NRf> is the RMS phase error for the pulse with the number of [first_pulse_num + n - 1] in degrees.

Examples

READ:PULSe:RESult:MEASview2:RMSPherror? might return 1, 908.4E-3, 752.8E-3, 981.7E-3, 886.4E-3 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:RRATe (Query Only)

Returns the repetition rate in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:RRATe?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<rep_rate(1)>,<rep_rate(2)>,...<rep_rate(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<rep_rate(n)>::<NRf> is the repetition rate for the pulse with the number of [first_pulse_num + n - 1] in Hz.

Examples

READ:PULSe:RESult:MEASview2:RRATe? might return 0, 62.50E+3, 62.52E+3, 62.51E+3, 62.49E+3 for Pulse 0 to 3.

READ:PULSe[:RESult][:MEASview<y>]:TIME (Query Only)

Returns the time in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:TIME

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<time(1)>,<time(2)>,...<time(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<time(n)>::<NRf> is the time for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

READ:PULSe:RESult:MEASview2:TIME? might return 1,7.937E-3,8.436E-3, 6.504E-3,9.876E-3 for Pulse 1 to 4.

READ:PULSe[:RESult][:MEASview<y>]:WIDTh (Query Only)

Returns the pulse width in the pulse table.

Conditions

Measurement views: Pulse table

Group

Read commands

Syntax

READ:PULSe[:RESult][:MEASview<y>]:WIDTh?

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<first_pulse_num>,<width(1)>,<width(2)>,...<width(n)>

Where

<first_pulse_num>::<NR1> is the first pulse number.

<width(n)>::<NRf> is the pulse width for the pulse with the number of [first_pulse_num + n - 1] in seconds.

Examples

READ:PULSe:RESult:MEASview2:WIDTh? might return 0,4.630E-6,4.632E-6, 4.639E-6,4.642E-6 for Pulse 0 to 3.

READ:PULSe:STATistics[:MEASview<y>] (Query Only)

Returns the trace data of the pulse statistics measurement selected by the DISPlay:PULSe:SElect:RESult command.

NOTE: Select the plot type (Trend, FFT, Time Trend or Histogram) using the DISPlay:PULSe:STATistics:PLOT command before executing this query.

Conditions

Measurement views: Pulse statistics

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]?
```

Arguments

None

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the amplitude at the nth data point.

The unit is current measurement unit (Plot = Trend or Time Trend), dB (Plot = FFT), count or percent (Plot = Histogram)

4-byte little endian floating-point format specified in IEEE 488.2.

The unit of power is selected by the [SENSe]:POWer:UNITs command.

Examples

READ:PULSe:STATistics:MEASview1? might return #264xxxx... (64-byte data) for the statistics trace of the pulse width measurement when DISPlay:PULSe:SElect:RESult is set to WIDTH.

READ:PULSe:STATistics[:MEASview<y>]:ADVanced (Query Only)

Returns the Pulse Count, Max, Max at Pulse number, Min, Min at Pulse number, Peak to Peak, Average and Standard Deviation values for the chosen measurement in pulse statistics display.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:ADVanced? <arg1>,<arg2>
```

Arguments

arg1 can be one of the following measurements:

```
{AVERage| PPOWer| ATX|WIDTH| RISE| FALL| RINTerval| RRATe|DUTPct| DUTRatio|RIPPlE| RIPDb|
DROOp| DRODb| OVERshoot|OVEDb| PPPHase| PPFRequency| RMSFrequerror| MFRequerror|RMSPherror|
MPHerror| FRDeviation| FDELta| PHDeviation|IRAMplitude|IRTime|PPPD|PPFD|FABS}
```

arg2 can be one of the following statistics results:

```
{TPCounT|MAX|MIN|PK2PK|AVG|SD|ALL}
```

Returns

<puls_cnt>|<max>|<min>|<pk_pk>|<avg>|<std_dev>|<all> for one of the following selected measurements.

Where

<avg_on>|<pk_pwr>|<avg_tx>|<width>|<rise>|<fall>|<rep_int>|<rep_rate>|<avg_on> | <pk_pwr>
| <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcmt> |
<duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> |
<ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> |
<p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> |
<dlta_freq> | <imp_resp_amp> | <imp_resp_time>|<time>

Where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>:: <NRf> is the average power transmitted

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB /-6 dB level (50%) of the user selected 100% level

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall> ::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate> ::<NRf> is the inverse of repetition interval

<duty_factor_pcmt>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq> ::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs.Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<dlta_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set.

Examples

READ:PULSe:STATistics:MEASview2:ADVanced RISE, MAX might return 7.9786177665E-9, "-", indicating the maximum rise value is 7.9786177665E-9.

READ:PULSe[:RESult]:ADVanced (Query Only)

Returns the PulseCount, Max, Max TimeStamp, Min, Min TimeStamp, Peak to Peak, Average, and Standard Deviation values for the chosen measurement in the Pulse Table display.

Conditions

Measurement views: All

Group

Read commands

Syntax

READ:PULSe[:RESult]:ADVanced? <arg1><arg2>

Arguments

<arg1> = {Pulse_number}

<arg2> = {AVERage | PPOWer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPPLE | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPHase | PPFrequency | RMSFreqerror | MFReqerror | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude|TIME | IRTIME | PPPD| PPFD | FABS}

Returns

<puls_cnt> | <max> | <max_timestamp> | <min> | <min_timestamp> | <pk_pk> | <avg> | <std_dev> | <all>

For one of the following selected measurements:

<avg_on> | <pk_pwr> | <avg_tx> | <width> | <rise> | <fall> | <rep_int> | <rep_rate> | <duty_factor_pcmt> | <duty_fact_ratio> | <ripple> | <ripple_db> | <droop> | <droop_db> | <ovrshoot> | <ovrshoot_db> | <pp_phase> | <pp_freq> | <rms_phase_err> | <rms_freq_err> | <p2p_phase> | <p2p_freq> | <pk_phase_err> | <pk_freq_err> | <abs_freq> | <freq_dev> | <phase_dev> | <dlta_freq> | <imp_resp_amp> | <imp_resp_time>|<time> for the given pulse number

where

<avg_on>::<NRf> is the average power transmitted during pulse on.

<pk_pwr>::<NRf> is the Maximum power during pulse on

<avg_tx>:: <NRf> is the average power transmitted

<width>::<NRf> is the time from the rising edge to the falling edge at the -3 dB / -6 dB level (50%) of the user selected 100% level

<rise>::<NRf> is the time required for a signal to rise from 10% to 90% (or 20% to 80%) of the user selected 100% level

<fall> ::<NRf> is the time required for a signal to fall from 90% to 10% (or 80% to 20%) of the user selected 100% level

<rep_int>::<NRf> is the time from a pulse rising edge to the next pulse rising edge

<rep_rate> ::<NRf> is the inverse of repetition interval

<duty_factor_pct>::<NRf> is the ratio of the width to the pulse period, expressed as a percentage

<duty_fact_ratio>::<NRf> is the ratio of the pulse width to the pulse period

<ripple>::<NRf> is the Ripple is the peak-to-peak ripple on the pulse top

<ripple_db>::<NRf> is the Ripple measurement expressed in dB

<droop>::<NRf> is the Droop is the power difference between the beginning and the end of the pulse On time

<droop_db>::<NRf> is the Droop measurement expressed in dB

<ovrshoot>::<NRf> is the amount by which the signal exceeds the 100% level on the pulse rising edge

<ovrshoot_db>::<NRf> is the Overshoot measurement expressed in dB

<pp_phase>::<NRf> is the phase difference between the selected pulse and the previous pulse in the analysis window

<pp_freq> ::<NRf> is the difference between the frequency of the current pulse and frequency of the previous pulse

<rms_phase_err>::<NRf> is the RMS average of the Phase vs Time trace, computed over the Measurement Time

<rms_freq_err>::<NRf> is the RMS average of the Freq Error vs.Time trace

<p2p_phase>::<NRf> is the frequency difference between the current pulse and the first pulse

<p2p_freq>::<NRf> is the frequency difference between the current pulse and immediate previous pulse

<pk_phase_err>::<NRf> is the maximum phase error

<abs_freq>::<NRf> is the absolute pulse frequency measured at a specific point

<freq_dev>::<NRf> is the difference between the maximum and minimum measured values of the signal frequency during the Measurement Time

<phase_dev>::<NRf> is the Phase Deviation difference between the maximum and minimum Phase values measured during the On time of a pulse

<dlt_freq>::<NRf> is the difference from the measurement frequency to each pulse frequency

<imp_resp_amp>::<NRf> is the difference in dB between the levels of the main lobe and highest side lobe

<imp_resp_time>::<NRf> is the difference in time between the main lobe and highest side lobe

<time>::<NRf> is the dtime in seconds relative to the time reference point in the first acquisition record in the data set

Examples

READ:PULSe[:RESULT]:ADVANCED 1,AVERage might return -1.4063608208, indicating the average ON value for the pulse number 1 is -1.4063608208.

READ:PULSe:STATistics[:MEASview<y>]:AVERage (Query Only)

Returns the average on power in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:AVERage
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<avg_avg>,<avg_min>,< avg_max>

Where

<avg_avg>::<NRf> is the average of the average on power.

<avg_min>::<NRf> is the minimum of the average on power.

<avg_max>::<NRf> is the maximum of the average on power.

Unit: dBm.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:PULSe:STATistics:MEASview2:AVERage might return -2.35, -2.36, -2.34 for the average on power in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:DRODb (Query Only)

Returns the droop in dB in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:DRODb
```

Related Commands

```
READ:PULSe:STATistics[:MEASview<y>]:DROop?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<droop_avg>,<droop_min>,<droop_max>

Where

<droop_avg>::<NRf> is the average droop.

<droop_min>::<NRf> is the minimum droop.

<droop_max>::<NRf> is the maximum droop.

Unit: in dB by watts.

Examples

READ:PULSe:STATistics:MEASview2:DRODb? might return 22.67E-3, -613.5E-3, 633.8E-3 for the droop in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:DROop (Query Only)

Returns the droop in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:DROop

Related Commands

[READ:PULSe:STATistics\[:MEASview<y>\]:DRODb?](#) (on page 1830)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<droop_avg>, <droop_min>, <droop_max>

Where

<droop_avg>::<NRf> is the average droop.

<droop_min>::<NRf> is the minimum droop.

<droop_max>::<NRf> is the maximum droop.

Unit: Percent (%) by watts.

Examples

READ:PULSe:STATistics:MEASview2:DROop might return 22.67E-3, -613.5E-3, 633.8E-3 for the droop in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:DUTPct (Query Only)

Returns the duty factor (%) in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:DUTPct
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<duty_pct_avg>,<duty_pct_min>,<duty_pct_max>
```

Where

<duty_pct_avg>::<NRf> is the average duty factor.

<duty_pct_min>::<NRf> is the minimum duty factor.

<duty_pct_max>::<NRf> is the maximum duty factor.

Unit: Percent (%).

Examples

READ:PULSe:STATistics:MEASview2:DUTPct might return 2.437,2.310,2.657 for the duty factor (%) in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:DUTRatio (Query Only)

Returns the duty factor (ratio) in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:DUTRatio
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<duty_ratio_avg>,<duty_ratio_min>,<duty_ratio_max>
```

Where

<duty_ratio_avg>::<NRf> is the average duty factor.

<duty_ratio_min>::<NRf> is the minimum duty factor.

<duty_ratio_max>::<NRf> is the maximum duty factor.

Unit: None.

Examples

`READ:PULSe:STATistics:MEASview2:DUTRatio?` might return `24.37E-3, 23.11E-3, 26.57E-3` for the duty factor (ratio) in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:FABS (Query Only)

Returns the absolute frequency in pulse statistics.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

`READ:PULSe:STATistics[:MEASview<y>]:FABS`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<fabs_avg>, <fabs_min>, <fabs_max>

Where

<fabs_avg>::<NRf> is the average of fabs.

<fabs_min>::<NRf> is the minimum of fabs.

<fabs_max>::<NRf> is the maximum of fabs.

Examples

`READ:PULSe:STATistics:MEASview2:FABS` might return `1.1196544000E+9, 919.8726400000E+6, 1.1929450240E+9` for the absolute frequency in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:FALL (Query Only)

Returns the fall time in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

`READ:PULSe:STATistics[:MEASview<y>]:FALL`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<fall_avg>, <fall_min>, <fall_max>

Where

<fall_avg>::<NRf> is the average fall time.

<fall_min>::<NRf> is the minimum fall time.

<fall_max>::<NRf> is the maximum fall time.

Unit: Seconds.

Examples

READ:PULSe:STATistics:MEASview2:FALL? might return 70.27E-9, 69.62E-9, 71.27E-9 for the fall time in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:FDELta (Query Only)

Return the delta frequency measurement in the pulse statistics.

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:FDELta

Arguments

None

Returns

<freq_delta_avg>, <freq_delta_min>, <freq_delta_max>

Where

<freq_delta_avg>::<NRf> is the average frequency deviation.

<freq_delta_min>::<NRf> is the minimum frequency deviation.

<freq_delta_max>::<NRf> is the maximum frequency deviation.

Unit: Hz.

Examples

READ:PULSe:STATistics:MEASview2:FDELta? might return 77.9785690308, -110.1940994263, 287.8957519531 for the frequency delta in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:FRDeviation (Query Only)

Returns the frequency deviation in the Pulse Statistics measurement. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:FRDeviation
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<freq_dev_avg>,<freq_dev_min>,<freq_dev_max>

Where

<freq_dev_avg>::<NRf> is the average frequency deviation.

<freq_dev_min>::<NRf> is the minimum frequency deviation.

<freq_dev_max>::<NRf> is the maximum frequency deviation.

Unit: Hz.

Examples

READ:PULSe:STATistics:MEASview2:FRDeviation? might return 754.1E+3, 660.5E+3, 835.2E+3 for the frequency deviation in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:IRAMplitude (Query Only)

Returns the Pulse Impulse Response amplitude measurement in the pulse statistics.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:IRAMplitude
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<amp;avg>,<amp;min>,<amp;max>

Where

<amp;avg>::<NRf> is the average of the impulse response amplitude.

<amp;min>::<NRf> is the minimum of the impulse response amplitude.

<amp;max>::<NRf> is the maximum of impulse response amplitude.

Unit: dB.

Examples

READ:PULSe:STATistics:MEASview2:IRAMplitude? might return -45.3, -47.1, -43.2 for the impulse response amplitude in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:IRTime (Query Only)

Returns the impulse response time in the pulse statistics.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:IRTime
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<avg_avg>, <avg_min>, <avg_max>

Where

<avg_avg>::<NRf> is the average of the impulse response time.

<avg_min>::<NRf> is the minimum of the impulse response time.

<avg_max>::<NRf> is the maximum of impulse response time.

Unit: seconds.

Examples

READ:PULSe:STATistics:MEASview2:IRTime? might return -2.35, -2.36, -2.34 for the impulse response time in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMber (Query Only)

Returns the maximum value at a certain pulse number in the pulse statistics display.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:MAX:PULSe:NUMber
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<max_pulse_no>

Where

<max_pulse_no>::<NRf> is the maximum value at a pulse number.

Examples

READ:PULSe:STATistics:MEASview2:MAX:PULSe:NUMber? might return 15 for the maximum pulse number in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:MFReqerror (Query Only)

Returns the maximum frequency error in the pulse statistics measurement. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:MFReqerror

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<max_freq_err_avg>,<max_freq_err_min>,<max_freq_err_max>

Where

<max_freq_err_avg>::<NRf> is the average of maximum frequency error.

<max_freq_err_min>::<NRf> is the minimum of maximum frequency error.

<max_freq_err_max>::<NRf> is the maximum of maximum frequency error.

Unit: Hz.

Examples

READ:PULSe:STATistics:MEASview2:MFReqerror? might return 645.0E+3, 555.6E+3, 738.8E+3 for the maximum frequency error in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMber? (Query Only)

Returns the minimum value at a certain pulse number in pulse statistics.

Conditions

Measurement views: Pulse statistics

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:MIN:PULSe:NUMBER?

Arguments

None

Returns

<min_pulse_no>

Where

<min_pulse_no>::<NRf> is the minimum value at a pulse number.

Examples

READ:PULSE:STATISTICS:MEASview1:MIN:PULSE:NUMBER? might return 1 for the minimum pulse number in the pulse statistics

READ:PULSe:STATistics[:MEASview<y>]:MPHError (Query Only)

Returns the maximum phase error in the Pulse Statistics measurement . This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:MPHError

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<max_phase_err_avg>,<max_phase_err_min>,<max_phase_err_max>

Where

<max_phase_err_avg>::<NRf> is the average of maximum phase error.

<max_phase_err_min>::<NRf> is the minimum of maximum phase error.

<max_phase_err_max>::<NRf> is the maximum of maximum phase error.

Unit: Degrees.

Examples

READ:PULSe:STATistics:MEASview2:MPHError? might return -11.47,-17.18,-7.61 for the maximum phase error in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:OVEDb (Query Only)

Returns the overshoot measurement result in dB in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND` or `TTRend`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:OVEDb
```

Related Commands

[READ:PULSe:STATistics\[:MEASview<y>\]:OVERshoot](#) (on page 1839)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

```
<overshoot_avg>, <overshoot_min>, <overshoot_max>
```

Where

`<overshoot_avg>`: :<NRf> is the average overshoot.

`<overshoot_min>`: :<NRf> is the minimum overshoot.

`<overshoot_max>`: :<NRf> is the maximum overshoot.

Unit: dB.

Examples

`READ:PULSe:STATistics:MEASview2:OVEDb` might return 0.3, 0.1, 0.5 for the overshoot measurement result in dB in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:OVERshoot (Query Only)

Returns the overshoot in the pulse statistics. This command is valid when `DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND` or `TTRend`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:OVERshoot
```

Related Commands

[READ:PULSe:STATistics\[:MEASview<y>\]:OVEDb](#) (on page 1839)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<overshoot_avg>, <overshoot_min>, <overshoot_max>

Where

<overshoot_avg>::<NRf> is the average overshoot.

<overshoot_min>::<NRf> is the minimum overshoot.

<overshoot_max>::<NRf> is the maximum overshoot.

Unit: Percent (%) as watts or volts.

Examples

READ:PULSe:STATistics:MEASview2:OVERshoot might return 0.3, 0.1, 0.5 for the overshoot in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:PHDeviation (Query Only)

Returns the phase deviation in the Pulse Statistics measurement. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TRENd

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:PHDeviation

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<phase_dev_avg>, <phase_dev_min>, <phase_dev_max>

Where

<phase_dev_avg>::<NRf> is the average phase deviation.

<phase_dev_min>::<NRf> is the minimum phase deviation.

<phase_dev_max>::<NRf> is the maximum phase deviation.

Unit: Degrees.

Examples

READ:PULSe:STATistics:MEASview2:PHDeviation might return 11.678, 7.694, 17.374 for the phase deviation in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:PPFD (Query Only)

Returns the pulse-pulse frequency difference in the Pulse Statistics measurement display.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:PPFD
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<ppfd_avg>,<ppfd_min>,<ppfd_max>
```

Where

<ppfd_avg>::<NRf> is the average of ppfd.

<ppfd_min>::<NRf> is the minimum of ppfd.

<ppfd_max>::<NRf> is the maximum of ppfd.

Examples

```
READ:PULSe:STATistics:MEASview2:PPFD? might return
```

365.4186562500E+3,-267.5911040000E+6,247.1117760000E+6 for the pulse-pulse frequency difference in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:PPFRequency (Query Only)

Returns the pulse-pulse carrier frequency in the pulse statistics measurement. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:PPFRequency
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<pp_freq_avg>,<pp_freq_min>,<pp_freq_max>

Where

<pp_freq_avg>::<NRf> is the average pulse-pulse carrier frequency.

<pp_freq_min>::<NRf> is the minimum pulse-pulse carrier frequency.

<pp_freq_max>::<NRf> is the maximum pulse-pulse carrier frequency.

Unit: Hz.

Examples

READ:PULSe:STATistics:MEASview2:PPFrequency? might return 1.135E+3,311.3E+3,-262.8E+3 for the pulse-pulse carrier frequency in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:PPOwer (Query Only)

Returns the peak power in the pulse statistics. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:PPOwer

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<pk_power_avg>,<pk_power_min>,<pk_power_max>

Where

<pk_power_avg>::<NRf> is the average peak power.

<pk_power_min>::<NRf> is the minimum peak power.

<pk_power_max>::<NRf> is the maximum peak power.

Unit: dBm.

The unit can be changed by the [SENSe]:POwer:UNITs command.

Examples

READ:PULSe:STATistics:MEASview2:PPOwer? might return -2.273,-2.313,-2.235 for the peak power in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:PPPD (Query Only)

Returns the overshoot measurement result in dB in the pulse statistics measurement. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND or TTRend.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:PPPD
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<pppd_avg>, <pppd_min>, <pppd_max>

Where

<pppd_avg>::<NRf> is the average of pppd.

<pppd_min>::<NRf> is the minimum of pppd.

<pppd_max>::<NRf> is the maximum of pppd.

Examples

```
READ:PULSe:STATistics:MEASview2:PPPD? might return -1.1131216288,  
-151.8063964844,130.5854492188, indicating the pulse-pulse phase difference in dB.
```

READ:PULSe:STATistics[:MEASview<y>]:PPPHase (Query Only)

Returns the overshoot measurement result in dB in the pulse statistics measurement. This command is valid when DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND or TTRend.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:PPPHase
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<pp_phase_avg>, <pp_phase_min>, <pp_phase_max>

Where

<pp_phase_avg>::<NRf> is the average pulse-pulse carrier phase.

<pp_phase_min>::<NRf> is the minimum pulse-pulse carrier phase.

`<pp_phase_max>::<NRf>` is the maximum pulse-pulse carrier phase.

Unit: Degrees.

Examples

`READ:PULSe:STATistics:MEASview2:PPPhase?` might return `-9.298E-3, -254.3E-3, 311.7E-3` for the pulse-pulse carrier phase in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:RINterval (Query Only)

Returns the repetition interval in the pulse statistics. This command is valid when

`DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

`READ:PULSe:STATistics[:MEASview<y>]:RINterval`

Arguments

`<y> = 1 to 8`; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<rep_int_avg>, <rep_int_min>, <rep_int_max>`

Where

`<rep_int_avg>::<NRf>` is the average repetition interval.

`<rep_int_min>::<NRf>` is the minimum repetition interval.

`<rep_int_max>::<NRf>` is the maximum repetition interval.

Unit: Seconds.

Examples

`READ:PULSe:STATistics:MEASview2:RINterval?` might return `240.5E-6, 217.9E-6, 281.2E-6` for the repetition interval in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:RIPDb (Query Only)

Returns the ripple in dB in the pulse statistics. This command is valid when

`DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview]:RIPDb

Related Commands

[READ:PULSe:STATistics\[:MEASview\]:RIPPlE](#) (on page 1845)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<ripple_avg>,<ripple_min>,<ripple_max>

Where

<ripple_avg>::<NRf> is the average ripple.

<ripple_min>::<NRf> is the minimum ripple.

<ripple_max>::<NRf> is the maximum ripple.

Unit: dB.

Examples

READ:PULSe:STATistics:MEASview2:RIPDb? might return 160.4E-3, 83.78E-3, 287.7E-3 for the ripple in dB in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:RIPPlE (Query Only)

Returns the ripple in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview]:RIPPlE

Related Commands

[READ:PULSe:STATistics\[:MEASview\]:RIPDb](#) (on page 1844)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<ripple_avg>,<ripple_min>,<ripple_max>

Where

<ripple_avg>::<NRf> is the average ripple.

<ripple_min>::<NRf> is the minimum ripple.

<ripple_max>::<NRf> is the maximum ripple.

Unit: Percent (%) as watts or volts.

Examples

READ:PULSe:STATistics:MEASview2:RIPple? might return 60.4E-3, 83.78E-3, 287.7E-3 for the ripple in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:RISE (Query Only)

Returns the rise time in the pulse statistics. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:RISE

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<rise_avg>, <rise_min>, <rise_max>

Where

<rise_avg>::<NRf> is the average rise time.

<rise_min>::<NRf> is the minimum rise time.

<rise_max>::<NRf> is the maximum rise time.

Unit: Seconds.

Examples

READ:PULSe:STATistics:MEASview2:RISE? might return 105.4E-9, 91.65E-9, 116.2E-9 for the rise time in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:RMSFreqerror (Query Only)

Returns the RMS frequency error in the pulse statistics measurement. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:RMSFreqerror
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<RMS_freq_err_avg>,<RMS_freq_err_min>,<RMS_freq_err_max>
```

Where

<RMS_freq_err_avg>::<NRf> is the average of RMS frequency error.

<RMS_freq_err_min>::<NRf> is the minimum of RMS frequency error.

<RMS_freq_err_max>::<NRf> is the maximum of RMS frequency error.

Unit: Hz.

Examples

READ:PULSe:STATistics:MEASview2:RMSFreqerror? might return 63.67E+3, 45.49E+3, 81.28E+3 for the RMS frequency error in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:RMSPherror (Query Only)

Returns the RMS phase error in the Pulse Statistics measurement. This command is valid when

DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT is set to TREND.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:STATistics[:MEASview<y>]:RMSPherror
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
<RMS_phase_err_avg>,<RMS_phase_err_min>,<RMS_phase_err_max>
```

Where

<RMS_phase_err_avg>::<NRf> is the average of RMS phase error.

<RMS_phase_err_min>::<NRf> is the minimum of RMS phase error.

<RMS_phase_err_max>::<NRf> is the maximum of RMS phase error.

Unit: Degrees.

Examples

`READ:PULSe:STATistics:MEASview2:RMSPherror?` might return 1.032, 604.5E-3, 1.606 for the RMS phase error in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:RRATe (Query Only)

Returns the repetition rate in the pulse statistics. This command is valid when

`DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

`READ:PULSe:STATistics[:MEASview<y>]:RRATe`

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<rep_rate_avg>`, `<rep_rate_min>`, `<rep_rate_max>`

Where

`<rep_rate_avg>::<NRf>` is the average repetition rate.

`<rep_rate_min>::<NRf>` is the minimum repetition rate.

`<rep_rate_max>::<NRf>` is the maximum repetition rate.

Unit: Hz.

Examples

`READ:PULSe:STATistics:MEASview2:RRATe?` might return 62.50E+3, 62.49E+3, 62.52E+3 for the repetition rate in the pulse statistics measurement.

READ:PULSe:STATistics[:MEASview<y>]:WIDTh (Query Only)

Returns the pulse width in the pulse statistics. This command is valid when

`DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT` is set to `TREND`.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

`READ:PULSe:STATistics[:MEASview<y>]:WIDTh`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<width_avg>, <width_min>, <width_max>

Where

<width_avg>::<NRf> is the average pulse width.

<width_min>::<NRf> is the minimum pulse width.

<width_max>::<NRf> is the maximum pulse width.

Unit: Seconds.

Examples

READ:PULSe:STATistics:MEASview2:WIDTh? might return 4.636E-6, 4.630E-6, 4.643E-6 for the pulse width in the pulse statistics.

READ:PULSe:STATistics[:MEASview<y>]:X (Query Only)

Returns the horizontal values of the trace data of the pulse statistics measurement selected by the DISPLAY:PULSe:SElect:RESult command.

NOTE: Select the plot type (Trend, FFT, Time Trend or Histogram) using the

DISPLAY:PULSe:STATistics[:MEASview<y>]:PLOT command before executing this query.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:X

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

#<num_digit><num_byte><data1><data2>....data<n>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the horizontal value of the statistics graph at the nth data point.

The unit is trace number (Plot = Trend), Hz (Plot = FFT), second (Plot = Time Trend) or current measurement unit (Plot = Histogram).

4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:PULSe:STATistics:MEASview2:X? might return #264xxxx... (64-byte data) for the statistics trace of the pulse width measurement when **DISPlay:PULSe:SElect:RESult** is set to **WIDTH**.

READ:PULSe:STATistics[:MEASview<y>]:XY (Query Only)

Returns the horizontal and vertical values of the trace data of the pulse statistics measurement selected by the **DISPlay:PULSe:SElect:RESult** command.

NOTE: Select the plot type (Trend, FFT, Time Trend or Histogram) using the **DISPlay:PULSe:STATistics[:MEASview<y>]:PLOT** command before executing this query.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number

Group

Read commands

Syntax

READ:PULSe:STATistics[:MEASview<y>]:XY

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

#<num_digit><num_byte><data1><data2>....data<n>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n) > is the horizontal value of the statistics graph at the nth data point.

<data (n+1) > is the vertical value of the statistics graph at the nth data point.

For horizontal values, the unit is trace number (Plot = Trend), Hz (Plot = FFT), second (Plot = Time Trend) or current measurement unit (Plot = Histogram).

For vertical values, the unit is current measurement unit (Plot = Trend or Time Trend), dB (Plot = FFT), count (Plot = Histogram)

4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:PULSe:STATistics:MEASview2:XY? might return #264xxxx... (64-byte data) for the statistics trace of the pulse width measurement when **DISPlay:PULSe:SElect:RESult** is set to **WIDTH**.

READ:PULSe:TRACe[:MEASview<y>]:Y

Returns the vertical values of the pulse trace. Use the **DISPlay:PULSe:SElect:NUMBer** command to select the pulse, and the **DISPlay:PULSe:SElect:RESult** command to select the measurement result.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:TRACe[:MEASview<y>]:Y?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
#<num_digit><num_byte><y(1)><y(2)>...<y(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<y(n)> is the vertical value of the pulse trace at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit depends on measurement results: Hz for frequency error and deviation, degrees for phase error and deviation, otherwise dBm. The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:PULSE:TRACE:MEASVIEW1:Y? might return #43204xxxx... (3204-byte data) for the vertical values of the pulse trace measurement view 1.

READ:PULSe:TRACe[:MEASview<y>]:X

Returns the time values of the pulse trace. Use the DISPLAY:PULSe:SElect:NUMBER command to select the pulse, and the DISPLAY:PULSe:SElect:RESUlt command to select the measurement result.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Read commands

Syntax

```
READ:PULSe:TRACe[:MEASview<y>]:X?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
#<num_digit><num_byte><X(1)><X(2)>...<X(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

$\langle X(n) \rangle$ is the time in seconds at the n th data point,
4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:PULSE:TRACE:MEASVIEW1:X?` might return `#43204xxxx...` (3204-byte data) for the time values of the trace in pulse trace measurement view 1.

READ:PULSe:TRACe[:MEASview<y>]:XY

Returns the horizontal (time) and vertical value pairs of the pulse trace. Use the `DISPlay:PULSe:SElect:NUMBer` command to select the pulse, and the `DISPlay:PULSe:SElect:RESult` command to select the measurement result.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Read commands

Syntax

`READ:PULSe:TRACe[:MEASview<y>]:XY?`

Arguments

$\langle y \rangle = 1$ to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<x(n)><y(n)>` is the horizontal value (time in seconds) and vertical value pair at the n th data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The vertical unit depends on measurement results: Hz for frequency error and deviation, degrees for phase error and deviation, otherwise dBm. The vertical unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:PULSE:TRACE:MEASVIEW1:XY?` might return `#43204xxxx...` (3204-byte data) for the horizontal (time) and vertical value pairs of the pulse trace measurement view 1.

READ:SEM:MHITs:COUNT? (Query Only)

Returns the number of rows in the results table in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs:COUNT?

Arguments

None

Returns

<NRf> The number of rows in the table.

Examples

READ:SEM:MHITS:COUNT? might return 7, indicating there are seven rows in the results table.

READ:SEM:MHITs<x>:AMPLitude:ABSolute? (Query Only)

Returns the absolute amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:AMPLitude:ABSolute?

Arguments

None

Returns

<NRf> Absolute amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs2:AMPLitude:ABSolute? might return -73.17 indicating that the absolute amplitude of signal in row 2 is -73.17 dBm.

READ:SEM:MHITs<x>:AMPLitude:RELative? (Query Only)

Returns the relative amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:AMPLitude:RELative?

Arguments

None

Returns

<NRf> Relative amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs2:AMPLitude:RELative? might return -91.81 indicating that the relative amplitude of mask hit signal in row 2 is -91.81 dBm.

READ:SEM:MHITs<x>:FREQuency? (Query Only)

Returns the frequency of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:FREQuency?

Arguments

None

Returns

<NRf> Frequency of the specified signal in Hz.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs4:FREQuency? might return 2.235E+6, indicating the frequency for mask hit signal in row 4 is 2.235 MHz.

READ:SEM:MHITs<x>:INTeg:ABSolute? (Query Only)

Returns the absolute integration amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:INTeg:ABSolute?

Arguments

None

Returns

<NRf> Absolute integration amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs4:INTEg:ABSolute? might return -75.14 indicating that the absolute integration amplitude for mask hit signal in row 4 is -75.14 dBm.

READ:SEM:MHITs<x>:INTEg:RELative? (Query Only)

Returns the relative integration amplitude of the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:INTEg:RELative?

Arguments

None

Returns

<NRf> Relative integration amplitude of the specified signal in dBm.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs4:INTEg:RELative? might return -85.14 indicating that the relative integration amplitude for mask hit signal in row 4 is -85.14 dBm.

READ:SEM:MHITs<x>:MARGin:ABSolute? (Query Only)

Returns the absolute margin for the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:MARGin:ABSolute?

Arguments

None

Returns

<NRf> Absolute margin of the specified signal in dB.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs4:MARGin:ABSolute? might return -62.33 indicating that the absolute margin for mask hit signal in row 4 is -62.33 dB.

READ:SEM:MHITs<x>:MARGin:RELative? (Query Only)

Returns the relative margin for the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:MARGin:RELative?

Arguments

None

Returns

<NRf> Relative margin of the specified signal in dB.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs4:MARGin:RELative? might return -62.33 indicating that the relative margin for mask hit signal in row 4 is -62.33 dB.

READ:SEM:MHITs<x>:OFFSet? (Query Only)

Returns the offset for the specified mask hit signal in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:MHITs<x>:OFFSet?

Arguments

None

Returns

<NRf> specifies the mask hit offset.

<x> specifies the row in the results table, where the range is from 1 to 12.

Examples

READ:SEM:MHITs4:OFFSet? might return BL, indicating the offset for mask hit signal in row 4 is BL.

READ:SEM:PASS? (Query Only)

Returns the pass/fail limit test result in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:PASS?

Arguments

None

Returns

0 (fail) or 1 (pass)

Examples

READ:SEM:PASS? might return 1, indicating that the limit test was successful.

READ:SEM:REF:POWer? (Query Only)

Returns the reference power level in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:REF:POWer?

Arguments

None

Returns

<NRf> specifies the reference power.

Examples

READ:SEM:REF:POWer? might return -16.92 dBm indicating that the reference power level is -16.92 dBm.

READ:SEM:SPECTrum:X? (Query Only)

Returns the frequencies of the spectrum trace in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:SPECTrum:X?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the frequency (Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:SEM:SPECTRUM:X? might return #516020xxxx... (16020-byte data) for the frequencies of the spectrum trace.

READ:SEM:SPECTrum:XY? (Query Only)

Returns the frequency and amplitude pairs of the spectrum trace in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

READ:SEM:SPECTrum:XY?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

$\langle x(n) \rangle \langle y(n) \rangle$ is the frequency (Hz) and amplitude (dBm) pair at the n th data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:SEM:SPECTRUM:XY?` might return `#516020xxxx...` (16020-byte data) for the frequency and amplitude pairs of the spectrum trace.

READ:SEM:SPECTrum[:Y]? (Query Only)

Returns the amplitude of the spectrum trace in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Read commands

Syntax

`READ:SEM:SPECTrum[:Y]?`

Arguments

None

Returns

`#<num_digit><num_byte><x(1)><x(2)>...<x(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<x(n)>` is the frequency (Hz) at the n th data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

`READ:SEM:SPECTRUM[:Y]?` might return `#516020xxxx...` (16020-byte data) for the frequencies of the spectrum trace.

READ:SGRam[:MEASview<y>] (Query Only)

Returns the spectrogram trace data. The line is selected using the `TRACe:SGRam:MEASview<y>:SElect:LINE` command.

Conditions

Measurement views: Spectrogram

Group

Read commands

Syntax

`READ:SGRam[:MEASview<y>]?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the trace data in dBm for the point n, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:SGRam:MEASview1? might return #43204xxxx... (3204-byte data) for the spectrogram trace.

READ:SPECTrum[:MEASview<y>]:TRACe<x>? (Query Only)

Returns the trace data in the Spectrum measurement.

NOTE: TRACe5 (spectrogram) is valid when the spectrum and spectrogram measurements are running.

Conditions

Measurement views: Spectrum

Group

Read commands

Syntax

READ:SPECTrum[:MEASview<y>]:TRACe<x>?

Arguments

The parameter <x> = 1 to 5.

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the trace data in dBm for the point n, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:SPECTRUM:MEASview1:TRACE1 might return #43204xxxx... (3204-byte data) for Trace 1 in the Spectrum measurement.

READ:SPURious:CARRier:POWer? (Query Only)

Returns the carrier power in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

READ:SPURious:CARRier:POWer?

Arguments

None

Returns

<NRf> Carrier power in dBm.

The unit can be changed by the [\[SENSe\]:POWer:UNITs](#) (on page 2287) command.

Examples

READ:SPURIOUS:CARRIER:POWER? might return 4.227, indicating that the carrier power is 4.227 dBm.

READ:SPURious:COUNT? (Query Only)

Returns the number of spurious signals in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

READ:SPURious:COUNT?

Arguments

None

Returns

<NRf> The spurious count.

Examples

READ:SPURIOUS:COUNT? might return 4, indicating that the spurious count is 4.

READ:SPURious:PASS? (Query Only)

Returns the pass/fail limit test result in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

READ:SPURious:PASS?

Arguments

None

Returns

0 (fail) or 1 (pass).

Examples

READ:SPURIOUS:PASS? might return 1, indicating that the limit test was successful.

READ:SPURious:SPECTrum:X? (Query Only)

Returns the frequencies of the spectrum trace in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

READ:SPURious:SPECTrum:X?

Arguments

None

Returns

#<num_digit><num_byte><x(1)><x(2)>...<x(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<x(n)> is the frequency (Hz) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:SPURIOUS:SPECTRUM:X? might return #516020xxxx... (16020-byte data) for the frequencies of the spectrum trace in the Spurious measurement.

READ:SPURious:SPECTrum:XY? (Query Only)

Returns the frequency and amplitude pairs of the spectrum trace in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPECTrum:XY?`

Arguments

None

Returns

`#<num_digit><num_byte><x(1)><y(1)><x(2)><y(2)>...<x(n)><y(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

`<num_byte>` is the number of bytes of data that follow.

`<x(n)><y(n)>` is the frequency (Hz) and amplitude (dBm) pair at the *n*th data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The amplitude unit can be changed by the `[SENSe]:POWeR:UNITs` command.

Examples

`READ:SPURIOUS:SPECTRUM:XY?` might return `#516020xxxx... (16020-byte data)` for the frequency and amplitude pairs of the spectrum trace in the Spurious measurement.

READ:SPURious:SPECTrum[:Y]? (Query Only)

Returns the amplitudes of the spectrum trace in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPECTrum[:Y]?`

Related Commands

[READ:SPURious:SPECTrum:X?](#) (on page 1862)

Arguments

None

Returns

`#<num_digit><num_byte><y(1)><y(2)>...<y(n)>`

Where

`<num_digit>` is the number of digits in `<num_byte>`.

<num_byte> is the number of bytes of data that follow.

<y (n)> is the amplitude (dBm) at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:SPURIOUS:SPECTRUM:Y` might return `#516020xxxx...` (16020-byte data) for the amplitudes of the spectrum trace in the Spurious measurement.

READ:SPURious:SPUR<x>:AMPLitude:ABSolute? (Query Only)

Returns the absolute amplitude of the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPUR<x>:AMPLitude:ABSolute?`

Arguments

None

Returns

<NRf> Absolute amplitude of the specified spurious in dBm.

The unit can be changed by the [\[SENSe\]:POWer:UNITs](#) (on page 2287) command.

Examples

`READ:SPURIOUS:SPUR1:AMPLITUDE:ABSOLUTE?` might return `-19.782`, indicating that the absolute amplitude of Spurious #1 is -19.782 dBm.

READ:SPURious:SPUR<x>:AMPLitude:RELative? (Query Only)

Returns the relative amplitude of the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPUR<x>:AMPLitude:RELative?`

Arguments

None

Returns

<NRf> Relative amplitude of the specified spurious signal in dB.

Use the [\[SENSe\]:SPURious:REFeRence](#) (on page 2424) command to set the power reference.

Examples

READ:SPURIOUS:SPUR1:AMPLITUDE:RELATIVE? might return -9.782, indicating that the relative amplitude of Spurious #1 is -9.782 dB.

READ:SPURious:SPUR<x>:FREQuency:ABSolute? (Query Only)

Returns the absolute frequency of the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

READ:SPURious:SPUR<x>:FREQuency:ABSolute?

Arguments

None

Returns

<NRf> Absolute frequency of the spurious signal in Hz.

Examples

READ:SPURIOUS:SPUR1:FREQUENCY:ABSOLUTE? might return 2.235E+9, indicating that the absolute frequency of Spurious #1 is 2.235 GHz.

READ:SPURious:SPUR<x>:FREQuency:RELative? (Query Only)

Returns the relative frequency of the specified spurious signal to the carrier in the Spurious measurement. This command is valid when [\[SENSe\]:SPURious:REFeRence](#) is set to [CARRier](#).

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

READ:SPURious:SPUR<x>:FREQuency:RELative?

Arguments

None

Returns

<NRf> Relative frequency of the spurious signal to the carrier in Hz.

Examples

`READ:SPURIOUS:SPUR1:FREQUENCY:RELATIVE?` might return `3.634E+6`, indicating that the relative frequency of Spurious #1 is 3.634 MHz.

READ:SPURious:SPUR<x>:LIMit:ABSolute? (Query Only)

Returns the absolute amplitude of the limit for the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPUR<x>:LIMit:ABSolute?`

Arguments

None

Returns

<NRf> Absolute amplitude of the limit for the specified spurious signal in dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` command.

Examples

`READ:SPURIOUS:SPUR1:LIMIT:ABSOLUTE?` might return `-50.0`, indicating that the absolute amplitude of the limit for Spurious #1 is -50 dBm.

READ:SPURious:SPUR<x>:LIMit:RELative? (Query Only)

Returns the relative amplitude of the limit for the specified spurious signal in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPUR<x>:LIMit:RELative?`

Arguments

None

Returns

<NRf> Relative amplitude of the limit for the specified spurious signal in dB.

Use the [\[SENSe\]:SPURious:REFerence](#) (on page 2424) command to set the power reference.

Examples

`READ:SPURIOUS:SPUR1:LIMIT:RELATIVE?` might return `-10.0`, indicating that the relative amplitude of the limit for Spurious #1 is -10 dB.

READ:SPURious:SPUR<x>:LIMit:VIOLation? (Query Only)

Returns whether the specified spurious signal exceeds the limit or not.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPUR<x>:LIMit:VIOLation?`

Arguments

None

Returns

0 (under the limit) or 1 (over the limit).

Examples

`READ:SPURIOUS:SPUR1:LIMIT:VIOLATION?` might return 1, indicating that Spurious #1 exceeds the limit.

READ:SPURious:SPUR<x>:RANGe? (Query Only)

Returns the frequency range in which the specified spurious signal occurred.

Conditions

Measurement views: Spurious

Group

Read commands

Syntax

`READ:SPURious:SPUR<x>:RANGe?`

Arguments

None

Returns

<string> "A" to "T" representing Range A to T, respectively.

Examples

`READ:SPURIOUS:SPUR1:RANGE?` might return "E", indicating that Spurious #1 is in Range E.

READ:SQUality[:MEASview<y>]:FREQuency:DEViation? (Query only)

Returns the frequency deviation in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to C4FM, FSK2, FSK4, FSK8, or FSK16.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQUality[:MEASview<y>]:FREQuency:DEViation?
```

Arguments

None

Returns

<NRf> Frequency deviation in Hz.

Examples

READ:SQUality:MEASview1:FREQuency:DEViation? might return 12.68E+3, indicating the frequency deviation is 12.68 kHz for measurement view 1.

READ:SQUality[:MEASview<y>]:FREQuency:DEViation:TABLE? (Query only)

Returns the number of columns and the values in the frequency deviation table for a signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to C4FM, FSK2, FSK4, FSK8, or FSK16.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQUality[:MEASview<y>]:FREQuency:DEViation:TABLE?
```

Arguments

None

Returns

<Dev_Num>,{<Freq_dev_Max>,<Freq_dev_Min>,<Freq_dev_Avg>}

Where

<Dev_Num>::<NR1> is the number of columns in the frequency deviation table.

= 2 (2FSK), 4 (4FSK, C4FM), 8 (8FSK), or 16 (16FSK)

<Freq_dev_Max>::<NRf> is the maximum frequency deviation in Hz.

<Freq_dev_Min>::<NRf> is the minimum frequency deviation in Hz.

<Freq_dev_Avg>::<NRf> is the average frequency deviation in Hz.

The dataset <Freq_dev_Max>,<Freq_dev_Min>,<Freq_dev_Avg> is returned for each symbol in ascending order of its level (for example, in order of symbol -3, -1, +1, and +3 for 4FSK).

Examples

READ:SQUality:MEASview1:FREQuency:DEVIation:TABLE? might return

2,1.257E+3,1.039E+3,1.162E+3,1.586E+3,1.298E+3,1.425E+3 for the frequency signal, populating the results table as follows.

Deviations	-1	+1
Maximum	1.257 kHz	1.586 kHz
Average	1.162 kHz	1.425 kHz
Minimum	1.039 kHz	1.298 kHz

READ:SQUality[:MEASview<y>]:FREQuency:ERRor? (Query only)

Returns the frequency error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

READ:SQUality[:MEASview<y>]:FREQuency:ERRor?

Arguments

None

Returns

<NRf> Frequency error in Hz.

Examples

`READ:SQQuality:MEASview1:FREQuency:ERRor?` might return `612.043E+3`, indicating that the frequency error is 612.043 kHz for measurement view 1.

READ:SQQuality[:MEASview<y>]:GAIN:IMBalance? (Query only)

Returns the gain imbalance in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQQuality[:MEASview<y>]:GAIN:IMBalance?`

Arguments

None

Returns

<NRf> Gain imbalance in dB.

Examples

`READ:SQQuality:MEASview1:GAIN:IMBalance?` might return `-57.746E-3`, indicating that the gain imbalance is -0.057746 dB for measurement view 1.

READ:SQQuality[:MEASview<y>]:ORIGin:OFFSet? (Query only)

Returns the origin offset in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQQuality[:MEASview<y>]:ORIGin:OFFSet?`

Arguments

None

Returns

<NRf> Origin offset in dB.

Examples

READ:SQUality:MEASview1:ORIGin:OFFSet? might return -44.968, indicating that the origin offset is -44.968 dB for measurement view 1.

READ:SQUality[:MEASview<y>]:PEAK:EVM? (Query only)

Returns the peak EVM (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

READ:SQUality[:MEASview<y>]:PEAK:EVM?

Arguments

None

Returns

<NRf> Peak EVM in percent (%).

Examples

READ:SQUality:MEASview1:PEAK:EVM? might return 4.276, indicating that the peak EVM is 4.276% for measurement view 1.

READ:SQUality[:MEASview<y>]:PEAK:EVM:DB? (Query only)

Returns the peak EVM (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQUality[:MEASview<y>]:PEAK:EVM:DB?`

Arguments

None

Returns

<NRf> Peak EVM in dB.

Examples

`READ:SQUality:MEASview1:PEAK:EVM:DB?` might return -27.358, indicating that the peak EVM is -27.358 dB for measurement view 1.

READ:SQUality[:MEASview<y>]:PEAK:EVM:DB:OFFSet? (Query only)

Returns the peak offset EVM (dB) in the signal quality measurement.

This command is valid when `[SENSe]:DDEMod:MODulation:TYPE` is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQUality[:MEASview<y>]:PEAK:EVM:DB:OFFSet?`

Arguments

None

Returns

<NRf> Peak offset EVM in dB.

Examples

`READ:SQUality:MEASview1:PEAK:EVM:DB:OFFSet?` might return -37.624, indicating the peak offset EVM is -37.624 dB for measurement view 1.

READ:SQUality[:MEASview<y>]:PEAK:EVM:LOCation? (Query only)

Returns the time at which the EVM is peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQUality[:MEASview<y>]:PEAK:EVM:LOCation?
```

Arguments

None

Returns

<NRf> The time in symbol number at which the EVM is peak.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

READ:SQUality:MEASview1:PEAK:EVM:LOCation? might return 68.000, indicating that the EVM is peak at symbol #68.000 for measurement view 1.

READ:SQUality[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet? (Query only)

Returns the time at which the offset EVM is peak.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQUality[:MEASview<y>]:PEAK:EVM:LOCation:OFFSet?
```

Arguments

None

Returns

<NRf> The time in symbol number at which the offset EVM is peak.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

`READ:SQUality:MEASview1:PEAK:EVM:LOCation:OFFSet?` might return 123.00, indicating that the offset EVM is peak at symbol #123 for measurement view 1.

`READ:SQUality[:MEASview<y>]:PEAK:EVM:OFFSet? (Query only)`

Returns the peak offset EVM (%) in the signal quality measurement.

This command is valid when `[SENSe]:DDEMod:MODulation:TYPE` is set to OQPSK or SOQPSK.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQUality[:MEASview<y>]:PEAK:EVM:OFFSet?`

Arguments

None

Returns

`<NRf>` Peak offset EVM in percent (%).

Examples

`READ:SQUality:MEASview1:PEAK:EVM:OFFSet?` might return 1.298, indicating the peak offset EVM is 1.298% for measurement view 1.

`READ:SQUality[:MEASview<y>]:PEAK:FERRor? (Query only)`

Returns the peak FSK error in the signal quality measurement.

This command is valid when `[SENSe]:DDEMod:MODulation:TYPE` is set to FSK2, FSK4, FSK8, or FSK16.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQUality[:MEASview<y>]:PEAK:FERRor?`

Arguments

None

Returns

<NRf> Peak FSK error in percent (%).

Examples

READ:SQQuality:MEASview1:PEAK:FERRor? might return 9.136, indicating the peak FSK error is 9.136% for measurement view 1.

READ:SQQuality[:MEASview<y>]:PEAK:MERRor? (Query only)

Returns the peak magnitude error (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

READ:SQQuality[:MEASview<y>]:PEAK:MERRor?

Arguments

None

Returns

<NRf> Peak magnitude error in percent (%).

Examples

READ:SQQuality:MEASview1:PEAK:MERRor? might return 3.595, indicating that the peak magnitude error is 3.595% for measurement view 1.

READ:SQQuality[:MEASview<y>]:PEAK:MERRor:DB? (Query only)

Returns the peak magnitude error (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQuality[:MEASview<y>]:PEAK:MERRor:DB?`

Arguments

None

Returns

<NRf> Peak magnitude error in dB.

Examples

`READ:SQuality:MEASview1:PEAK:MERRor:DB?` might return -28.583, indicating that the magnitude error is -28.583 dB for measurement view 1.

READ:SQuality[:MEASview<y>]:PEAK:MERRor:LOCation? (Query only)

Returns the time at which the magnitude error is peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQuality[:MEASview<y>]:PEAK:MERRor:LOCation?`

Arguments

None

Returns

<NRf> The time in symbol number at which the magnitude error is peak.

The unit can be changed by the `[SENSe]:DDEMod:TIME:UNITs` command.

Examples

`READ:SQuality:MEASview1:PEAK:MERRor:LOCation?` might return 68.000, indicating that the magnitude error is peak at symbol #68 for measurement view 1.

READ:SQuality[:MEASview<y>]:PEAK:PERRor? (Query only)

Returns the peak phase error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQQuality[:MEASview<y>]:PEAK:PERRor?
```

Arguments

None

Returns

<NRf> Peak phase error in degrees.

Examples

READ:SQQuality:MEASview1:PEAK:PERRor? might return 1.907, indicating that the peak phase error is 1.907 ° for measurement view 1.

READ:SQQuality[:MEASview<y>]:PEAK:PERRor:LOCation? (Query only)

Returns the time at which the phase error is peak.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQQuality[:MEASview<y>]:PEAK:PERRor:LOCation?
```

Arguments

None

Returns

<NRf> The time in symbol number at which the phase error is peak.

The unit can be changed by the [SENSe]:DDEMod:TIME:UNITs command.

Examples

`READ:SQQuality:MEASview1:PEAK:PErRor:LOCation?` might return 68.000, indicating that the phase error is peak at symbol #68 for measurement view 1.

`READ:SQQuality[:MEASview<y>]:QUADrature:ERRor? (Query only)`

Returns the quadrature error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQQuality[:MEASview<y>]:QUADrature:ERRor?`

Arguments

None

Returns

<NRf> Quadrature error in degrees.

Examples

`READ:SQQuality:MEASview1:QUADrature:ERRor?` might return -14.264E-3, indicating that the quadrature error is -0.014264° for measurement view 1.

`READ:SQQuality[:MEASview<y>]:RHO? (Query only)`

Returns the ρ (waveform quality) value in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQQuality[:MEASview<y>]:RHO?`

Arguments

None

Returns

<NRf> p value.

Examples

READ:SQUality:MEASview1:RHO? might return 998.703E-3, indicating that p is 0.998703 for measurement view 1.

READ:SQUality[:MEASview<y>]:RMS:EVM? (Query only)

Returns the RMS EVM (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

READ:SQUality[:MEASview<y>]:RMS:EVM?

Arguments

None

Returns

<NRf> RMS EVM in percent (%).

Examples

READ:SQUality:MEASview1:RMS:EVM? might return 2.417, indicating that the RMS EVM is 2.417% for measurement view 1.

READ:SQUality[:MEASview<y>]:RMS:EVM:DB? (Query only)

Returns the RMS EVM (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

READ:SQUality[:MEASview<y>]:RMS:EVM:DB?

Arguments

None

Returns

<NRf> RMS EVM in dB.

Examples

READ:SQUality:MEASview1:RMS:EVM:DB? might return -32.356, indicating that the RMS EVM is -32.356 dB for measurement view 1.

READ:SQUality[:MEASview<y>]:RMS:EVM:DB:OFFSet? (Query only)

Returns the RMS offset EVM (dB) in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

READ:SQUality[:MEASview<y>]:RMS:EVM:DB:OFFSet?

Arguments

None

Returns

<NRf> RMS offset EVM in dB.

Examples

READ:SQUality:MEASview1:RMS:EVM:DB:OFFSet? might return -41.276, indicating the RMS offset EVM is -41.276 dB for measurement view 1.

READ:SQUality[:MEASview<y>]:RMS:EVM:OFFSet? (Query only)

Returns the RMS offset EVM (%) in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to OQPSK or SOQPSK.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQQuality[:MEASview<y>]:RMS:EVM:OFFSet?
```

Arguments

None

Returns

<NRf> RMS offset EVM in percent (%).

Examples

READ:SQQuality:MEASview1:RMS:EVM:OFFSet? might return 0.783, indicating the RMS offset EVM is 0.783% for measurement view 1.

READ:SQQuality[:MEASview<y>]:RMS:FERRor? (Query only)

Returns the RMS FSK error in the signal quality measurement.

This command is valid when [SENSe]:DDEMod:MODulation:TYPE is set to FSK2, FSK4, FSK8, or FSK16.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQQuality[:MEASview<y>]:RMS:FERRor?
```

Arguments

None

Returns

<NRf> RMS FSK error in percent (%).

Examples

READ:SQQuality:MEASview1:RMS:FERRor? might return 8.67, indicating the RMS FSK error is 8.67% for measurement view 1.

READ:SQQuality[:MEASview<y>]:RMS:MER:DB? (Query only)

Returns the RMS MER (Modulation Error Ratio) in dB in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQQuality[:MEASview<y>]:RMS:MER:DB?
```

Arguments

None

Returns

<NRf> RMS MER in dB.

Examples

READ:SQQuality:MEASview1:RMS:MER:DB? might return 27.394, indicating that the RMS MER is 27.394 dB for measurement view 1.

READ:SQQuality[:MEASview<y>]:RMS:MERRor? (Query only)

Returns the RMS magnitude error (%) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

```
READ:SQQuality[:MEASview<y>]:RMS:MERRor?
```

Arguments

None

Returns

<NRf> RMS magnitude error in percent (%).

Examples

`READ:SQUality:MEASview1:RMS:MERRor?` might return 1.837, indicating that the RMS magnitude error is 1.837% for measurement view 1.

`READ:SQUality[:MEASview<y>]:RMS:MERRor:DB? (Query only)`

Returns the RMS magnitude error (dB) in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQUality[:MEASview<y>]:RMS:MERRor:DB?`

Arguments

None

Returns

<NRf> RMS magnitude error in dB.

Examples

`READ:SQUality:MEASview1:RMS:MERRor:DB?` might return -34.706, indicating that the magnitude error is -34.706 dB for measurement view 1.

`READ:SQUality[:MEASview<y>]:RMS:PERRor? (Query only)`

Returns the RMS phase error in the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

`READ:SQUality[:MEASview<y>]:RMS:PERRor?`

Arguments

None

Returns

<NRf> RMS phase error in degrees.

Examples

READ:SQUALity:MEASview1:RMS:PError? might return 893.472E-3, indicating that the RMS phase error is 0.893472° for measurement view 1.

READ:SQUALity[:MEASview<y>]:SYMBOL:LENGth? (Query only)

Returns the number of analyzed symbols.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Read commands

Syntax

READ:SQUALity[:MEASview<y>]:SYMBOL:LENGth?

Related Commands

Returns

<NR1> indicates the length of the synch word in symbols.

Examples

READ:SQUALity:MEASview1:SYMBOL:LENGth? might return 3, indicating the length is three symbols for measurement view 1.

READ:SQUALity[:MEASview<y>]:SYMBOL:RATE? (Query only)

Returns the value of the calculated symbol rate in Hz.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

It is valid when the modulation type is 2|4|8|16FSK and [:SENSe]:DDEMod:SYMBOL:RATE:SEARCh is ON.

Group

Read commands

Syntax

```
READ:SQUality[:MEASview<y>]:SYMBOL:RATE?
```

Related Commands

[\[SENSe\]:DDEMod:SYMBOL:RATE:SEARCh](#) (on page 2077)

Returns

<NRf> is the calculated symbol rate in Hz.

Examples

READ:SQUality:MEASview1:SYMBOL:RATE? might return 95.24E+3, indicating the calculated symbol rate is 95.24 kHz for measurement view 1.

READ:SQUality[:MEASview<y>]:SYMBOL:RATE:ERRor? (Query only)

Returns the value of the symbol rate error in percent (%).

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

It is valid when the modulation type is 2|4|8|16FSK and [:SENSe]:DDEMod:SYMBOL:RATE:SEARCh is ON.

Group

Read commands

Syntax

```
READ:SQUality[:MEASview<y>]:SYMBOL:RATE:ERRor?
```

Related Commands

[\[SENSe\]:DDEMod:SYMBOL:RATE:SEARCh](#) (on page 2077)

Returns

<NRf> is the symbol error percent (%).

Examples

READ:SQUality:MEASview1:SYMBOL:RATE:ERRor? might return -0.002, indicating that the symbol rate error is -0.002% for measurement view 1.

READ:TDiagram[:MEASview<y>]:FERRor? (Query only)

Returns the frequency error in the Trellis diagram measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Read commands

Syntax

```
READ:TDIagram[:MEASview<y>]:FERRor?
```

Arguments

None

Returns

<freq_error>::<NRf> is the frequency error in Hz.

Examples

READ:TDIagram:MEASview2:FERROR? might return -10.7E+3, indicating the frequency error is -10.7 kHz.

READ:TDIagram[:MEASview<y>]:TRACe? (Query only)

Returns the Trellis diagram trace data.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

Group

Read commands

Syntax

```
READ:TDIagram[:MEASview<y>]:TRACe?
```

Arguments

None

Returns

```
#<num_digit><num_byte><Y(1)><X(1)><Y(2)><X(2)>...<Y(n)><X(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<Y(n)> and <X(n)> is the phase in degrees and the time in symbols pair at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:TDIagram:MEASview2:TRACe? might return #3160xxxx... (160-byte data) for the frequency deviation versus Time trace.

READ:TOVerview[:MEASview<y>] (Query Only)

Returns the trace data in the time overview.

Conditions

Measurement views: Time overview with specified Measurement view number

Group

Read commands

Syntax

```
READ:TOVerview[:MEASview<y>]
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the trace data in dBm for the point n, 4-byte little endian floating-point format specified in IEEE 488.2.

The unit can be changed by the [SENSe]:POWer:UNITs command.

Examples

READ:TOVerview:MEASview1? might return #43204xxxx... (3204-byte data) for the trace in the time overview.

READ:WLAN:AD:CONStE:DATA:EVM? (Query Only)

Queries the EVM value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Read commands

Syntax

```
READ:WLAN:AD:CONStE:DATA:EVM?
```

Arguments

None

Returns

<NRf> = EVM value

Examples

`READ:WLAN:AD:CONSTE:DATA:EVM?` might return `-42.482`, indicating the EVM value present in the analysis data is `-42.482` dB.

`READ:WLAN:AD:CONStE:DATA:EVM:PEAK? (Query Only)`

Queries the EVM Peak value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Read commands

Syntax

`READ:WLAN:AD:CONStE:DATA:EVM:PEAK?`

Arguments

None

Returns

`<NRf>` = EVM peak value

Examples

`READ:WLAN:AD:CONSTE:DATA:EVM:PEAK?` might return `-35.325`, indicating the EVM Peak value is `-35.325` dB.

`READ:WLAN:AD:CONStE:DATA:EVM:PEAK:SYMBol? (Query Only)`

Queries the EVM peak symbol value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Read commands

Syntax

`READ:WLAN:AD:CONStE:DATA:EVM:PEAK:SYMBol?`

Arguments

None

Returns

`<NRf>` = Symbol value

Examples

`READ:WLAN:AD:CONSTE:DATA:EVM:PEAK:SYMBOL?` might return `6.312`, indicating the EVM peak symbol value is `6.312`.

READ:WLAN:AD:CONStE:FERRor? (Query Only)

Queries the frequency Error value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Read commands

Syntax

READ:WLAN:AD:CONStE:FERRor?

Arguments

None

Returns

<NR3> = frequency error

Examples

READ:WLAN:AD:CONStE:FERRor? might return 3.344+3, indicating the frequency error value is 3.344 kHz.

READ:WLAN:AD:CONStE:IQDC:OFFSet? (Query Only)

Queries IQ Origin Offset value in Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Read commands

Syntax

READ:WLAN:AD:CONStE:IQDC:OFFSet?

Arguments

None

Returns

<NRf> = IQ Origin offset value

Examples

READ:WLAN:AD:CONStE:IQDC:OFFSet? might return -51.841, indicating the IQ Origin Offset value is -51.841 dB.

READ:WLAN:AD:EVM:TRACe? (Query Only)

Returns the EVM versus time trace data.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Read commands

Syntax

READ:WLAN:AD:EVM:TRACe?

Arguments

None

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the EVM value at the nth data point in percent (%), <data (n)> follows 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:WLAN:AD:EVM:TRACE? might return #42036xxxx... (2036-byte data), indicating the EVM versus time trace data.

READ:WLAN:AD:SUMMARY:AVERAGE:BURST:COUNT (Query Only)

Returns the current burst number out of the total burst in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:AVERAGE:BURST:COUNT?

Arguments

None

Returns

<NR1>

Examples

READ:WLAN:AD:SUMMARY:AVERAGE:BURST:COUNT? might return 1, indicating the current burst count is 1 out of the total burst.

READ:WLAN:AD:SUMMARY:AVERAGE:BURST:TOTAL:COUNT (Query Only)

Returns the total burst count to be averaged in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:AVERAge:BURSt:TOTAL:COUNT?`

Arguments

None

Returns

<NR1>

Examples

`READ:WLAN:AD:SUMMARY:AVERAGE:BURST:TOTAL:COUNT?` might return 1, indicating the total burst count to be averaged is 1.

READ:WLAN:AD:SUMMARY:ESNR (Query Only)

Returns the value of estimated SNR value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:ESNR?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:ESNR?` might return 36.856, indicating the estimated SNR value is 36.856 dB.

READ:WLAN:AD:SUMMARY:EVM:DATA:AVERAge (Query Only)

Returns Avg EVM (Data) value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:DATA:AVERAge?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:EVM:DATA:AVERAGE might return -40.7035275551, indicating that the Avg EVM (Data) value is -40.70 dB.

READ:WLAN:AD:SUMMARY:EVM:DATA:AVERAge:STATus (Query Only)

Returns Avg EVM (Data) status in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:DATA:AVERAge:STATus?

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not applicable.

Examples

READ:WLAN:AD:SUMMARY:EVM:DATA:AVERAGE:STATUS? might return PASS, indicating that the Avg EVM (Data) test has passed.

READ:WLAN:AD:SUMMARY:EVM:DATA:MAX (Query Only)

Returns Max EVM (Data) value in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:DATA:MAX?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:EVM:DATA:MAX? might return 922.1968241036E-3, indicating the Max EVM (Data) value is 922.19 dB.

READ:WLAN:AD:SUMMARY:EVM:PACKet:CEF:EVM (Query Only)

Returns the EVM value in the CEF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:PACKet:CEF:EVM?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:EVM:PACKet:CEF:EVM? might return 6.9680400193, indicating the EVM value in the CEF region of the packet is 6.69 dB.

READ:WLAN:AD:SUMMARY:EVM:PACKet:CEF:PEAK (Query Only)

Returns the peak Error occurred at the given Symbol in CEF Packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:PACKet:CEF:PEAK?

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:CEF:PEAK` might return `13.7763872743`, indicating the peak error value at the given symbol in CEF region of the packet is 13.77 dB.

READ:WLAN:AD:SUMMARY:EVM:PACKET:CEF:SYMBOL (Query Only)

Returns the symbol at which the peak error occurred in the CEF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:CEF:SYMBOL?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:CEF:SYMBOL` might return `7.4020000000E+3`, indicating the peak error occurred at symbol 7.40 in the CEF region of the packet.

READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:EVM (Query Only)

Returns the EVM value in Data region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:EVM?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:EVM` might return `-33.5668742100`, indicating EVM value in Data region of the packet is -33.56 dB.

READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:PEAK (Query Only)

Returns the peak Error occurred at the given Symbol in Data Packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:PEAK?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:PEAK?` might return `-26.5964736883`, indicating Peak Error value at given Symbol in Data packet is -26.59 dB.

READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:STATUS (Query Only)

Returns the status of the Data packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:STATUS?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not Applicable

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:STATUS?` might return `Pass`, indicating that the Data packet test result has Passed.

READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:SYMBOL (Query Only)

Returns the symbol at which the peak Error occurred in the DATA region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:SYMBOL?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:DATA:SYMBOL` might return `4.6610000000E+3`, indicating at 4.66 symbol, peak error occurred in Data Region of the packet.

READ:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:EVM (Query Only)

Returns the EVM value in the Guard region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:EVM?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:EVM` might return `-65.4983500315`, indicating the EVM value in the Guard region of the packet is `-65.49 dB`.

READ:WLAN:AD:SUMMARY:EVM:PACKet:GUARd:PEAK (Query Only)

Returns the peak error occurred at the given symbol in Guard packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:PACKet:GUARd:PEAK?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:PEAK might return -26.5964736883 , indicating the peak error value at the given symbol in the Guard packet is -26.59 dB.

READ:WLAN:AD:SUMMARY:EVM:PACKet:GUARd:SYMBol (Query Only)

Returns the symbol at which the peak error occurred in the Guard region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:PACKet:GUARd:SYMBOL?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:EVM:PACKET:GUARD:SYMBOL might return $3.3340000000E+3$, indicating the peak error occurred at symbol 3.33 in the Guard region of the packet.

READ:WLAN:AD:SUMMARY:EVM:PACKet:HEADer:EVM (Query Only)

Returns the EVM value in the Header region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKet:HEADer:EVM?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:HEADER:EVM` might return `-67.1981081169`, indicating the EVM value in the Header region of the packet is `-67.19` dB.

READ:WLAN:AD:SUMMARY:EVM:PACKet:HEADer:PEAK (Query Only)

Returns the peak error occurred at the given symbol in the Header packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKet:HEADer:PEAK?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:HEADER:PEAK` might return `-60.9603086224`, indicating the peak error value at the given symbol in the Header region of the packet is `-60.9603086224`.

READ:WLAN:AD:SUMMARY:EVM:PACKet:HEADer:SYMBol (Query Only)

Returns the symbol at which the peak error occurred in the Header region of the packet in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:HEADER:SYMBOL?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:HEADER:SYMBOL` might return `3.3970000000E+3`, indicating the peak error occurred at symbol 3.39 in the Header region of the packet.

READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:EVM (Query Only)

Returns the EVM value in STF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:EVM?`

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:EVM` might return `-22.9729890175`, indicating the EVM value in the STF region of the packet is `-22.97` dB.

READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:PEAK (Query Only)

Returns the peak error at the given symbol in the STF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:PEAK?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:PEAK might return 38.8123661280, indicating the peak error at the given symbol in the STF packet is 38.81 dB.

READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:SYMBOL (Query Only)

Returns the symbol at which the peak error occurred in the STF region of the packet in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:SYMBOL?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:EVM:PACKET:STF:SYMBOL might return 0.0000, indicating the peak error occurred at symbol 0.0000 in the STF region of the packet.

READ:WLAN:AD:SUMMARY:FERROR:AVERAGE (Query Only)

Returns the Avg Frequency Error value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:FERROR:AVERAGE?

Arguments

None

Returns

<NRf>

Examples

`READ:WLAN:AD:SUMMARY:FERROR:AVERAGE` might return `-114.1332879317E-3`, indicating the Avg Frequency Error value is `-114.1332879317E-3` ppm.

READ:WLAN:AD:SUMMARY:FERROR:AVERAGE:STATUS (Query Only)

Returns the Avg Frequency Error status in the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:FERROR:AVERAGE:STATUS?`

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not applicable.

Examples

`READ:WLAN:AD:SUMMARY:FERROR:AVERAGE:STATUS?` might return `PASS`, indicating that the Avg Frequency Error test has passed.

READ:WLAN:AD:SUMMARY:FERROR:HERTZ (Query Only)

Returns the Frequency Error value in 802.11ad Summary Display in Hz.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:FERROR:HERTZ?`

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:FERROR:HERTZ might return $2.875\text{E}+3$, indicating the Frequency Error value is $2.875\text{E}+3$ Hz.

READ:WLAN:AD:SUMMARY:FERROR:MAX (Query Only)

Returns Max Frequency Error value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:FERROR:MAX?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:FERROR:MAX might return $-114.1332879317\text{E}-3$, indicating the maximum frequency error is $-14.1332879317\text{E}-3$ ppm.

READ:WLAN:AD:SUMMARY:FERROR:PPM (Query Only)

Returns the Frequency Error value in 802.11ad Summary display in ppm.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:FERROR:PPM?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:FERROR:PPM might return 575.023E-3, indicating the Frequency Error value is 575.023E-3 ppm.

READ:WLAN:AD:SUMMARY:FERROR:STATUS (Query Only)

Returns the Frequency Error Status in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:FERROR:STATUS?

Arguments

None

Returns

<String>

PASS indicates that the test passed.

FAIL indicates that the test failed.

NA indicates that the test is not applicable.

Examples

READ:WLAN:AD:SUMMARY:FERROR:STATUS? might return PASS, indicating that the Frequency Error test has passed.

READ:WLAN:AD:SUMMARY:IQ:GAIN:IMBALANCE (Query Only)

Returns IQ Gain Imbalance value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:IQ:GAIN:IMBALANCE?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:IQ:GAIN:IMBALANCE might return 69.2700818181E-3, indicating IQ Gain Imbalance value is 69.2700818181E-3 % .

READ:WLAN:AD:SUMMARY:IQ:ORIGIN:OFFSET (Query Only)

Returns IQ Origin Offset value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:IQ:ORIGIN:OFFSET?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:IQ:ORIGIN:OFFSET might return -160.0000000000, indicating that the IQ Origin Offset value is -160 dB.

READ:WLAN:AD:SUMMARY:IQ:QUADRATURE:ERROR (Query Only)

Returns IQ Quadrature Error value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:IQ:QUADRATURE:ERROR?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:IQ:QUADRATURE:ERROR? might return -220.5967903137E-3, indicating IQ Quadrature Error value is -220.5967903137E-3 degrees.

READ:WLAN:AD:SUMMary:PACKet:AGGRegation (Query Only)

Returns the value of Aggregation packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMary:PACKet:AGGRegation?

Arguments

None

Returns

<Boolean> 0, 1

Examples

READ:WLAN:AD:SUMMARY:PACKET:AGGREGATION? might return "0", indicating the Aggregation value is "0".

READ:WLAN:AD:SUMMary:PACKet:BTR (Query Only)

Returns the value of Beam Tracking Request packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMary:PACKet:BTR?

Arguments

None

Returns

<Boolean> 0, 1

Examples

READ:WLAN:AD:SUMMARY:PACKET:BTR might return "0", indicating the Beam Tracking Request value.

READ:WLAN:AD:SUMMary:PACKet:HCS (Query Only)

Returns the value of HCS packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:PACKet:HCS?

Arguments

None

Returns

<String>

Examples

READ:WLAN:AD:SUMMARY:PACKET:HCS might return "1001010000001000", indicating the HCS value.

READ:WLAN:AD:SUMMARY:PACKet:LENGth (Query Only)

Returns the value of Length packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:PACKet:LENGth?

Arguments

None

Returns

<String>

Examples

READ:WLAN:AD:SUMMARY:PACKET:LENGTH might return "1000", indicating the Length value is "1000".

READ:WLAN:AD:SUMMARY:PACKet:MCS (Query Only)

Returns the value of MCS packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:PACKet:MCS?

Arguments

None

Returns

<NR1> Range is 0 to 12

Examples

READ:WLAN:AD:SUMMARY:PACKET:MCS might return 5, indicating the MCS value is 5.

READ:WLAN:AD:SUMMARY:PACKET:PPDU (Query Only)

Returns the value of Additional PPDU packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:PACKET:PPDU?

Arguments

None

Returns

<Boolean> 0,1

Examples

READ:WLAN:AD:SUMMARY:PACKET:PPDU might return "0", indicating the Additional PPDU value is "0".

READ:WLAN:AD:SUMMARY:PACKET:RSSI (Query Only)

Returns the value of last RSSI packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:PACKET:RSSI?

Arguments

None

Returns

<String>

Examples

`READ:WLAN:AD:SUMMARY:PACKET:RSSI` might return "0000", indicating the last RSSI value.

READ:WLAN:AD:SUMMARY:PACKET:SCRAMBLER:INITIALIZATION (Query Only)

Returns the value of Scrambler initialization packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:PACKET:SCRAMBLER:INITIALIZATION?`

Arguments

None

Returns

<String>

Examples

`READ:WLAN:AD:SUMMARY:PACKET:SCRAMBLER:INITIALIZATION` might return "0101110", indicating the Scrambler Initialization value is "0101110".

READ:WLAN:AD:SUMMARY:PACKET:TAROUND (Query Only)

Returns the value of Turnaround packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

`READ:WLAN:AD:SUMMARY:PACKET:TAROUND?`

Arguments

None

Returns

<Boolean> 0,1

Examples

`READ:WLAN:AD:SUMMARY:PACKET:TAROUND` might return "1", indicating the Turnaround value.

READ:WLAN:AD:SUMMARY:PACKET:TLEN (Query Only)

Returns the value of Training Length packet information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:PACKET:TLEN?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:PACKET:TLEN might return 21, indicating the value of Training Length packet is 21.

READ:WLAN:AD:SUMMARY:PACKET:TYPE (Query Only)

Returns the value of Packet Type information in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:PACKET:TYPE?

Arguments

None

Returns

<Boolean> 0,1

Examples

READ:WLAN:AD:SUMMARY:PACKET:TYPE might return "0", indicating the Packet Type value is "0".

READ:WLAN:AD:SUMMARY:RCPI (Query Only)

Returns the RCPI value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:RCPI?

Arguments

None

Returns

<NR1>

Examples

READ:WLAN:AD:SUMMARY:RCPI might return 207.0000000000, indicating the RCPI value is 207.

READ:WLAN:AD:SUMMARY:RF:POWER (Query Only)

Queries the RF Output Power value in 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Read commands

Syntax

READ:WLAN:AD:SUMMARY:RF:POWER?

Arguments

None

Returns

<NRf>

Examples

READ:WLAN:AD:SUMMARY:RF:POWER might return -6.3434391022, indicating the RF Output Power is -6.3434391022 dBm.

READ:WLAN:AY:CONStE:DATA:EVM? (Query Only)

Query the maximum EVM value present in the analysis data in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Read commands

Syntax

READ:WLAN:AY:CONStE:DATA:EVM?

Returns

<NRf>

Units: dB

Examples

READ:WLAN:AY:CONS:FREQ:ERRO? may return -42.482, which indicates that the maximum EVM value is -42.482 dB.

READ:WLAN:AY:CONStE:DATA:EVM:PEAK? (Query Only)

Query the Data Peak Error value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Read commands

Syntax

READ:WLAN:AY:CONStE:DATA:EVM:PEAK?

Returns

<NRf>

Units: dB

Examples

READ:WLAN:AY:CONS:DATA:EVM:PEAK? may return -35.325, which indicates that the Data Peak Error value is -35.325 dB.

READ:WLAN:AY:CONStE:DATA:EVM:PEAK:SYMBol? (Query Only)

Query the maximum EVM value at the given Symbol in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Read commands

Syntax

READ:WLAN:AY:CONStE:DATA:EVM:PEAK:SYMBol?

Returns

<NRf>

Examples

READ:WLAN:AY:CONS:DATA:EVM:PEAK:SYMB? may return 3.327e+003, which is the maximum EVM value at the 3327 Symbol.

READ:WLAN:AY:CONStE:FERRor? (Query Only)

Query the Frequency Error value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Read commands

Syntax

READ:WLAN:AY:CONStE:FERRor?

Returns

<NRf>

Units: Hz

Examples

READ:WLAN:AY:CONS:FERR? may return -51.841, which indicates that the Frequency Error value is -51.841 Hz.

READ:WLAN:AY:CONStE:FREQuency:ERROr? (Query Only)

Query the Frequency Error value in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Read commands

Syntax

READ:WLAN:AY:CONStE:FREQuency:ERROr?

Returns

<NRf>

Units: Hz

Examples

READ:WLAN:AY:CONS:FREQ:ERRO? may return 0.0000, which indicates that the Frequency Error value is 0.0000 Hz.

READ:WLAN:AY:CONStE:IQDC:OFFSet? (Query Only)

Query the IQ Origin Offset value in the Constellation display in dB.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Read commands

Syntax

READ:WLAN:AY:CONSt:IQDC:OFFSet?

Returns

<NRf>

Examples

READ:WLAN:AY:CONS:IQDC:OFFS? may return -51.841, which indicates that the IQ Origin Offset value is -51.841 dB.

READ:WLAN:AY:EVM:TRACe? (Query Only)

Query the EVM versus time trace data after performing a single run.

NOTE: The instrument must be connected.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Read commands

Syntax

READ:WLAN:AY:EVM:TRACe?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the EVM value at the nth data point in percentage (%).

<data(n)> follows 4-byte little endian floating point format specified in IEEE 488.2.

Examples

READ:WLAN:AY:EVM:TRAC? may return #42036xxxx...(2036-byte data) for the EVM versus time trace.

READ:WLAN:AY:SUMMAry:AVERAge:BURSt:COUNT? (Query Only)

Query the current Burst Count in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMAry:AVERAge:BURSt:COUNT?

Returns

<NR1>

Examples

READ:WLAN:AY:SUMM:AVER:BURS:COUN? may return 1, which indicates that the current Burst Count is 1.

READ:WLAN:AY:SUMMary:AVERage:BURSt:TOTAL:COUNT? (Query Only)

Query the Total Burst Count to be averaged.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:AVERage:BURSt:TOTAL:COUNT?

Returns

<NR1>

Examples

READ:WLAN:AY:SUMM:AVER:BURS:TOTA:COUN? may return 1, which indicates that the Total Burst Count to be averaged is 1.

READ:WLAN:AY:SUMMary:ESNR? (Query Only)

Query the Estimated SNR (Signal-to-Noise Ratio) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:ESNR?

Returns

<NRf>

Units: dB

Examples

READ:WLAN:AY:SUMM:ESNR? may return 34.50, which indicates that the Estimated SNR value is 34.50 dB.

READ:WLAN:AY:SUMMary:EVM:DATA:AVERage? (Query Only)

Query the Average EVM (Data) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

```
READ:WLAN:AY:SUMMARY:EVM:DATA:AVERAGE?
```

Returns

<NRf>

Units: dB or % (based on the selected EVM unit)

Examples

READ:WLAN:AY:SUMM:EVM:DATA:AVER? may return -40.7035275551, which indicates that the Average EVM (Data) value is -40.7035275551 dB.

READ:WLAN:AY:SUMMARY:EVM:DATA:AVERAGE:STATUS? (Query Only)

Query the Average EVM (Data) Status in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

```
READ:WLAN:AY:SUMMARY:EVM:DATA:AVERAGE:STATUS?
```

Returns

<string>

Examples

READ:WLAN:AY:SUMM:EVM:DATA:AVER:STAT? may return PASS, FAIL, or NA.

READ:WLAN:AY:SUMMARY:EVM:DATA:MAX? (Query Only)

Query the Maximum EVM (Data) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

```
READ:WLAN:AY:SUMMARY:EVM:DATA:MAX?
```

Returns

<NRf>

Units: dB or % (based on the selected EVM unit)

Examples

`READ:WLAN:AY:SUMM:EVM:DATA:MAX?` may return `922.1968241036e-3`, which indicates that the Maximum EVM (Data) value is 922.1968241036e-3 dB.

READ:WLAN:AY:SUMMary:EVM:DATA:SIGma? (Query Only)

Query the Standard Deviation (1-Sigma) of the EVM Data.

When the EVM unit is in dB, it queries the Standard Deviation after converting evm values to the dB scale.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMary:EVM:DATA:SIGma?`

Returns

<NRf>

Units: dB

Examples

`READ:WLAN:AY:SUMM:EVM:DATA:SIG?` may return `1.8950`, which indicates that the 1-Sigma EVM Data value is 1.8950 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:DATA:EVM? (Query Only)

Query the EVM value that occurs in the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMary:EVM:PACKet:DATA:EVM?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:DATA:EVM? may return -33.5668742100 , which indicates that the EVM value is -33.5668742100% .

READ:WLAN:AY:SUMMary:EVM:PACKet:DATA:PEAK? (Query Only)

Query the value of the Peak Error that occurs at the given Symbol in the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:DATA:PEAK?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:DATA:PEAK? may return -26.5964736883 , which indicates that the value of the Peak Error is -26.5964736883 at the given Symbol.

READ:WLAN:AY:SUMMary:EVM:PACKet:DATA:STATus? (Query Only)

Query the status of the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:DATA:STATus?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:EVM:PACK:DATA:STAT? may return PASS, FAIL, or NA.

READ:WLAN:AY:SUMMary:EVM:PACKet:DATA:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the Data Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:DATA:SYMBOL?`

Returns

<NRf>

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:DATA:SYMB?` may return `4.6610000000e+3`, which indicates that the Peak Error occurs at the `4.661000000e+3` Symbol.

READ:WLAN:AY:SUMMARY:EVM:PACKet:EDMG:CEF:EVM? (Query Only)

Query the EVM value in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:EDMG:CEF:EVM?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:EDMG:CEF:EVM?` may return `6.9680400193`, which indicates that the EVM value is `-6.9680400193` dB.

READ:WLAN:AY:SUMMARY:EVM:PACKet:EDMG:CEF:PEAK? (Query Only)

Query the Peak Error that occurs at the given Symbol in the 11ay 2.16 GHz BW and EDMG CEF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:PEAK?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:EDMG:CEF:PEAK? may return 13.7763872743, which indicates that the Peak Error value is 13.7763872743% at the given Symbol.

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the 11ay 2.16 GHz BW and EDMG CEF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:CEF:SYMBol?

Returns

<NRf>

Examples

READ:WLAN:AY:SUMM:EVM:PACK:EDMG:CEF:SYMB? may return 7.4020000000e+3, which indicates that the Peak Error occurs at the 7.402000000e+3 Symbol.

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:EVM? (Query Only)

Query the EVM value in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:EVM?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:EDMG:STF:EVM? may return -22.9729890175, which indicates that the EVM value is -22.9729890175 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:PEAK? (Query Only)

Query the Peak Error that occurs at the given Symbol in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:PEAK?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:EDMG:STF:PEAK? may return 38.8123661280, which indicates that the Peak Error value is 38.8123661280% at the given Symbol.

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the 11ay 2.16 GHz BW and EDMG STF for 11ay 4.32 GHz BW of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:EDMG:STF:SYMBol?

Returns

<NRf>

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:EDMG:STF:SYMB?` may return `0.0000`, which indicates that the Peak Error occurs at the 0.0000 Symbol.

READ:WLAN:AY:SUMMary:EVM:PACKet:GUARd:EVM? (Query Only)

Query the EVM value in the Guard Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMary:EVM:PACKet:GUARd:EVM?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:GUAR:EVM?` may return `-65.4983500315`, which indicates that the value of the EVM is -65.4983500315 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:GUARd:PEAK? (Query Only)

Query the value of the Peak Error that occurs at the given Symbol in the Guard Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMary:EVM:PACKet:GUARd:PEAK?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:GUAR:PEAK?` may return `-26.5964736883`, which indicates that the value of the Peak Error is -26.5964736883 at the given Symbol.

READ:WLAN:AY:SUMMary:EVM:PACKet:GUARd:SYMBol? (Query Only)

Query the Symbol at which the Peak Error occurs in the Guard Region of the packet in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:GUARd:SYMBol?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:GUAR:SYMB? may return 3.334000000e+3, which indicates that the Peak Error occurs at the 3.334000000e+3 Symbol.

READ:WLAN:AY:SUMMary:EVM:PACKet:HEADer:EVM? (Query Only)

Query the EVM value in the Header Region of the packet (excluding GI symbols) in the Summary display. This command is not applicable for 11ay 4.32 GHz BW and the value can be ignored.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:HEADer:EVM?

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:HEAD:EVM? may return -67.1981081169, which indicates that the EVM value in the Header Region is -67.1981081169 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:HEADer:PEAK? (Query Only)

Query the Peak Error that occurs at the given Symbol in Header Region (excluding GI symbols) of the packet in the Summary display. This command is not applicable for 11ay 4.32 GHz BW and the value can be ignored.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:HEADer:PEAK?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:HEAD:PEAK?` may return `-60.9603086224`, which indicates that the Peak Error value is -60.9603086224 dB at the given Symbol.

READ:WLAN:AY:SUMMARY:EVM:PACKet:HEADer:SYMBOL? (Query Only)

Query the Symbol at which the Peak Error occurs in the Header Region of the packet (excluding GI symbols) in the Summary display. This command is not applicable for 11ay 4.32 GHz BW and the value can be ignored.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:HEADer:SYMBOL?`

Returns

<NRf>

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:HEAD:SYMB?` may return `3.3970000000e+3`, which indicates that the peak error occurs at the 3.3970000000e+3 Symbol.

READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:A1Header:EVM? (Query Only)

Query the value of the Pre-EDGM1 Header-A EVMpacket information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:A1Header:EVM?`

Returns

`<string>`

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:PRE1E:A1H:EVM?` may return `-34.3702`, which indicates that the value of the Pre-EDGM1 Header-A EVM packet is -34.3702 dB.

READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:CEF1:EVM? (Query Only)

Query the value of the Pre-EDMG1 CEF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:CEF1:EVM?`

Returns

`<string>`

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:PRE1E:CEF1:EVM?` may return `-34.5666`, which indicates that the value of the Pre-EDMG1 CEF EVM packet is -34.5666 dB.

READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:GUARd1:EVM? (Query Only)

Query the value of the Pre-EDMG1 EVM Guard packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE1Edmg:GUARd1:EVM?`

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:PRE1ELGUAR1:EVM? may return -34.1327, which indicates that the value of the Pre-EDMG1 EVM Guard Region is -34.1327 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:HEADer1:EVM? (Query Only)

Query the value of the Pre-EDMG1 L-Header EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:HEADer1:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:PRE1E:HEAD1:EVM? may return -34.4326, which indicates that the value of the Pre-EDMG1 L-Header EVM packet is -34.4326 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:STF1:EVM? (Query Only)

Query the value of the Pre-EDMG1 STF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE1Edmg:STF1:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:PRE1E:STF1:EVM? may return -33.6325 , which indicates that the value of the Pre-EDMG1 STF1 EVM packet is -33.6325 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:A2Header:EVM? (Query Only)

Query the value of the Pre-EDMG2 EDMG Header-A EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:A2Header:EVM?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:EVM:PACK:PRE2E:A2H:EVM? may return -34.37 , which indicates that the value of the Pre-EDMG2 EDMG-Header-A EVM packet is -34.37 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:CEF2:EVM? (Query Only)

Query the value of the Pre-EDMG2 CEF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:CEF2:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:PRE2E:CEF2:EVM? may return -34.5665 , which indicates that the value of the Pre-EDMG2 CEF EVM packet is -34.5665 dB.

READ:WLAN:AY:SUMMary:EVM:PACKet:PRE2Edmg:GUARd2:EVM? (Query Only)

Query the value of the Pre-EDMG2 Guard EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE2Edmg:GUARd2:EVM?`

Returns

<string>

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:PRE2E:GUAR:EVM?` may return `-33.137`, which indicates that the value of the Pre-EDMG2 Guard EVM packet is -33.137 dB.

READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE2Edmg:HEADER2:EVM? (Query Only)

Query the value of the Pre-EDMG2 L-Header EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE2Edmg:HEADER2:EVM?`

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

`READ:WLAN:AY:SUMM:EVM:PACK:PRE2E:HEAD2:EVM?` may return `-34.4321`, which indicates that the value of the Pre-EDMG2 L-Header EVM packet is -34.4321 dB.

READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE2Edmg:STF2:EVM? (Query Only)

Query the value of the Pre-EDMG2 STF EVM packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMARY:EVM:PACKet:PRE2Edmg:STF2:EVM?

Returns

<string>

Units: dB or % (based on the EVM unit selected)

Examples

READ:WLAN:AY:SUMM:EVM:PACK:PRE2E:STF2:EVM? may return -33.6324, which indicates that the value of the Pre-EDMG2 STF2 EVM packet is -33.6324 dB.

READ:WLAN:AY:SUMMARY:FERRor:AVERage? (Query Only)

Query the Average Frequency Error in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMARY:FERRor:AVERage?

Returns

<NRf>

Units: ppm

Examples

READ:WLAN:AY:SUMM:FERR:AVER? may return -114.1332879317e-3, which indicates that the Average Frequency Error value is -114.1332879317e-3 ppm.

READ:WLAN:AY:SUMMARY:FERRor:AVERage:STATus? (Query Only)

Query the Average Frequency Error status in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMARY:FERRor:AVERage:STATus?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:FERR:AVER:STAT? may return PASS, FAIL, or NA.

READ:WLAN:AY:SUMMary:FERRor:HERTz? (Query Only)

Query the Frequency Error value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:FERRor:HERTz?

Returns

<NRf>

Units: Hz or kHz

Examples

READ:WLAN:AY:SUMM:FERR:HERT? may return 2.875e+3, which indicates that the Frequency Error value is 2.875 kHz.

READ:WLAN:AY:SUMMary:FERRor:MAX? (Query Only)

Query the Maximum Frequency Error value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:FERRor:MAX?

Returns

<NRf>

Units: ppm

Examples

READ:WLAN:AY:SUMM:FERR:MAX? may return -114.1332879317e-3, which indicates that the Maximum Frequency Error value is -114.1332879317e-3 ppm.

READ:WLAN:AY:SUMMary:FERRor:PPM? (Query Only)

Query the Frequency Error value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:FERRor:PPM?

Returns

<NRf>

Units: ppm

Examples

READ:WLAN:AY:SUMM:FERR:PPM? may return $575.023e-3$, which indicates that the Frequency Error value is 575.023e-3 ppm.

READ:WLAN:AY:SUMMary:FERRor:STATus? (Query Only)

Query the Frequency Error status in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:FERRor:STATus?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:FERR:STAT? may return PASS, FAIL, or NA.

READ:WLAN:AY:SUMMary:IQ:GAIN:IMBALance? (Query Only)

Query the IQ Gain Imbalance in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:IQ:GAIN:IMBALance?

Returns

<NRf>

Units: dB

Examples

READ:WLAN:AY:SUMM:IQ:GAIN:IMBAL? may return $69.2700818181e-3$, which indicates that the IQ Gain Imbalance value is $69.2700818181e-3$ dB.

READ:WLAN:AY:SUMM:ry:IQ:ORIGin:OFFSet? (Query Only)

Query the IQ Origin Offset value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMM:ry:IQ:ORIGin:OFFSet?

Returns

<NRf>

Units: dB

Examples

READ:WLAN:AY:SUMM:IQ:ORIG:OFFS? may return -160.0000000000 , which indicates that the IQ Origin Offset value is -160.0000000000 dB.

READ:WLAN:AY:SUMM:ry:IQ:QUADrature:ERROr? (Query Only)

Query the IQ Quadrature Error value (degrees) in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMM:ry:IQ:QUADrature:ERROr?

Returns

<NRf>

Units: degrees

Examples

READ:WLAN:AY:SUMM:IQ:QUAD:ERRO? may return $-220.5967903137e-3$, which indicates that the IQ Quadrature Error value is $-220.5967903137e-3^\circ$ degrees.

READ:WLAN:AY:SUMM:ry:PACKet:BEAMformed? (Query Only)

Query the value of the Beamformed packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMary:PACKet:BEAMformed?`

Returns

`<string>`

Examples

`READ:WLAN:AY:SUMM:PACK:BEAM?` may return 0, which indicates that the value of the Beamformed packet is 0.

READ:WLAN:AY:SUMMary:PACKet:BWBitmap? (Query Only)

Query the value of the Bandwidth BitMap packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMary:PACKet:BWBitmap?`

Returns

`<string>`

Examples

`READ:WLAN:AY:SUMM:PACK:BWb?` may return 11000000, which indicates that the value of the Bandwidth BitMap packet is 11000000.

READ:WLAN:AY:SUMMary:PACKet:COMPbw? (Query Only)

Query the value of the Compressed BW packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMary:PACKet:COMPbw?`

Returns

`<string>`

Examples

READ:WLAN:AY:SUMM:PACK:COMP? may return 2, which indicates that the value of the Compressed BW packet is 2.

READ:WLAN:AY:SUMMary:PACKet:CRC? (Query Only)

Query the value of the CRC packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:CRC?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:CRC? may return 0110001001011010, which indicates that the value of the CRC packet is 0110001001011010.

READ:WLAN:AY:SUMMary:PACKet:EDMGmcs? (Query Only)

Query the value of the EDMG MCS packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:EDMGmcs?

Returns

<Nrf>

Examples

READ:WLAN:AY:SUMM:PACK:EDMG? may return 5, which indicates that the value of the EDMG MCS packet is 5.

READ:WLAN:AY:SUMMary:PACKet:LDPCcwlen? (Query Only)

Query the value of the additional LPDC CW Length packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:LDPCcwlens?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:LDPC? may return 0, which indicates that the value of the LDPC CW Length packet is 0.

READ:WLAN:AY:SUMMary:PACKet:PRIMarychannel? (Query Only)

Query the value of the Primary Channel packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:PRIMarychannel?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:PRIM? may return 0, which indicates that the value of the Primary Channel packet is 0.

READ:WLAN:AY:SUMMary:PACKet:PSDUlen? (Query Only)

Query the Length value of the packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:PSDUlen?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:PSDU? may return 1000, which indicates that the Length value of the packet is 1000.

READ:WLAN:AY:SUMMary:PACKet:RSSI? (Query Only)

Query the value of the last RSSI packet information in the Summary display.

The first 2 bits of the last RSSI will fetch the Guard Interval type for EDMG (00/01/10 - Short/Normal/Long).

Conditions

Measurement view 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:RSSI?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:RSSI? may return 0000, which indicates that the last value of the RSSI packet is 0000.

READ:WLAN:AY:SUMMary:PACKet:SCRAmbler:INITIALIZATION? (Query Only)

Query the value of the Scrambler Initialization packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:SCRAmbler:INITIALIZATION?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:SCRA:INIT? may return 0101110, which indicates that the value of the Scrambler Initialization packet is 0101110.

READ:WLAN:AY:SUMMary:PACKet:SPATIALstreams? (Query Only)

Query the value of the Spatial Streams packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:SPATialstreams?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:SPAT? may return 0, which indicates that the value of the Spatial Streams packet is 0.

READ:WLAN:AY:SUMMary:PACKet:STBCapplied? (Query Only)

Query the value of the STBC Applied packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:STBCapplied?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PACK:STBC? may return 0, which indicates that the value of the STBC Applied packet is 0.

READ:WLAN:AY:SUMMary:PACKet:TRNLen? (Query Only)

Query the value of the EDMG TRN Length packet information in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

READ:WLAN:AY:SUMMary:PACKet:TRNLen?

Returns

<string>

Examples

READ:WLAN:AY:SUMM:PAC:TRNL? may return 0, which indicates that the value of the EDMG TRN Length packet is 0.

READ:WLAN:AY:SUMMary:RCPI? (Query Only)

Query the RCPI (Received Channel Power Indicator) value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:RCPI?`

Returns

<NR1>

Examples

`READ:WLAN:AY:SUMM:RCPI?` may return `207.0000000000`, which indicates that the RCPI value is 207.0000000000.

READ:WLAN:AY:SUMMARY:RF:POWER? (Query Only)

Query the Radio Frequency (RF) Output Power value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:RF:POWER?`

Returns

<NRf>

You must select the units in the Units tab.

Examples

`READ:WLAN:AY:SUMM:RF:POW?` may return `-6.3434391022`, which indicates that the Radio Frequency Output Power value is -6.3434391022.

READ:WLAN:AY:SUMMARY:SIG:QUALITY? (Query Only)

Query the Signal Quality value in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Read commands

Syntax

`READ:WLAN:AY:SUMMARY:SIG:QUALITY?`

Returns

<NRf>

Units: rho

Examples

READ:WLAN:AY:SUMM:SIG:QUA? may return 999.6323e-3,, which indicates that the Signal Quality value is 999.6323e-3 rho.

READ:WLAN:CONSte:MAGNitude? (Query Only)

Returns the magnitude data for the WLAN constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:CONSte:MAGNitude?

Returns

Returned data is in the form

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

READ:WLAN:CONS:MAGN? might return #510400.. (10400-byte data) for the measurement.

READ:WLAN:CONSte:PHASe? (Query Only)

Returns the phase data for the WLAN Constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:CONSte:PHASe?

Returns

Returned data is in the form

```
#<num_digit><num_byte><data(1)><data(2)>..<data(n)>
```

where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

READ:WLAN:CONS:PHAS? might return #510400.. (10400-byte data) for the measurement.

READ:WLAN:CONStE:TYPE? (Query Only)

Returns the type (context) of the WLAN Constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:CONStE:TYPE?
```

Returns

```
#<num_digit><num_byte><data(1)><data(2)>..<data(n)>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in 16-bit little endian integers.

The integers must be translated to the proper context as listed below.

Integer value Type (context):

- 0 Pilot
- 1 Data
- 2 Unused or Null

Examples

READ:WLAN:CONS:TYPE? might return #41352.. (1352-byte data) for the measurement. The actual data must be decoded to the context type using the table above.

READ:WLAN:CONStE:VALue? (Query Only)

Returns the value (decoded symbol) for the WLAN Constellation measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:CONSt:VALue?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in 16-bit little endian integers.

Examples

READ:WLAN:CONSt:VALUE? might return #41352 indicating 1352 bytes of data for the measurement.

READ:WLAN:CRESPonse:MAGNitude? (Query Only)

Returns the magnitude data for the WLAN Channel Response measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:CRESPonse:MAGNitude?

Returns

Returned data is in the form

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

READ:WLAN:CRESt:MAGN? might return #510400.. (10400-byte data) for the measurement.

READ:WLAN:CRESPonse:PHASe? (Query Only)

Returns the phase data for the WLAN Channel Response measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:CRESPonse:PHASe?

Returns

Returned data is in the form

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point in dB, 4-byte little endian floating-point format specified in IEEE 488.2

Examples

READ:WLAN:CRESP:PHAS? might return #510400 (10400-byte data) representing the phase data for the measurement.

READ:WLAN:EVM:TRACe<x>? (Query Only)

Returns the trace data for the selected WLAN EVM trace.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbol.

When <x> is 3, the parameter is Average versus Subcarrier

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:EVM:TRACe<x>?

Returns

#<num_digit><num_byte><data (1)><data (2)>...<data (n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data (n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:WLAN:EVM:TRAC2? might return #510400.. (10400-byte data) for the measurement.

READ:WLAN:FLATness:PASS? (Query Only)

Queries whether the average power level values of the subcarriers across the signal bandwidth on the WLAN Spectral Flatness display remain within the limits defined for a particular standard.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Group

Read commands

Syntax

READ:WLAN:FLATness:PASS?

Returns

Returns "1" in the case that all data remains within the defined limits, and "0" otherwise.

Examples

READ:WLAN:FLAT:PASS? might return 1, which means that the average power level values of subcarriers across the signal bandwidth remains within the defined limits.

READ:WLAN:FLATness:RESult? (Query Only)

Returns the summary results of each segment of the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:FLATness:RESult?

Returns

The data is returned as 12 comma delineated text values. The specific values are :

- minimum subcarrier within segment 1
- minimum subcarrier average energy deviation from the global average within segment 1
- deviation the of minimum subcarrier average from the allowed value in segment 1
- maximum subcarrier within segment 1
- maximum subcarrier average energy deviation from the global average within segment 1
- deviation of the maximum subcarrier average from the allowed value in segment 1
- minimum subcarrier within segment 2
- minimum subcarrier average energy deviation from the global average within segment 2
- deviation the of minimum subcarrier average from the allowed value in segment 2

- maximum subcarrier within segment 2
- maximum subcarrier average energy deviation from the global average within segment 2
- deviation of the maximum subcarrier average from the allowed value in segment 2

Examples

READ:WLAN:FLAT:RES? might return

-6.0000000000, -17.0626174659E-3, 3.9829373825, 12.0000000000, 19.979260861, which represents the summary results of each segment of the WLAN Spectral Flatness display.

READ:WLAN:FLATness:TRACe<x>? (Query Only)

Returns the WLAN Spectral Flatness trace data. When <x> is 1, the parameter is Matrix (symbol deviation per subcarrier). When <x> is 2, the parameter is Average Deviation vs Subcarrier.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:FLATness:TRACe<x>?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:WLAN:FLAT:TRAC2 might return #510400.. (10400-byte data) for the measurement.

READ:WLAN:MERRor:TRACe<x>? (Query Only)

Returns the trace data for the selected WLAN Magnitude Error trace.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbol.

When <x> is 3, the parameter is Average versus Subcarrier

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:MERRor:TRACe<x>?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:WLAN:MERR:TRAC2? might return #510400.. (10400-byte data) for the measurement.

READ:WLAN:PERRor:TRACe<x>? (Query Only)

Returns the trace data for the selected WLAN Phase Error trace.

When <x> is 1, the parameter is Matrix.

When <x> is 2, the parameter is Average versus Symbol.

When <x> is 3, the parameter is Average versus Subcarrier

Group

Read commands

Syntax

READ:WLAN:PERRor:TRACe<x>?

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point in percent (%), 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:WLAN:PERR:TRAC2? might return #510400.. (10400-byte data) for the measurement.

READ:WLAN:PVTime:BURSt:POWer? (Query Only)

Returns the average power of the burst packet, in dBm, for the WLAN Power vs. Time trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

`READ:WLAN:PVTime:BURSt:POWer?`

Returns

Floating point number that represents the average power of the burst packet, in dBm.

Examples

`READ:WLAN:PVT:BURST:POWER?` might return `-1.99`, which represents the value of the average power of the burst packet of -1.99 dBm.

READ:WLAN:PVTime:BURSt:WIDTh? (Query Only)

Returns the value of the measured time width of the burst packet from Power-On to Power-Down (or end of waveform, if that occurs before Power-Down), in seconds, for the WLAN Power vs. Time trace.

Group

Read commands

Syntax

`READ:WLAN:PVTime:BURSt:WIDTh?`

Returns

Floating point number which represents the value of the measured time width of the burst packet from Power-On to Power-Down (or end of waveform, if that occurs before Power-Down), in seconds.

Examples

`READ:WLAN:PVT:BURST:WIDTH?` might return `156.0000000000E-6`, which represents a burst packet width of 156 μ S.

READ:WLAN:PVTime:FALL:TIME? (Query Only)

Queries the value of the width of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

`READ:WLAN:PVTime:FALL:TIME?`

Returns

Floating point number which represents the value of the width of the falling edge of the burst, in seconds.

Examples

`READ:WLAN:PVT:FALL:TIME?` might return $7e-6$, which indicates the width value of the falling edge is 7 μ s.

READ:WLAN:PVTime:FALL:TIME:START? (Query Only)

Queries the value of the start time of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

`READ:WLAN:PVTime:FALL:TIME:START?`

Returns

Floating point number which represents the value of the start time of the falling edge of the burst, in seconds.

Examples

`READ:WLAN:PVT:FALL:TIME:STAR?` might return $6e-6$, which indicates that the start time value of the falling edge is at 6 μ s.

READ:WLAN:PVTime:FALL:TIME:STOP? (Query Only)

Queries the value of the stop time of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

`READ:WLAN:PVTime:FALL:TIME:STOP?`

Returns

Floating point number which represents the value of the stop time of the falling edge of the burst, in seconds.

Examples

`READ:WLAN:PVT:FALL:TIME:STOP?` might return $7e-6$, which indicates the stop time value of the falling edge is at 7 μ s.

READ:WLAN:PVTime:FTIME? (Query Only)

Queries the value of the width of the falling edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:PVTime:FTIME?

Returns

Floating point number which represents the value of the width of the falling edge of the burst, in seconds.

Examples

READ:WLAN:PVT:FALL:TIME? might return $7e-6$, which indicates the width of the falling edge is 7 μ s.

READ:WLAN:PVTime:RISE:TIME? (Query Only)

Queries the value of the width of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:PVTime:RISE:TIME?

Returns

Floating point number which represents the value of the width of the rising edge of the burst, in seconds.

Examples

FETCH:WLAN:PVT:RISE:TIME? might return $7e-6$, which indicates the width value of the rising edge is 7 μ s.

READ:WLAN:PVTime:RISE:TIME:START? (Query Only)

Queries the value of the start time of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:PVTime:RISE:TIME:START?

Returns

Floating point number which represents the value of the start time of the rising edge of the burst, in seconds.

Examples

`READ:WLAN:PVT:RISE:TIME:STAR?` might return $6e-6$, which indicates the start time value of the rising edge is at 6 μ s.

READ:WLAN:PVTime:RISE:TIME:STOP? (Query Only)

Queries the value of the stop time of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

`READ:WLAN:PVTime:RISE:TIME:STOP?`

Returns

Floating point number which represents the value of the stop time of the rising edge of the burst, in seconds.

Examples

`FETCH:WLAN:PVT:RISE:TIME:STOP?` might return $7e-6$, which indicates the stop time value of the rising edge is at 7 s.

READ:WLAN:PVTime:RTIME? (Query Only)

Queries the value of the width of the rising edge, in seconds.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

`READ:WLAN:PVTime:RTIME?`

Returns

Floating point number which represents the value of the width of the rising edge of the burst, in seconds.

Examples

`READ:WLAN:PVT:RISE:TIME?` might return $7e-6$, which indicates the width value of the rising edge is 7 μ s.

READ:WLAN:PVTime:TRACe:X? (Query Only)

Returns the horizontal values (time in seconds) for the WLAN Power vs. Time trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:PVTime:TRACe:X?
```

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:WLAN:PVT:TRAC:X might return #43204 (3204-byte data), which represents the value of the time in seconds (horizontal values) for the WLAN Power vs. Time trace.

READ:WLAN:PVTime:TRACe:XY? (Query Only)

Returns the horizontal value (time in seconds) and vertical value (power) for the WLAN Power vs. Time trace.

<x(n)><y(n)> is the horizontal value and vertical value pair at the nth data point.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:PVTime:TRACe:XY?
```

Returns

#<num_digit><num_byte><data(1)><data(2)>...<data(n)>

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

READ:WLAN:PVT:TRAC:XY? might return #43204 (3204-byte data), which represents the horizontal value (time in seconds) and vertical value (power) pair at the nth data point.

READ:WLAN:PVTime:TRACe[:Y]? (Query Only)

Returns the vertical values (power) for the WLAN Power vs. Time trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:PVTime:TRACe[:Y]?
```

Returns

```
#<num_digit><num_byte><data(1)><data(2)>...<data(n)>
```

Where:

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<data(n)> is the data value at the nth data point, 4-byte little endian floating-point format specified in IEEE 488.2.

Examples

FETCH:WLAN:PVT:TRAC:Y? might return #43204 (3204-byte data), which represents the vertical values (power) for the WLAN Power vs. Time trace.

READ:WLAN:STABLe:VALUe? (Query Only)

Returns the number of bytes in the symbol table for the WLAN measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:STABLe:VALUe?
```

Returns

```
#<num_digit><num_byte>
```

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

Examples

READ:WLAN:STABLe:VALUe? might return #43848, indicating that there are 3848 bytes of data in the symbol table.

READ:WLAN:SUMMary:BURSt:INDex? (Query Only)

Returns the index of the analyzed packet within the analysis record.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMary:BURSt:INDex?

Arguments

None

Returns

<NRf> data in dB.

READ:WLAN:SUMMary:BURSt:POWer? (Query Only)

Returns the average power of all symbols in the packet, including Preamble and Data segments.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMary:BURSt:POWer?

Arguments

None

Returns

<NRf> data in dBm.

READ:WLAN:SUMMary:BURSt:POWer:CFActor? (Query Only)

Returns the peak-to-average burst power factor in the WLAN measurement. The ratio of the highest instantaneous signal power level to the average signal power.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Programmer Manual

Read commands

Syntax

READ:WLAN:SUMMary:BURSt:POWer:CFACTOR?

Arguments

None

Returns

<NRf> data in dB.

READ:WLAN:SUMMary:CERRor? (Query Only)

Returns the symbol clock error in the WLAN measurement.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMary:CERRor?

Arguments

None

Returns

<NRf> data in parts per million.

READ:WLAN:SUMMary:CPE? (Query Only)

Returns the RMS magnitude error of the pilots over all data symbols.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMary:CPE?

Arguments

None

Returns

<NRf> data in percent.

READ:WLAN:SUMMARY:EVM:PEAK:ALL? (Query Only)

Returns the peak EVM value for all subcarriers in the WLAN measurement or for all chips depending on the selected standard.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:ALL?

Arguments

None

Returns

<NRf> data in dB.

READ:WLAN:SUMMARY:EVM:PEAK:CHIP:ALL? (Query Only)

Returns the chip at which the reported peak EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:CHIP:ALL?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:PEAK:CHIP:ONEKchips? (Query Only)

Returns the chip at which the reported peak EVM value over the first 1000 chips occurred.

Only available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:CHIP:ONEKchips?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:PEAK:DATA? (Query Only)

Returns the peak EVM value for the data subcarriers in the WLAN measurement.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:DATA?

Arguments

None

Returns

<NRf> data in dB.

READ:WLAN:SUMMARY:EVM:PEAK:ONEKchips? (Query Only)

Returns the peak EVM value measured over the first 1000 chips.

Available only for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:ONEKchips?

Arguments

None

Returns

<NRf> data in dB.

READ:WLAN:SUMMARY:EVM:PEAK:PILots? (Query Only)

Returns the peak EVM value for the pilots in the WLAN measurement.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:PILots?

Arguments

None

Returns

<NRf> data in dB.

READ:WLAN:SUMMARY:EVM:PEAK:SCARrier:ALL? (Query Only)

Returns the subcarrier on which the ALL peak EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:SCARrier:ALL?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:PEAK:SCARrier:DATA? (Query Only)

Returns the subcarrier on which the DATA peak EVM value occurred.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:SCARrier:DATA?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:PEAK:SCARrier:PILOts? (Query Only)

Returns the subcarrier on which the PILOT peak EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:SCARrier:PILOts?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:ALL? (Query Only)

Returns the symbol on which the reported EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:ALL?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:DATA? (Query Only)

Returns the symbol on which the DATA peak EVM value occurred.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:DATA?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:PILOTS? (Query Only)

Returns the symbol on which the PILOT peak EVM value occurred.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:PEAK:SYMBOL:PILOTS?

Arguments

None

Returns

<NR1>

READ:WLAN:SUMMARY:EVM:RMS:ALL? (Query Only)

Returns the RMS EVM data for all subcarriers in the WLAN measurement and for all chips for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:RMS:ALL?

Arguments

None

Returns

<NRf> RMS EVM in dB

READ:WLAN:SUMMARY:EVM:RMS:AVERAGE? (Query Only)

Returns the average RMS EVM value in the WLAN measurement over the selected number of bursts.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:EVM:RMS:AVERAGE?

Arguments

None

Returns

<NRf> RMS EVM in dB

READ:WLAN:SUMMARY:EVM:RMS:DATA? (Query Only)

Returns the RMS EVM data for the data subcarriers in the WLAN measurement.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:SUMMARY:EVM:RMS:DATA?
```

Arguments

None

Returns

<NRf> RMS EVM in dB

READ:WLAN:SUMMARY:EVM:RMS:MAXimum? (Query Only)

Returns the maximum RMS EVM value in the WLAN measurement over the selected number of bursts.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:SUMMARY:EVM:RMS:MAXimum?
```

Arguments

None

Returns

<NRf> RMS EVM in dB

READ:WLAN:SUMMARY:EVM:RMS:ONEKchips? (Query Only)

Returns the RMS EVM data for the 1k chips in the WLAN measurement measured over the first 1000 chips.

Only available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:SUMMARY:EVM:RMS:ONEKchips?
```

Arguments

None

Returns

<NRf> RMS EVM in dB

READ:WLAN:SUMMARY:EVM:RMS:PILOTS? (Query Only)

Returns the RMS EVM data for the pilot subcarriers in the WLAN measurement.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:SUMMARY:EVM:RMS:PILOTS?
```

Arguments

None

Returns

<NRf> data in percent.

READ:WLAN:SUMMARY:FERROR? (Query Only)

Returns the frequency difference between the measured carrier frequency of the signal and the measurement frequency setting.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:SUMMARY:FERROR?
```

Arguments

None

Returns

<NRf> data in kHz.

READ:WLAN:SUMMARY:HEADER? (Query Only)

Returns the received packet header information for the WLAN measurement.

Applies to the 802.11b standard only.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:HEADER?

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

READ:WLAN:SUMMARY:HTSig? (Query Only)

Returns the decimal values of the received packet HT-SIGNAL. Applies to the 802.11n standard only.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:HTSig?

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

READ:WLAN:SUMMARY:IQOffset? (Query Only)

Returns the average magnitude of the DC subcarrier level relative to total signal power.

Group

Read commands

Syntax

READ:WLAN:SUMMARY:IQOffset?

Arguments

None

Returns

<NRf> data in dB.

READ:WLAN:SUMMARY:LSIG? (Query Only)

Returns the decimal values of the received packet (legacy) SIGNAL symbols fields. Applies to the 802.11n standard only.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:LSIG?

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

READ:WLAN:SUMMARY:PACKET? (Query Only)

Returns the type and number of symbols, EVM-RMS and average power of the Preamble and Data portions of the packet.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:PACKET?

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

READ:WLAN:SUMMARY:PACKET:DMODULATION? (Query Only)

Returns the modulation used in the Data symbols.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:PACKet:DMODulation?

Arguments

None

Returns

<string> The data modulation being used.

READ:WLAN:SUMMARY:PACKet:FORMat? (Query Only)

Returns the packet format setting for the WLAN measurement

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:PACKet:FORMat?

Arguments

None

Returns

<string> The packet format setting.

READ:WLAN:SUMMARY:PACKet:GUARd? (Query Only)

Returns the packet guard interval used by the DATA symbols.

Not available for 802.11b.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:PACKet:GUARd?

Arguments

None

Returns

<NRf> The packet guard interval, 1/4 or 1/8.

READ:WLAN:SUMMARY:SIG? (Query Only)

Returns the decimal values of the received packet SIGNAL symbols fields.

Available only for 802.11agjp.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:SIG?

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

READ:WLAN:SUMMARY:VHTSig:A? (Query Only)

Returns the decimal values of the received packet VHT-SIGNAL(A) symbols' fields.

Available only for 802.11ac.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

READ:WLAN:SUMMARY:VHTSig:A?

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

READ:WLAN:SUMMARY:VHTSig:B? (Query Only)

Returns the decimal values of the received packet VHT-SIGNAL(B) symbols fields.

Available only for 802.11ac.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Read commands

Syntax

```
READ:WLAN:SUMMARY:VHTSig:B?
```

Arguments

None

Returns

Results are returned in the same left-to-right order in which they are presented in the display.

Sense commands

[SENSe]:ACPower:AVERage

Sets or queries how to average waveform in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:AVERage { OFF | TIME | FREQUENCY }  
[SENSe]:ACPower:AVERage?
```

Arguments

OFF disables averaging.

TIME averages waveform using time samples.

FREQUENCY averages waveform using frequency samples.

Examples

```
SENSe:ACPOWER:AVERAGE TIME averages waveform using time samples.
```

[SENSe]:ACPower:AVERage:COUNT

Sets or queries the number of traces for averaging in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:AVERage:COUNT <number>  
[SENSe]:ACPower:AVERage:COUNT?
```

Arguments

<number>::<NR1> specifies the average count. Range: 2 to 10000.

Examples

SENSe:ACPOWER:AVERAGE:COUNT 64 sets the average count to 64.

[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth (RBW). Programming a specified RBW sets [SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]:AUTO OFF.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution] <value>  
[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]?
```

Related Commands

[\[SENSe\]:ACPower:{BANDwidth|BWIDth}\[:RESolution\]:AUTO](#) (on page 1967)

Arguments

<value>::<NRf> specifies the RBW. Range: 100 Hz to 5 MHz.

Examples

SENSe:ACPOWER:BANDWIDTH:RESOLUTION 200kHz sets the RBW to 200 kHz.

[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]:ACTual? (Query Only)

Queries the actual resolution bandwidth (RBW) in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]:ACTual?
```

Arguments

None

Returns

<NRf> is the actual RBW in Hz.

Examples

SENSe:ACPOWER:BANDWIDTH:RESOLUTION:ACTUAL? might return 299.624E+3, indicating that the actual RBW is 299.624 kHz.

[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]:AUTO

Determines whether to set the resolution bandwidth (RBW) automatically or manually in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]:AUTO { OFF | ON | 0 | 1 }
[SENSe]:ACPower:{BANDwidth|BWIDth}[:RESolution]:AUTO?
```

Arguments

OFF or 0 specifies that the RBW is set manually using the [SENSe]:ACPower: {BANDwidth|BWIDth}[:RESolution] command.

ON or 1 specifies that the RBW is set automatically.

Examples

SENSe:ACPOWER:BANDWIDTH:AUTO ON sets the RBW automatically.

[SENSe]:ACPower:{BANDwidth|BWIDth}:VIDeo

Sets or queries the video bandwidth (VBW). Programming a specified VBW sets [SENSe]:ACPower:{BANDwidth|BWIDth}:VIDeo:STATE OFF.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:{BANDwidth|BWIDth}:VIDeo <value>
[SENSe]:ACPower:{BANDwidth|BWIDth}:VIDeo?
```

Related Commands

[\[SENSe\]:ACPower:{BANDwidth|BWIDth}:VIDeo:STATe](#) (on page 1968)

Arguments

<value>: : <NRf> specifies the VBW.

Range: Current RBW/10⁴ (1 Hz minimum) to Current RBW.

Examples

SENSe:ACPOWER:BANDWIDTH:VIDEO 200kHz sets the VBW to 200 kHz.

[SENSe]:ACPower:{BANDwidth|BWIDth}:VIDeo:STATe

Determines whether to enable or disable the video bandwidth (VBW) in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:{BANDwidth|BWIDth}:VIDeo:STATe { OFF | ON | 0 | 1 }
[SENSe]:ACPower:{BANDwidth|BWIDth}:VIDeo:STATe?
```

Arguments

OFF or 0 disables the VBW.

ON or 1 enables the VBW.

Examples

SENSe:ACPOWER:BANDWIDTH:VIDEO:STATE ON enables the VBW.

[SENSe]:ACPower:CHANnel:{BANDwidth|BWIDth}

Sets or queries frequency bandwidth of each channel (all share the same value) in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:CHANnel:{BANDwidth|BWIDth} <value>
[SENSe]:ACPower:CHANnel:{BANDwidth|BWIDth}?
```


Arguments

`<value>::<NRf>` specifies the channel bandwidth. Range: 1 Hz to full span.

Examples

`SENSe:ACPOWER:CHANNEL:BANDWIDTH 1.5MHz` sets the channel bandwidth to 1.5 MHz.

[SENSe]:ACPower:CHANnel:FILTer

Sets or queries the adjacent channel filter in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:CHANnel:FILTer { RRCosine | NONE }  
[SENSe]:ACPower:CHANnel:FILTer?
```

Arguments

`RRCosine` uses the Root-Raised Cosine filter.

`NONE` uses no filter.

Examples

`SENSe:ACPOWER:CHANNEL:FILTER RRCosine` uses the Root-Raised Cosine filter for the Channel power and ACPR measurement.

[SENSe]:ACPower:CHANnel:PAIRs

Sets or queries the number of adjacent channel pairs (upper and lower) in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:CHANnel:PAIRs <number>  
[SENSe]:ACPower:CHANnel:PAIRs?
```

Arguments

`<number>::<NR1>` specifies the number of adjacent pairs. Range: 0 to 50.

Examples

`SENSe:ACPOWER:CHANNEL:PAIRS 5` sets five adjacent channel pairs.

[SENSe]:ACPower:CHANnel:SPACing

Sets or queries frequency difference between centers of each channel in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:CHANnel:SPACing <value>  
[SENSe]:ACPower:CHANnel:SPACing?
```

Arguments

<value>::<NRf> specifies the channel-to-channel spacing.

Range: 1 Hz to 1 GHz.

Examples

SENSe:ACPOWER:CHANNEL:SPACING 5MHz sets the channel-to-channel spacing to 5 MHz.

[SENSe]:ACPower:CHIPrate

Sets or queries the chip rate when [SENSe]:ACPower:CHANnel:FILTer is set to RRCosine (Root Raised Cosine).

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:CHIPrate <value>  
[SENSe]:ACPower:CHIPrate?
```

Related Commands

[\[SENSe\]:ACPower:CHANnel:FILTer](#) (on page 1969)

Arguments

<value>::<NRf> specifies the chip rate. Range: 100 Hz to 105 MHz.

Examples

SENSe:ACPOWER:CHIPRATE 5kHz sets the chip rate to 5 kHz.

[SENSe]:ACPower:CLEar:RESults (No Query Form)

Restarts the average trace.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:CLEar:RESults
```

Arguments

None

Examples

SENSe:ACPOWER:CLEAR:RESULTS restarts the average trace.

[SENSe]:ACPower:FREQuency

Sets or queries the center frequency in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:FREQuency <value>  
[SENSe]:ACPower:FREQuency?
```

Arguments

<value>::**<NRf>** specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:ACPOWER:FREQUENCY 2.35GHz sets the center frequency to 2.35 GHz.

[SENSe]:ACPower:FREQuency:STEP

Sets or queries the frequency step size in the Channel power and ACPR measurement. Programming a specified step size sets [SENSe]:ACPower:FREQuency:STEP:AUTO OFF.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:FREQUENCY:STEP <value>  
[SENSe]:ACPower:FREQUENCY:STEP?
```

Related Commands

[\[SENSe\]:ACPower:FREQUENCY:STEP:AUTO](#) (on page 1972)

Arguments

<value>: : <NRf> specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:ACPOWER:FREQUENCY:STEP 1kHz sets the frequency step size to 1 kHz.

[SENSe]:ACPower:FREQUENCY:STEP:AUTO

Determines whether to set the frequency step size automatically or manually in the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:FREQUENCY:STEP:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:ACPower:FREQUENCY:STEP:AUTO?
```

Arguments

OFF or 0 specifies that the frequency step size is set manually using the [SENSe]:ACPower:FREQUENCY:STEP command.

ON or 1 specifies that the frequency step size is set automatically.

Examples

SENSe:ACPOWER:FREQUENCY:STEP:AUTO ON specifies that the frequency step size is set automatically.

[SENSe]:ACPower:NFLoor:STaTe

Determines whether to enable or disable the correction for noise floor.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:NFLoor:State { OFF | ON | 0 | 1 }  
[SENSe]:ACPower:NFLoor:State?
```

Arguments

OFF or 0 disables the correction for noise floor.

ON or 1 enables the correction for noise floor.

Examples

SENSe:ACPOWER:NFLOOR:STATE ON enables the correction for noise floor.

[SENSe]:ACPower:POINts:COUNT

Sets or queries the number of points used for the trace in the Channel Power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:POINts:COUNT { P801 | P2401 | P4001 | P8001 | P10801 }  
[SENSe]:ACPower:POINts:COUNT?
```

Arguments

RTBandwidth optimizes the measurement for real-time bandwidth.

DRANge optimizes the measurement for dynamic range.

Examples

SENSe:ACPOWER:POINTS:COUNT P4001 sets the number of points used in the trace of the Channel Power and ACPR display to 4001.

[SENSe]:ACPower:RRCRolloff

Sets or queries the filter parameter (roll-off ratio) for the Root Raised Cosine filter.

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:RRCRolloff <value>  
[SENSe]:ACPower:RRCRolloff?
```

Related Commands

[\[SENSe\]:ACPower:CHANnel:FILTer](#) (on page 1969)

Arguments

<value>: : <NRf> specifies the filter parameter.

Range: 0.0001 to 1 in 0.0001 steps.

Examples

SENSe:ACPOWER:RRCROLLOFF 0.3 sets the filter parameter to 0.3.

[SENSe]:ACPower:SYMBrate

Sets or queries the symbol rate when [SENSe]:ACPower:CHANnel:FILTer is set to RRCosine (Root Raised Cosine).

Conditions

Measurement views: Channel power and ACPR

Group

Sense commands

Syntax

```
[SENSe]:ACPower:SYMBrate <value>  
[SENSe]:ACPower:SYMBrate?
```

Related Commands

[\[SENSe\]:ACPower:CHANnel:FILTer](#) (on page 1969)

Arguments

<value>: : <NRf> specifies the symbol rate. Range: 100 Hz to 105 MHz.

Examples

SENSe:ACPOWER:CHIPRATE 5kHz sets the symbol rate to 5 kHz.

[SENSe]:ACQuisition:{BANDwidth|BWIDth}

Sets or queries the acquisition bandwidth (frequency range of the acquisition) when [SENSe]:ACQuisition:MODE is set to SAMPles or LENGth.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:{BANDwidth|BWIDth} <value>  
[SENSe]:ACQuisition:{BANDwidth|BWIDth}?
```

Arguments

<value>: : <NRf> specifies the acquisition bandwidth.

Range: 1MHz to 40 MHz (Standard) / 110MHz (Option 110).

Examples

`SENSe:ACQUISITION:BANDWIDTH 30MHz` sets the acquisition bandwidth to 30 MHz.

[SENSe]:ACQuisition:FFRame:ACTual? (Query Only)

Queries the actual number of Fast Frames.

Conditions

Measurement views: All

Group

Sense commands

Syntax

`[SENSe]:ACQuisition:FFRame:ACTual?`

Arguments

None

Returns

`<NR1>` The actual number of Fast Frames.

Examples

`SENSe:ACQUISITION:FFRAME:ACTUAL?` might return 178, indicating that the actual number of Fast Frames is 178.

[SENSe]:ACQuisition:FFRame:LIMit

Sets or queries the limit number of Fast Frames.

Conditions

Measurement views: All

Group

Sense commands

Syntax

`[SENSe]:ACQuisition:FFRame:LIMit`

`[SENSe]:ACQuisition:FFRame:LIMit?`

Arguments

`<value>::<NR1>` specifies the fast frame limit. Range: 1 to 65535 frames.

Where 1 to 65535 frames for RSA 5000A series. For others, the range is 1 to 220 -1 frames.

Examples

`SENSe:ACQUISITION:FFRAME:LIMIT 500` sets the Fast Frame limit to 500.

[SENSe]:ACQuisition:FFRame:STATe

Determines whether to enable or disable the Fast Frame.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:FFRame:STAtE { OFF | ON | 0 | 1 }  
[SENSe]:ACQuisition:FFRame:STAtE?
```

Arguments

OFF or 0 disables the Fast Frame.

ON or 1 enables the Fast Frame.

Examples

SENSe:ACQUISITION:FFRAME:STATE ON enables the Fast Frame.

[SENSe]:ACQuisition:FSAVe:ENABle

Set or queries the FastSave acquisition mode.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:FSAVe:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:ACQuisition:FSAVe:ENABle?
```

Arguments

OFF or 0 disables the FastSave acquisition.

ON or 1 enables the FastSave acquisition..

Examples

SENSe:ACQUISITION:FSAVE:ENABLE ON enables the FastSave acquisition.

[SENSe]:ACQuisition:FSAVe:FILEs:MAXimum

Set or queries the FastSave maximum number of files saved per run.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:FSAVe:FILEs:MAXimum <value>
```



```
[SENSe]:ACQuisition:FSAVe:FILEs:MAXimum?
```

Arguments

<value>::<NR2> specifies the maximum number of files saved per run. Range: 1 to 1,000,000 files.

NOTE: When the FILEs:MAXimum is reached, an event is added to the event queue to indicate that saves are completed. Note that this same event is issued now when Trigger Actions Max total files is reached as well.

Examples

SENSe:ACQUISITION:FSAVE:FILES:MAXIMUM 10 sets the maximum number of files saved per run to 10.

[SENSe]:ACQuisition:FSAVe:FORMat

Set or queries the FastSave file format.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:FSAVe:FORMat { TIQ| MAT }  
[SENSe]:ACQuisition:FSAVe:FORMat?
```

Arguments

TIQ selects the TIQ file format for FastSave acquisitions.

MAT selects the MAT file format for FastSave acquisitions.

Examples

SENSe:ACQUISITION:FSAVE:FORMAT MAT selects the Matlab file format.

[SENSe]:ACQuisition:FSAVe:LOCation

Set or queries the FastSave file save location (a directory).

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:FSAVe:LOCation <path>  
[SENSe]:ACQuisition:FSAVe:LOCation?
```

Arguments

<path>::<string> specifies the location where FastSave acquisitions will be saved.

Examples

SENSe:ACQUISITION:FSAVE:LOCATION "C:\RSA5100B Files\Test_folder" sets location where FastSave acquisitions are saved to C:\RSA5100B Files\Test_folder.

[SENSe]:ACQuisition:FSAVe:NAME:BASE

Set or queries the FastSave Base file name.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:FSAVe:NAME:BASE <file_name>  
[SENSe]:ACQuisition:FSAVe:NAME:BASE?
```

Arguments

<file_name>::<string> specifies the base file name use for FastSave acquisitions.

Examples

SENSe:ACQUISITION:FSAVE:NAME:BASE "FSAVE" sets the Base file name to FSAVE.

[SENSe]:ACQuisition:MEMory:AVailable:SAMPLEs? (Query Only)

Returns the amount of acquisition memory available in the instrument.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:MEMory:AVailable:SAMPLEs?
```

Arguments

None

Returns

<NRf> The amount of acquisition memory available in samples.

Examples

SENSe:ACQUISITION:MEMORY:AVAILABLE:SAMPLES? might return 999.424E+3, indicating that 999424 samples are available.

[SENSe]:ACQuisition:MEMory:CAPacity[:TIME]? (Query Only)

Returns the acquisition memory capacity (maximum period of time that can be acquired with the acquisition memory).

Conditions

Measurement views: All

Group

Sense commands

Syntax

`[SENSe]:ACQuisition:MEMory:CAPacity[:TIME]?`

Arguments

None

Returns

<NRf> The acquisition memory capacity in seconds.

Examples

`SENSe:ACQUISITION:MEMORY:CAPACITY:TIME?` might return `26.651E-3`, indicating that 26.651 ms can be acquired.

`[SENSe]:ACQuisition:MEMory:USED[:PERCent]?` (Query Only)

Returns the percentage of the capacity used based on the current settings.

Conditions

Measurement views: All

Group

Sense commands

Syntax

`[SENSe]:ACQuisition:MEMory:USED[:PERCent]?`

Arguments

None

Returns

<NRf> The percentage of the capacity used.

Examples

`SENSe:ACQUISITION:MEMORY:USED:PERCENT?` might return `50.0`, indicating that 50% is used.

`[SENSe]:ACQuisition:MODE`

Sets or queries the acquisition mode (how to determine the sampling parameters of acquisition bandwidth, samples, and length).

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:MODE { AUTO | SAMPlEs | LENGth }
[SENSe]:ACQuisition:MODE?
```

Related Commands

[\[SENSe\]:ACQuisition:{BANDwidth|BWIDth}](#) (on page 1974)

[\[SENSe\]:ACQuisition:SAMPlEs](#) (on page 1989)

[\[SENSe\]:ACQuisition:SEConds](#) (on page 1989)

Arguments

AUTO sets the all sampling parameters automatically.

SAMPlEs sets the acquisition bandwidth and samples manually, using the `[SENSe]:ACQuisition:{BANDwidth|BWIDth}` and `:SAMPlEs` commands.

LENGth sets the acquisition bandwidth and length manually, using the `[SENSe]:ACQuisition:{BANDwidth|BWIDth}` and `:SEConds` commands.

Examples

`SENSe:ACQUISITION:MODE AUTO` sets the all sampling parameters automatically.

[SENSe]:ACQuisition:OPTimization

Sets or queries the method of the global gain and input bandwidth optimization.

This command replaces the following commands:

- `[ :SENSe ]:ACPower:OPTimize:SPAN(?)`
- `[ :SENSe ]:DPX:{BANDwidth|BWIDth}:OPTimization(?)`
- `[ :SENSe ]:SGRam:{BANDwidth|BWIDth}:OPTimization(?)`
- `[ :SENSe ]:SPECTrum:{BANDwidth|BWIDth}:OPTimization(?)`
- `[ :SENSe ]:MCPower:OPTimize:SPAN(?)`

When a setup or tiq file that was created with an earlier version of software is recalled, the instrument selects a setting for the global optimization that will result in the recalled measurement-specific optimizations. If recalled measurements have conflicting optimizations, then the instrument selects one of the optimizations and issues a GPIB event (event number 108).

Conditions

Measurement views: Spectrum, DPX, Spectrum, Spectrogram, ACPR, MCPR

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:OPTimization { BEST | AUTO | MAXDynrange | MINNoise | MINTime }
[SENSe]:ACQuisition:OPTimization?
```

Arguments

For RSA7100A only:

BEST (Best for multiple displays) causes the instrument to evaluate all the open displays and select an Acquisition Bandwidth wide enough to satisfy as many measurements as possible.

MINTime optimizes the gain and input bandwidth to minimize sweep time.

For RSA5000:

BEST (Best for multiple displays) causes the instrument to evaluate all the open displays and select an Acquisition Bandwidth wide enough to satisfy as many measurements as possible.

AUTO sets the gain and input bandwidth for an optimized trade-off of the competing performance choices.

MAXDynrange optimizes the gain and input bandwidth to maximize the dynamic range.

MINNoise optimizes the gain and input bandwidth to minimize noise.

MINTime optimizes the gain and input bandwidth to minimize sweep time.

Examples

`SENSE:SPECTRUM:BANDWIDTH:OPTIMIZATION AUTO` optimizes automatically the gain and input bandwidth.

[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth|BWIDth}:AUTO

Set or queries whether the recording acquisition bandwidth is automatic or manual.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth|BWIDth}: AUTO { OFF | ON | 0 | 1 }
[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth|BWIDth}: AUTO ?
```

Arguments

ON or **1** indicates that the acquisition bandwidth during recording is based on the current system acquisition bandwidth.

OFF or **0** indicates that the acquisition bandwidth during recording is the selected bandwidth.

Returns

See Arguments.

Examples

`SENSe:ACQUISITION:RECORD:ACQUISITION:BANDWIDTH:AUTO?` might return `0`, indicating that the acquisition bandwidth during recording is the selected bandwidth.

[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth|BWIDth}<value>

Set or queries the Acquisition Bandwidth used during recording.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth|BWIDth} <value>
[SENSe]:ACQuisition:RECORD:ACQuisition:{BANDwidth|BWIDth} <value> ?
```

Arguments

`<value>::<NRf>` specifies the acquisition bandwidth used during recording.

Returns

<NRf>

Examples

SENSe:ACQuisition:RECORD:ACQuisition:BWIDth 20 sets the acquisition bandwidth to 20 MHz.

[SENSe]:ACQuisition:RECORD:FILE:LENGth

Sets or queries how much data (time in milliseconds, seconds, or minutes) is recorded when recording starts. File Length uses the Max saved files per run: setting to determine how many data files are captured per each recording session.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:LENGth <numeric>  
[SENSe]:ACQuisition:RECORD:FILE:LENGth?
```

Arguments

<numeric>::=<NR3> determines the file length of each data file saved.

Range: 1E-21 to 10E3 when units set to milliseconds

Range: 1E-5 to 10E3 when units set to seconds

Range: 1E-13 to 10E3 when units set to minutes

Returns

Examples

SENSe:ACQUISITION:RECORD:FILE:LENGTH 10E2 sets the file length to 1000.

[SENSe]:ACQuisition:RECORD:FILE:LENGth:ENABLE

Sets or queries the file length conditions to determine how much data is recorded. File Length uses theMax saved files per run: setting to determine how many data files are captured per each recording session.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:LENGth:ENABLE { OFF | ON | 0 | 1 }  
[SENSe]:ACQuisition:RECORD:FILE:LENGth:ENABLE?
```

Arguments

ON or 1 enables File Length.

OFF or 0 disables File Length.

Examples

`SENSe:ACQUISITION:RECORD:FILE:LENGTH:ENABLE ON` enables the File Length conditions.

[SENSe]:ACQuisition:RECORD:FILE:LENGTH:UNITs

Sets or queries the units used for the file length setting.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:LENGTH:UNITs { MSEC | SEC | MIN }
```

Arguments

MSEC: milliseconds

SEC: seconds

MIN: minutes

Examples

`SENSe:ACQUISITION:RECORD:FILE:LENGTH:UNITs MSEC` sets the units for the file length to milliseconds.

[SENSe]:ACQuisition:RECORD:FILE:LOCation

Sets the file location of the saved data records. To fully support data streaming, the drive selected for recording data must have a minimum write speed of 300 MB/sec.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:LOCation <file_path>  
[SENSe]:ACQuisition:RECORD:FILE:LOCation?
```

Arguments

`<file_path>::="string">` specifies the location.

If you omit the directory path, the default path is used, which is C:\SignalVu-PC Files\Sample Data Records initially.

Examples

`SENSe:ACQUISITION:RECORD:FILE:LOCATION "C:\SignalVu-PC Files\Sample Data Records"` sets the location of the data records to that location.

[SENSe]:ACQuisition:RECORD:FILE:MAXimum

Sets or queries how many times a record is created, of the specified File Length setting. If the File Length is not enabled, this setting is ignored. See the command [:SENSe]:ACQuisition:RECORD:FILE:LENGTH:ENABle.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:MAXimum <value>  
[SENSe]:ACQuisition:RECORD:FILE:MAXimum?
```

Arguments

<value>::=<NR1> the number of records created.

Range: 1 to 1000000.

Examples

SENSe:ACQUISITION:RECORD:FILE:MAXIMUM 10 sets the number of files to saved to ten.

[SENSe]:ACQuisition:RECORD:FILE:NAME:BASE

Sets or queries the base file name that is used for all data recordings. The base name is appended with additional information, creating unique file names.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:NAME:BASE <base_name>  
[SENSe]:ACQuisition:RECORD:FILE:NAME:BASE?
```

Arguments

<base_name>::=<"string"> specifies the base file name used for all data recordings.

Examples

SENSe:ACQUISITION:RECORD:FILE:NAME:BASE "DataFile" sets the base name to DataFile.

SENSe:ACQuisition:RECORD:FILE:NAME:INDEX

Sets or queries the index value of the file suffix.

Conditions

Requires a RSA7100A my connected and XCOM be the selected file format.

Group

Sense commands

Syntax

SENSe:ACQuisition:RECORD:FILE:NAME:INDEX {integer value}
SENSe:ACQuisition:RECORD:FILE:NAME:INDEX?

Arguments

{integer value} between 0 and 99999.

Returns

See arguments

Examples

SENSe:ACQUISITION:RECORD:FILE:NAME:INDEX? might return 12, indicating that the index value is 12.

SENSe:ACQuisition:RECORD:FILE:NAME:SUFFIX

Sets or queries the file name suffix to append to the output base file name.

Conditions

Requires a RSA7100A my connected and XCOM be the selected file format.

Group

Sense commands

Syntax

SENSe:ACQuisition:RECORD:FILE:NAME:SUFFIX

Arguments

TIMestamp creates a timestamp formed from the file creation time. For example, myfile-2018.08.15.09.33.12.522.xmrk.

NONE sets the base file name to be used without a suffix. For example, myfile.xmrk.

INDEX allows you to set an index value. For example, myfile-00004.xmrk. Value can be an integer between 0 and 99999.

Returns

See Arguments.

Examples

SENSe:ACQUISITION:RECORD:FILE:NAME:SUFFIX? might return INDEX, indicating that the suffix is set to Index.

[SENSe]:ACQuisition:RECORD:FILE:SIZE? (Query Only)

Queries the expected recording file size in bytes. This item is only displayed in the UI when Record Time is enabled.

Group

Sense commands

Syntax

[SENSe]:ACQuisition:RECORD:FILE:SIZE?

Arguments

None

Returns

<NRf> in mseconds.

Examples

`SENSe:ACQUISITION:RECORD:FILE:SIZE?` might return 10, indicating that the recorded file size is expected to be 10 ms.

[SENSe]:ACQuisition:RECORD:FILE:STRucture

Sets or queries the file structure to use for the recorded data files.

Conditions

Requires an RSA 306, 306B, 500A series, 600A series, of 7100A be connected.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:STRucture { RAW | FORM }
```

Arguments

RAW: Unformatted files are created. Two files are created for each recording, a header file (.r3h) and the data file (.r3a).

FORMatted: Formatted files are created, ending with a .r3f suffix.

MDSCombined: Midas 2.0 (CDIF) files are created.

MDSDetached: Midas 2.0 Detached (CDIF+DET) files are created.

The contents of these file types is described in the API Reference manual (077-1031-XX) available on the SignalVu-PC Software and Documentation Flash Drive or on tek.com.

Examples

`SENSe:ACQUISITION:RECORD:FILE:STRUCTURE FORMATTED` sets the file format to Formatted.

[SENSe]:ACQuisition:RECORD:FILE:WBWidth:DFormat

Set or queries the data format used for recording. At 800 MHz acquisition bandwidth, data is packed at 12 bits/sample to avoid gaps in the streamed recording. If you require 16-bit samples, use the unpacked argument.

Conditions

Only available when a RSA7100A is connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:FILE:WBWidth:DFormat { PACK | UNPack }  
[SENSe]:ACQuisition:RECORD:FILE:WBWidth:DFormat ?
```

Arguments

PACK sets data to be recorded in packed data format.

UNPack sets data to be recorded in unpacked data format.

Returns

See Arguments.

Examples

SENSe:ACQUISITION:RECORD:FILE:WBWIDTH:DFORMAT might return **PACK**, indicating that data is set to packed data format.

[SENSe]:ACQuisition:RECORD:RESults? (Query Only)

Queries the recording status.

Group

Sense commands

Syntax

[SENSe]:ACQuisition:RECORD:RESults?

Arguments

None

Returns

<Number files completed>,<bytes in file>,<percentage in file>,<Acquisition Data Status>

Where

<Number files completed>::<NR1> Number of files completed.

<bytes in file>::<NR1> Number of bytes written to current file.

<percentage in file>::<NRf> Percentage of current file written.

<Acquisition Data Status>::<NR1> Acquisition data status. This is the overall acquisition data status since recording started.

The following hexadecimal values indicate acquisition data status.

Description	Value
ADC Overrange	0x1
Acquisition Data Lost	0x20
IF Power Overrange	0x100000

Examples

SENSe:ACQUISITION:RECORD:RESULTS? might return **2,2400,50,0x1** indicating that 2 files were completed, 2400 total bytes, 50% completed, and that there is ADC overrange.

[SENSe]:ACQuisition:RECORD:START (No Query Form)

Starts the data recording. The Record to disk must be set to Record now. See the command [:SENSe]:ACQuisition:RECORD:TYPE. See the command [:SENSe]:ACQuisition:RECORD:FILE:LOCation to specify the file name and location.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:START
```

Arguments

None

Examples

SENSe:ACQUISITION:RECORD:START starts the data recording.

[SENSe]:ACQuisition:RECORD:STOP (No Query Form)

Starts the data recording. The Record to disk must be set to Record now. See the command [:SENSe]:ACQuisition:RECORD:TYPE. See the command [:SENSe]:ACQuisition:RECORD:FILE:LOCation to specify the file name and location.

Conditions

Requires an RSA 306, 306B, 500A series, or 600A series be connected.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECORD:STOP
```

Arguments

None

Examples

SENSe:ACQUISITION:RECORD:STOP stops the data recording.

[SENSe]:ACQuisition:RECORD:TYPE

Sets or queries when the recording starts streaming data to the specified file.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:RECOrd:TYPE { NOW | TRIGger }
```

Arguments

NOW starts the recording immediately when Start is enabled. See the command [\[:SENSe\]:ACQuisition:RECOrd:STARt](#) (on page 1988).

TRIGger starts the recording when an appropriate trigger signal is received and Triggering is set to Triggered. See the command [:TRIGger:SEQuence\[:STATus\]](#) (on page 2737).

Examples

SENSe:ACQUISITION:RECORD:TYPE NOW sets the Record to disk setting to Record now.

[SENSe]:ACQuisition:SAMPles

Sets or queries the acquisition samples (number of samples acquired over the acquisition time) when [SENSe]:ACQuisition:MODE is set to SAMPles.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:SAMPles <value>
[SENSe]:ACQuisition:SAMPles?
```

Arguments

<value>::<NR1> specifies the acquisition samples. Range: 2 to 1 G samples..

Examples

SENSe:ACQUISITION:SAMPLES 1114 sets the acquisition samples to 1114.

[SENSe]:ACQuisition:SEConds

Sets or queries the acquisition length (time over which the acquisition occurs) when [SENSe]:ACQuisition:MODE is set to LENGth.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ACQuisition:SEConds <value>
[SENSe]:ACQuisition:SEConds?
```

Arguments

<value>::<NRf> specifies the acquisition length.

Examples

`SENSe:ACQUISITION:SAMPLES 12.5ms` sets the acquisition length to 12.5 ms.

[SENSe]:{AM|FM|PM}:{BANDwidth|BWIDth}:MEASurement

Sets measurement bandwidth for the AM, FM, or PM demodulation to analyze.

Conditions

Measurement views: AM, FM, PM

Group

Sense commands

Syntax

```
[SENSe]:{AM|FM|PM}:{BANDwidth|BWIDth}:MEASurement <value>
[SENSe]:{AM|FM|PM}:{BANDwidth|BWIDth}:MEASurement?
```

Related Commands

[FETCh:{AM|FM|PM}?](#) (on page 1100)

[READ:AM:RESult?](#) (on page 1595)

[READ:FM:RESult?](#) (on page 1689)

[READ:PM:RESult?](#) (on page 1792)

Arguments

`<value>::<NRf>` specifies the demodulation bandwidth for the specified modulation type.

Examples

`SENSe:AM:BANDwidth:MEASurement 1e6` sets the amplitude demodulation bandwidth to 1 MHz.

[SENSe]:{AM|FM|PM}:CLEar:RESults (No Query Form)

Clear results in the AM/FM/PM measurement.

Conditions

Measurement views: AM, FM, PM

Group

Sense commands

Syntax

```
[SENSe]:{AM|FM|PM}:CLEar:RESults
```

Arguments

None

Examples

`SENSe:AM:CLEAR:RESULTS` clears results in the AM measurement.

[SENSe]:{AM|FM|PM}:{MTPoints|MAXTracepoints}

Sets or queries the maximum trace points in the AM/FM/PM measurement.

Conditions

Measurement views: AM, FM, PM

Group

Sense commands

Syntax

```
[SENSe]:{AM|FM|PM}:{MTPoints|MAXTracepoints} { ONEK | TENK | HUNDredk | NDECimate | NEVerdecimate }
[SENSe]:{AM|FM|PM}:{MTPoints|MAXTracepoints}?
```

Arguments

The following table lists the arguments.

Argument	Maximum trace points
ONEK	1k
TENK	10k
HUNDredk	100k
NDECimate or NEVerdecimate	Never decimate

Examples

`SENSe:AM:MTPPOINTS ONEK` selects the maximum trace points of 1000 in the AM measurement.

[SENSe]:AM:DETECT:AMPLitude

Sets or queries the carrier amplitude detection method used to determine the 0% reference modulation in the AM measurement.

Conditions

Measurement views: AM

Group

Sense commands

Syntax

```
[SENSe]:AM:DETECT:AMPLitude { AVERage | MEDian }
[SENSe]:AM:DETECT:AMPLitude?
```

Arguments

`AVERage` defines the 0% reference modulation as the average amplitude in the analysis range (default).

`MEDian` defines the 0% reference modulation as the median amplitude $\frac{((\text{maximum}) + (\text{minimum}))}{2}$ in the analysis range.

Examples

`SENSe:AM:DETECT:AMPLITUDE AVERage` defines the 0% modulation as the average amplitude in the analysis range.

[SENSe]:ANALysis:ADVanced:DITHer

Determines whether to enable or disable dithering, or set it automatically.

Dither is a random low-level signal consisting of white noise of one quantizing level peak-to-peak amplitude which may be added to an analog signal prior to sampling for the purpose of minimizing quantization error.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ANALysis:ADVanced:DITHer { AUTO | ON | OFF }  
[SENSe]:ANALysis:ADVanced:DITHer?
```

Arguments

AUTO specifies that the dither is set automatically.

ON enables dithering.

OFF disables dithering.

Examples

SENSe:ANALYSIS:ADVANCED:DITHER ON enables dithering.

[SENSe]:ANALysis:ADVanced:DITHer:HWAre:STATus? (Query Only)

Returns the dithering hardware status.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ANALysis:ADVanced:DITHer:HWAre:STATus?
```

Arguments

None

Returns

One of the following status information.

Dithering status

Status	Description
DUNaligned	Dithering is disabled and unaligned.

Status	Description
ON	Dithering is enabled.
OFF	Dithering is disabled.

Examples

SENSE:ANALYSIS:ADVANCED:DITHER:HWARE:STATUS? might return OFF, indicating that the dithering is disabled.

[:SENSe]:ANALysis:BANDwidth:FILTer:MODE {set and query}

Sets or queries the measurement bandwidth filter mode.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
SENSe:ANALysis:BANDwidth:FILTer:MODE {0|1|TRUE|FALSE}
SENSe:ANALysis:BANDwidth:FILTer:MODE? (Query)
```

Returns

0 is used to change the 'Measurement Bandwidth Filter' checkbox state from unchecked to checked.

1 is used to change 'Measurement Bandwidth Filter' checkbox state from checked to unchecked.

Examples

SENSe:ANALysis:BANDwidth:FILTer:MODE 0 changes 'Measurement Bandwidth Filter' checkbox state to unchecked.

[SENSe]:ANALysis:LENGth[:SOURce<z>]

Sets or queries the analysis length. Programming a specified length sets [SENSe]:ANALysis:AUTO OFF.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ANALysis:LENGth[:SOURce<z>] <value>
[SENSe]:ANALysis:LENGth[:SOURce<z>]?
```

Related Commands

[\[SENSe\]:ANALysis:LENGth\[:SOURce2\]:AUTO](#) (on page 1994)

Arguments

<value>: :<NRf> specifies the analysis length.

Range: 10 ns to [(acquisition length) - 400 ns].

If [(analysis start) + (analysis length)] > [(acquisition length) - 400 ns], the actual analysis length is reduced to [(acquisition length) - 200 ns].

Examples

SENSe:ANALysis:LENGth:SOURce2 25.625 μ s sets the analysis length of Source 2 to 25.625 μ s.

[SENSe]:ANALysis:LENGth[:SOURce<z>]:ACTual? (Query only)

Queries the actual analysis length.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:ANALysis:LENGth[:SOURce<z>]:ACTual?

Returns

<NRf> Actual analysis length in seconds.

Examples

SENSe:ANALysis:LENGth:SOURce2:ACTual? might return 25.625E-6, indicating that the actual analysis length is 25.625 μ s.

[SENSe]:ANALysis:LENGth[:SOURce<z>]:AUTO

Determines whether to set the analysis length automatically or manually.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:ANALysis:LENGth:SOURce<z>:AUTO { OFF | ON | 0 | 1 }
[SENSe]:ANALysis:LENGth:SOURce<z>:AUTO?

Arguments

OFF or 0 sets the analysis length manually, using the [SENSe]:ANALysis:LENGth command.

ON or 1 sets the analysis length automatically.

Examples

SENSe:ANALysis:LENGth:SOURce2:AUTO ON sets the analysis length of Source 2 automatically.

[SENSe]:ANALysis:REFeRence[:SOURce<z>]

Sets or queries the analysis time reference.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ANALysis:REFeRence:SOURCE<z> { ACQSTART | TRIGGER }
[SENSe]:ANALysis:REFeRence:SOURCE<z>?
```

Arguments

ACQSTART specifies the acquisition start as the time zero reference.

TRIGGER specifies the trigger point as the time zero reference.

Examples

SENSe:ANALysis:REFeRence:SOURCE2 ACQSTART specifies the acquisition start as the analysis time reference for Source 2.

[SENSe]:ANALysis:STARt[:SOURce<z>]

Sets or queries the analysis offset time. Programming a specified offset time sets [SENSe]:ANALysis:STARt:AUTO OFF.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ANALysis:STARt:SOURCE<z> <value>
[SENSe]:ANALysis:STARt:SOURCE<z>?
```

Related Commands

[\[SENSe\]:ANALysis:LENGth\[:SOURCE<z>\]](#) (on page 1994)

[\[SENSe\]:ANALysis:START\[:SOURCE<z>\]:AUTO](#) (on page 1996)

Arguments

<value>: : <NRf> specifies the analysis offset time.

Range: 0 to [(acquisition length) - 200 ns].

If [(analysis start) + (analysis length)] > [(acquisition length) - 400 ns], the actual analysis length is reduced to [(acquisition length) - 200 ns].

Examples

SENSe:ANALysis:START:SOURCE2 23.5µs sets the analysis offset to 23.5 µs.

[SENSe]:ANALysis:START[:SOURce<z>]:AUTO

Determines whether to set the analysis offset automatically or manually.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ANALysis:START:SOURCE<z>:AUTO { OFF | ON | 0 | 1 }
[SENSe]:ANALysis:SOURCE<z>:START:AUTO?
```

Arguments

OFF or 0 sets the analysis offset manually, using the [SENSe]:ANALysis:START command.

ON or 1 sets the analysis offset automatically.

Examples

SENSe:ANALysis:START:SOURCE1:AUTO ON sets the analysis offset automatically.

[SENSe]:ANSPectrum:START:AUTO:METHod

Sets or queries the method used for computing auto analysis and spectrum offsets when

[SENSe]:ANALysis:REfERENCE is set to TRIGger.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ANSPectrum:START:AUTO:METHod { INCLude | LEGacy }
[SENSe]:ANSPectrum:START:AUTO:METHod?
```

Arguments

INCLude includes the trigger point.

LEGacy starts a trigger point.

Examples

SENSe:ANSPECTRUM:START:AUTO:METHOd INCLUDE includes the trigger point.

[SENSe]:AUDio:AVERage:COUNT

Sets or queries the number of harmonics to average in the audio measurement.

The range is from 2 to 20.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:AVERage:COUNT <average_value>  
[SENSe]:AUDio:AVERage:COUNT?
```

Arguments

<average_value> ::= <NR1> the number of harmonics to average.

Examples

SENSe:AUDio:AVERAGE:COUNT 10 sets the number of harmonics to average to 10.

[SENSe]:AUDio:AVERage:ENABLE

Enables or disables averaging of harmonics in the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:AVERage:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:AVERage:ENABle?
```

Arguments

OFF or 0 turns averaging off.

ON or 1 turns averaging on.

Examples

SENSe:AUDio:AVERAGE:ENABLE ON turns on averaging of harmonics in the audio measurement.

[SENSe]:AUDio:BANDwidth|BWIDth

Sets or queries the audio measurement bandwidth.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:BANDwidth|BWIDth <value>  
[SENSe]:AUDio:BANDwidth|BWIDth?
```

Arguments

<value> ::= <NR3> the audio measurement bandwidth value.

Examples

SENSe:AUDIO:BANDWIDTH|BWIDTH 20.5E+3 sets the audio measurement bandwidth to 20.5 kHz.

[SENSe]:AUDio:BANDwidth|BWIDth:RESolution

Sets or queries the resolution bandwidth for the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:BANDwidth|BWIDth:RESolution <value>  
[SENSe]:AUDio:BANDwidth|BWIDth:RESolution?
```

Arguments

<value> ::= <NR3> the resolution bandwidth value.

Examples

SENSe:AUDIO:BANDWIDTH|BWIDTH:RESOLUTION 40 sets the resolution bandwidth to 40 Hz.

[SENSe]:AUDio:BANDwidth|BWIDth:RESolution:AUTO

Determines whether to set the resolution bandwidth frequency automatically or manually.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:BANDwidth|BWIDth:RESolution:AUTO { OFF | ON | 0 | 1 }
[SENSe]:AUDio:BANDwidth|BWIDth:RESolution:AUTO?
```

Arguments

OFF or 0 specifies the resolution bandwidth is set manually.

ON or 1 specifies the resolution bandwidth is set automatically.

Examples

SENSe:AUDIO:BANDWIDTH|BWIDTH:RESOLUTION:AUTO ON sets the resolution bandwidth automatically.

[SENSe]:AUDio:BANDwidth|BWIDth:RESolution:SHAPE

Sets or queries the shape of the resolution bandwidth for the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:BANDwidth|BWIDth:RESolution:SHAPE { FLATtop | KAISer }
[SENSe]:AUDio:BANDwidth|BWIDth:RESolution:SHAPE?
```

Arguments

FLATtop sets the resolution bandwidth shape to Flattop.

KAISer sets the resolution bandwidth shape to Kaiser.

Examples

SENSe:AUDIO:BANDWIDTH|BWIDTH:RESOLUTION:SHAPE FLATtop sets the resolution bandwidth to Flattop for the audio measurement.

[SENSe]:AUDio:CARRier:OFFSet

Sets or queries the carrier frequency offset. This selection is available for FM or PM measurements.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:CARRier:OFFSet <value>
[SENSe]:AUDio:CARRier:OFFSet?
```

Arguments

<value> ::= <NR3> the carrier frequency offset value.

Returns

<NR3>

Examples

`SENSe:AUDIO:CARRIER:OFFSet 422.5` sets the carrier frequency offset to 422.5 Hz.

[SENSe]:AUDio:CARRier:OFFSet:AUTO

Determines whether to set the carrier frequency error automatically or manually. This selection is available FM or PM measurements.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:CARRier:OFFSet:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:CARRier:OFFSet:AUTO?
```

Arguments

`OFF` or `0` specifies the carrier frequency error is set manually.

`ON` or `1` specifies the carrier frequency error is set automatically.

Examples

`SENSe:AUDIO:CARRIER:OFFSet:AUTO ON` sets the carrier frequency error automatically.

[SENSe]:AUDio:DEMod:MUTE

Sets or queries the mute setting for the audio demodulation. Enabling Mute inhibits the audio from playing out through the PC speakers.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:AUDio:DEMod:MUTE { OFF | ON | 0 | 1 }
```

Arguments

`ON` or `1` enables the Mute setting for audio demodulation.

`OFF` or `0` disables the Mute setting for audio demodulation.

Returns

`ON` or `1` means that the Mute setting for audio demodulation is enabled.

`OFF` or `0` means that the Mute setting for audio demodulation is disabled.

Examples

`SENSe:AUDIO:DEMOD:MUTE 1` enables the audio demodulation mute setting, inhibiting the audio signal from playing out through the PC speakers.

[SENSe]:AUDio:DEMod[:STATe]

Sets or queries the audio demodulation state.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:AUDio:DEMod[:STATe] { 0 | 1 }
```

Arguments

1 starts the demodulation.

0 stops the demodulation.

Returns

1 means the demodulation is started.

0 means the demodulation is stopped.

Examples

`SENSe:AUDIO:DEMOD[:STATE] 1` starts the demodulating the audio signal.

[SENSe]:AUDio:DEMod:STReam:ACTivate

Sets or queries the Stream to File function. When checked, anytime the Run button is pressed, the audio stream-to-file begins.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:AUDio:DEMod:STReam:ACTivate { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:DEMod:STReam:ACTivate?
```

Arguments

ON or 1 enables the stream to file function.

OFF or 0 disables the stream to file function.

Returns

ON or 1 means the stream to file function is enabled.

OFF or 0 means the stream to file function is disabled.

Examples

SENSe:AUDIO:DEMOD:STREAM:ACTIVATE 1 enables (activates) the audio streaming function.

SENSe:AUDIO:DEMOD:STREAM:ACTIVATE? might return 0, indicating the audio streaming function is deactivated.

[SENSe]:AUDio:DEMod:STReam[:FILE] (No Query Form)

Sets the file name and file location of the audio file when streaming to disc.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:AUDio:DEMod:STReam[:FILE] <file>
```

Arguments

<file_name>::=<string> specifies the file name and location. The file extension is .wav. You can omit the extension.

You can use the absolute path to specify the file name. For example, specify the SAMPLE1 file in the My Documents folder on the C drive as "C:\My Documents\Audio1".

If you omit the directory path, the default path is used, which is C:\SignalVu-PC Files\Sample Data Records, initially.

Examples

SENSe:AUDIO:DEMOD:STREAM[:FILE] "C:\SignalVu-PC Files\Sample Data Records\Audio1" saves the streamed audio file Audio1 to the specified location.

[SENSe]:AUDio:DEMod:TYPE

Sets or queries both the audio signal demodulation type and bandwidth.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:AUDio:DEMod:TYPE { AM8K | FM8K | FM13K | FM75K | FM200K }
```

Related Commands

Arguments

AM8K

FM8K

FM13K

FM75K

FM200K

Returns

Same as arguments.

Examples

`SENSe:AUDIO:DEMOD:TYPE AM8K` sets the audio demodulation type to AM and the bandwidth to 8 KHz.

`SENSe:AUDIO:DEMOD:TYPE?` might return AM8K.

[SENSe]:AUDio:DEMod:VOLume

Sets or queries the volume of the demodulated audio signal when played out through the PC speakers.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Sense commands

Syntax

```
[SENSe]:AUDio:DEMod:VOLume <value>  
[SENSe]:AUDio:DEMod:VOLume?
```

Arguments

`<value>::=<NR2>` the value of relative volume setting.

Range = 0.0 to 1.0.

Examples

`SENSe:AUDIO:DEMOD:VOLUME 1.0` sets the volume output to maximum.

[SENSe]:AUDio:FILTer:DEEMphasis

Sets or queries the de-emphasis filter type.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:DEEMphasis { U25 | U50 | U75 | U750 | USER}  
[SENSe]:AUDio:FILTer:DEEMphasis?
```

Arguments

U25 specifies the 25 μ s filter.

U50 specifies the 50 μ s filter.

U75 specifies the 75 μ s filter.

U750 specifies the 750 μ s filter.

USER specifies a user-defined filter.

Examples

SENSe:AUDIO:FILTER:DEEMPHASIS U50 specifies the 50 μ s filter for the audio measurement.

[SENSe]:AUDio:FILTer:DEEMphasis:ENABLE

Enables or disables the de-emphasis filter for the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:DEEMphasis:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:FILTer:DEEMphasis:ENABle?
```

Arguments

OFF or 0 turns off the de-emphasis filter.

ON or 1 turns on the de-emphasis filter.

Examples

SENSe:AUDIO:FILTER:DEEMPHASIS:ENABLE ON turns on the de-emphasis filter.

[SENSe]:AUDio:FILTer:DEEMphasis:USER

Sets or queries a user-defined de-emphasis audio filter.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:DEEMphasis:USER <value>  
[SENSe]:AUDio:FILTer:DEEMphasis:USER?
```

Arguments

<value> ::= <NR3> the value of the user defined filter.

Examples

SENSe:AUDIO:FILTER:DEEMPHASIS:USER 50.0E-6 sets the user-defined de-emphasis filter to 50 μ s.

[SENSe]:AUDio:FILTer:HPF

Sets or queries the high-pass filter type.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:HPF { H20 | H50 | H300 | H400 | USER }  
[SENSe]:AUDio:FILTer:HPF?
```

Arguments

H20 specifies the 20 Hz filter.

H50 specifies the 50 Hz filter.

H300 specifies the 300 Hz filter.

H400 specifies the 400 Hz filter.

USER specifies a user-defined filter.

Examples

SENSe:AUDIO:FILTER:HPF H300 specifies the 300 Hz filter for the audio measurement.

[SENSe]:AUDio:FILTer:HPF:ENABLE

Enables or disables the high-pass audio filter for the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:HPF:ENABLE { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:FILTer:HPF:ENABLE?
```

Arguments

OFF or 0 turns the high-pass audio filter off.

ON or 1 turns the high-pass audio filter on.

Examples

SENSe:AUDIO:FILTER:HPF:ENABLE ON turns the high-pass audio filter on.

[SENSe]:AUDio:FILTer:HPF:USER

Sets or queries a user-defined high-pass audio filter.

Conditions

Measurement views: Audio Spectrum

Group

Programmer Manual

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:HPF:USER <value>  
[SENSe]:AUDio:FILTer:HPF:USER?
```

Arguments

<value> ::= <NR3> the value of the user defined filter.

Examples

SENSe:AUDIO:FILTER:HPF:USER 50 sets the user-defined high-pass filter to 50 Hz.

[SENSe]:AUDio:FILTer:LPF

Sets or queries the low-pass filter type.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:LPF { H300 | H3K | H15K | H30K | H80K | H300K | USER }  
[SENSe]:AUDio:FILTer:LPF?
```

Arguments

H300 specifies the 300 Hz filter.

H3K specifies the 3 kHz filter.

H15 specifies the 15 kHz filter.

H30K specifies the 30 kHz filter.

H80K specifies the 80 kHz filter.

H300K specifies the 300 kHz filter.

USER specifies a user-defined filter.

Examples

SENSe:AUDIO:FILTER:LPF H300 specifies the 300 Hz filter for the audio measurement.

[SENSe]:AUDio:FILTer:LPF:ENABLE

Enables or disables the low-pass filter for the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:LPF:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:FILTer:LPF:ENABle?
```

Arguments

OFF or 0 turns the low-pass audio filter off.

ON or 1 turns the low-pass audio filter on.

Examples

SENSe:AUDIO:FILTER:LPF:ENABLE ON turns the low-pass filter on.

[SENSe]:AUDio:FILTer:LPF:USER

Sets or queries a user-defined low-pass audio filter.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:LPF:USER <value>  
[SENSe]:AUDio:FILTer:LPF:USER?
```

Arguments

<value> ::= <NR3> the value of the user defined filter.

Examples

SENSe:AUDIO:FILTER:LPF:USER 1500 sets the user-defined low-pass filter to 1.50 kHz.

[SENSe]:AUDio:FILTer:MODE:PREDefined

Selects a predefined audio filter or a filter stored on the instrument file system.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:MODE:PREDefined { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:FILTer:MODE:PREDefined?
```

Arguments

OFF or 0 specifies the predefined filter on the file system. The file is specified by the [SENSe]:AUDio:FILTer:SOURce? command.

ON or 1 specifies the filter will be one of the selected predefined filters.

Examples

`SENSe:AUDIO:FILTER:MODE:PREDEFINED ON` specifies the filter will be one of the predefined filters.

[SENSe]:AUDio:FILTer:SOURce? (Query Only)

Queries the measurement filter from the user-defined source file.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

`[SENSe]:AUDio:FILTer:SOURce?`

Related Commands

[\[SENSe\]:AUDio:FILTer:MODE:PREDefined](#) (on page 2007)

Arguments

None

Returns

`<file name> ::= <string>` the name of the predefined filter.

Examples

`SENSe:AUDIO:FILTER:SOURCE? AUD-Test3` loads the predefined filter "AUD-Test3."

[SENSe]:AUDio:FILTer:STANdard

Sets or queries the Standard audio filter.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

`[SENSe]:AUDio:FILTer:STANdard { CCITT | CMSG }`
`[SENSe]:AUDio:FILTer:STANdard?`

Arguments

`CCITT` specifies the CCITT Standard filter.

`CMSG` specifies the CMSG Standard filter.

Examples

`SENSe:AUDIO:FILTER:STANDARD CCITT` specifies the CCITT Standard filter.

[SENSe]:AUDio:FILTer:STANdard:ENABle

Enables or disables a Standard filter for the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FILTer:STANdard:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:FILTer:STANdard:ENABle?
```

Arguments

OFF or 0 turns the standard filter off.

ON or 1 turns the standard audio filter on.

Examples

SENSe:AUDIO:FILTER:STANDARD:ENABLE ON turns the Standard filter on.

[SENSe]:AUDio:FREQuency

Sets or queries the reference audio frequency.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FREQuency <value>  
[SENSe]:AUDio:FREQuency?
```

Arguments

<value> ::= <NR3> the reference audio frequency.

Examples

SENSe:AUDIO:FREQUENCY? might return 5.824000000E+3 indicating that the reference audio frequency is 5.824 kHz.

[SENSe]:AUDio:FREQuency:AUTO

Determines whether to set the reference audio frequency automatically or manually.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:FREQuency:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:FREQuency:AUTO?
```

Arguments

OFF or 0 specifies the audio reference frequency is set manually.

ON or 1 specifies the audio reference frequency is set automatically.

Examples

SENSe:AUDIO:FREQUENCY:AUTO ON sets the audio reference frequency automatically.

[SENSe]:AUDio:HNOise:ENABLE

Enables or disables the Hum and Noise information in the Audio Summary display.

Conditions

Measurement views: Audio Summary

Group

Sense commands

Syntax

```
[SENSe]:AUDio:HNOise:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:AUDio:HNOise:ENABle?
```

Related Commands

[\[SENSe\]:AUDio:HNOise:REFerence](#) (on page 2010)

Arguments

OFF or 0 turns off the Hum and Noise information in Audio Summary display.

ON or 1 turns on the Hum and Noise information in the Audio Summary display.

Examples

SENSe:AUDIO:HNOISE:ENABLE OFF turns off the Hum and Noise information in the Audio Spectrum display.

[SENSe]:AUDio:HNOise:REFerence (No Query Form)

Captures the current Hum and Noise information in the Audio Summary display.

Conditions

Measurement views: Audio Summary

Group

Sense commands

Syntax

```
[SENSe]:AUDio:HNOise:REFerence
```

Related Commands

[\[SENSe\]:AUDio:HNOise:ENABLE](#) (on page 2010)

Arguments

None

Examples

`SENSe:AUDIO:HNOISE:REFERENCE` shows the current Hum and Noise information in the Audio Summary display.

[SENSe]:AUDio:SIGnal:TYPE

Sets or queries the audio signal type.

The signal type selection determines the available selections for the `[SENSe]:AUDio:UNITs` command.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:SIGnal:TYPE { AM | FM | DIRection | PM }  
[SENSe]:AUDio:SIGnal:TYPE?
```

Related Commands

[\[SENSe\]:AUDio:UNITs](#) (on page 2012)

Arguments

`AM` sets the signal type to amplitude modulation.

`FM` sets the signal type to frequency modulation.

`DIRection` sets the signal type to direct modulation.

`PM` sets the signal type to pulse modulation.

Returns

Examples

`SENSe:AUDIO:SIGNAL:TYPE FM` sets the signal type to FM, frequency modulation for the audio spectrum measurement.

[SENSe]:AUDio:SPECTrum:CLEar:RESults (No Query Form)

Clears the results of the audio spectrum measurement.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:SPECTrum:CLEar:RESults
```

Arguments

None

[SENSe]:AUDio:SPECTrum:POINTs:COUNT

Sets or queries the number of trace points acquired for the audio spectrum display.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:SPECTrum:POINTs:COUNT { P801 | P2401 | P4001 | P8001 | P10401 }  
[SENSe]:AUDio:SPECTrum:POINTs:COUNT?
```

Arguments

P801 sets the number of sample points to 801.

P2401 sets the number of sample points to 2401.

P4001 sets the number of sample points to 4001.

P8001 sets the number of sample points to 8001.

P10401 sets the number of sample points to 10401.

Examples

SENSe:AUDio:SPECTrum:POINTs:COUNT P2401 sets the number of sample points to 2401 in the audio spectrum display.

[SENSe]:AUDio:UNITs

Sets or queries the units of the audio spectrum measurement.

The available selections depend on signal type.

Conditions

Measurement views: Audio Spectrum

Group

Sense commands

Syntax

```
[SENSe]:AUDio:UNITs { AM | AM2 | DBAM2 | HZ | HZ2 | DBHZ2 | RAD | RAD2 | DBRAD2 | DBM | DBV | VOLTs  
| WATTs }  
[SENSe]:AUDio:UNITs?
```

Related Commands

[\[SENSe\]:AUDio:SIGnal:TYPE](#) (on page 2011)

Arguments

The following table lists the arguments.

Argument	Unit	Signal type
DBM	dBm	Direct
DBV	dBV	
VOLTs	Volts	
WATTs	Watts	
AM	am	AM
AM2	am ²	
DBAM2	dBam ²	
HZ	Hz	FM
HZ2	Hz ²²	
DBHZ2	dBHz ²	
RAD	rad	PM
RAD2	rad ²	
DBRAD2	dBrad ²	

Examples

`SENSe:AUDIO:UNITS VOLTs` sets the units to volts for the Direct signal type.

[SENSe]:AVTime[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Amplitude versus Time for a selected Measurement view number.

Conditions

Measurement views: Amplitude versus Time

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:AVTime[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:AVTime[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:AVTIME:MEASVIEW1:SELECTED:SOURCE 2 queries the Source for Amplitude versus Time Measurement View 1.

[SENSe]:AVTime[:MEASview<y>]:SPAN:LINK

Sets or queries the frequency span in the Amplitude versus Time measurement. Programming a specified span disables the [SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth} setting.

Conditions

Measurement views: Amplitude versus Time

Group

Sense commands

Syntax

```
[SENSe]:AVTime[:MEASview<y>]:SPAN:LINK <value>
[SENSe]:AVTime[:MEASview<y>]:SPAN:LINK?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

OFF or 0 specifies that Link to Span is not checked

ON or 1 specifies that Link to Span is checked

Examples

SENSe:AVTIME:MEASVIEW1:SPAN:LINK? the frequency span link on Amplitude versus Time Measurement View 1.

[SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth}

Sets or queries the time-domain bandwidth filter in the Amplitude versus Time measurement. Programming a specified bandwidth disables the [SENSe]:AVTime[:MEASview<y>]:SPAN setting.

Conditions

Measurement views: Amplitude versus Time

Group

Sense commands

Syntax

```
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth} <value>
[SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth}?
```

Arguments

<value>::<NRf> specifies the filter bandwidth.

Range: 1 Hz to 20 MHz (Standard) / 60 MHz (Option 110).

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`SENSe:AVTIME:MEASVIEW1:BANDWIDTH 10MHz` sets the filter bandwidth to 10 MHz on Amplitude versus Time Measurement View 1.

[SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth}:ACTual? (Query Only)

Queries the actual time-domain bandwidth in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Sense commands

Syntax

`[SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth}:ACTual?`

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> The actual time-domain bandwidth in Hz.

Examples

`SENSe:AVTIME:MEASVIEW1:BANDWIDTH:ACTUAL?` might return `20E+6`, indicating that the actual time-domain bandwidth is 20 MHz on Amplitude versus Time Measurement View 1.

[SENSe]:AVTime[:MEASview<y>]:CLEar:RESults (No Query Form)

Restarts multi-trace functions (Average and Max/Min Hold).

Conditions

Measurement views: Amplitude versus Time

Group

Sense commands

Syntax

`[SENSe]:AVTime[:MEASview<y>]:CLEar:RESults`

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`SENSe:AVTIME:MEASVIEW1:CLEAR:RESULTS` restarts multi-trace functions on Amplitude versus Time Measurement View 1.

[SENSe]:AVTime[:MEASview<y>]:MAXTracepoints

Sets or queries the maximum trace points in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Sense commands

Syntax

```
[SENSe]:AVTime[:MEASview<y>]:MAXTracepoints { ONEK | TENK | HUNDredk | NEVerdecimate }
[SENSe]:AVTime[:MEASview<y>]:MAXTracepoints?
```

Arguments

`ONEK` sets the maximum trace points to 1 k.

`TENK` sets the maximum trace points to 10 k.

`HUNDredk` sets the maximum trace points to 100 k.

`NEVerdecimate` never decimates the trace points.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`SENSe:AVTIME:MEASVIEW1:MAXTRACEPOINTS TENK` sets the maximum trace points to 10 k on Amplitude versus Time Measurement View 1.

[SENSe]:AVTime[:MEASview<y>]:METHod

Sets or queries the method to set the measurement bandwidth in the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Sense commands

Syntax

```
[SENSe]:AVTime[:MEASview<y>]:METHod { SPAN | TDBW }
[SENSe]:AVTime[:MEASview<y>]:METHod?
```

Arguments

`SPAN` specifies that the measurement bandwidth is set by the frequency span, using the `[SENSe]:AVTime:SPAN` command.

`TDBW` specifies that the measurement bandwidth is set by the time-domain bandwidth, using the `[SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth}` command.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`SENSe:AVTIME:MEASVIEW1:METHOd SPAN` specifies that the measurement bandwidth is set by the frequency span on Amplitude versus Time Measurement View 1.

[SENSe]:AVTime[:MEASview<y>]:SPAN

Sets or queries the frequency span in the Amplitude versus Time measurement. Programming a specified span disables the `[SENSe]:AVTime[:MEASview<y>]:{BANDwidth|BWIDth}` setting.

Conditions

Measurement views: Amplitude versus Time

Group

Sense commands

Syntax

```
[SENSe]:AVTime[:MEASview<y>]:SPAN <value>
[SENSe]:AVTime[:MEASview<y>]:SPAN?
```

Arguments

`<value>::<NRf>` specifies the frequency span.

Range: 10 Hz to 40 MHz (Standard) / 110 MHz (Option 110)

The parameter `<y>=1` to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`SENSe:AVTIME:MEASVIEW1:SPAN 5MHz` sets the frequency span to 5 MHz on Amplitude versus Time Measurement View 1.

[SENSe]:BLUEtooth:ANALysis:LENGth

Sets or returns the analysis length in the Bluetooth displays. Programming a specified length sets `[SENSe]:BLUEtooth:ANALysis:LENGth:AUTO` to off.

Conditions

Measurement views: All Bluetooth displays

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:ANALysis:LENGth <value>
[SENSe]:BLUEtooth:ANALysis:LENGth?
```

Related Commands

[\[SENSe\]:BLUEtooth:ANALysis:LENGth:AUTO](#) (on page 2018)

Arguments

`<value> ::= <NRf>` the analysis length. The minimum range depends on the modulation type.

Examples

`SENSe:BLUETOOTH:ANALYSIS:LENGTH 25.625E-6` sets the analysis length to 25.625 μ s.

[SENSe]:BLUEtooth:ANALysis:LENGth:ACTual? (Query Only)

Sets the actual analysis length in the Bluetooth displays.

Conditions

Measurement views: All Bluetooth displays

Group

Sense commands

Syntax

`[SENSe]:BLUEtooth:ANALysis:LENGth:ACTual?`

Arguments

None

Returns

<NR3> the actual analysis length in seconds.

Examples

`SENSe:BLUETOOTH:ANALYSIS:LENGTH:ACTUAL?` might return `25.625E-6`, indicating that the actual analysis length is 25.625 μ s.

[SENSe]:BLUEtooth:ANALysis:LENGth:AUTO

Sets or queries the length mode of the Bluetooth displays.

Conditions

Measurement views: All Bluetooth displays

Group

Sense commands

Syntax

`[SENSe]:BLUEtooth:ANALysis:LENGth:AUTO { OFF | ON | 0 | 1 }`
`[SENSe]:BLUEtooth:ANALysis:LENGth:AUTO?`

Related Commands

[\[SENSe\]:BLUEtooth:ANALysis:LENGth](#) (on page 2017)

Arguments

OFF or 0 sets the analysis length manually, using the `[SENSe]:BLUEtooth:ANALysis:LENGth` command.

ON or 1 sets the analysis length automatically.

Examples

`SENSe:BLUETOOTH:ANALYSIS:LENGTH:AUTO ON` sets the analysis length mode automatically.

[SENSe]:BLUEtooth:ANALysis:MEAS[:BANDwidth|BWIDth]

Sets or returns the measurement bandwidth in the Bluetooth measurement.

Conditions

Measurement views: All Bluetooth displays

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:ANALysis:MEAS[:BANDwidth|BWIDth] <value>
[SENSe]:BLUEtooth:ANALysis:MEAS[:BANDwidth|BWIDth]?
```

Arguments

<value> ::= <NR3>, the measurement bandwidth.

Examples

SENSe:BLUETOOTH:ANALYSIS:MEAS[:BANDWIDTH|BWIDTH]? might return 6.400E+6 indicating the measurement bandwidth is 6.400 MHz.

[SENSe]:BLUEtooth:ANALysis:MEAS:SOURce

Sets or returns the analysis measurement source in the Bluetooth measurement.

Conditions

Measurement views: All Bluetooth displays

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:ANALysis:MEAS:SOURce { MANual | AUTO | LSP }
[SENSe]:BLUEtooth:ANALysis:MEAS:SOURce?
```

Arguments

MANual allows for manual selection of the measurement bandwidth. A typical use is setting a narrow measurement bandwidth on a small range of frequencies to examine one signal while rejecting the others that are present in a Spectrum graph.

AUTO automatically selects a measurement bandwidth. The measurement picks a bandwidth based on other parameter settings (such as symbol rate and modulation type).

LSP sets the measurement bandwidth to Link to Span. This allows you to use the Spectrum display to tune the frequency, view the signal, and then use the Span control to set the measurement bandwidth. This mode emulates legacy instruments.

Examples

SENSe:BLUETOOTH:ANALYSIS:MEAS:SOURCE? might return MAN indicating a manual selection of the bandwidth measurement.

[SENSe]:BLUEtooth:ANALysis:OFFSet

Sets or returns the Bluetooth symbol analysis offset.

Conditions

Measurement views: Bluetooth displays

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:ANALysis:OFFSet <value>  
[SENSe]:BLUEtooth:ANALysis:OFFSet?
```

Arguments

<NR1> the symbol analysis offset as a percentage. The range is from 0 to 100%.

Examples

SENSe:BLUETOOTH:ANALYSIS:OFFSET -50 sets the symbol analysis of set to -50%.

[SENSe]:BLUEtooth:ANALysis:OFFSet:AUTO

Determines whether to set the carrier frequency error automatically or manually in the Bluetooth displays.

Conditions

Measurement views: Bluetooth displays

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:ANALysis:OFFSet:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:BLUEtooth:ANALysis:OFFSet:AUTO?
```

Arguments

OFF or 0 specifies the carrier frequency error is set manually.

ON or 1 specifies the carrier frequency error is set automatically.

Examples

SENSe:BLUETOOTH:ANALYSIS:OFFSET:AUTO ON sets the carrier frequency error automatically.

[SENSe]:BLUEtooth:ANALysis:TIME:UNITs (No Query Form)

Sets the time units for the Bluetooth Constellation settings.

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:ANALysis:TIME:UNITs {SEConds | SYMBols }  
[SENSe]:BLUEtooth:ANALysis:TIME:UNITs?
```

Arguments

SEConds sets the time units to seconds.

SYMBols sets the time units to symbols.

Examples

SENSe:BLUETOOTH:ANALYSIS:TIME:UNITS sets the time units to seconds.

[SENSe]:BLUEtooth([:BANDwidth]:BWIDth):MODE

Sets or returns the measurement bandwidth mode for the Bluetooth measurements.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth([:BANDwidth]:BWIDth):MODE { MANual | AUTO | LSP }
[SENSe]:BLUEtooth([:BANDwidth]:BWIDth):MODE?
```

Arguments

MANual allows for manual selection of the measurement bandwidth. A typical use is setting a narrow measurement bandwidth on a small range of frequencies to examine one signal while rejecting the others that are present in a Spectrum graph.

AUTO automatically selects a measurement bandwidth. The measurement picks a bandwidth based on other parameter settings (such as symbol rate and modulation type).

LSP sets the Measurement BW to Link to Span. This allows you to use the Spectrum display to tune the frequency, view the signal, and then use the Span control to set the measurement bandwidth. This mode emulates legacy instruments.

Examples

SENSe:BLUETOOTH([:BANDWIDTH]:BWIDTH):MODE AUTO sets the bandwidth mode to automatically select a measurement bandwidth.

[SENSe]:BLUEtooth([:BANDwidth]:BWIDth):TINterval

Sets or returns the measurement bandwidth frequency span in the Bluetooth displays.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth([:BANDwidth]:BWIDth):TINterval <value>
[SENSe]:BLUEtooth([:BANDwidth]:BWIDth):TINterval?
```

Arguments

<value> ::= <NRf> specifies the measurement bandwidth in MHz.

Returns

<NRf> the actual measurement bandwidth.

Examples

SENSe:BLUETOOTH([:BANDWIDTH]|:BWIDTh):TINTERVAL? might return 35.255E+6 indicating the bandwidth is 35.255 MHz.

[SENSe]:BLUEtooth([:BANDwidth]|:BWIDth):TINTerval:AUTO

Sets or returns the Bluetooth measurement bandwidth to Auto or to Manual.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth([:BANDwidth]|:BWIDth):TINTerval:AUTO { 0 | 1 | OFF | ON }
[SENSe]:BLUEtooth([:BANDwidth]|:BWIDth):TINTerval:AUTO?
```

Arguments

OFF or 0 sets measurement bandwidth to Auto.

ON or 1 sets measurement bandwidth to Manual.

Examples

SENSe:BLUETOOTH([:BANDWIDTH]|:BWIDTh):TINTERVAL:AUTO? might return 1 indicating the measurement bandwidth is set to Auto.

[SENSe]:BLUEtooth:CONStellation:PREFs:GRATicule:SHOW

Show or hides the graticule state in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:CONStellation:PREFs:GRATicule:SHOW { OFF | ON | 0 | 1 }
[SENSe]:BLUEtooth:CONStellation:PREFs:GRATicule:SHOW?
```

Arguments

OFF or 0 hides the graticule in the display.

ON or 1 shows the graticule in the display.

Returns

0 indicates the graticule is turned off.

1 indicates the graticule is turned on.

Examples

`SENSe:BLUETOOTH:CONSTELLATION:PREFS:GRATICULE:SHOW ON` turns on the graticule in the display.

[SENSe]:BLUEtooth:CONStellation:PREFs:MARKERS:SHOW

Show or hides the marker readout in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:CONStellation:PREFs:MARKERS:SHOW { OFF | ON | 0 | 1 }  
[SENSe]:BLUEtooth:CONStellation:PREFs:MARKERS:SHOW?
```

Arguments

`OFF` or `0` hides the marker readout in the display.

`ON` or `1` shows the marker readout in the display.

Returns

0 indicates the marker readout is turned off.

1 indicates the marker readout is turned on.

Examples

`SENSe:BLUETOOTH:CONSTELLATION:PREFS:GRATICULE:SHOW ON` turns on the marker readout in the display.

[SENSe]:BLUEtooth:CONStellation:PREFs:RADIx

Sets or returns the radix of the marker readout in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:CONStellation:PREFs:RADIx { Binary | Hex }  
[SENSe]:BLUEtooth:CONStellation:PREFs:RADIx?
```

Arguments

`Binary` sets the marker readout to Binary.

`Hex` sets the marker readout to Hex.

Examples

`SENSe:BLUETOOTH:CONSTELLATION:PREFS:RADIX?` might return `BINARY` indicating the Marker readout radix is set to Binary.

[SENSe]:BLUEtooth:CONStellation:TRACe<x>:CONTent

Sets or returns the appearance of the specified trace (Trace 1 or Trace 2) in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:CONTent { Vectors | Points | Lines }
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:CONTent?
```

Arguments

`Vectors` indicates the traces appear as vectors.

`Points` indicates the traces appear as a series of points.

`Lines` indicates the traces appear as lines.

Examples

`SENSe:BLUETOOTH:CONSTELLATION:TRACE1:CONTENT VECTORS` sets the Trace 1 to show as vectors in the display.

[SENSe]:BLUEtooth:CONStellation:TRACe<x>:FREEze

Sets or freezes the updates of the specified trace (Trace 1 or Trace 2) in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:FREEze { OFF | ON | 0 | 1 }
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:FREEze?
```

Arguments

`OFF` or `0` normally updates the display of the specified trace.

`ON` or `1` stops updating the display of the specified trace.

Examples

`SENSe:BLUETOOTH:CONSTELLATION:TRACE1:FREEZE 1` freezes the updates of Trace 1.

[SENSe]:BLUEtooth:CONStellation:TRACe<x>:POINTsPerSymbol

Sets or returns the number of points per symbol (how many points to use between symbols) for the specified trace (Trace 1 or Trace 2) in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:POINtsPerSymbol { ONE | TWO | FOUR | EIGHT | SIXTeen | THIRtytwo }
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:POINtsPerSymbol?
```

Arguments

The number of points per symbol (1,2,4,8,16,32).

Examples

`SENSe:BLUETOOTH:CONSTELLATION:TRACE2:POINTSPERSYMBOL FOUR` sets the number of points per symbol for trace 2 to four.

[SENSe]:BLUEtooth:CONStellation:TRACe<x>:SHOW

Shows or hides the specified trace (Trace 1 or Trace 2) in the Bluetooth Constellation display.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:SHOW { OFF | ON | 0 | 1 }
[SENSe]:BLUEtooth:CONStellation:TRACe<x>:SHOW?
```

Arguments

`OFF` or `0` hides the specified trace in the display.

`ON` or `1` shows the specified trace in the display.

Examples

`SENSe:BLUETOOTH:CONSTELLATION:TRACE1:SHOW OFF` hides trace 1 in the display.

[SENSe]:BLUEtooth:DELTa:AVERAge:FONE

Sets or returns the average frequency for the low deviation pattern in the Bluetooth measurement.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:DELTa:AVERAge:FONE <value>
```

```
[SENSe]:BLUetooth:DELTA:AVERage:FONE?
```

Arguments

<value> ::= <NR3>, the average frequency of the low deviation pattern.

Examples

SENSe:BLUETOOTH:DELTA:AVERAGE:FONE? might return 139.8309531250E+3 indicating the average frequency of the low deviation pattern is 139.83 kHz.

[SENSe]:BLUetooth:DELTA:AVERage:FTWO

Sets or returns the average frequency for the high deviation pattern in the Bluetooth measurement.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:DELTA:AVERage:FTWO <value>  
[SENSe]:BLUetooth:DELTA:AVERage:FTWO?
```

Arguments

<value> ::= <NR3>, the average frequency of the high deviation pattern.

Examples

SENSe:BLUETOOTH:DELTA:AVERAGE:FTWO? might return 139.8309531250E+3 indicating the average frequency of the low deviation pattern is 139.83 kHz.

[SENSe]:BLUetooth:FDVTime:TRACE:OCTet? (Query Only)

Returns the selected octet number on the Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:FDVTime:TRACE:OCTet?
```

Arguments

None

Returns

<NR3> the octet number.

Examples

SENSe:BLUEtooth:FDVTime:TRACE:OCTet? might return 5 indicating that 5 is the selected octet number.

[SENSe]:BLUEtooth:FDVTime:TRACE:OCTet:TOTAL:COUNT? (Query Only)

Returns the total octet value to be selected on the Frequency Deviation vs. Time display.

For the standard low-energy range the maximum number of octets available is 36. For standard basic rate range, the maximum number of octets depends on the packet type.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Sense commands

Syntax

[SENSe]:BLUEtooth:FDVTime:TRACE:OCTet:TOTAL:COUNT?

Arguments

None

Returns

An <NR3> number indicating the maximum numbers of octets available.

Examples

SENSe:BLUEtooth:FDVTime:TRACE:OCTet:TOTAL:COUNT? might return 36 indicating the maximum number of octets selected is 36.

[SENSe]:BLUEtooth:FDVTime:TRACE:VIEW:MODE

Sets or queries view mode in the Frequency Deviation vs. Time display.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Sense commands

Syntax

[SENSe]:BLUEtooth:FDVTime:TRACE:VIEW:MODE {PACK | OCTET}
[SENSe]:BLUEtooth:FDVTime:TRACE:VIEW:MODE?

Arguments

PACK indicates the display is in Packet mode.

OCTET indicates the display is in Octet mode.

Examples

SENSe:BLUEtooth:FDVTime:TRACE:VIEW:MODE PACK sets the view to packet mode.

[SENSe]:BLUEtooth:FILTer:ALPHa

Sets or returns the alpha filter factor (α /BT) in the Bluetooth analysis.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:FILTer:ALPHa <value>  
[SENSe]:BLUEtooth:FILTer:ALPHa?
```

Arguments

<value> ::= <Nrf> the filter factor; range: 0.001 to 1.

Examples

SENSe:BLUETOOTH:FILTER:ALPHA 0.5 sets the filter factor to 0.5.

[SENSe]:BLUEtooth:FILTer:MEASurement

Sets or returns the measurement filter in the Bluetooth measurements.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:FILTer:MEASurement {OFF | BR | LE | USER1 | USER2 | UOTH }  
[SENSe]:BLUEtooth:FILTer:MEASurement?
```

Arguments

OFF no measurement filter is used.

BR, the Basic Rate filter is used.

LE, the Low Energy filter is used.

USER1, the User Meas Filter 1 is used.

USER2, the User Meas Filter 2 is used.

UOTH a user-defined filter is used.

Examples

SENSe:BLUETOOTH:FILTER:MEASUREMENT USER1 uses the User Measurement Filter 1 as the measurement filter.

[SENSe]:BLUEtooth:FILTer:REFerence

Sets or returns the reference filter used in the Bluetooth measurements.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:FILTer:REFeRence {OFF | BR | USER1 | USER2 | UOTH }  
[SENSe]:BLUEtooth:FILTer:REFeRence?
```

Related Commands

AADD

Arguments

OFF no reference measurement filter is used.

BR, the Basic Rate filter is used.

USER1, the User Ref Filter 1 is used.

USER2, the User Ref Filter 2 is used.

UOTH, a user-defined filter is used.

Examples

SENSe:BLUETOOTH:FILTER:REFERENCE OFF selects None or no reference filter.

[SENSe]:BLUEtooth:FREQuency:DEViation

Sets or returns the frequency deviation in the Bluetooth analysis.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:FREQuency:DEViation <value>  
[SENSe]:BLUEtooth:FREQuency:DEViation?
```

Related Commands

[\[SENSe\]:BLUEtooth:FREQuency:DEViation:AUTO](#) (on page 2030)

Arguments

<value> ::= <NRf>, the frequency deviation.

The Standard product range is 1 Hz to 40 MHz; the Option 110 product range is 1 Hz to 110 MHz.

Examples

SENSe:BLUETOOTH:FREQUENCY:DEVIATION 1MHz sets the frequency deviation to 1 MHz.

[SENSe]:BLUEtooth:FREQuency:DEViation:AUTO

Determines whether to detect the frequency deviation automatically or manually for the Bluetooth measurement.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:FREQuency:DEViation:AUTO { 0 | 1 | OFF | ON }
[SENSe]:BLUEtooth:FREQuency:DEViation:AUTO?
```

Related Commands

[\[SENSe\]:BLUEtooth:FREQuency:DEViation](#) (on page 2029)

Arguments

OFF or 0 sets the frequency deviation manually.

ON or 1 automatically calculates the frequency deviation; (default setting).

Examples

SENSe:BLUETOOTH:FREQUENCY:DEVIATION:AUTO ON automatically calculates the frequency deviation.

[SENSe]:BLUEtooth:FREQuency:ERRor

Sets or returns the frequency error in the Bluetooth analysis parameters (when Auto is off).

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:FREQuency:ERRor <value>
[SENSe]:BLUEtooth:FREQuency:ERRor?
```

Related Commands

[\[SENSe\]:BLUEtooth:FREQuency:ERRor:AUTO](#) (on page 2030)

Arguments

<value> ::= <Nrf>, the frequency error in Hz.

Examples

SENSe:BLUETOOTH:FREQUENCY:ERROR 0.02 sets the frequency error to 0.02.

[SENSe]:BLUEtooth:FREQuency:ERRor:AUTO

Determines whether the frequency error is set to Auto or Manual.

To enter a manual value, when Auto is Off, use the `[SENSe]:BLUEtooth:FREQuency:ERRor` command.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:FREQuency:ERRor:AUTO { 0 | 1 | OFF | ON }
[SENSe]:BLUEtooth:FREQuency:ERRor:AUTO?
```

Arguments

OFF or 0 sets the frequency error manually using the `[SENSe]:BLUEtooth:FREQuency:ERRor` command.

ON or 1 sets the frequency error automatically.

Examples

`SENSe:BLUETOOTH:FREQUENCY:ERROR:AUTO ON` determines the frequency error automatically.

[SENSe]:BLUEtooth:INBEmissions:POWEr:LIMIt<x>

Sets or queries the limits of the Bluetooth InBand Emission settings.

When `<x> = 1`, then commands set or query the $f_{TX} \pm 2$ MHz limit.

When `<x> = 2`, then commands set or query the $f_{TX} \pm (3 + n)$ MHz limit.

Conditions

Measurement views: Bluetooth InBand Emissions display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:INBEmissions:POWEr:LIMIt<x> <value>
[SENSe]:BLUEtooth:INBEmissions:POWEr:LIMIt<x>?
```

Arguments

`<value> ::= <NR3>` the limit of the specified inband emissions setting in dBm.

Examples

`SENSe:BLUETOOTH:INBEMISSIONS:POWER:LIMIT2?` might return -20 indicating the $f_{TX} \pm 2$ limit is -20 dBm.

[SENSe]:BLUEtooth:POWEr:CLASs

Sets or queries the power class of the Bluetooth standard.

Conditions

Measurement views: Bluetooth displays

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:POWer:CLASs {THREE|TWO|ONE}  
[SENSe]:BLUetooth:POWer:CLASs?
```

Arguments

THREE is power class 3.

TWO is power class 2.

ONE is power class 1.

Examples

SENSe:BLUETOOTH:POWER:CLASS THREE sets the power class to 3.

[SENSe]:BLUetooth:STANdard

Sets or queries the Bluetooth standard.

Conditions

Measurement views: Bluetooth Constellation

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:STANdard {BR|LE|EDR}  
[SENSe]:BLUetooth:STANdard?
```

Arguments

BR is the Basic Rate standard.

LE is the Low Energy standard.

EDR is the Eye Diagram standard.

Examples

SENSe:BLUETOOTH:STANDARD BR sets the standard type to Basic Rate.

[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:DELTa:FONE:AVERage:MAX

Sets or returns the maximum limit of the Basic Rate $\Delta F1$ average in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:DELTa:FONE:AVERage:MAX<value>  
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:DELTa:FONE:AVERage:MAX?
```


Arguments

<value> ::= <NRf> the maximum average limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:DELTA:FONE:AVERAGE:MAX 175.0E+3 sets the maximum Basic Rate limit of the $\Delta F1$ average to 175.0 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIT:BDR:DELTA:FONE:AVERAGE:MIN

Sets or returns the minimum limit of the Basic Rate $\Delta F1$ average in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIT:BDR:DELTA:FONE:AVERAGE:MIN<value>
[SENSe]:BLUEtooth:SUMMARY:LIMIT:BDR:DELTA:FONE:AVERAGE:MIN?
```

Arguments

<value> ::= <NRf> the minimum average limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:DELTA:FONE:AVERAGE:MIN 140.0E+3 sets the minimum limit of the Basic Rate $\Delta F1$ average to 140.0 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIT:BDR:DELTA:FTWO:PERcent

Sets or returns the limit of the Basic Rate $\Delta F2$ percentage in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIT:BDR:DELTA:FTWO:PERcent<value>
[SENSe]:BLUEtooth:SUMMARY:LIMIT:BDR:DELTA:FTWO:PERcent?
```

Arguments

<value> ::= <NRf> the limit in percent (%).

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:DELTA:FTWO:PERCENT? might return 99.00 indicating the limit of the Basic Rate $\Delta F2$ percentage is 99%.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FTWO:RESult

Sets or returns the limit of the Basic Rate $\Delta F2$ result in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FTWO:RESult<value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:DELTA:FTWO:RESult?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:DELTA:FTWO:RESULT 115.0E+3 sets the limit of the Basic Rate $\Delta F2$ result to 115.0 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:DRIFT:FNFZero

Sets or returns the limit of the Basic Rate maximum drift $f_n - f_0$ in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:DRIFT:FNFZero<value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:DRIFT:FNFZero?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:MAX:DRIFT:FNFZERO? might return 20.00E+3 indicating the limit of the Basic Rate maximum drift $f_n - f_0$ is 20 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BDR:MAX:FREQuency:OFFSet

Sets or returns the limit of the Basic Rate maximum frequency offset in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:FREQuency:OFFSet <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:FREQuency:OFFSet?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:MAX:FREQUENCY:OFFSET 150.0E+3 sets the Basic Rate maximum frequency offset limit to 150 kHz.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:FREQuency:OFFSet:PREAmBDR

Sets or returns the limit of the Basic Rate maximum frequency offset value from the preamble region in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:FREQuency:OFFSet:PREAmBDR <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:MAX:FREQuency:OFFSet:PREAmBDR?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:MAX:FREQUENCY:OFFSET: PREAMBDR 150.0E+3 sets the limit of the Basic Rate maximum frequency offset limit to 150 kHz.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:ONE:AVERage:MAX

Sets or returns the limit of the Basic Rate Power Class 1 maximum average output power value in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:ONE:AVERage:MAX <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:ONE:AVERage:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:ONE:AVERAGE:MAX? might return 20.00 indicating the maximum output power average is 20.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:ONE:AVERAge:MIN

Sets or returns the limit of the Basic Rate Power Class 1 minimum average output power value in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:ONE:AVERAge:MIN <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:ONE:AVERAge:MIN?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:ONE:AVERAGE:MIN? might return 0.00 indicating the minimum output power average is 0 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:ONE:PEAK:MAX

Sets or returns the limit of the Basic Rate Power Class 1 maximum peak output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:ONE:PEAK:MAX <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPower:CLASs:ONE:PEAK:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:ONE:PEAK:MAX? might return 23.00 indicating the maximum peak output power is 23.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:ONE:PEAK:MIN

Sets or returns the limit of the Basic Rate Power Class 1 minimum peak output power value in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:ONE:PEAK:MIN <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:ONE:PEAK: MIN?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:ONE:PEAK:MIN? might return 3.00 indicating the maximum peak output power is 3.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:AVERage:MAX

Sets or returns the limit of the Basic Rate Power Class 3 maximum average output power value in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:AVERage:MAX <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:AVERage:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:THREE:AVERAGE:MAX? might return -40.00 indicating the maximum output power average is -40.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:AVERage:MIN

Sets or returns the limit of the Basic Rate Power Class 3 minimum average output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:AVERage:MIN <value>  
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:AVERage:MIN?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPOWER:CLASS:THREE:AVERAGE:MIN? might return 0.00 indicating the minimum output power average is 0.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:PEAK:MAX

Sets or returns the limit of the Basic Rate Power Class 3 maximum peak output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:PEAK:MAX <value>  
[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:PEAK:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPOWER:CLASS:THREE:PEAK:MAX? might return 37.00 indicating the maximum peak output power is 37.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BDR:OPOWer:CLASs:THREe:PEAK:MIN

Sets or returns the limit of the Basic Rate Power Class 3 minimum peak output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:THREe:PEAK:MIN <value>  
[SENSe]:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:THREe:PEAK:MIN?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:THREe:PEAK:MIN? might return 3.00 indicating the maximum peak output power is 3.00 dBm.

[SENSe]:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS: TWO:AVERage:MAX

Sets or returns the limit of the Basic Rate Power Class 2 maximum average output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:TWO:AVERage:MAX <value>  
[SENSe]:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:TWO:AVERage:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:TWO:AVERage:MAX? might return 4.00 indicating the maximum output power average is 4.00 dBm.

[SENSe]:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS: TWO:AVERage:MIN

Sets or returns the limit of the Basic Rate Power Class 2 minimum average output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:AVERage:MIN <value>  
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:AVERage:MIN?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:TWO:AVERAGE:MIN? might return -6.00 indicating the minimum output power average is -6.00 dBm.

[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MAX

Sets or returns the limit of the Basic Rate Power Class 2 maximum peak output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MAX <value>  
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:TWO:PEAK:MAX? might return 7.00 indicating the maximum peak output power is 7.00 dBm.

[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MIN

Sets or returns the limit of the Basic Rate Power Class 2 minimum peak output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MIN <value>  
[SENSe]:BLUetooth:SUMMary:LIMIt:BDR:OPower:CLASs:TWO:PEAK:MIN?
```


Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BDR:OPower:CLASS:TWO:PEAK:MIN? might return -3.00 indicating the maximum peak output power is -3.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTa:FONE:AVERage:MIN

Sets or returns the minimum limit of the Low Energy $\Delta F1$ average in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTa:FONE:AVERage:MIN <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTa:FONE:AVERage:MIN?
```

Arguments

<value> ::= <NRf> the minimum average limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:DELTA:FONE:AVERAGE:MIN 225.0E+3 sets the minimum limit of the Low Energy $\Delta F1$ average to 225.0 kHz.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTa:FTWO:PERcent

Sets or returns the limit of the Low Energy $\Delta F2$ percentage in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTa:FTWO:PERcent <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTa:FTWO:PERcent?
```

Arguments

<value> ::= <NRf> the limit in percent (%).

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:DELTA:FTWO:PERCENT? might return 99.00 indicating the limit of the Low Energy $\Delta F2$ percentage is 99%.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:DELTA:FTWO:RESult

Sets or returns the limit of the Low Energy $\Delta F2$ result in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:DELTA:FTWO:RESult <value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:DELTA:FTWO:RESult?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:DELTA:FTWO:RESULT 185.0E+3 sets the limit of the Low Energy $\Delta F2$ result to 185.0 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:MAX:DRIFT:FNFZero

Sets or returns the limit of the Low Energy maximum drift $f_n - f_0$ in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:MAX:DRIFT:FNFZero <value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:MAX:DRIFT:FNFZero?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:MAX:DRIFT:FNFZERO? might return 50.0E+3 indicating the limit of the Low Energy maximum drift $f_n - f_0$ is 50 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:MAX:FREQuency:OFFSet

Sets or returns the limit of the Low Energy maximum frequency offset in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:MAX:FREQUENCY:OFFSET 75.0E+3 sets the Basic Rate maximum frequency offset limit to 75 kHz.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet:PREAmble

Sets or returns the limit of the Low Energy maximum frequency offset value from the preamble region in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet:PREAmble <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:MAX:FREQuency:OFFSet:PREAmble?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:MAX:FREQUENCY:OFFSET:PREAMBLE75.0E+3 sets the limit of the Low Energy maximum frequency offset limit to 75 kHz.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:AVERage:MAX

Sets or returns the limit of the Low Energy maximum average output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:AVERage:MAX <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPOWer:AVERage:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

`SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:OPower:AVERAGE:MAX?` might return 10.00 indicating the Low Energy maximum output power average is 10.00 dBm.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:OPOWer:AVERage:MIN

Sets or returns the limit of the Low Energy minimum average output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:OPOWer:AVERage:MIN <value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:OPOWer:AVERage:MIN?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

`SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:OPower:AVERAGE:MIN?` might return -20.00 indicating the Low Energy minimum output power average is -20 dBm.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:OPOWer:PEAK:MAX

Sets or returns the limit of the Low Energy maximum peak output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:OPOWer:PEAK:MAX <value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:OPOWer:PEAK:MAX?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

`SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:OPower:PEAK:MAX?` might return 13.00 indicating the maximum peak output power is 13.00 dBm.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:BLE:DELTA:FONE:AVERage:MAX

Sets or returns the maximum limit of the Low Energy $\Delta F1$ average in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FONE:AVERage:MAX <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:DELTA:FONE:AVERage:MAX?
```

Arguments

<value> ::= <NRf> the maximum average limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:DELTA:FONE:AVERAGE:MAX 275.0E+3 sets the maximum Low Energy limit of the Low Energy $\Delta F1$ average to 275.0 kHz.

[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPower:PEAK:MIN

Sets or returns the limit of the Low Energy minimum peak output power value in the Bluetooth Constellation Summary display.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPower:PEAK:MIN <value>
[SENSe]:BLUEtooth:SUMMary:LIMIt:BLE:OPower:PEAK:MIN?
```

Arguments

<value> ::= <NRf> the limit in dBm.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:BLE:OPower:PEAK:MIN? might return -17.00 indicating the maximum peak output power is -17.00 dBm.

[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFT:F1FZero

Sets or returns the limit of the maximum $f_n - f_{n0}$ drift in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMary:LIMIt:MAX:DRIFT:F1FZero <value>
```

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:F1FZero?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:MAX:DRIFT:F1FZERO 20.0E+3 sets the maximum fn–fn0 drift in the packet to 20.00 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:FNFN5

Sets or returns the limit of the maximum fn–fn5 drift in the packet from the Bluetooth summary.

Conditions

Measurement views: Bluetooth summary

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:FNFN5 <value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:FNFN5?
```

Arguments

<value> ::= <NRf> the limit in Hz.

Examples

SENSe:BLUETOOTH:SUMMARY:LIMIT:MAX:DRIFT:FNFN5 20.0E+3 sets the maximum fn–fn5 drift in the packet to 20.00 kHz.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:F0FThree

Sets and queries the limit of the LE Coded maximum drift frequency value of F0F3 in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:F0FThree <0 | 1>,<value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:F0FThree?
```

Arguments

<value> ::= <NRf>

1 indicates to enable tick mark in “On” column

0 indicates to disable tick mark in “On” column

Returns

<NRf>

Examples

`SENSe:BLUETOOTH:SUMMARY:LIMIT:MAX:DRIFT:LECODED:F0FTHREE 1,85000` sets the limit value to 85 kHz and the tick mark to enabled in the “On” column.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:F1FFour

Sets and queries the limit of the LE Coded maximum drift frequency value of F1F4 in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:F1FFour <0 | 1>,<value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:F1FFour?
```

Arguments

<value> ::= <NRf>

1 indicates to enable tick mark in “On” column

0 indicates to disable tick mark in “On” column

Returns

<NRf>

Examples

`SENSe:BLUETOOTH:SUMMARY:LIMIT:MAX:DRIFT:LECODED:F1FFOUR 1,35000` sets the limit value to 35 kHz and the tick mark to enabled in the “On” column.

[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:FNFN3

Sets and queries the limit of the LE Coded maximum drift frequency value of FNFN3 in the Bluetooth Summary display.

Conditions

Measurement views: Bluetooth summary display

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:FNFN3 <0 | 1>,<value>
[SENSe]:BLUEtooth:SUMMARY:LIMIt:MAX:DRIFt:LECoded:FNFN3?
```

Arguments

<value> ::= <NRf>

1 indicates to enable tick mark in “On” column

0 indicates to disable tick mark in “On” column

Returns

<NRf>

Examples

`SENSe:BLUETOOTH:SUMMARY:LIMIT:MAX:DRIFT:LECODED:FNFN3 1,15000` sets the limit value to 15 kHz and the tick mark to enabled in the “On” column.

[SENSe]:BLUEtooth:SYMBol:POINts

Sets or returns the number of points per symbol (how many points to use between symbols) in the Bluetooth measurement.

Conditions

Measurement views: Any Bluetooth display.

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:SYMBol:POINts { ONE | TWO | FOUR | EIGHT | SIXTeen | THIRtytwo }  
[SENSe]:BLUEtooth:SYMBol:POINts?
```

Arguments

The number of points per symbol.

Examples

`SENSe:BLUETOOTH:SYMBOL:POINTS FOUR` sets the number of points per symbol to four.

[SENSe]:BLUEtooth:TEST:PATtern

Sets or returns the test pattern type in the Bluetooth displays.

Conditions

Measurement views: Any Bluetooth display.

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:TEST:PATtern { LDEVIation | HDEVIation | TPOTHer }  
[SENSe]:BLUEtooth:TEST:PATtern?
```

Related Commands

[\[SENSe\]:BLUEtooth:TEST:PATtern:AUTO:DETEct](#) (on page 2049)

Arguments

`LDEVIation` indicates the low deviation test pattern.

`HDEVIation` indicates the high deviation test pattern.

TPOTHER indicates a user defined test pattern.

Examples

SENSe:BLUETOOTH:TEST:PATTERN? might return LDEV indicating the selected test pattern type is the low deviation type.

[SENSe]:BLUEtooth:TEST:PATtern:AUTO:DETEct

Sets or returns the auto detect setting for the Bluetooth displays.

Conditions

Measurement views: Any Bluetooth display.

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:TEST:PATtern:AUTO:DETEct {0|1}  
[SENSe]:BLUEtooth:TEST:PATtern:AUTO:DETEct?
```

Related Commands

[\[SENSe\]:BLUEtooth:TEST:PATtern](#) (on page 2048)

Arguments

1 indicates that the auto detect test pattern is enabled (checked in the view).

0 indicates that the auto detect test pattern is not enabled (not checked).

Examples

SENSe:BLUETOOTH:TEST:PATTERN:AUTO:DETECT? might return 0 indicating that the auto detect test pattern is not enabled.

[SENSe]:BLUEtooth:TIME:ZERO:REFERENCE

Sets or returns the Time Zero Reference setting in the Bluetooth display.

Conditions

Measurement views: Any Bluetooth display.

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:TIME:ZERO:REFERENCE {Acquisistion Start|Trigger}  
[SENSe]:BLUEtooth:TIME:ZERO:REFERENCE?
```

Arguments

Acquisition Start sets the Time Zero Reference to the start of the acquisition.

Trigger sets the Time Zero Reference to the trigger position.

Examples

`SENSe:BLUETOOTH:TIME:ZERO:REFERENCE?` might return `TRIGGER` indicating the Time Zero Reference is the trigger position.

[SENSe]:BLUEtooth:TRACe:TYPE

Sets or queries the type of trace on the Trace tab of the control panel.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:BLUEtooth:TRACe:TYPE {IQ|FREQDEV}
[SENSe]:BLUEtooth:TRACe:TYPE?
```

Arguments

`IQ` specifies the IQ trace.

`FREQDEV` specifies the Frequency Deviation trace.

Examples

`SENSe:BLUETOOTH:TRACE:TYPE?` might return `IQ` indicating the Trace type is set to IQ.

[SENSe]:CONSte[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Constellation for a selected Measurement view number.

The parameter `<y>` = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

`MEASview` keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (ex: GPDemod Constellation).

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:CONSte[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:CONSte[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter `<y>`=1 to 8 represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional by default `y` is 1.

Examples

`SENSe:CONSte:MEASview1:SELEcted:SOURce?` queries the Source for Constellation Measurement View 1.

[SENSe]:CCDF:{BANDwidth|BWIDth}

Sets or queries the CCDF measurement bandwidth (frequency span).

Conditions

Measurement views: CCDF

Group

Sense commands

Syntax

```
[SENSe]:CCDF:{BANDwidth|BWIDth} <value>
[SENSe]:CCDF:{BANDwidth|BWIDth}?
```

Arguments

<value> ::= <NRf> is the CCDF measurement bandwidth.

Range: 10 Hz to 40 MHz (Standard) / 60 MHz (Option 110).

Examples

SENSe:CCDF:BANDWIDTH 1MHz sets the CCDF measurement bandwidth to 1 MHz.

[SENSe]:CCDF:CLEAr (No Query Form)

Clears the CCDF accumulator and restarts the measurement.

Conditions

Measurement views: CCDF

Group

Sense commands

Syntax

```
[SENSe]:CCDF:CLEAr
```

Arguments

None

Examples

SENSe:CCDF:CLEAr clears the CCDF accumulator and restarts the measurement.

[SENSe]:CCDF:TIME:TOTal:LENGth

Sets or queries the CCDF measurement time when [SENSe]:CCDF:TIME:TYPE is set to TOTal.

Conditions

Measurement views: CCDF

Group

Sense commands

Syntax

```
[SENSe]:CCDF:TIME:TOTal:LENGth <value>
[SENSe]:CCDF:TIME:TOTal:LENGth?
```

Arguments

<value>: : <NRf> specifies the CCDF measurement time.

Range: 20 ms to 100 s.

Examples

SENSe:CCDF:TIME:TOTAL:LENGTH 10 sets the CCDF measurement time to 10 s.

[SENSe]:CCDF:TIME:TYPE

Determines how to repeat the CCDF measurement.

Conditions

Measurement views: CCDF

Group

Sense commands

Syntax

```
[SENSe]:CCDF:TIME:TYPE { SINGLE | TOTal | CONTinuous }
[SENSe]:CCDF:TIME:TYPE?
```

Related Commands

[INITiate:CONTinuous](#) (on page 1515)

[INITiate\[:IMMediate\]](#) (on page 1516)

[INITiate:RESume](#) (on page 1516)

Arguments

SINGLE specifies that the analyzer sets the analysis length to 1 ms and then acquire data once to calculate CCDF.

TOTAL specifies that the analyzer sets the analysis length to 20 ms and then repeats data acquisition and CCDF calculation for the time specified by the [\[SENSe\]:CCDF:TIME:TOTal:LENGth](#) (on page 2051) command.

CONTinuous specifies that the analyzer sets the analysis length to 1 ms and then repeats data acquisition and CCDF calculation continuously. To reset the process, use the [\[SENSe\]:CCDF:CLEar](#) (on page 2051) command or the **INITiate** commands.

Examples

SENSe:CCDF:TIME:TYPE SINGLE specifies that the analyzer sets the analysis length to 1 ms and then acquire data once to calculate CCDF.

[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth

Sets or queries the analysis length in seconds or symbols. The command

`[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs` determines which is used. For example, if the symbol rate is 1 MHz and the acquisition length is 20 ms, the range may be 0 to 19999. Setting a specified length changes `[SENSe]:DDEMod[:SOURce<x>]:ANALysis:AUTO` to OFF.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth<value>
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:ANALysis:LENGth:ACTual?](#) (on page 2053)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:TIME:UNITs](#) (on page 2079)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:ANALysis:LENGth:AUTO](#) (on page 2054)

Arguments

<x> = 1 to 8, representing Range of Source

<value>: : <NRf> specifies the analysis length in seconds or symbols.

Range in seconds: 200 ns to [(acquisition length) - 400 ns].

If [(analysis start) + (analysis length)] > [(acquisition length) - 400 ns], the actual analysis length is reduced to [(acquisition length) - 200 ns].

Range in symbols: 200 ns * (symbol rate) to [(acquisition length) - 400 ns] * (symbol rate).

If [(analysis start) + (analysis length)] > [(acquisition length) - 400 ns], the actual analysis length is reduced to [(acquisition length) - 200 ns] * (symbol rate).

Examples

SENSe:DDEMOD:SOURce1:ANALYSIS:LENGTH 25.625µs sets the analysis length of the measurement source1 to 25.625 µs.

SENSe:DDEMOD:SOURce1:ANALYSIS:LENGTH 256 sets the analysis length of the measurement source1 to 256 symbols.

[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:ACTual? (Query only)

Queries the actual analysis length which returns a value in either seconds or symbols. The command [SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs determines which is used.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:ACTual?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:ANALysis:LENGth](#) (on page 2052)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:TIme:UNITs](#) (on page 2079)

Arguments

<x> = 1 to 8, representing Range of Source.

Returns

<NRf> Actual analysis length in seconds or symbols.

Examples

SENSe:DDEMOD:SOURCE1:ANALYSIS:LENGTH:ACTUAL? might return 25.625E-6, indicating that the actual analysis length of the measurement source1 is 25.625 μ s.

[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:AUTO

Determines whether to set the analysis length of the measurement source automatically or manually.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:AUTO { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:ANALysis:LENGth:AUTO?
```

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 sets the analysis length manually, using the [\[SENSe\]:DDEMod\[:SOURce<x>\]:ANALysis:LENGth](#) (on page 2052) command.

ON or 1 sets the analysis length automatically.

Examples

SENSe:DDEMOD:SOURCE1:ANALYSIS:LENGTH:AUTO ON sets the analysis length of the measurement source1 automatically.

[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:MODE

Sets or queries the measurement bandwidth mode of the measurement source for Digital Demod measurements.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:MODE { MANual | AUTO | LSPan }
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:MODE?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:{BANDwidth|BWIDth}:TINTerval](#) (on page 2055)

Arguments

<x> = 1 to 8, representing Range of Source.

MANual specifies manual bandwidth control mode. A typical use is setting a narrow measurement bandwidth on a small range of frequencies to examine one signal while rejecting the others that are present in a Spectrum graph.

AUTO specifies automatic bandwidth control mode where a measurement picks a bandwidth based on other parameter settings (such as symbol rate, modulation type, filter, and so on).

LSPan (LinkToSpan) specifies Lspan bandwidth control mode, where you can use the Spectrum display to tune the frequency, view the signal, and use the Span control to set the measurement bandwidth. This mode emulates legacy instruments.

Examples

SENSe:DDEMOD:SOURce1:BANDWIDTH:MODE AUTO sets the analyzer bandwidth mode of the measurement source1 to automatically select a measurement bandwidth.

[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:TINTerval

Sets or queries the measurement bandwidth of the measurement source (frequency span).

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:TINTerval<value>
[SENSe]:[:SOURce<x>]:{BANDwidth|BWIDth}:TINTerval?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:SRATe](#) (on page 2074)

Arguments

<x> = 1 to 8, representing Range of Source.

<value> ::= <NRf> specifies the measurement bandwidth.

Range: Symbol rate to 40 MHz or with option 110, 110 MHz.

The minimum value depends on the setting of [:SENSe]:DDEMod[:SOURce<x>]:SRATe.

Returns

<NRf> Actual analysis length in seconds or symbols.

Examples

SENSe:DDEMOD:SOURce1:BANDWIDTH:TINTERVAL 35.255MHz sets the measurement bandwidth of the measurement source1 to 35.255 MHz.

[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:TINTerval:AUTO

Sets or queries the measurement bandwidth of the measurement source (frequency span) automatically.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:TINTerval:AUTO { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:TINTerval:AUTO?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:{BANDwidth|BWIDth}:TINTerval](#) (on page 2055)

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 sets the measurement bandwidth manually, using the `[SENSe]:DDEMod[:SOURce<x>]:{BANDwidth|BWIDth}:TINTerval` command.

ON or 1 sets the measurement bandwidth automatically.

Examples

SENSe:DDEMOD:SOURce1:BANDWIDTH:TINTERVAL:AUTO sets the measurement bandwidth of the measurement source1 automatically.

[SENSe]:DDEMod[:SOURce<x>]:BURSt:DETECT

Sets or queries burst detection of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:BURSt:DETECT { ON | OFF }
[SENSe]:DDEMod[:SOURce<x>]:BURSt:DETECT?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:BURSt:THReshold](#) (on page 2057)

Arguments

<x> = 1 to 8, representing Range of Source.

ON analyzes just that burst period if a burst is found. If a burst is not found, does not analyze but displays an error message.

OFF analyzes the whole analysis length.

NOTE: When selecting On and if the signal is not adequate for the demodulation, the measurement will fail and show an error message.

Examples

SENSe:DDEMOD:SOURce1:BURST:DETECT OFF disables burst detection of the measurement source and analyzes the whole analysis length.

[SENSe]:DDEMod[:SOURce<x>]:BURSt:THReshold

Sets or queries the threshold level of the measurement source above which the input signal is determined to be a burst.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:BURSt:THReshold<value>
[SENSe]:DDEMod[:SOURce<x>]:BURSt:THReshold?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:BURSt:DETECT](#) (on page 2056)

Arguments

<x> = 1 to 8, representing Range of Source

<value>::<NRf> specifies the threshold level for detecting bursts.

Range: -100 to -10 dBc.

Examples

SENSe:DDEMOD:SOURce1:BURST:THRESHOLD -25 sets the threshold level of the measurement source1 to -25 dBc.

[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet

Sets or queries the carrier frequency offset for the measurement source in digital modulation analysis.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet<value>
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet?
```

Related Commands

The settings of the following commands may narrow the effective range.

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:ALPHa](#) (on page 2062)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:FILTer:REFerence](#) (on page 2064)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:MODulation:TYPE](#) (on page 2068)

[\[SENSe\]:DDEMod\[:SOURce<x>\]:SRATe](#) (on page 2074)

Arguments

<x> = 1 to 8, representing Range of Source.

<value> ::= <NRf> specifies the carrier frequency offset.

Range: -20 MHz to +20 MHz or with Option 110, -55 MHz to +55 MHz.

Examples

SENSe:DDEMOD:SOURCE1:CARRIER:OFFSET 2kHz sets the carrier frequency offset to 2 kHz for the measurement source 1.

[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet:AUTO

Sets or queries whether to detect the carrier frequency automatically for the measurement source in digital modulational analysis.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet:AUTO { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet:AUTO?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:CARRier:OFFSet](#) (on page 2057)

Arguments

<x> = 1 to 8, representing Range of Source

OFF or 0 sets the carrier frequency manually, using the [SENSe]:DDEMod[:SOURce<x>]:CARRier:OFFSet command.

ON or 1 detects the carrier frequency automatically.

Examples

SENSe:DDEMOD:SOURce1:CARRIER:OFFSET:AUTO ON enables automatic detection of the carrier frequency for measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:AVAIlable? (Query only)

Determines if the equalizer is available for the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:AVAIlable?
```

Arguments

<x> = 1 to 8, representing Range of Source.

Returns

0 indicates the equalizer is not available for the current modulation type and reference filter.

1 indicates the equalizer is available.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:CONVergence

Sets or queries the Convergence value (also known as tap update rate) of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:CONVergence <value>  
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:CONVergence?
```

Arguments

<x> = 1 to 8, representing Range of Source.

<value>::<NR3> specifies the convergence value.

Examples

SENSe:DDEMOD:SOURce1:EQUALIZER:CONVERGENCE? might return **1.0000000000E-6** for measurement source 1.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:ENABLE

Sets or queries the Equalizer state of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:ENABle {OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:ENABle?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:EQUalizer:MODE](#) (on page 2060)

Arguments

<x> = 1 to 8, representing Range of Source.

ON or 1 enables the Equalizer.

OFF or 0 disables the Equalizer.

Examples

SENSe:DDEMod:SOURce1:EQU:ENAB 1 might return 1, indicating that the equalizer is enabled for the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:LENGth

Sets or queries the equalizer filter length of measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:LENGth<value>
```

Arguments

<x> = 1 to 8, representing Range of Source.

<value>::<NR1> specifies the equalizer filter length.

Examples

SENSe:DDEMOD:SOURce1:EQUALIZER:LENGTH 39 sets the filter length of measurement source 1 to 39 symbols.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:MODE

Sets or queries the equalizer mode of the measurement source. The equalizer can in learning mode (train) or enabled (hold).

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:MODE {TRAIIn | HOLD }
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:MODE?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:EQUalizer:ENABle](#) (on page 2059)

Arguments

<x> = 1 to 8, representing Range of Source.

TRAIIn places the equalizer in training mode.

HOLD places in the equalizer in enabled mode.

Examples

SENSe:DDEMOD:SOURce1:EQUALIZER:MODE HOLD places the equalizer in enabled mode for the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:RESet (No query form)

Resets the equalizer settings of the measurement source to default values.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:RESet
```

Examples

SENSe:DDEMOD:SOURce1:EQUALIZER:RESET sets the equalizer parameters of the measurement source1 to their default values.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TAPS

Sets or queries the number of filter coefficients for the equalizer of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TAPS <value>
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TAPS?
```

Arguments

<x> = 1 to 8, representing Range of Source.

<value>::=<NR1> the filter coefficient for the equalizer.

Examples

SENSe:DDEMOD:SOURce<x>:EQUALIZER:TAPS 65 sets the measurement source1 filter coefficient to 65.

[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TSRAtio

Sets or queries the Equalizer taps or Symbol parameter for the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:EQUalizer:TSRAtio { ONE | TWO | FOUR | EIGHT }
```

Arguments

Valid arguments are ONE, TWO, FOUR, or EIGHT. Numerals are not valid arguments.

<x> = 1 to 8, representing Range of Source.

Examples

SENSe:DDEMOD:SOURCE1:EQUALIZER:TSRATIO FOUR sets the Taps or Symbol value to four for the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:FILTer:ALPHa

Sets or queries the filter factor (α/BT) for the measurement source in the digital modulation analysis.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:FILTer:ALPHa <value>
```

```
[SENSe]:DDEMod[:SOURce<x>]:FILTer:ALPHa?
```

Arguments

<x> = 1 to 8, representing Range of Source.

<value>: : <NRf> specifies the filter factor. Range: 0.001 to 1.

Examples

SENSe:DDEMOD:SOURCE1:FILTER:ALPHA 0.5 sets the filter factor to 0.5 for the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:FILTer:MEASurement

Sets or queries the measurement filter for the measurement source in the digital modulation analysis.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:FILTer:MEASurement { OFF | RRCosine | RCOSine | GAUSSian | RECTangular |  
IS95TXEQ_MEA | IS95TX_MEA | C4FM_P25 | USERx | UOTHer }  
[SENSe]:DDEMod[:SOURce<x>]:FILTer:MEASurement?
```

Arguments

The following table lists the arguments.

<x> = 1 to 8, representing Range of Source.

Digital modulation measurement filter

Argument	Measurement filter
OFF	No filter
RRCosine	Root Raised Cosine
RCOSine	Raised Cosine
GAUSSian	Gaussian
RECTangular	Rectangular
IS95TXEQ_MEA	IS95 receive filter for the transmitter configured with both the transmit filter and the phase equalizer.
IS95TX_MEA	IS95 receive filter for the transmitter configured with only the transmit filter.
C4FM_P25	C4FM-P25
USER1	User defined Measurement Filter 1

Argument	Measurement filter
USER2	User defined Measurement Filter 2
USER3	User defined Measurement Filter 3
UOTHer	Other user defined Measurement Filter

Examples

`SENSe:DDEMOD:SOURCE1:FILTER:MEASUREMENT RRCosine` selects the Root Raised Cosine filter as the measurement filter for the measurement source1.

[SENSe]:DDEMod:SOURCE<x>:FILTER:REference

Sets or queries the reference filter for the measurement source in the digital modulation analysis..

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:FILTer:REference { OFF | RCOsine | GAUSSian | RECTangular | IS95REF |
    HSINe | SOQPSK_MIL | SOQPSK_ARTM | SBPSK_MIL | USERx | UOTHer }
[SENSe]:DDEMod[:SOURce<x>]:FILTer:REference?
```

Arguments

<x> = 1 to 8, representing Range of Source.

The following table lists the arguments.

Digital modulation reference filter

Argument	Measurement filter
OFF	No filter
RCOSine	Raised Cosine
GAUSSian	Gaussian
RECTangular	Rectangular
IS95REF	IS95 reference filter including the response of the transmit filter, the phase equalizer, and the receive (complementary) filter.
HSINe	Half Sine
SOQPSK_MIL	SOQPSK-MIL

Argument	Measurement filter
SOQPSK_ARTM	SOQPSK-ARTM
SBPSK_MIL	SBPSK-MIL
USER1	User defined Measurement Filter 1
USER2	User defined Measurement Filter 2
USER3	User defined Measurement Filter 3
UOTHer	Other user defined Measurement Filter

Examples

`SENSe:DDEMOD:SOURce1:FILTER:REFERENCE RCOSine` selects the Raised Cosine filter as the reference filter for the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation

Sets or queries the frequency deviation of the measurement source in the digital modulation analysis. Programming a specified frequency deviation sets `[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation:AUTO OFF`.

This command is valid when `[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE` is set to C4FM, FSK2, FSK4, FSK8, or FSK16.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation<value>
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation?
```

Arguments

`<x>` = 1 to 8, representing Range of Source.

`<value>::<NRf>` sets the frequency deviation.

Standard product range: 1 Hz to 40 MHz.

Option 110 product range: 1 Hz to 110 MHz.

Examples

`SENSe:DDEMOD:SOURce1:FREQUENCY:DEVIATION 1MHz` sets the frequency deviation of the measurement source1 to 1 MHz.

[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation:AUTO

Determines whether to detect automatically or set manually the frequency deviation of the measurement source used to determine the symbol values of an FSK or C4FM signal.

This command is valid when [SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE is set to C4FM, FSK2, FSK4, FSK8, or FSK16.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation:AUTO { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation:AUTO?
```

Arguments

<x> = 1 to 8, representing Range of Source.

ON or 1 automatically calculates the frequency deviation for the analysis range (default).

OFF or 0 sets the frequency deviation using the [SENSe]:DDEMod[:SOURce<x>]:FREQuency:DEViation command.

Examples

SENSe:DDEMOD:SOURce1:FREQUENCY:DEVIATION:AUTO ON automatically calculates the frequency deviation of the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:MAGNitude:NORMalize

Sets or queries the method for the magnitude normalization of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:MAGNitude:NORMalize { RSYMBOL | MSYMBOL }
[SENSe]:DDEMod[:SOURce<x>]:MAGNitude:NORMalize?
```

Arguments

<x> = 1 to 8, representing Range of Source

RSYMBOL normalizes the magnitude with the RMS symbol magnitude.

MSYMBOL normalizes the magnitude with the maximum symbol magnitude.

Examples

`SENSe:DDEMOD:SOURCE1:MAGNITUDE:NORMALIZE` `RSYMBOL` normalizes the magnitude of measurement source1 with the RMS symbol magnitude.

[SENSe]:DDEMod[:SOURce<x>]:MINDEX

Sets or queries the measurement source modulation index of a CPM signal.

This command is valid when `[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE` is set to CPM and `[SENSe]:DDEMod[:SOURce<x>]:MINDEX:AUTO` is set to OFF.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:MINDEX { 1 | 2 | 3 | 4 | 5 | 6 }
[SENSe]:DDEMod[:SOURce<x>]:MINDEX?
```

Arguments

<x> = 1 to 8, representing Range of Source.

The following table shows the arguments and modulation index.

CPM modulation index

Argument	Modulation index
1	4/16, 5/16
2	5/16, 6/16
3	6/16, 7/16
4	7/16, 10/16
5	12/16, 13/16
6	8/16, 8/16

Examples

`SENSe:DDEMOD:SOURCE1:MINDEX 1` selects the measurement source1 modulation index to "4/16, 5/16".

[SENSe]:DDEMod[:SOURce<x>]:MINDEX:AUTO

Determines whether to detect automatically or set manually the measurement source modulation index of a CPM signal.

This command is valid when `[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE` is set to CPM.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:MINdex:AUTO { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:MINdex:AUTO
```

Arguments

<x> = 1 to 8, representing Range of Source.

ON or 1 automatically calculates the modulation index for the analysis range.

OFF or 0 sets the modulation index using the [SENSe]:DDEMod[:SOURce<x>]:MINdex command.

Examples

SENSe:DDEMOD:SOURce1:MINDEX:AUTO ON automatically calculates the measurement source1 modulation index for the analysis range.

[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE

Sets or queries the modulation type for the measurement source in the digital modulation analysis.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE { QPSK | PSK8 | D8PSK | PIOVER2DBPSK | DQPSK |
PIOVER4DQPSK | BPSK | OQPSK | QAM16 | QAM32 | QAM64 | QAM128 | QAM256 | QAM1024 | MSK | FSK2 |
FSK4 | FSK8 | FSK16 | CPM | APSK16| APSK32 | SOQPSK | SBPSK | C4FM }
[SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE?
```

Arguments

<x> = 1 to 8, representing Range of Source.

The following table lists the arguments and corresponding modulation type.

Modulation type

Argument	Modulation type
QPSK	QPSK
PSK8	8PSK
D8PSK	D8PSK
PIOVER2DBPSK	$\pi/2$ DBPSK
DQPSK	DQPSK

Argument	Modulation type
PIOVER4DQPSK	$\pi/4$ QPSK
BPSK	BPSK
OQPSK	OQPSK
QAM16	16QAM
QAM32	32QAM
QAM64	64QAM
QAM128	128QAM
QAM256	256QAM
QAM1024	1024QAM
MSK	MSK
FSK2	FSK2
FSK4	FSK4
FSK8	FSK8
FSK16	FSK16
CPM	CPM
APSK16	APSK16
APSK32	APSK32
SOQPSK	SOQPSK
SBPSK	SBPSK
C4FM	C4FM

Examples

`SENSe:DDEMOD:SOURCE1:MODULATION:TYPE QPSK` selects QPSK modulation system for the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:PRESet (No query form)

Presets the modulation analysis analysis of the measurement source to a communication standard.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

[SENSe]:DDEMod[:SOURce<x>]:PRESet <standard_name>

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:MODulation:TYPE](#) (on page 2068)

Arguments

<x> = 1 to 8, representing Range of Source.

The following table lists the preset standard names with their modulation types and settings.

Modulation Presets

Preset Name	Modulation type	Settings
"802.15.4"	OQPSK	Symbol rate: 1 MHz
		Meas Filter: None
		Ref Filter: Half sine
		Filter Param: None
		Symbol Pt Location: NA
		Remove Q offset: not checked
"SBPSK-MIL"	SBPSK	Symbol rate: 2.4 kHz
		Meas Filter: None
		Ref Filter: SBPSK-MIL
		Filter Param: 0.5
		Symbol Pt Location: NA
		Remove Q offset: NA

Preset Name	Modulation type	Settings
"SOQPSK-MIL"	SOQPSK	Symbol rate: 2.4 kHz
		Meas Filter: None
		Ref Filter: SOQPSK-MIL
		Filter Param: 0.5
		Symbol Pt Location: Center
		Remove Q offset: checked
"CPM-MIL"	CPM	Symbol rate: 19.2 KHz
		Meas Filter: None
		Ref Filter: None
		Filter Param: None
		Symbol Pt Location: NA
		Remove Q offset: NA
"SOQPSK-ARTM Tier 1"	SOQPSK	Symbol rate: 2.5 MHz
		Meas Filter: None
		Ref Filter: SOQPSK-ARTM
		Filter Param: None
		Symbol Pt Location: Center
		Remove Q offset: checked
"Project25 Phase I"	C4FM	Symbol rate: 4.8 kHz
		Meas Filter: C4FM-P25
		Ref Filter: Raised cosine
		Filter Param: 0.2
		Symbol Pt Location: NA
		Remove Q offset: NA

Preset Name	Modulation type	Settings
"CDMA2000-Base"	QPSK	Symbol rate: 1.2288 MHz
		Meas Filter: IS95 TXEQ_MEA
		Ref Filter: IS95 REF
		Filter Param: None
		Symbol Pt Location: NA
		Remove Q offset: NA
"W-CDMA"	QPSK	Symbol rate: 3.84 MHz
		Meas Filter: Root raised cosine
		Ref Filter: Raised cosine
		Filter Param: 0.22
		Symbol Pt Location: NA
		Remove Q offset: NA

In addition to the specific settings listed in the table, the following general settings are also made when you load any of the defined presets.

Setting	Value
Points/symbol	4
Burst detection mode	Off
Burst detection threshold	-10 dBc
Analysis offset	Auto
Analysis length	Auto
Frequency offset	Auto
Measurement BW	Auto
Frequency deviation	Auto
Modulation index	Auto

Examples

`SENSe:DDEMOD:SOURCE1:PRESET "802.15.4"` the measurement source1 demodulation to the standard OQPSK modulation.

[SENSe]:DDEMod[:SOURce<x>]:RING:RADius

Sets or queries the ring radius of the measurement source in the digital APSK modulation analysis.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:RING:RADius <value>  
[SENSe]:DDEMod[:SOURce<x>]:RING:RADius?
```

Arguments

<x> = 1 to 8, representing Range of Source.

<value>::<NRf> specifies the ring radius.

APSK16 valid ring arguments are 1 and 2.

APSK32 valid ring arguments are 1, 2, and 3.

Examples

```
SENSe:DDEMOD:SOURce1:RING:RADIUS
```

[SENSe]:DDEMod[:SOURce<x>]:RING:ROTation

Sets or queries the ring rotation of the measurement source in the digital APSK modulation analysis.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:RING:ROTation <value>  
[SENSe]:DDEMod[:SOURce<x>]:RING:ROTation?
```

Arguments

<x> = 1 to 8, representing Range of Source.

<value>::<NRf> specifies the ring rotation.

APSK16 valid ring arguments are 1 and 2.

APSK32 valid ring arguments are 1, 2, and 3.

Examples

```
SENSe:DDEMOD[:SOURce<x>]:RING:ROTATION
```

[SENSe]:DDEMod[:SOURce<x>]:SRATe

Sets or queries the symbol rate for the measurement source in the digital modulation analysis.

Conditions

Measurement views: General purpose digital modulation

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SRATe<value>
[SENSe]:DDEMod[:SOURce<x>]:SRATe?
```

Arguments

<x> = 1 to 8, representing Range of Source.

<value>: : <NRf> specifies the symbol rate.

Standard product range: 100 Hz to 40 MHz.

Option 110 product range: 100 Hz to 110 MHz.

Examples

SENSe:DDEMOD:SOURCE1:SRATE 21.0E3 sets the symbol rate of measurement source1 to 21 kHz.

[SENSe]:DDEMod[:SOURce<x>]:SWAP:IQ

Determines whether or not to exchange I and Q data of the measurement source before demodulating.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SWAP:IQ { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:SWAP:IQ?
```

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 uses I and Q data as they are.

ON or 1 exchanges I and Q data.

Examples

SENSe:DDEMOD:SOURce1:SWAP:IQ ON exchanges I and Q data of the measurement source1 before demodulating.

[SENSe]:DDEMod[:SOURce<x>]:SYMBol:HSSHift

Sets or queries the measurement source Q data half-symbol shift for OQPSK and SOQPSK signals.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:HSSHift { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:HSSHift?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:MODulation:TYPE](#) (on page 2068)

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 the Q offset shift is not applied.

ON or 1 the Q offset shift is applied.

Examples

SENSe:DDEMod:SOURce1:SYMBOL:HSSHift ON the measurement source Q offset is applied.

[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:MAP:SOURce? (Query only)

Queries the user symbol map of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:MAP:SOURce?
```

Arguments

<x> = 1 to 8, representing Range of Source.

Examples

SENSe:DDEMOD:SOURCE1:SYMBOL:MAP:SOURCE? returns the symbol map filename of the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:MAP[:STATE]

Determines whether or not to use the user symbol map of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:MAP[:STATe] { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:MAP[:STATe] ?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:SYMBOL:MAP:SOURce<x>](#) (on page 2075)

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 disables the user symbol map.

ON or 1 enables the user symbol map.

Examples

SENSe:DDEMOD:SOURCE1:SYMBOL:MAP:STATE ON enables the user symbol map of measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:PLOT:POSition

Sets or queries the symbol point location for measurement source on an SOQPSK waveform.

Conditions

Source keyword is optional, if not present Source1 will be default source.

Effective on SOQPSK waveform and any general purpose digital demodulation views except Signal Quality and Symbol Table.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:PLOT:POSition { EDGE | MIDDLE }
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:PLOT:POSition ?
```

Arguments

<x> = 1 to 8, representing Range of Source.

EDGE sets the symbol location at the edge of the eye opening.

MIDDLE sets the symbol location at the middle of the eye opening.

Examples

SENSe:DDEMOD:SOURCE1:SYMBOL:PLOT:POSITION EDGE sets the symbol location the edge of the eye opening for the measurement source 1.

[SENSe]:DDEMod[:SOURce<x>]:SYMBol:POINTs

Sets or queries the number of points per symbol of the measurement source (how many points to use between symbols when connecting the dots).

NOTE: 1 is not valid for the GMSK modulation.

NOTE: In the constellation view, select VECTors using the TRACe<x>:CONSt:MODE command first to change Points/Symbol.

Conditions

Measurement views: Constellation, EVM versus Time, Magnitude error versus Time, Phase error versus Time, Freq Dev versus Time, Demod I&Q versus Time.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:POINTs { ONE | TWO | FOUR | EIGHT }
[SENSe]:DDEMod[:SOURce<x>]:SYMBol:POINTs?
```

Arguments

<x> = 1 to 8, representing Range of Source.

ONE, TWO, FOUR, and EIGHT represent the number of points per symbol.

The following table lists the conditions of use.

Argument	Supported modulation type
ONE	All except SOQPSK, OQPSK, SBPSK
TWO	All except SOQPSK
THREE	All
FOUR	All

Examples

SENSe:DDEMOD:SOURCE1:SYMBOL:POINTS FOUR sets the number of points per symbol of the measurement source1 to four.

[SENSe]:DDEMod[:SOURce<x>]:SYMBol:RATE:SEARCh

Determines whether to enable a symbol rate search of the measurement source. This command is valid when the demodulation type is set to FSK2, FSK4, FSK8, or FSK16.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYMBOL:RATE:SEARCH { OFF | ON | 0 | 1 }
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:MODulation:TYPE](#) (on page 2068)

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 disables the search.

ON or 1 enables the search.

Examples

SENSe:DDEMOD:SOURCE1:SYMBOL:RATE:SEARCH ON enables the symbol rate search of measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD

Determines whether to enable the synchronization word of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD { OFF | ON | 0 | 1 }
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD?
```

Related Commands

[\[SENSe\]:DDEMod\[:SOURce<x>\]:SYNCh:WORD:SYMBOL](#) (on page 2078)

Arguments

<x> = 1 to 8, representing Range of Source.

OFF or 0 disables the synchronization word.

ON or 1 enables the synchronization word.

Examples

SENSe:DDEMOD:SOURCE1:SYNCh:WORD ON enables the synchronization word of the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD:SYMBOL

Sets or queries the synchronization word of the measurement source when

[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD is ON. The word depends on the modulation type selected by the [SENSe]:DDEMod[:SOURce<x>]:MODulation:TYPE command.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD:SYMBOL<block>
[SENSe]:DDEMod[:SOURce<x>]:SYNCh:WORD:SYMBOL?
```

Arguments

<x> = 1 to 8, representing Range of Source.

<block> ::= #<num_digit><num_byte><sym(1)><sym(2)>...<sym(n)>

Where

<num_digit> is the number of digits in <num_byte>.

<num_byte> is the number of bytes of data that follow.

<sym(n)> is the nth symbol value of the sync word. 32-bit integer.

n: Max 256.

Examples

SENSe:DDEMOD:SOURce1:SYNCH:WORD:SYMBOL #216xxxx (4 symbols) sets a sync word composed of four symbols for the measurement source1.

[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs

Sets or queries the fundamental unit of time of the measurement source.

Conditions

Measurement views: General purpose digital modulation

Source keyword is optional, if not present Source 1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs { SEConds | SYMBOLs }
[SENSe]:DDEMod[:SOURce<x>]:TIME:UNITs?
```

Arguments

<x> = 1 to 8, representing Range of Source.

SEConds specifies the fundamental unit of time as seconds.

SYMBOLs specifies the fundamental unit of time as symbols.

Examples

SENSe:DDEMOD:SOURCE1:TIME:UNITs SEConds specifies the fundamental unit of time as seconds for measurement source 1.

[SENSe]:DIQVtime[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Demod I&Q versus Time for a selected Measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Demod I&Q versus Time).

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:DIQVtime[:MEASview<y>]:SELEcted:SOURce {"Source 1" "Source 2" "Source 3"| "Source 4"}
[SENSe]:DIQVtime[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

Examples

SENSe:DIQVtime:MEASview1:SELECTED:SOURce? queries the Source for Demod I&Q versus Time Measurement View .

[SENSe]:DPX:AUDio:DEMod:GAIN

Sets or queries the audio gain.

NOTE: The sound level is also affected by the Windows volume control.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:AUDio:DEMod:GAIN <value>
[SENSe]:DPX:AUDio:DEMod:GAIN?
```

Arguments

<value>::<NR1> specifies the audio gain. Range: 0 to 15 (integer).

Examples

SENSe:DPX:AUDIO:DEMOD:GAIN 7 sets the audio gain to 7.

[SENSe]:DPX:AUDio:DEMod:RXBWidth

Sets or queries the receiver bandwidth in the audio demodulation.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:AUDio:DEMod:RXBWidth <value>  
[SENSe]:DPX:AUDio:DEMod:RXBWidth?
```

Arguments

<value>::<NRf> specifies the receiver bandwidth in the audio demodulation.

Range: 1 kHz to 500 kHz.

Examples

SENSe:DPX:AUDIO:DEMOD:RXBWIDTH 30kHz sets the receiver bandwidth to 30 kHz.

[SENSe]:DPX:AUDio:DEMod:RXFrequency? (Query Only)

Returns the receiver frequency in the audio demodulation. The frequency depends on the setting of the [SENSe]:DPX:AUDio:DEMod:TUNE command.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:AUDio:DEMod:RXFrequency?
```

Arguments

None

Returns

<frequency>::<NRf> is the receiver frequency in the audio demodulation.

Examples

SENSe:DPX:AUDIO:DEMOD:RXFREQUENCY? might return 80.3E+6, indicating that the receiver frequency is 80.3 MHz.

[SENSe]:DPX:AUDio:DEMod:STaTe

Determines whether to enable the audio demodulation.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:AUDio:DEMod:STATe { OFF | ON | 0 | 1 }  
[SENSe]:DPX:AUDio:DEMod:STATe?
```

Arguments

OFF or 0 disables the audio demodulation.

ON or 1 enables the audio demodulation.

Examples

SENSe:DPX:AUDIO:DEMOD:STATE ON enables the audio demodulation.

[SENSe]:DPX:AUDio:DEMod:TUNE

Sets or queries how to determine the tuning frequency in the audio demodulation.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:AUDio:DEMod:TUNE { MR | MARK1 | MARK2 | MARK3 | MARK4 | SMARker | FREQcontrol }  
[SENSe]:DPX:AUDio:DEMod:TUNE?
```

Arguments

The following table lists the arguments.

Frequency tuning

Argument	Tune with
MR	Reference marker (MR)
MARK1	Marker 1 (M1)
MARK2	Marker 2 (M2)
MARK3	Marker 3 (M3)
MARK4	Marker 4 (M4)
SMARker	Selected marker
FREQcontrol	Center frequency setting

Examples

SENSe:DPX:AUDIO:DEMOD:TUNE MARK1 sets the tuning frequency to the value at Marker 1.

[SENSe]:DPX:AUDio:DEMod:TYPE

Sets or queries the modulation type in the audio demodulation.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:AUDio:DEMod:TYPE { AM | FM }  
[SENSe]:DPX:AUDio:DEMod:TYPE?
```

Arguments

AM selects the AM (Amplitude Modulation).

FM selects the FM (Frequency Modulation).

Examples

SENSe:DPX:AUDIO:DEMOD:TYPE FM selects FM in the audio demodulation.

[SENSe]:DPX:{BANDwidth|BWIDth}:ACTual? (Query Only)

Queries the actual bandwidth whether set automatically or manually.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:{BANDwidth|BWIDth}:ACTual?
```

Arguments

None

Examples

SENSe:DPX:BANDWIDTH:ACTUAL? returns the RBW as a percentage of the Span.

[SENSe]:DPX:{BANDwidth|BWIDth}:RESolution

Sets or queries the resolution bandwidth (RBW) in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:{BANDwidth|BWIDth}:RESolution <value>
[SENSe]:DPX:{BANDwidth|BWIDth}:RESolution?
```

Arguments

<value>: : <NRf> specifies the resolution bandwidth.

Range: 1 Hz to 10 MHz.

Examples

SENSe:DPX:BANDWIDTH:RESOLUTION? might return 100.00003E+3 for the RBW.

[SENSe]:DPX:{BANDwidth|BWIDth}[:RESolution]:AUTO

Determines whether to set the resolution bandwidth (RBW) automatically or manually in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:{BANDwidth|BWIDth}[:RESolution]:AUTO { OFF | ON | 0 | 1 }
[SENSe]:DPX:{BANDwidth|BWIDth}[:RESolution]:AUTO?
```

Arguments

OFF or 0 specifies that the resolution bandwidth is set manually using the [SENSe]:DPX:{BANDwidth|BWIDth}:ACTual? command.

ON or 1 specifies that the resolution bandwidth is set automatically.

Examples

SENSe:DPX:BANDWIDTH:AUTO ON sets the resolution bandwidth automatically.

[SENSe]:DPX:CLEar:RESults (No Query Form)

Restarts multi-trace functions (Average and Max/Min Hold).

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:CLEar:RESults
```

Arguments

None

Examples

`SENSe:DPX:CLEAR:RESULTS` restarts multi-trace functions.

[SENSe]:DPX:COLor

Sets or queries the color palette of three-dimensional graphs.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:COLor { RED | GREen | BLUe | CYAN | BCYan | YELLow | MAGenta | GRAY | TEMPerature |  
                  SPECTral }  
[SENSe]:DPX:COLor?
```

Arguments

The following table lists the arguments.

Color palette for DPX, Spectrum

Argument	Palette
RED	Red
GREen	Green
BLUe	Blue
CYAN	Cyan
BCYan	Binary cyan
YELLow	Yellow
MAGenta	Magenta
GRAY	Gray
TEMPerature	Temperature
SPECTral	Spectral

Examples

`SENSe:DPX:COLOR TEMPERATURE` selects the temperature color palette.

[SENSe]:DPX:COLor:MAXimum

Sets or queries the maximum value of the color axis in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:COLOr:MAXimum <value>  
[SENSe]:DPX:COLOr:MAXimum?
```

Arguments

<value> ::= <Nrf> specifies the maximum value of the color axis.

Range: The minimum value to 100%.

The minimum value is set using the [SENSe]:DPX:COLOr:MINimum command.

Examples

SENSe:DPX:COLOR:MAXIMUM 90 sets the maximum value of the color axis to 90%.

[SENSe]:DPX:COLOr:MINimum

Sets or queries the minimum value of the color axis in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:COLOr:MINimum <value>  
[SENSe]:DPX:COLOr:MINimum?
```

Arguments

<value> ::= <Nrf> specifies the minimum value of the color axis.

Range: 0% to the maximum value.

The maximum value is set using the [SENSe]:DPX:COLOr:MAXimum command.

Examples

SENSe:DPX:COLOR:MINIMUM 10 sets the minimum value of the color axis to 10%.

[SENSe]:DPX:DDENsity:MEASurement:SHOW

Sets the Show measurement value (measurement always visible for DPX Trigger) or queries for the current value.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DDENsity:MEASurement:SHOW { OFF | ON | 0 | 1 }  
[SENSe]:DPX:DDENsity:MEASurement:SHOW?
```

Arguments

OFF or 0 specifies that the Show measurement value is disabled.

ON or 1 specifies that the Show measurement value is disabled.

Examples

SENSe:DPX:DDENSITY:MEASUREMENT:SHOW ON enables the Show measurement value.

[SENSe]:DPX:DGRam:COLor:MAXimum

Sets or queries the maximum value of the color axis in the DPXogram measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:COLor:MAXimum <value>  
[SENSe]:DPX:DGRam:COLor:MAXimum?
```

Arguments

<value> ::= <NRf> specifies the maximum value of the color axis.

Range: -50 dBm to -169.00 dBm.

The minimum value is set using the [SENSe]:DPX:DGRam:COLor:MINimum command.

Examples

SENSe:DPX:DGRAM:COLOR:MAXIMUM 0 sets the maximum value of the color axis to 0.00 dBm.

[SENSe]:DPX:DGRam:COLor:MINimum

Sets or queries the minimum value of the color axis in the DPXogram measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:COLor:MINimum <value>  
[SENSe]:DPX:DGRam:COLor:MINimum?
```

Arguments

<value> ::= <NRf> specifies the maximum value of the color axis.

Range: 49.00 dBm to –170.00 dBm.

The maximum value is set using the `[SENSe]:DPX:DGRam:COLor:MAXimum` command.

Examples

`SENSe:DPX:DGRAM:COLOR:MINIMUM -100` sets the minimum value of the color axis to –100.00 dBm.

[SENSe]:DPX:DGRam:POINTs:COUNT

Sets or queries the number of trace points acquired for the DPXogram display.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:POINTs:COUNT { P801 | P2401 | P4001 }  
[SENSe]:DPX:DGRam:POINTs:COUNT?
```

Arguments

`P801` sets the number of sample points to 801.

`P2401` sets the number of sample points to 2401.

`P4001` sets the number of sample points to 4001.

Examples

`SENSe:DPX:DGRAM:POINTS:COUNT P2401` sets the number of trace points to acquire for the DPXogram display.

[SENSe]:DPX:DGRam:TIME:CAPacity? (Query Only)

Returns the time capacity of the DPXogram measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:TIME:CAPacity?
```

Arguments

None

Returns

`<Time> ::= <String>` The time capacity in hours:minutes:seconds.

Examples

SENSe:DPX:DGRAM:TIME:CAPACITY? might return "0:25:50" indicating that the time capacity of the measurement was 0 hours, 25 minutes, and 50 seconds.

[SENSe]:DPX:DGRam:TIME:RESolution

Sets or queries the time resolution of the DPXogram measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:TIME:RESolution <value>  
[SENSe]:DPX:DGRam:TIME:RESolution?
```

Arguments

<value> ::= <NRf> specifies the time resolution of the DPXogram measurement.

Examples

SENSe:DPX:DGRAM:TIME:RESOLUTION 25.0 ms sets the time resolution to 25 ms.

[SENSe]:DPX:DGRam:TIME:RESolution:AUTO

Determines whether to set the time resolution automatically or manually in the DPXogram measurement.

When Auto is enabled, the time resolution value is based on the Time/div setting. See the DISPlay:DPX:DGRam:TIME[:SCALE]:PDIVision command.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:TIME:RESolution:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:DPX:DGRam:TIME:RESolution:AUTO?
```

Arguments

OFF or 0 disables the auto time resolution.

ON or 1 enables the auto time resolution.

Examples

SENSe:DPX:DGRAM:TIME:RESOLUTION:AUTO ON sets the timer resolution automatically.

[SENSe]:DPX:DGRam:WATerfall:DIRection

Sets or queries the direction of the Waterfall (DPXogram) display.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:WATerfall:DIRection { NW | NE }  
[SENSe]:DPX:DGRam:WATerfall:DIRection?
```

Arguments

NW sets the display direction to northwest.

NE sets the display direction to northeast.

Examples

SENSe:DPX:DGRAM:WATERFALL:DIRECTION NW sets the waterfall display direction to northwest.

[SENSe]:DPX:DGRam:WATerfall:ENABLE

Sets or queries the Waterfall (DPXogram) display.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:WATerfall:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:DPX:DGRam:WATerfall:ENABle?
```

Arguments

OFF or 0 disables the Waterfall display.

ON or 1 enables the Waterfall display.

Examples

SENSe:DPX:DGRAM:WATERFALL:ENABLE ON enables the 3-D Waterfall display.

[SENSe]:DPX:DGRam:Y[:SCALE]:AUTO (No Query Form)

Rescales the height axis automatically to fit the waveform to the screen in the DPXogram display.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DGRam:Y[:SCALE]:AUTO
```

Arguments

None

Examples

`SENSe:DPX:DGRAM:Y[:SCALE]:AUTO` rescales the height scale automatically to fit the waveform to the DPXogram display.

[SENSe]:DPX:DGRam:Y[:SCALE]:RESet (No Query Form)

Resets the height scale of the DPXogram display to the default values:

Height position = 0 dB and Height scale = 100 dB.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

`[SENSe]:DPX:DGRam:Y[:SCALE]:RESet`

Arguments

None

Examples

`SENSe:DPX:DGRAM:Y[:SCALE]:RESET` resets the height scale of the DPXogram display.

[SENSe]:DPX:DWELl

Sets or queries the value of the Dwell time for the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

`[SENSe]:DPX:DWELl <value>`
`[SENSe]:DPX:DWELl?`

Arguments

`<value>::<NRf>` specifies the time the DPX sweep remains in a frequency segment collecting data and updating the bitmap and traces before moving on to the next higher frequency segment.

Range: 50 ms to 100 s per frequency segment.

Examples

`SENSe:DPX:DWELl 100ms` sets the dwell value for sweeps to 100 ms.

[SENSe]:DPX:DWELl:AUTO

Sets the value of the Dwell time automatically or queries for the current value.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:DWELl:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:DPX:DWELl:AUTO?
```

Related Commands

[\[SENSe\]:DPX:DWELl](#) (on page 2091)

Arguments

OFF or 0 specifies that the dwell is set manually.

ON or 1 specifies that the dwell is set automatically.

Examples

SENSe:DPX:DWELl:AUTO ON sets the dwell value automatically for sweeps.

[SENSe]:DPX:FREQuency:CENTer

Sets or queries the center frequency in the DPX, Spectrum measurement.

NOTE: The center, start and stop frequencies are set interlocking each other with the following relationships: (start frequency) = (center frequency) - (span)/2 and (stop frequency) = (center frequency) + (span)/2.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:FREQuency:CENTer <value>  
[SENSe]:DPX:FREQuency:CENTer?
```

Related Commands

[\[SENSe\]:DPX:FREQuency:STARt](#) (on page 2094)

[\[SENSe\]:DPX:FREQuency:STOP](#) (on page 2095)

Arguments

<value> ::= <NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:DPX:FREQUENCY:CENTER 7.5GHz` sets the center frequency to 7.5 GHz.

[SENSe]:DPX:FREQuency:SPAN

Sets or queries the frequency span in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:FREQuency:SPAN <value>
[SENSe]:DPX:FREQuency:SPAN?
```

Arguments

`<value> ::= <NRf>` is the frequency span.

Range: 10 Hz to 40 MHz (Standard) / 110 MHz (Option 110)

Examples

`SENSe:DPX:FREQUENCY:SPAN 20MHz` sets the span to 20 MHz.

[SENSe]:DPX:FREQuency:SPAN:{BANDwidth|BWIDth}[:RESolution]:RATio

Determines whether to set the resolution bandwidth (RBW) automatically or manually in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:FREQuency:SPAN:{BANDwidth|BWIDth}[:RESolution]:RATio <value>
[SENSe]:DPX:FREQuency:SPAN:{BANDwidth|BWIDth}[:RESolution]:RATio?
```

Related Commands

[\[SENSe\]:DPX:{BANDwidth|BWIDth}\[:RESolution\]:AUTO](#) (on page 2084)

Arguments

`<value> ::= <NRf>` is used to calculate the RBW.

Examples

`SENSe:DPX:FREQuency:SPAN:BANDWIDTH:RATIO 100` the ratio of 100 is used to set the resolution bandwidth when `SENSe:DPX:{BANDwidth|BWIDth}[:RESolution]:AUTO` is set to ON.

[SENSe]:DPX:FREQuency:START

Sets or queries the measurement start frequency (left edge on the graph) in the DPX, Spectrum measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the `[SENSe]:DPX:FREQuency:CENTer` command.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:FREQuency:START <value>
[SENSe]:DPX:FREQuency:START?
```

Related Commands

[\[SENSe\]:DPX:FREQuency:STOP](#) (on page 2095)

Arguments

`<value> ::= <NRf>` is the measurement start frequency.

Range: (center frequency) $\pm$ (span)/2.

Examples

`SENSe:DPX:FREQUENCY:START 6.95GHz` sets the start frequency to 6.95 GHz.

[SENSe]:DPX:FREQuency:STEP

Sets or queries the frequency step size (the amount per press by which the up or down key changes the setting value).

Programming a specified step size sets `[SENSe]:DPX:FREQuency:STEP:AUTO OFF`.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:FREQuency:STEP <value>
[SENSe]:DPX:FREQuency:STEP?
```

Related Commands

[\[SENSe\]:DPX:FREQuency:STEP:AUTO](#) (on page 2095)

Arguments

`<value> ::= <NRf>` specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSE:DPX:FREQUENCY:STEP 1.5kHz` sets the step size to 1.5 kHz.

[SENSe]:DPX:FREQuency:STEP:AUTO

Determines whether to set the frequency step size automatically or manually.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:FREQuency:STEP:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:DPX:FREQuency:STEP:AUTO?
```

Arguments

OFF or 0 specifies that the frequency step size is set manually using the `[SENSe]:DPX:FREQuency:STEP` command.

ON or 1 specifies that the frequency step size is set automatically.

Examples

`SENSE:DPX:BANDWIDTH:AUTO ON` sets the frequency step size automatically.

[SENSe]:DPX:FREQuency:STOP

Sets or queries the measurement stop frequency (right edge of the graph) in the DPX, Spectrum measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the `[SENSe]:DPX:FREQuency:CENTer` command.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:FREQuency:STOP <value>  
[SENSe]:DPX:FREQuency:STOP?
```

Related Commands

[\[SENSe\]:DPX:FREQuency:STARt](#) (on page 2094)

Arguments

<value>: : <Nrf> is the measurement stop frequency.

Range: (center frequency) $\pm$ (span)/2.

Examples

SENSe:DPX:FREQUENCY:STOP 7.05GHz sets the stop frequency to 7.05 GHz.

[SENSe]:DPX:PLOT

Sets or queries the plot in the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:PLOT { DGRam | SPLit | SPECTrum | ZSPan | FREQuency | PHASe }
[SENSe]:DPX:PLOT?
```

Arguments

DGRam selects the DPXogram display.

SPLit selects the DPX Split display.

SPECTrum selects the DPX, Spectrum display.

ZSPan select the DPX Zero Span display.

FREQuency selects the DPX Frequency vs Time display.

PHASe selects the DPX Phase vs Time display.

Examples

SENSe:DPX:PLOT SPECTRUM selects the DPX, Spectrum display

[SENSe]:DPX:POINTs:COUNT

Sets the number of trace points acquired for the DPX, Spectrum display.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:POINTs:COUNT { P801 | P2401 | P4001 | P10401 }
[SENSe]:DPX:POINTs:COUNT?
```

Arguments

P801 sets the number of sample points to 801.

P2401 sets the number of sample points to 2401.

P4001 sets the number of sample points to 4001.

P8001 sets the number of sample points to 8001.

P10401 sets the number of sample points to 10401.

Examples

SENSe:DPX:POINTS:COUNT P2401 sets the number of trace points to acquire for the DPX, Spectrum display.

[SENSe]:DPX:TDM:{BANDwidth|BWIDth}

Sets or queries the value of the measurement bandwidth in the DPX measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

[SENSe]:DPX:TDM:{BANDwidth|BWIDth} <value>

[SENSe]:DPX:TDM:{BANDwidth|BWIDth}?

Arguments

<value>::<NRf> specifies the measurement bandwidth.

Range: 100 Hz to Max AcqBW.

Examples

SENSe:DPX:TDM:BANDWIDTH 200 sets the measurement bandwidth to 200 Hz.

[SENSe]:DPX:TDM:{BANDwidth|BWIDth}:ACTual? (Query Only)

Queries the actual bandwidth in the DPX measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

[SENSe]:DPX:TDM:{BANDwidth|BWIDth}:ACTual?

Arguments

None

Returns

<NRf> The actual RBW in Hz.

Examples

SENSe:DPX:TDM:BANDWIDTH:ACTUAL? might return 10E+3, indicating that the actual bandwidth is 10 kHz

[SENSe]:DPX:TDM:FREQuency:CENTer

Sets or queries the center frequency in the DPX, Spectrum measurement.

NOTE: The center, start and stop frequencies are set interlocking each other with the following relationships: (start frequency) = (center frequency) - (span)/2 and (stop frequency) = (center frequency) + (span)/2.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:CENTer <value>
[SENSe]:DPX:TDM:FREQuency:CENTer?
```

Arguments

<value>::<NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:DPX:TDM:FREQUENCY:CENTER 7.5GHz sets the center frequency to 7.5 GHz.

[SENSe]:DPX:TDM:FREQuency:TXBer:CLEar:RESults (No Query Form)

Clears the measurement results of the active Tx BER measurement. Sending this command does not halt the Tx BER measurement.

Conditions

Measurement views: DPX, frequency

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:TXBer:CLEar:RESults
```

Arguments

None

Examples

`SENSe:DPX:TDM:FREQUENCY:TXBER:CLEAR:RESULTS` clears the results of the active TxBER measurement, but does not halt the measurement.

[SENSe]:DPX:TDM:FREQuency:TXBer:ENABle

Sets or queries the Tx BER measurement.

Conditions

Measurement views: DPX, frequency

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:TXBer:ENABle { OFF | ON | 0 | 1 }
```

Arguments

`OFF` or `0` halts the Tx BER measurement.

`ON` or `1` starts the Tx BER measurement.

Returns

Examples

```
SENSe:DPX:TDM:FREQUENCY:TXBER:ENABLE
```

[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern

Sets or queries the Tx BER data pattern.

Conditions

Measurement views: DPX frequency

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern { PRBS9 | PRBS11 | PRBS15 | USER }  
[SENSe]:DPX:TDM:FREQuency:TXBer:PATtern?
```

Arguments

`PRBS9` specifies a 9-bit PRBS as the data pattern.

`PRBS11` specifies a 11-bit PRBS as the data pattern.

`PRBS15` specifies a 15-bit PRBS as the data pattern

`USER` specifies a user-defined sequence as the data pattern.

Returns

`<string>` which is the selected data pattern. Returned strings are the same as the arguments.

Examples

SENSe:DPX:TDM:FREQUENCY:TXBER:PATTERN PRBS9 sets the data pattern to PRBS9.

[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:INVert

Sets or queries the data pattern Invert setting.

Conditions

Measurement views: DPX frequency

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:INVert { 0 | 1 | OFF | ON }  
[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:INVert?
```

Arguments

OFF or 0 sets the data pattern to normal.

ON or 1 inverts the data pattern.

Returns

<value> ::= <NR1> where:

0 indicates the data pattern is normal.

1 indicates the data pattern is inverted.

Examples

SENSe:DPX:TDM:FREQUENCY:TXBER:PATTERN:INVERT 1 inverts the data pattern.

[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:REPeat

Sets or queries the test duration for a User Pattern. A User Pattern test duration can be one time through or it can repeat.

Conditions

Measurement views: DPX frequency

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:REPeat { 0 | 1 | OFF | ON }  
[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:REPeat?
```

Arguments

OFF or 0 sets the data pattern to normal.

ON or 1 inverts the data pattern.

Returns

<value> ::= <NR1> where:

0 indicates repeat is off.

1 indicates repeat is on.

Examples

`SENSe:DPX:TDM:FREQUENCY:TXBER:PATTERN:REPEAT 1` causes the User pattern to repeat.

[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:REVerse

Sets or queries whether the data pattern is in normal order or reversed. This setting applies only to PRBS patterns.

Conditions

Measurement views: DPX frequency

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:REVerse { 0 | 1 | OFF | ON }  
[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:REVerse?
```

Arguments

OFF or 0 sets the data pattern to normal order.

ON or 1 sets the data pattern to reversed order.

Returns

<value> ::= <NR1> where:

0 indicates the data pattern is in normal order.

1 indicates the data pattern is in reversed order.

Examples

`SENSe:DPX:TDM:FREQUENCY:TXBER:PATTERN:REVERSE?` might return 1, indicating the data pattern is reversed.

[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:SOURce? (Query Only)

Returns the path and file name of the user-defined pattern file.

Conditions

Measurement views: DPX frequency

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:FREQuency:TXBer:PATTerN:SOURce?
```

Returns

<path>::<string> which is the path to the defined User data pattern.

Examples

SENSe:DPX:TDM:FREQUENCY:TXBER:PATTERN:SOURCE? might return "C:\RSA5100B Files\Example Files\SampleUserPattern.csv".

[SENSe]:DPX:TDM:RBW

Sets or queries the value of the RBW filter.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:RBW <value>  
[SENSe]:DPX:TDM:RBW?
```

Arguments

<value>::<NRf> specifies the RBW filter value.

Range: 1 Hz to 60MHz

Examples

SENSe:DPX:TDM:RBW 2.5 sets the RBW filter value to 2.5 Hz.

[SENSe]:DPX:TDM:RBW:STATe

Determines whether to set the resolution bandwidth (RBW) filter automatically or manually in the DPX measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:RBW:STATe { OFF | ON | 0 | 1 }  
[SENSe]:DPX:TDM:RBW:STATe?
```

Arguments

OFF or 0 specifies that the RBW is set automatically.

ON or 1 specifies that the RBW is set manually.

Examples

SENSe:DPX:TDM:RBW:STATe ON sets the RBW manually.

[SENSe]:DPX:TDM:SWEep:TIME

Sets or queries the sweep time when the plot is set to ZSPan, FREQuency, or PHASe.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:SWEep:TIME <value>
[SENSe]:DPX:TDM:SWEep:TIME?
```

Arguments

<value>: : <NRf> specifies the sweep time.

Range: 100 ns to 2000 s.

Examples

SENSe:DPX:TDM:SWEeP:TIME 200 sets the sweep time to 200 s.

[SENSe]:DPX:TDM:TMOTion

Sets or queries the trace motion when the plot is set to ZSPan, FREQuency, or PHASe.

Conditions

Measurement views: DPX, Spectrum

Group

Sense commands

Syntax

```
[SENSe]:DPX:TDM:TMOTion { NONE | ROLL | NORMal }
[SENSe]:DPX:TDM:TMOTion?
```

Arguments

NONE turns scrolling off.

ROLL shifts the previous data points to the left and the latest data point to the right edge of the display.

NORMAL shifts the latest data point on the display from left to right.

Examples

SENSe:DPX:TDM:TMOTION NORMAL sets the scroll direction to normal.

[SENSe]:EDlagram[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Eye diagram for a selected Measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Eye diagram).

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:EDiagram[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:EDiagram[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

Examples

SENSe:EDiagram:MEASview1:SELEcted:SOURce? queries the Source for Eye diagram Measurement View 1.

[SENSe]:DEMOd:EVM[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of EVM versus Time for a selected Measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Eye diagram).

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:DEMOd:EVM[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:DEMOd:EVM[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

Examples

SENSe:DEMOd:EVM:MEASview1:SELEcted:SOURce? queries the Source for EVM versus Time Measurement View 1.

SENSe:EMC:ACCEssory<x>:ANTEнна:DISTance

Sets or queries the distance between EUT and Antenna in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement views: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:ANTEнна:DISTance <value>  
SENSe:EMC:ACCEssory<x>:ANTEнна:DISTance?
```

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:ACCEssory1:ANTEнна:DISTance might returns 10.5, indicating that the distance between accessory 1 (Antenna) and EUT is 10.5 m.

SENSe:EMC:ACCEssory<x>:ASSEt:TAG

Sets or queries the asset tag of the specified accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement views: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:ASSEt:TAG <arg>  
SENSe:EMC:ACCEssory<x>:ASSEt:TAG?
```

Arguments

<arg> = "String"

Returns

<String>

Examples

SENSe:EMC:ACCEssory1:ASSEt:TAG might return A4001993, indicating that asset tag of accessory 1 is A4001993.

SENSe:EMC:ACCEssory<x>:CALibration:DATE

Sets or queries the Calibration date of the specified accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement views: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:CALibration:DATE <arg>  
SENSe:EMC:ACCEssory<x>:CALibration:DATE?
```

Arguments

<arg> = "String"

Returns

<String>

Examples

SENSe:EMC:ACCEssory1:CALibration:DATE might return "9/21/2017", indicating that calibration date of the accessory 1 is 9/21/2017 (21st of September 2017).

SENSe:EMC:ACCEssory<x>:CALibration:DATE:DISAble

Sets or queries the enabling and disabling the calibration due date of the specified accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement views: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:CALibration:DATE:DISAble { 0 | OFF | 1 | ON}  
SENSe:EMC:ACCEssory<x>:CALibration:DATE:DISAble?
```

Arguments

0 or OFF disables the calibration due date check box

1 or ON enables the calibration due date check box

Returns

<Boolean>0,1

Examples

SENSe:EMC:ACCEssory1:CALibration:DATE:DISAble 0 will disable the calibration due date check box of accessory 1.

SENSe:EMC:ACCEssory<x>:CONStant:LOSS

Sets or queries the Constant loss of an accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement views: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:CONStant:LOSS <value>  
SENSe:EMC:ACCEssory<x>:CONStant:LOSS?
```

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:ACCEssory1:CONStant:LOSS might return 10.00, indicating that the Constant Loss of accessory 1 is 10 dB.

SENSe:EMC:ACCEssory<x>:ENABle

Sets or queries enabling and disabling the specified accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement views: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:ENABle { 0 | OFF | 1 | ON}  
SENSe:EMC:ACCEssory<x>:ENABle?
```

Arguments

0 or OFF disables the accessory

1 or ON enables the accessory

Returns

<Boolean>0,1

Examples

SENSe:EMC:ACCEssory<x>:ENABle 0 will disable accessory 1.

SENSe:EMC:ACCEssory<x>:FREQuency:INTerpolation

Sets or queries the frequency interpolation of an accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement views: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:FREQuency:INTErpolation { LIN | LOG}
SENSe:EMC:ACCEssory<x>:FREQuency:INTErpolation?
```

Arguments

LIN = Sets Linear as frequency interpolation

LOG = Sets Log as frequency interpolation

Returns

<String> LIN or LOG

Examples

SENSe:EMC:ACCEssory1:ANTEнна:DISTance might returns 10.5, indicating that the distance between accessory 1 (Antenna) and EUT is 10.5 m.

SENSe:EMC:ACCEssory<x>:LOSS:TABLE:ADD (No Query Form)

Adds a row in the loss table with values for the specified accessory in EMC view.

<x> = <NR1> 1 to 6

NOTE: This command works only when the specified accessory is enabled.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:LOSS:TABLE:ADD <arg1,arg2>
```

Arguments

<arg1> = Specifies the frequency value

<arg2> = Specifies the Gain/Loss value

Returns

None

Examples

SENSe:EMC:ACCEssory1:LOSS:TABLE:ADD 30KHz ,10 adds a new row to the accessory 1 loss table with frequency 30 kHz and an RBW of 10 k.

SENSe:EMC:ACCEssory<x>:LOSS:TABLE:DELeTe:ALL (No Query Form)

Deletes all the row in the loss table for the specified accessory in EMC view.

<x> = <NR1> 1 to 6

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:ACCEssory<x>:LOSS:TABLE:DELeTe:ALL`

Arguments

None

Returns

None

Examples

`SENSe:EMC:ACCEssory2:LOSS:TABLE:DELeTe:ALL` deletes all the rows in the loss table of accessory 2.

SENSe:EMC:ACCEssory<x>:LOSS:TYPE

Sets or queries the loss type of an accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:ACCEssory<x>:LOSS:TYPE {ALT | CLOS | AFT}`

`SENSe:EMC:ACCEssory<x>:LOSS:TYPE?`

Arguments

ALT = Antenna Loss Table

CLOS = Constant Loss

AFT = Antenna Factor

Returns

<String> ALT or CLOS or AFT

Examples

`SENSe:EMC:ACCEssory1:LOSS:TYPE?` might return CLOS, indicating that the loss type of accessory 1 is CLOS (Constant Loss).

SENSe:EMC:ACCEssory<x>:MODEl

Sets or queries the model number of the specified accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:MODe1 <arg>  
SENSe:EMC:ACCEssory<x>:MODe1?
```

Arguments

<arg> = "String"

Returns

<String>

Examples

SENSe:EMC:ACCEssory2:MODe1? might return A16235, indicating that the model number of accessory 2 is A16235.

SENSe:EMC:ACCEssory<x>:SERial

Sets or queries the serial number of the specified accessory in EMC View.

<x> = <NR1> 1 to 6

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:SERial <arg>  
SENSe:EMC:ACCEssory<x>:SERial?
```

Arguments

<arg> = "String"

Returns

<String>

Examples

SENSe:EMC:ACCEssory1:SERial might return S1987652, indicating that the serial number of accessory 1 is S1987652.

SENSe:EMC:ACCEssory<x>:TYPE

Sets or queries the type of specified accessory in EMC view.

<x> = <NR1> 1 to 6

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:ACCEssory<x>:TYPE <arg>  
SENSe:EMC:ACCEssory<x>:TYPE?
```

Arguments

If emission type is Conducted:

If emission type is Radiated:

<arg> = { ANTE | NFPR | CABL | AMPL | LIMI | ATTE | FILT | OTHE }

where

LISN = LISN

CABL = Cable

LIMI = Limiter

AMPL = Amplifier

ATTE = Attenuator

FILT = Filter

OTHE = Others

ANTE = Antenna

NFPR = Near Field Probe

Returns

<String> See Arguments

Examples

SENSe:EMC:ACCEssory1:TYPE might return LIMI, indicating that accessory 1 is Limiter.

SENSe:EMC:CLEar:RESults (No Query Form)

Clears all the data in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:CLEar:RESults
```

Arguments

None

Returns

None

Examples

`SENSe:EMC:CLEAR:RESULTS` clears the data in the EMC-EMI display.

SENSe:EMC:EMISsion:TYPE

Sets or queries the type of emission in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:EMISsion:TYPE {COND | RADI}  
SENSe:EMC:EMISsion:TYPE?
```

Arguments

`COND` = Sets Conducted as Emission type

`RADI` = Sets Radiated as Emission type

Returns

<String> COND or RADI

Examples

`SENSe:EMC:EMISSION:TYPE` sets Conducted as the emission type.

SENSe:EMC[:FREQuency]:OVERlap? (Query Only)

Queries whether there is a frequency range overlap in ranges and Limits of EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC[:FREQuency]:OVERlap?
```

Arguments

None

Returns

<Boolean> 0,1

Examples

SENSE:EMC[:FREQUENCY]:OVERLAP? might return 1, indicating that the frequency is overlapped.

SENSe:EMC:LIST

Sets or queries the list of spots to be displayed in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:LIST {ALL | OVER | OLWM}  
SENSe:EMC:LIST?
```

Arguments

ALL = Sets All spots to be displayed

OVER = Sets Over Limit spots to be displayed

OLWM = Sets Over Limit with margin spots to be displayed

Returns

<String> See Arguments

Examples

SENSe:EMC:LIST might return ALL, indicating All spots are displayed.

SENSe:EMC:MARGIn

Sets or queries the Margin value in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MARGIn <value>  
SENSe:EMC:MARGIn?
```

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:MARGIN might return 15, indicating that the margin value is 15 dB.

SENSe:EMC:MEASurement:AMBIent:DELTA:THREshold

Sets or queries Delta threshold value of Ambient detection in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:AMBIent:DELTA:THREshold <value>  
SENSe:EMC:MEASurement:AMBIent:DELTA:THREshold?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

SENSe:EMC:MEASUREMENT:AMBIENT:DELTA:THRESHOLD might return 1.00000, indicating that the Delta threshold value of ambient detection is 1.0 dB.

SENSe:EMC:MEASurement:AMBIent:DETEctor

Sets or queries the detector type of the ambient detector in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:AMBIent:DETEctor <arg>  
SENSe:EMC:MEASurement:AMBIent:DETEctor?
```

Arguments

<arg> =

AVER = Sets Avg (VRMS) as the detector type

PEAK = Sets +Peak as the detector type

MILSTD = Sets Mil +Peak as the detector type

QUAS = Sets CISPR QPk as the detector type

CPE = Sets CISPR +Pk as the detector type

CAV = Sets CISPR Avg as the detector type

AVGL = Sets Avg (of logs) as the detector type

CAVL = Sets CISPR Avg (of logs) as the detector type

DSA = Sets DEF STAN Avg as the detector type

DSP = Sets DEF STAN Peak as the detector type

Returns

<String> See Argument

Examples

SENSe:EMC:MEASurement:AMBIent:DETECTOR might return DSP, indicating that the ambient detector type is DEF STAN Peak.

SENSe:EMC:MEASurement:AMBIent:DWELL:TIME

Sets or queries the dwell time of ambient detection in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:AMBIent:DWELL:TIME <value>  
SENSe:EMC:MEASurement:AMBIent:DWELL:TIME?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

SENSe:EMC:MEASurement:AMBIent:DWELL:TIME might return 329.142E-6, indicating that the dwell time of ambient detection is 329.1 μ s.

SENSe:EMC:MEASurement:AMBIent:DWELL:TIME:AUTO

Sets or queries to automatically set the dwell time of ambient detection in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:AMBIent:DWELL:TIME:AUTO { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:AMBIent:DWELL:TIME:AUTO?
```

Arguments

0 or OFF disables the Auto check box of dwell time

1 or ON enables the Auto check box of dwell time

Returns

<Boolean> 0,1

Examples

`SENSE:EMC:MEASUREMENT:AMBIENT:DWELL:TIME:AUTO?` might return 1, indicating that the dwell time of ambient detection is set automatically.

SENSe:EMC:MEASurement:AMBlent:STARt (No Query Form)

Starts the ambient detection with respect to selected detector.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:MEASurement:AMBIent:STARt`

Arguments

None

Returns

None

Examples

`SENSE:EMC:MEASUREMENT:AMBIENT:START SINGLE` performs a single ambient scan with respect to the selected scan detector.

SENSe:EMC:MEASurement:INSpect:DETEctor<x>

Sets or queries the detector type for the specified detector in discrete search of EMC View.

<x> = 1 or 2 or 3 specifies detector number

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:MEASurement:INSpect:DETEctor<x> <arg>`
`SENSe:EMC:MEASurement:INSpect:DETEctor<x>?`

Arguments

<arg> =

AVER = Sets Avg (VRMS) as the detector type

PEAK = Sets +Peak as the detector type

MILSTD = Sets Mil +Peak as the detector type

QUAS = Sets CISPR QPk as the detector type

CPE = Sets CISPR +Pk as the detector type

CAV = Sets CISPR Avg as the detector type

AVGL = Sets Avg (of logs) as the detector type

CAVL = Sets CISPR Avg (of logs) as the detector type

DSA = Sets DEF STAN Avg as the detector type

DSP = Sets DEF STAN Peak as the detector type

Returns

<String> See Argument

Examples

SENSe:EMC:MEASurement:INSpect:DETEctor1? might return QUAS, indicating that the detector type for detector 1 in discrete search is CISPR QPk.

SENSe:EMC:MEASurement:INSpect:DETEctor<x>:COMParision:LEVEL

Sets or queries the comparison level value for the specified detector in discrete search of EMC View.

<x> = 1 or 2 or 3 (specifies detector number)

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:DETEctor<x>:COMParision:LEVEL <value>
SENSe:EMC:MEASurement:INSpect:DETEctor<x>:COMParision:LEVEL?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

SENSe:EMC:MEASurement:INSpect:DETEctor1:COMParision:LEVEL might return 39.9897, indicating that the comparison level value of detector 1 is 39.98 dBuV.

SENSe:EMC:MEASurement:INSpect:DETEctor<x>:ENABLE

Sets or queries the Enabling or disabling of specified detector in discrete search of EMC View.

<x> = 1 or 2 or 3 (specifies detector number)

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:DETEctor<x>:ENABle { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:INSpect:DETEctor<x>:ENABle?
```

Arguments

0 or OFF disables the specified detector

1 or ON enables the specified detector

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASurement:INSpect:DETEctor1:ENABle might return 1, indicating detector 1 is enabled.

SENSe:EMC:MEASurement:INSpect:DWELl:TIME

Sets or queries the dwell time in discrete search of EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:DWELl:TIME <value>  
SENSe:EMC:MEASurement:INSpect:DWELl:TIME?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

SENSe:EMC:MEASUREMENT:INSPECT:DWELL:TIME might return 2.500, indicating that the dwell time is 2.5 s.

SENSe:EMC:MEASurement:INSpect:DWELl:TIME:AUTO

Sets or queries to automatically set the dwell time in discrete search of EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:DWELL:TIME:AUTO { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:INSpect:DWELL:TIME:AUTO?
```

Arguments

0 or OFF disables the auto check box

1 or ON enables the auto check box

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASUREMENT:INSPECT:DWELL:TIME:AUTO might return 0, indicating auto check box is disabled.

SENSe:EMC:MEASurement:INSpect:MODE

Sets or queries the inspect search mode in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE { DISC | HARM }  
SENSe:EMC:MEASurement:INSpect:MODE?
```

Arguments

DISC = Sets inspect search to Discrete mode

HARM = Sets inspect search to Harmonic mode

Returns

<String> DISC or HARM

Examples

SENSe:EMC:MEASUREMENT:INSPECT:MODE might return HARM, indicating inspect search is in harmonic search mode.

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:ENABLE

Sets or queries the enabling or disabling of the specified row number in discrete search of EMC View.

<x> = <NR1> specifies row number

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:ENABle { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:ENABle?
```

Arguments

0 or OFF disables the specified row number

1 or ON enables the specified row number

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency3:ENABle? might return 1, indicating that the row 3 is enabled.

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:FREQuency

Sets or queries the frequency value of the specified row number in discrete search of EMC View.

<x> = <NR1> specifies row number

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:FREQuency <value>  
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:FREQuency?
```

Arguments

<value> = <NRf> frequency value

Returns

<NRf>

Examples

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency2:FREQuency? might return 25.00000E+6, indicating that the frequency value of row 2 is 25.00 MHz.

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:RBW

Sets or queries the RBW value of the specified row number in discrete search of EMC View.

<x> = <NR1> Specifies row number

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:RBW <value>  
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:RBW?
```

Arguments

<value> = <NRf> RBW value

Returns

<NRf>

Examples

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency1:RBW? might return 9.00000E+3, indicating that the RBW value of row 1 is 9.00 kHz.

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:RBW:AUTO

Sets or queries the enabling or disabling of Auto RBW check box of the specified row number in discrete search of EMC View.

<x> = <NR1> specifies row number

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:RBW:AUTO { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency<x>:RBW:AUTO?
```

Arguments

0 or OFF disables the Auto check box

1 or ON enables the Auto check box

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:FREQuency4:RBW:AUTO? might return 1, indicating that the Auto check box for row 4 is enabled.

SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:LOAD:EMISSION:RESults (No Query Form)

Loads the frequency spots from Emission results into discrete search table. Only the top 20 spots of emission results will be loaded.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:DIScrete:LOAD:EMISSION:RESults
```

Arguments

None

Returns

None

Examples

SENSe:EMC:MEASUREMENT:INSPECT:MODE:DISCRETE:LOAD:EMISSION:RESULTS loads the emission results.

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:ENABLE

Sets or queries to enable or disable the specified harmonic in EMC View.

<x> = 1 or 2 or 3 specifies the harmonic

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:ENABLE { 0 | OFF | 1 | ON }  
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:ENABLE?
```

Arguments

0 or OFF disables the specified harmonic

1 or ON enables the specified harmonic

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic1:ENABLE? might return 1, indicating that the harmonic 1 is enabled.

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:ENABle

Sets or queries the enabling or disabling harmonic factor of a specified harmonic in EMC View.

<x> = 1 or 2 or 3 specifies the harmonic

<y> = <NR1> (1 to 10) Specifies the harmonic factor

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:ENABle { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:ENABle?
```

Arguments

0 or OFF disables the harmonic factor

1 or ON enables the harmonic factor

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic1:FACTor2:ENABle might return 1, indicating that harmonic factor 2 of harmonic 1 is enabled.

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:FREQuency

Sets or queries the frequency value of the specified harmonic and factor in harmonic search of EMC View.

p<x> = 1 or 2 or 3 specifies the harmonic

<y> = <NR1> (1 to 10) specifies the harmonic factor

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:FREQuency <value>  
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:FREQuency?
```

Arguments

<value> = <NRf> Frequency value

Returns

<NRf>

Examples

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic1:FACTOR2:FREQuency?` might return `25.00000E+6`, indicating that the frequency value of harmonic 1 factor 2 is 25.00 MHz.

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTOR<y>:HARMonic:FACTOR

Sets or queries the harmonic factor value for the specified harmonic in EMC View.

<x> = 1 or 2 or 3 specifies the harmonic

<y> = <NR1> (1 to 10) Specifies the harmonic factor

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTOR<y>:HARMonic:FACTOR <value>`
`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTOR<y>:HARMonic:FACTOR?`

Arguments

<value> =

Either

OEIG = 1/8

QUAR = 1/4

HALF = 1/2

ONE = 1

TWO = 2

THREE = 3

FOUR = 4

FIVE = 5

SIX = 6

SEVEN = 7

EIGHT = 8

NINE = 9

TEN = 10

Returns

<String> See Arguments

Examples

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic1:FACTor2:HARMonic:FACTor?` might return "HALF", indicating the 2nd harmonic factor value for harmonic 1 is ½.

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:RBW

Sets or queries the RBW value of the specified harmonic and factor in harmonic search of EMC View.

<x> = 1 or 2 or 3 specifies the harmonic

<y> = <NR1> (1 to 10) specifies the harmonic factor

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:RBW <value>`

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:RBW?`

Arguments

<value> = <NRf> RBW value

Returns

<NRf>

Examples

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic1:FACTor2:RBW?` might return 9.00000E+3, indicating that the RBW value of harmonic 1 factor 2 is 9.00 kHz.

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:RBW:AUTO

Sets or queries the enabling and disabling of Auto RBW check box with respect to the specified harmonic and factor in harmonic search of EMC View.

<x> = 1 or 2 or 3 specifies the harmonic

<y> = <NR1> (1 to 10) specifies the harmonic factor

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:RBW:AUTO { 0 | OFF | 1 | ON }`

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FACTor<y>:RBW:AUTO?`

Arguments

0 or OFF disables the Auto checkbox

1 or ON enables the Auto checkbox

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic2:FACTor1:RBW:AUTO?` might return 1, indicating that the Auto check box is enabled for harmonic 2 factor 1.

SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FREquency

Sets or queries the frequency of the Specified Harmonic in EMC View.

<x> = 1 or 2 or 3 Specifies the harmonic

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FREquency <value>
SENSe:EMC:MEASurement:INSpect:MODE:HARMonic<x>:FREquency?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

`SENSe:EMC:MEASurement:INSpect:MODE:HARMonic1:FREquency` returns 20000, indicating that the frequency of harmonic 1 is 20 kHz.

SENSe:EMC:MEASurement:INSpect:STARt (No Query Form)

Sets the type of run in inspect section of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

```
Syntax
SENSe:EMC:MEASurement:INSpect:STARt {SINGle | CONTinuous | STOP}
```

Arguments

SINGle = Performs Single run

CONTinuous = Performs a Continuous run

STOP = Stops the acquisition

Returns

None

Examples

SENSe:EMC:MEASUREMENT:INSPECT:START SINGLE sets the inspect mode to perform a single run.

SENSe:EMC:MEASurement:SCAN:DETEctor<x>

Sets or queries the detector type of the specified scan detector in EMC View.

<x> = 1 or 2

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:MEASurement:SCAN:DETEctor<x> <arg>

SENSe:EMC:MEASurement:SCAN:DETEctor<x>?

Arguments

<arg> =

AVER = Sets Avg (VRMS) as the detector type

PEAK = Sets +Peak as the detector type

MILSTD = Sets Mil +Peak as the detector type

QUAS = Sets CISPR QPk as the detector type

CPE = Sets CISPR +Pk as the detector type

CAV = Sets CISPR Avg as the detector type

AVGL = Sets Avg (of logs) as the detector type

CAVL = Sets CISPR Avg (of logs) as the detector type

DSA = Sets DEF STAN Avg as the detector type

DSP = Sets DEF STAN Peak as the detector type

Returns

<String> See Arguments

Examples

SENSe:EMC:MEASurement:SCAN:DETEctor1? might return QUAS, indicating that the detector type for scan detector 1 is CISPR QPk.

SENSe:EMC:MEASurement:SCAN:DETEctor<x>:ENABle

Sets or queries the enabling or disabling of the specified scan detector in EMC View.

<x> = 1 or 2

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SCAN:DETEctor<x>:ENABle { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:SCAN:DETEctor<x>:ENABle?
```

Arguments

0 or OFF disables the scan detector

1 or ON enables the scan detector

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASurement:SCAN:DETEctor1:ENABle? might return 1, indicating that scan detector 1 is enabled.

SENSe:EMC:MEASurement:SCAN:DETEctor<x>:LIMit

Sets or queries the limit of specified scan detector in EMC View.

<x> = 1 or 2

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SCAN:DETEctor<x>:LIMit <arg>  
SENSe:EMC:MEASurement:SCAN:DETEctor<x>:LIMit?
```

Arguments

<arg> = Either ONE , TWO or THREE

ONE = Sets Limit to Limit 1

TWO = Sets Limit to Limit 2

THREE = Sets Limit to Limit 3

Returns

<String>See Argument

Examples

`SENSe:EMC:MEASurement:SCAN:DETEctor1:LIMit?` might return `TWO`, indicating that the limit selected for scan detector 1 is Limit 2.

SENSe:EMC:MEASurement:SCAN:DWELI:TIME

Sets or queries the dwell time of scan detection in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SCAN:DWELl:TIME <value>  
SENSe:EMC:MEASurement:SCAN:DWELl:TIME?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

`SENSe:EMC:MEASUREMENT:SCAN:DWELL:TIME?` might return `640.315E-3`, indicating the dwell time of scan detection is 640.3 ms.

SENSe:EMC:MEASurement:SCAN:DWELI:TIME:AUTO

Sets or queries to automatically set the dwell time of scan detection in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SCAN:DWELl:TIME:AUTO { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:SCAN:DWELl:TIME:AUTO?
```

Arguments

0 or OFF disables the Auto check box of dwell time

1 or ON enables the Auto check box of dwell time

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:MEASUREMENT:SCAN:DWELL:TIME:AUTO?` might return 1, indicating that the dwell time of scan detection is set automatically.

SENSe:EMC:MEASurement:SCAN:STARt (No Query Form)

Starts the scan on the signal with respect to selected scan detector and displays the measurement values.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:MEASurement:SCAN:STARt {SINGle | CONTInuous | STOP}`

Arguments

`SINGle` = Performs a Single scan

`CONTInuous` = Performs a Continuous scan

`STOP` = Stops the acquisition

Returns

None

Examples

`SENSe:EMC:MEASUREMENT:SCAN:STARt SINGle` performs a Single scan with respect to the selected scan detector.

SENSe:EMC:MEASurement:SPOT:ALL

Sets or queries to enable or disable All check box to include all spots for spot analysis.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:MEASurement:SPOT:ALL { 0 | OFF | 1 | ON}`

`SENSe:EMC:MEASurement:SPOT:ALL?`

Arguments

0 or OFF disables the All check box

1 or ON enables the All check box

Returns

<Boolean> 0,1

Examples

SENSE:EMC:MEASUREMENT:SPOT:ALL? might return 1, indicating that all spots are included for spot analysis.

SENSe:EMC:MEASurement:SPOT:COUNT

Sets or queries the Maximum number of spots required for spot Analysis in EMC View. Applies only to Pre-scan + Auto spot measurement type.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SPOT:COUNT <value>  
SENSe:EMC:MEASurement:SPOT:COUNT?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

SENSe:EMC:MEASUREMENT:SPOT:COUNT? might return 20, indicating 20 spots to be selected for spot analysis.

SENSe:EMC:MEASurement:SPOT:DETEctor<x>

Sets or queries the detector type of the specified spot detector in EMC View.

<x> = 1 or 2 or 3

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SPOT:DETEctor<x> <arg>  
SENSe:EMC:MEASurement:SPOT:DETEctor<x>?
```

Arguments

<arg> =

AVER = Sets Avg (VRMS) as the detector type

PEAK = Sets +Peak as the detector type

MILSTD = Sets Mil +Peak as the detector type

QUAS = Sets CISPR QPk as the detector type

CPE = Sets CISPR +Pk as the detector type

CAV = Sets CISPR Avg as the detector type

AVGL = Sets Avg (of logs) as the detector type

CAVL = Sets CISPR Avg (of logs) as the detector type

DSA = Sets DEF STAN Avg as the detector type

DSP = Sets DEF STAN Peak as the detector type

Returns

<String> See Argument

Examples

SENSe:EMC:MEASurement:SPOT:DETEctor1? might return QUAS, indicating that the spot detector type for detector 1 is CISPR QPk.

SENSe:EMC:MEASurement:SPOT:DETEctor<x>:ENABLE

Sets or queries the enabling and disabling of specified spot detector in EMC View.

<x> = 1 or 2 or 3

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:MEASurement:SPOT:DETEctor<x>:ENABLE { 0 | OFF | 1 | ON}
SENSe:EMC:MEASurement:SPOT:DETEctor<x>:ENABLE?

Arguments

0 or OFF disables the spot detector

1 or ON enables the spot detector

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASurement:SPOT:DETEctor1:ENABLE? might return 1, indicating that spot detector 1 is enabled.

SENSe:EMC:MEASurement:SPOT:DETEctor<x>:LIMit

Sets or queries the limit of specified spot detector in EMC View.

<x> = 1 or 2 or 3

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SPOT:DETEctor<x>:LIMit <arg>  
SENSe:EMC:MEASurement:SPOT:DETEctor<x>:LIMit?
```

Arguments

<arg> = Either ONE , TWO or THREE

ONE = Sets Limit to Limit 1

TWO = Sets Limit to Limit 2

THREE = Sets Limit to Limit 3

Returns

<String> See Argument

Examples

SENSe:EMC:MEASurement:SPOT:DETEctor2:LIMit? might return ONE, indicating that the limit selected for spot detector 2 is Limit 1.

SENSe:EMC:MEASurement:SPOT:DWELI:TIME

Sets or queries the dwell time of spot detection in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SPOT:DWELl:TIME <value>  
SENSe:EMC:MEASurement:SPOT:DWELl:TIME?
```

Arguments

<value> = <NRf>

Returns

<NRf>

Examples

SENSe:EMC:MEASUREMENT:SPOT:DWELL:TIME? might return 1.000000, indicating that the dwell time of spot detection is 1 s.

SENSe:EMC:MEASurement:SPOT:DWELI:TIME:AUTO

Sets or queries to automatically set the dwell time of spot detection in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SPOT:DWELL:TIME:AUTO { 0 | OFF | 1 | ON}  
SENSe:EMC:MEASurement:SPOT:DWELL:TIME:AUTO?
```

Arguments

0 or OFF disables the Auto check box of dwell time

1 or ON enables the Auto check box of dwell time

Returns

<Boolean> 0,1

Examples

SENSe:EMC:MEASUREMENT:SPOT:DWELL:TIME:AUTO? might return 1, indicating that the dwell time of spot detection is set automatically.

SENSe:EMC:MEASurement:SPOT:STARt (No Query Form)

Starts the spot re-measurement on the selected spots with respect to selected spot detector.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:SPOT:STARt
```

Arguments

None

Returns

None

Examples

SENSe:EMC:MEASUREMENT:SPOT:STARt starts spot re-measurement on the selected spots.

SENSe:EMC:MEASurement:TYPE

Sets or queries the measurement type in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MEASurement:TYPE {PSMS | PSAS | CS}  
SENSe:EMC:MEASurement:TYPE?
```

Arguments

PSMS = Sets Pre-scan+ Manual Spot as measurement type.

PSAS = Sets Pre-scan+ Auto Spot as measurement type.

CS = Sets Complete scan as measurement type.

Returns

<String> PSMS or PSAS or CS

Examples

SENSe:EMC:MEASUREMENT:TYPE might return CS, indicating that Complete scan is the measurement type selected.

SENSe:EMC:MODE

Sets or queries the frequency ranges (mode) in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:MODE {MULT | SING}  
SENSe:EMC:MODE?
```

Arguments

MULT = Sets multiple as frequency range

SING = Sets Single as frequency range

Returns

<String> MULT or SING

Examples

SENSe:EMC:MODE? might return SING, indicating that the frequency range is Single.

SENSe:EMC:OPTimization

Sets or queries the method of optimizing the gain and input bandwidth in the EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:OPTimization { AUTO | MINTime | MAXDynrange | MINNoise }  
SENSe:EMC:OPTimization?
```

Arguments

AUTO = optimizes automatically the gain and input bandwidth.

MINTime = optimizes the gain and input bandwidth to minimize sweep time.

MAXDynrange = optimizes the gain and input bandwidth to maximize the dynamic range.

MINNoise = optimizes the gain and input bandwidth to minimize noise.

Returns

<String> See Argument

Examples

SENSe:EMC:OPTIMIZATION AUTO optimizes automatically the gain and input bandwidth.

SENSe:EMC:POINTs:COUNT

Sets or queries the trace points value in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:POINTs:COUNT { P801 | P2401 | P4001 | P8001 | P10401 | P16001 | P32001 | P64001 }  
SENSe:EMC:POINTs:COUNT?
```

Arguments

P801 = Sets 801 as trace point value.

P2401 = Sets 2401 as trace point value.

P4001 = Sets 4001 as trace point value.

P8001 = Sets 8001 as trace point value.

P10401 = Sets 10401 as trace point value.

P16001 = Sets 16001 as trace point value.

P32001 = Sets 32001 as trace point value.

P64001 = Sets 64001 as trace point value.

Returns

<String> See Arguments

Examples

SENSe:EMC:POINTS:COUNT P2401 sets 2401 as trace point value in EMC view.

SENSe:EMC:RANGe<x>:BANDwidth:VIDeo

Sets or queries the (Video Bandwidth) VBW value of selected range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:BANDwidth:VIDeo <value>

SENSe:EMC:RANGe<x>:BANDwidth:VIDeo?

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:RANGe1:BANDwidth:VIDeo? might return 1.0000000E+6, indicating that the VBW value of range 1 is 1 MHz.

SENSe:EMC:RANGe<x>:BANDwidth:VIDeo:STATe

Sets or queries the enabling or disabling the (Video state) VBW check box of specified range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:BANDwidth:VIDeo:STATe { 0 | OFF | 1 | ON }

SENSe:EMC:RANGe<x>:BANDwidth:VIDeo:STATe?

Arguments

0 or OFF disables the VBW check box

1 or ON enables the VBW check box

Returns

<Boolean> 0,1

Examples

SENSe:EMC:RANGe2:BANDwidth:VIDeo:STATe? might return 0, indicating that VBW check box is disabled for range 2.

SENSe:EMC:RANGe<x>:EXCursion

Sets or queries the excursion value of the specified range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:EXCursion <value>

SENSe:EMC:RANGe<x>:EXCursion?

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:RANGe1:EXCursion? might return 6.0000, indicating that the threshold value of range 1 is 6 dB.

SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth

Sets or queries the (Resolution Bandwidth) RBW value of selected range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth <value>

SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth?

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:RANGe1:FREQuency:STOP? might return 9.00, indicating that the RBW value of range 1 is 9 kHz.

SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO

Sets or queries the Enabling or disabling of RBW Auto checkbox of selected range to set RBW value automatically in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO { 0 | OFF | 1 | ON}  
SENSe:EMC:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO?
```

Arguments

0 or OFF disables the Auto check box

1 or ON enables the Auto check box

Returns

<Boolean> 0,1

Examples

SENSe:EMC:RANGe0:FREQuency:STOP? might return 0, indicating that Auto check box is disabled.

SENSe:EMC:RANGe<x>:FREQuency:STARt

Sets or queries the Start frequency of the specified range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:RANGe<x>:FREQuency:STARt <value>  
SENSe:EMC:RANGe<x>:FREQuency:STARt?
```

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:RANGe1:FREQuency:STARt? might return 150000, indicating that the start frequency of range 1 is 150 kHz.

SENSe:EMC:RANGe<x>:FREQuency:STOP

Sets or queries the stop frequency of selected range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:FREQuency:STOP <value>

SENSe:EMC:RANGe<x>:FREQuency:STOP?

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:RANGe1:FREQuency:STOP? might return 500000, indicating that the stop frequency of range 1 is 500 kHz.

SENSe:EMC:RANGe<x>:LIMit<y>:EQUAL

Sets or queries whether limit start and stop value of selected range and limit are the same in EMC View.

<x> = <NR1> 1 to 20

<y> = <NR1> Either Limit 1 or 2 or 3

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:LIMit<y>:EQUAL { 0 | OFF | 1 | ON }

SENSe:EMC:RANGe<x>:LIMit<y>:EQUAL?

Arguments

0 or OFF disables the Limit same check box

1 or ON enables the Limit same check box

Returns

<Boolean> 0,1

Examples

SENSe:EMC:RANGe1:LIMit1:EQUAL? might return 1, indicating the Limit 1 start and stop value for range 2 are the same.

SENSe:EMC:RANGe<x>:LIMit<y>:STARt

Sets or queries the Limit start value of the specified range and specified limit in EMC View.

<x> = <NR1> 1 to 20

<y> = <NR1> Either Limit 1 or 2 or 3

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:LIMit<y>:STARt <value>

SENSe:EMC:RANGe<x>:LIMit<y>:STARt?

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

SENSe:EMC:RANGe1:LIMit1:STARt? might return 79.0000, indicating that the Limit 1 start value of range 1 is 79 dBuV.

SENSe:EMC:RANGe<x>:LIMit<y>:STOP

Sets or queries the Limit stop value of the specified range and specified limit in EMC View.

<x> = <NR1> 1 to 20

<y> = <NR1> Either Limit 1 or 2 or 3

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

SENSe:EMC:RANGe<x>:LIMit<y>:STOP <value>

SENSe:EMC:RANGe<x>:LIMit<y>:STOP?

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

`SENSe:EMC:RANGe1:LIMit1:STOP?` might return `79.0000`, indicating that the Limit 1 stop value of range 1 is 79 dBuV.

SENSe:EMC:RANGe<x>:STATe

Sets or queries Enabling and disabling the selected range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:RANGe<x>:STATe { 0 | OFF | 1 | ON }  
SENSe:EMC:RANGe<x>:STATe?
```

Arguments

0 or OFF disables the range

1 or ON enables the range

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:RANGe2:STATe?` might return 0, indicating that range 2 is disabled.

SENSe:EMC:RANGe<x>:THReshold

Sets or queries the threshold value of the specified range in EMC View.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:RANGe<x>:THReshold <value>  
SENSe:EMC:RANGe<x>:THReshold?
```

Arguments

<value> = <NR3>

Returns

<NR3>

Examples

`SENSe:EMC:RANGe1:THReshold?` might return `46.0000`, indicating that the threshold value of range 1 is 46 dBuV.

SENSe:EMC:REGion

Sets or queries the region of standard in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:REGion {EURO | US}  
SENSe:EMC:REGion?
```

Arguments

`EURO` = Sets Europe as the region

`US` = Sets US as the region

Returns

<String> See Argument

Examples

`SENSe:EMC:REGION?` might return `US`, indicating that the region selected is US.

SENSe:EMC:REPOrt:INCLude:CONTRol:SETTings

Sets or queries to include or exclude control settings in report by enabling or disabling include control settings check box in report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:REPOrt:INCLude:CONTRol:SETTings { 0 | OFF | 1 | ON}  
SENSe:EMC:REPOrt:INCLude:CONTRol:SETTings?
```

Arguments

`0` or `OFF` exclude the control settings in report

`1` or `ON` include the control settings in report

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:REPort:INCLude:CONTROL:SETTINGS?` might return 1, indicating that control settings is included in report.

SENSe:EMC:REPort:INCLude:EMISsion:RESUltS

Sets or queries to include or exclude emission results in report by enabling or disabling include emission results check box in report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:REPort:INCLude:EMISsion:RESUltS { 0 | OFF | 1 | ON}  
SENSe:EMC:REPort:INCLude:EMISsion:RESUltS?
```

Arguments

0 or OFF exclude emission results in report

1 or ON include emission results in report

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:REPort:INCLude:EMISSION:RESULTS?` might return 1, indicating that emission results is included in report.

SENSe:EMC:REPort:INCLude:ENVIronment:INFOrmation

Sets or queries to include or exclude environment information in report by enabling or disabling environment information check box in report setup of EMC display.

<x> = <NR1> 1 to 20

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

```
SENSe:EMC:REPort:INCLude:ENVIronment:INFOrmation { 0 | OFF | 1 | ON}  
SENSe:EMC:REPort:INCLude:ENVIronment:INFOrmation?
```

Arguments

0 or OFF exclude environment information in report

1 or ON include environment information in report

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:REPORT:INCLUDE:ENVIRONMENT:INFORMATION?` might return 1, indicating that environment information is included in report.

SENSe:EMC:REPOrt:INCLude:ENVIronment:INFOrmation:ADD (No Query Form)

Adds one Environment information content by adding one title and its corresponding value in the report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPORT:INCLude:ENVIronment:INFOrmation:ADD "Title","Value"`

Arguments

Title = <String>

Value = <String>

Returns

None

Examples

`SENSe:EMC:REPORT:INCLUDE:ENVIRONMENT:INFORMATION:ADD "Temperature","20"` adds the environment information temperature and its value as 20 in the report.

SENSe:EMC:REPOrt:INCLude:ENVIronment:INFOrmation:DELeTe:ALL (No Query Form)

Deletes all the environment information in the report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPORT:INCLude:ENVIronment:INFOrmation:DELeTe:ALL`

Arguments

None

Returns

None

Examples

`SENSe:EMC:REPORT:INCLUDE:ENVIRONMENT:INFORMATION:DELETE:ALL` deletes all the environment information in the report.

SENSe:EMC:REPOrt:INCLude:EUT:INFOrmation

Sets or queries to include or exclude EUT (Equipment under test) information in report by enabling or disabling EUT information check box in report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPOrt:INCLude:EUT:INFOrmation { 0 | OFF | 1 | ON }`
`SENSe:EMC:REPOrt:INCLude:EUT:INFOrmation?`

Arguments

0 or OFF exclude EUT information in report

1 or ON include EUT information in report

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:REPORT:INCLUDE:EUT:INFORMATION?` might return 0, indicating that EUT information is excluded in report.

SENSe:EMC:REPOrt:INCLude:EUT:INFOrmation:ADD (No Query Form)

Adds one EUT information content by adding one title and its corresponding value in the report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPOrt:INCLude:EUT:INFOrmation:ADD "Title","Value"`

Arguments

Title = <String>

Value = <String>

Returns

None

Examples

`SENSe:EMC:REPORT:INCLUDE:EUT:INFORMATION:ADD "Serial Number","ABC156"` adds the EUT information Serial Number and its value as ABC156 in the report.

SENSe:EMC:REPOrt:INCLude:EUT:INFOrmation:DElete:ALL (No Query Form)

Deletes all the EUT information in the report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPOrt:INCLude:EUT:INFOrmation:DElete:ALL`

Arguments

None

Returns

None

Examples

`SENSe:EMC:REPORT:INCLUDE:EUT:INFORMATION:DELETE:ALL` deletes all the EUT information in the report.

SENSe:EMC:REPOrt:INCLude:GRAPH

Sets or queries to include or exclude graph of measurement results in report by enabling or disabling include graph check box in report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPOrt:INCLude:GRAPH { 0 | OFF | 1 | ON }`
`SENSe:EMC:REPOrt:INCLude:GRAPH?`

Arguments

0 or OFF exclude the graph in report

1 or ON include the graph in report

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:REPort:INCLude:GRAPH?` might return 0, indicating that graph is excluded in report.

SENSe:EMC:REPort:INCLude:INSPEct:FREQuency:RESUltS

Sets or queries to include or exclude inspect frequency results in report by enabling or disabling include inspect req results check box in report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPort:INCLude:INSPEct:FREQuency:RESUltS { 0 | OFF | 1 | ON}`
`SENSe:EMC:REPort:INCLude:INSPEct:FREQuency:RESUltS?`

Arguments

0 or OFF exclude inspect frequency results in report

1 or ON include inspect frequency results in report

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:REPort:INCLude:INSPEct:FREQuency:RESUltS?` might return 0, indicating that inspect frequency results is excluded in report.

SENSe:EMC:REPort:INCLude:USER:INFORmation

Sets or queries to include or exclude user information in report by enabling or disabling user information check box in report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPort:INCLude:USER:INFORmation { 0 | OFF | 1 | ON}`
`SENSe:EMC:REPort:INCLude:USER:INFORmation?`

Arguments

0 or OFF exclude user information in report

1 or ON include user information in report

Returns

<Boolean> 0,1

Examples

`SENSe:EMC:REPORT:INCLUDE:USER:INFORMATION?` might return 1, indicating that user information is included in report.

SENSe:EMC:REPOrt:INCLude:USER:INFOrmation:ADD (No Query Form)

Adds one user information content by adding one title and its corresponding value in the report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPOrt:INCLude:USER:INFOrmation:ADD "Title","Value"`

Arguments

Title = <String>

Value = <String>

Returns

None

Examples

`SENSe:EMC:REPORT:INCLUDE:USER:INFORMATION:ADD "Engineer","xyz"` adds the user information engineer and its value as xyz in the report.

SENSe:EMC:REPOrt:INCLude:USER:INFOrmation:DELeTe:ALL (No Query Form)

Deletes all the user information in the report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPOrt:INCLude:USER:INFOrmation:DELeTe:ALL`

Arguments

None

Returns

None

Examples

`SENSe:EMC:REPORT:INCLUDE:USER:INFORMATION:DELETE:ALL` deletes all the user information in the report.

SENSe:EMC:REPOrt:MEASurement:HEADing

Sets or queries the measurement heading in the report setup of EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:REPOrt:MEASurement:HEADing <value>`

`SENSe:EMC:REPOrt:MEASurement:HEADing?`

Arguments

`<value> = <String>`

Returns

`<String>`

Examples

`SENSe:EMC:REPORT:MEASUREMENT:HEADING?` might return “spot”, indicating that the measurement heading of the report is spot.

SENSe:EMC:STANdard

Sets or queries the standard in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Sense commands

Syntax

`SENSe:EMC:STANdard <arg>`

`SENSe:EMC:STANdard?`

Arguments

When the region is US

`<arg> = {FCC Part 15 | FCC Part 18 | MIL-STD 461G}`

When the region is Europe

```
<arg> = {EN55011 | EN55013 | EN55014 | EN55015 | EN55025 | EN55032 | EN60601 | DEF STAN | EN61000}
```

Returns

<String> See Argument

Examples

SENSe:EMC:STANDARD FCC Part 15 sets FCC Part 15 as the standard.

[SENSe]:FDVTime[:MEASview<y>]:SELEcted:SOURce

Sets or queries the source of Frequency deviation versus Time for a selected measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

The source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:FDVTime[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:FDVTime[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents the measurement index based on the number of sources of connected instrument, where the MEASview keyword is optional by default and y is 1.

Examples

SENSe:FDVTime:MEASview<y>:SELECTED:SOURce? queries the Source for Frequency deviation versus Time measurement view 1.

[SENSe]:{FM|PM}:BURSt:THReshold

Sets or queries the threshold level above which the input signal is determined to be a burst in the FM/PM measurement. The burst detected first is used for the measurement.

Conditions

Measurement views: FM, PM

Group

Sense commands

Syntax

```
[SENSe]:{FM|PM}:BURSt:THReshold <value>
[SENSe]:{FM|PM}:BURSt:THReshold?
```

Arguments

<value>: :<NRf> specifies the threshold level. Range: –100.0 to –10.0 dB.

Returns

<Boolean> 0,1

Examples

SENSE:FM:BURST:THRESHOLD -10 sets the threshold level to –10 dB in the FM measurement.

[SENSe]:{FM|PM}:FREQuency:OFFSet

Sets or queries the carrier frequency offset in the FM/PM measurement.

Conditions

Measurement views: FM, PM

Group

Sense commands

Syntax

```
[SENSe]:{FM|PM}:FREQuency:OFFSet <value>
[SENSe]:{FM|PM}:FREQuency:OFFSet?
```

Arguments

<value>: :<NRf> specifies the frequency offset from the center frequency. Range: $-(\text{MeasBW} \times 1.1)/2$ to $+(\text{MeasBW} \times 1.1)/2$ where MeasBW is set by the command [SENSe]:{AM|FM|PM}:{BANDwidth|BWIDth}:MEASurement.

Examples

SENSE:FM:FREQUENCY:OFFSET 10MHZ sets the carrier frequency offset to 10 MHz.

[SENSe]:{FM|PM}:FREQuency:OFFSet:MARKer (No Query Form)

Sets the frequency offset from the selected marker location in the FM measurement.

Sets the frequency offset from the selected delta marker location in the PM measurement.

Conditions

Measurement views: FM, PM

Group

Sense commands

Syntax

```
[SENSe]:{FM|PM}:FREQuency:OFFSet:MARKer
```

Arguments

None

Examples

SENSE:FM:FREQUENCY:OFFSET:MARKER sets frequency offset from the selected Marker position.

[SENSe]:{FM|PM}:FREQuency:SEARch:AUTO

Determines whether to detect the carrier frequency automatically or manually in the FM/PM measurements.

Conditions

Measurement views: FM, PM

Group

Sense commands

Syntax

```
[SENSe]:{FM|PM}:FREQuency:SEARch:AUTO { OFF | ON | 0 | 1 }
[SENSe]:{FM|PM}:FREQuency:SEARch:AUTO?
```

Arguments

OFF or **0** specifies that the carrier frequency is set manually. Use the command **[SENSe]:{FM|PM}:FREQuency:OFFSet** to set the carrier offset frequency.

ON or **1** specifies that the carrier frequency is detected automatically.

Examples

SENSE:FM:FREQUENCY:SEARCH:AUTO ON specifies that the carrier frequency is detected automatically.

[SENSe]:{FSETtling|PSETtling}:{BANDwidth|BWIDTh}

Sets or queries the measurement bandwidth for the Settling Time measurements.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:{BANDwidth|BWIDTh} <value>
[SENSe]:{FSETtling|PSETtling}:{BANDwidth|BWIDTh}?
```

Related Commands

[FETCh:{AM|FM|PM}? \(on page 1100\)](#)

[READ:AM:RESult? \(on page 1595\)](#)

Arguments

<value>::<NRf> specifies the bandwidth for the specified settling time measurement.

Examples

SENSE:FSETTLING:BANDwidth 1e6 sets the Frequency Settling time measurement bandwidth to 1 MHz.

[SENSe]:{FSETtling|PSETtling}:{BANDwidth|BWIDTh}:ACTual? (Query Only)

Queries the actual measurement bandwidth in the Settling Time measurements.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:{BANDwidth|BWIDTh}:ACTual?
```

Arguments

None

Returns

<NRf> The actual measurement bandwidth in Hz.

Examples

SENSe:FSETTLING:BANDWIDTH:ACTUAL? might return 40.000E+6, indicating that the actual RBW is 40.00 MHz.

[SENSe]:{FSETtling|PSETtling}:FREQuency:CENTer

Sets or queries the measurement frequency.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:FREQuency:CENTer <value>
[SENSe]:{FSETtling|PSETtling}:FREQuency:CENTer?
```

Arguments

<value>::<NRf> specifies the measurement frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:PSETTLING:FREQUENCY:CENTER 7.5GHz sets the Phase Settling Time measurement frequency to 7.5 GHz.

[SENSe]:{FSETtling|PSETtling}:FREQuency:OFFSet

Sets or queries the offset frequency.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:FREQuency:OFFSet <value>
[SENSe]:{FSETtling|PSETtling}:FREQuency:OFFSet?
```

Arguments

<value>::<NRf> specifies the offset frequency.

Range: $\pm (0.5 \times \text{Measurement bandwidth})$

Default: 0 Hz.

Examples

SENSe:PSETTLING:FREQUENCY:OFFSET 20E6 sets the Phase Settling Time offset frequency to 20 MHz.

[SENSe]:{FSETtling|PSETtling}:LENGth

Sets or queries the measurement length.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:LENGth <value>
[SENSe]:{FSETtling|PSETtling}:LENGth?
```

Arguments

<value>::<NRf> specifies the measurement length in seconds.

Range: 10 ns to [(acquisition length) - 400 ns].

If [(analysis start) + (analysis length)] > [(acquisition length) - 400 ns], the actual measurement length is reduced to [(acquisition length) - 200 ns].

Default: 1 ms.

Examples

SENSe:PSETTLING:LENGTH 25.625us sets the measurement length to 25.625 μ s.

[SENSe]:{FSETtling|PSETtling}:LENGth:ACTual? (Query Only)

Queries the actual measurement length for the Settling Time measurements.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:LENGth:ACTual?
```

Arguments

None

Returns

<NRf> The actual measurement length in Hz.

Examples

SENSe:FSETTLING:LENGTH:ACTUAL? might return 25.625E-6, indicating that the actual measurement length is 25.625 μ s.

[SENSe]:{FSETtling|PSETtling}:MASK:LIMit

Sets or queries the frequency or phase limit for the specified region.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:MASK:LIMit <x> <value>
[SENSe]:{FSETtling|PSETtling}:MASK:LIMit <x>?
```

Arguments

<x> ::= { 1 | 2 | 3 } specifies the mask region.

<value> ::= <NRf> specifies the frequency or phase limit for the region.

For Frequency Settling Time:

- Range: 1 Hz to 1 GHz
- Default: 500 kHz

For Phase Settling Time:

- Range: 0.1 degree to 180 degrees
- Default: 1 degree

Examples

SENSe:FSETTLING:MASK:LIMIT2 7.5E5 sets the limit for region 2 to 750 kHz.

[SENSe]:{FSETtling|PSETtling}:MASK:STATe

Sets or queries mask test state.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:MASK:STATe { OFF | ON | 0 | 1 }
```

Arguments

OFF or 0 enables Mask test.

ON or 1 disables Mask test.

Examples

SENSe:FSETTLING:MASK:STATE ON enables mask test.

[SENSe]:{FSETtling|PSETtling}:MASK:TIME:REFeRence

Sets or queries the mask time reference.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:MASK:TIME:REFeRence { TRIGger | TRANSition }
```

Arguments

TRIGger specifies that the trigger point service as the mask time reference.

TRANSition specifies that the point where the signal transitions out of the previous tolerance range serves as the mask time reference.

Default: Trigger

Examples

SENSe:FSETTLING:MASK:TIME:REFeRence TRIGGER specifies that the trigger point serve as the mask time reference.

[SENSe]:{FSETtling|PSETtling}:MASK:TIME:START

Sets or queries the mask region start time in seconds.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:MASK:TIME:START <x> <value>
[SENSe]:{FSETtling|PSETtling}:MASK:TIME:START <x>?
```

Arguments

<x>::= { 1 | 2 | 3 } specifies the mask region.

<value>::<NRf> specifies the start time of the mask region in seconds.

Examples

SENSe:FSETTLING:MASK:TIME:START3? might return 1.0000E-3 as the start time for mask region 3.

[SENSe]:{FSETtling|PSETtling}:MASK:TIME:STOP

Sets or queries the mask region stop time in seconds.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:MASK:TIME:STOP <value>
[SENSe]:{FSETtling|PSETtling}:MASK:TIME:STOP <x>?
```

Arguments

<value>::<NRf> specifies the stop time of the mask in seconds.

Examples

SENSe:FSETTLING:MASK:TIME:STOP? might return 6.244120000E-3 as the mask stop time.

[SENSe]:{FSETtling|PSETtling}:MAXTracepoints

Sets or queries the maximum trace points in the Settling Time measurements.

Conditions

Measurement views: Frequency and Phase Settling

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:MAXTracepoints { ONEK | TENK | HUNDredk | NEVerdecimate }
[SENSe]:{FSETtling|PSETtling}:MAXTracepoints?
```

Arguments

ONEK sets the maximum trace points to 1 k.

TENK sets the maximum trace points to 10 k.

HUNDredk sets the maximum trace points to 100 k.

NEVerdecimate never decimates the trace points.

Examples

SENSe:PSETTLING:MAXTRACEPOINTS TENK sets the maximum trace points to 10 k.

[SENSe]:{FSETtling|PSETtling}:SDURation:MINimum

Sets or queries the minimum settled duration in seconds. This duration time determines the result of :FETCh:
{FSETtling | PSETtling}:SLMSd[:PASS]?

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:SDURation:MINimum <value>
[SENSe]:{FSETtling|PSETtling}:SDURation:MINimum?
```

Arguments

<value>::<NRf> specifies the minimum settled duration in seconds.

Examples

SENSe:FSETTLING:SDURATION:MINIMUM 17.73E-3 sets the minimum settled duration to 17.73 ms.

[SENSe]:{FSETtling|PSETtling}:TARGet:REFeRence

Sets or queries the target reference frequency.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:TARGet:REFeRence { AUTO | MFReq }
[SENSe]:{FSETtling|PSETtling}:TARGet:REFeRence?
```

Arguments

AUTO causes the instrument to determine the target reference value by averaging at least the last 256 samples at the end of the measurement period.

MFReq specifies that the Measurement Frequency value is used as the target reference frequency.

Default: AUTO

Examples

`SENSe:FSETTLING:TARGET:REFERENCE MFREQ` specifies that the target reference frequency is the measurement frequency.

[SENSe]:{FSETtling|PSETtling}:TOLerance

Sets or queries the frequency or phase range into which the signal must settle.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Sense commands

Syntax

```
[SENSe]:{FSETtling|PSETtling}:TOLerance <value>
[SENSe]:{FSETtling|PSETtling}:TOLerance?
```

Arguments

`<value>::<NRf>` specifies the frequency or phase range.

For Frequency Settling Time:

- Range: 1 Hz to 1 GHz
- Default: 500 kHz

For Phase Settling Time:

- Range: 0.1 degree to 180 degrees
- Default: 1 degree

Examples

`SENSe:FSETTLING:TOLERANCE 2.5E5` sets the tolerance to 250 kHz.

[SENSe]:FVTime[:MEASview<y>]:CLEAr:RESults (No Query Form)

Restarts multi-trace functions (Average and Max/Min Hold).

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:CLEAr:RESults
```

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

Examples

`SENSe:FVTIME:MEASview1:CLEAr:RESULTS` restarts multi-trace functions.

[SENSe]:FVTime[:MEASview<y>]:FREQuency:CENTer

Sets or queries the center frequency in the Frequency versus Time measurement.

NOTE: The center, start and stop frequencies are set interlocking each other with the following relationships: (start frequency) = (center frequency) - (span)/2 and (stop frequency) = (center frequency) + (span)/2.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:FREQuency:CENTer <value>
[SENSe]:FVTime[:MEASview<y>]:FREQuency:CENTer?
```

Related Commands

[\[SENSe\]:FVTime\[:MEASview<y>\]:FREQuency:START](#) (on page 2162)

[\[SENSe\]:FVTime\[:MEASview<y>\]:FREQuency:STOP](#) (on page 2164)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:FVTIME:MEASview1:FREQUENCY:CENTer 7.5GHz sets the center frequency to 7.5 GHz.

[SENSe]:FVTime[:MEASview<y>]:FREQuency:SPAN

Sets or queries the frequency span in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:FREQuency:SPAN <value>
[SENSe]:FVTime[:MEASview<y>]:FREQuency:SPAN?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> is the frequency span.

Range: 10 Hz to 40 MHz (Standard) / 110MHz (Option 110)

Examples

SENSe:FVTime:MEASview1:FREQUENCY:SPAN 20MHz sets the span to 20 MHz.

[SENSe]:FVTime[:MEASview<y>]:FREQUENCY:SPAN:LINK

Sets or queries if frequency span is linked or not in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:FREQUENCY:SPAN:LINK <value>
[SENSe]:FVTime[:MEASview<y>]:FREQUENCY:SPAN:LINK?
```

Arguments

OFF or 0 specifies that Link to Span is not checked.

ON or 1 specifies that Link to Span is checked .

Examples

SENSe:FVTime:MEASview1:FREQUENCY:SPAN:LINK? might return 0 or 1 based on condition of Link to Span checkbox.

[SENSe]:FVTime[:MEASview<y>]:FREQUENCY:START

Sets or queries the measurement start frequency (left edge on the graph) in the Frequency versus Time measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the

[SENSe]:FVTime[:MEASview<y>]:FREQUENCY:CENTer command.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:FREQUENCY:START <value>
[SENSe]:FVTime[:MEASview<y>]:FREQUENCY:START?
```

Related Commands

[\[SENSe\]:FVTime\[:MEASview<y>\]:FREQUENCY:STOP](#) (on page 2164)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> is the measurement start frequency.

Range: (center frequency) $\pm$ (span)/2.

Examples

SENSe:FVTIME:MEASview1:FREQUENCY:START 6.95GHz sets the start frequency to 6.95 GHz.

[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP

Sets or queries the frequency step size (the amount per press by which the up or down key changes the setting value).

Programming a specified step size sets [SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP:AUTO OFF.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP <value>
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP?
```

Related Commands

[\[SENSe\]:FVTime\[:MEASview<y>\]:FREQuency:STEP:AUTO](#) (on page 2163)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:FVTIME:MEASview1:FREQUENCY:STEP 1.5kHz sets the step size to 1.5 kHz.

[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP:AUTO

Determines whether to set the frequency step size automatically or manually.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP:AUTO { OFF | ON | 0 | 1 }
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP:AUTO?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 specifies that the frequency step size is set manually using the [SENSe]:FVTime[:MEASview<y>]:FREQuency:STEP command.

ON or 1 specifies that the frequency step size is set automatically.

Examples

SENSe:FVTIME:MEASview1:BANDWIDTH:AUTO ON sets the frequency step size automatically.

[SENSe]:FVTime[:MEASview<y>]:FREQuency:STOP

Sets or queries the measurement stop frequency (right edge of the graph) in the Frequency versus Time measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the

[SENSe]:FVTime[:MEASview<y>]:FREQuency:CENTer command.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STOP <value>
[SENSe]:FVTime[:MEASview<y>]:FREQuency:STOP?
```

Related Commands

[\[SENSe\]:FVTime\[:MEASview<y>\]:FREQuency:START](#) (on page 2162)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> is the measurement stop frequency.

Range: (center frequency) ± (span)/2.

Examples

SENSe:FVTIME:MEASview1:FREQUENCY:STOP 7.05GHz sets the stop frequency to 7.05 GHz.

[SENSe]:FVTime[:MEASview<y>]:MAXTracepoints

Sets or queries the maximum trace points in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Sense commands

Syntax

```
[SENSe]:FVTime[:MEASview<y>]:MAXTracepoints { ONEK | TENK | HUNDredk | NEVerdecimate }
[SENSe]:FVTime[:MEASview<y>]:MAXTracepoints?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

ONEK sets the maximum trace points to 1 k.

TENK sets the maximum trace points to 10 k.

HUNDredk sets the maximum trace points to 100 k.

NEVerdecimate never decimates the trace points.

Examples

SENSe:FVTIME:MEASview1:MAXTRACEPOINTS TENK sets the maximum trace points to 10 k.

[SENSe]:FVTime[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source with respect to the Frequency versus Time Measurement View number

Conditions

Measurement views: Frequency versus Time with specified Measurement view number

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
SENSe:FVTime[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
SENSe:FVTime[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

SENSe:FVTime:MEASview1:SELEcted:SOURce? queries or sets the Source for Frequency versus Time Measurement View 1.

[SENSe]:IQVTime[:MEASview<y>]:CLEar:RESults (No Query Form)

Restarts multi-trace functions (Average and Max/Min Hold).

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:CLEAr:RESults
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

SENSe:IQVTIME:MEASview1:CLEAR:RESULTS restarts multi-trace functions.

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer

Sets or queries the center frequency in the RF I&Q versus Time measurement.

NOTE: The center, start and stop frequencies are set interlocking each other with the following relationships: (start frequency) = (center frequency) - (span)/2 and (stop frequency) = (center frequency) + (span)/2.

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer <value>
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer?
```

Related Commands

[\[SENSe\]:IQVTime\[:MEASview<y>\]:FREQuency:START](#) (on page 2167)

[\[SENSe\]:IQVTime\[:MEASview<y>\]:FREQuency:STOP](#) (on page 2169)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:IQVTIME:MEASview1:FREQUENCY:CENTER 7.5GHz sets the center frequency to 7.5 GHz.

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN

Sets or queries the frequency span in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN <value>
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> is the frequency span.

Range: 10 Hz to 40 MHz (Standard) / 110 MHz (Option 110)

Examples

SENSe:IQVTIME:MEASview1:FREQUENCY:SPAN 20MHz sets the span to 20 MHz.

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN:LINK

Sets or queries if frequency span is linked or not in the RF I & Q versus Time measurement.

Conditions

Measurement views: RF I & Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN:LINK <value>
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:SPAN:LINK?
```

Arguments

OFF or 0 specifies that Link to Span is not checked.

ON or 1 specifies that Link to Span is checked .

Examples

SENSe:IQVTime:MEASview1:FREQUENCY:SPAN:LINK? might return 0 or 1 based on condition of Link to Span checkbox.

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:START

Sets or queries the measurement start frequency (left edge on the graph) in the RF I&Q versus Time measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer command.

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:START <value>
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:START?
```

Related Commands

[\[SENSe\]:IQVTime\[:MEASview<y>\]:FREQuency:STOP](#) (on page 2169)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> is the measurement start frequency.

Range: (center frequency) $\pm$ (span)/2.

Examples

SENSe:IQVTIME:MEASview1:FREQUENCY:START 6.95GHz sets the start frequency to 6.95 GHz.

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP

Sets or queries the frequency step size (the amount per press by which the up or down key changes the setting value). Programming a specified step size sets [SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP:AUTO OFF.

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP <value>
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP?
```

Related Commands

[\[SENSe\]:IQVTime\[:MEASview<y>\]:FREQuency:STEP:AUTO](#) (on page 2169)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:IQVTIME:MEASview1:FREQUENCY:STEP 1.5kHz sets the step size to 1.5 kHz.

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP:AUTO

Determines whether to set the frequency step size automatically or manually.

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP:AUTO { OFF | ON | 0 | 1 }
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP:AUTO?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 specifies that the frequency step size is set manually using the [SENSe]:IQVTime[:MEASview<y>]:FREQuency:STEP command.

ON or 1 specifies that the frequency step size is set automatically.

Examples

SENSe:IQVTIME:MEASview1:FREQUENCY:STEP:AUTO ON sets the frequency step size automatically.

[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STOP

Sets or queries the measurement stop frequency (right edge of the graph) in the RF I&Q versus Time measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the [SENSe]:IQVTime[:MEASview<y>]:FREQuency:CENTer command.

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STOP <value>
[SENSe]:IQVTime[:MEASview<y>]:FREQuency:STOP?
```

Related Commands

[\[SENSe\]:IQVTime\[:MEASview<y>\]:FREQuency:START](#) (on page 2167)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> is the measurement stop frequency.

Range: (center frequency) $\pm$ (span)/2.

Examples

`SENSe:IQVTime:MEASview1:FREQUENCY:STOP 7.05GHz` sets the stop frequency to 7.05 GHz.

[SENSe]:IQVTime[:MEASview<y>]:MAXTracepoints

Sets or queries the maximum trace points in the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Sense commands

Syntax

```
[SENSe]:IQVTime[:MEASview<y>]:MAXTracepoints { ONEK | TENK | HUNDredk | NEVerdecimate }
[SENSe]:IQVTime[:MEASview<y>]:MAXTracepoints?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

ONEK sets the maximum trace points to 1 k.

TENK sets the maximum trace points to 10 k.

HUNDredk sets the maximum trace points to 100 k.

NEVerdecimate never decimates the trace points.

Examples

`SENSe:IQVTime:MEASview1:MAXTRACEPOINTS TENK` sets the maximum trace points to 10 k.

[SENSe]:IQVTime[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source with respect to the RF I&Q versus Time Measurement View number

Conditions

Measurement views: RF I&Q versus Time

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
SENSe:IQVTime[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
SENSe:IQVTime[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

`SENSe:IQVTime:MEASview1:SELEcted:SOURce?` queries or sets the Source for RF I&Q versus Time.

SENSe:LTE:ACLR:BANDwidth:RESolution

Sets or queries the resolution bandwidth (RBW) in the LTE ACLR display.

Conditions

Measurement views: LTE ACLR

Group

Sense commands

Syntax

`SENSe:LTE:ACLR:BANDwidth:RESolution`

Arguments

`<value>::<NRf>` specifies the resolution bandwidth

Returns

`<NR3>`

Examples

`SENSe:LTE:ACLR:BANDWIDTH:RESOLUTION?` might return `100.0000000E+3`, indicating the RBW is 100 kHz.

SENSe:LTE:ACLR:BANDwidth:VIDeo

Sets or queries the video bandwidth (VBW) in the LTE ACLR display.

Conditions

Measurement views: LTE ACLR

Group

Sense commands

Syntax

`SENSe:LTE:ACLR:BANDwidth:VIDeo <value>`

Arguments

`<value>::<NRf>` specifies the video bandwidth

Returns

`<NR3>`

Examples

`SENSe:LTE:ACLR:BANDWIDTH:VIDEO 2.0000000E+3` sets the VBW to 2 kHz.

SENSe:LTE:ACLR:BANDwidth:VIDeo:STATe

Sets or queries enabling or disabling the video bandwidth (VBW) in the LTE ACLR display.

Conditions

Measurement views: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:BANDwidth:VIDeo:STATe { 0 | 1 }  
SENSe:LTE:ACLR:BANDwidth:VIDeo:STATe?
```

Arguments

0 disables the VBW.

1 enables the VBW.

Returns

0 means that the VBW is disabled.

1 means that the VBW is enabled.

Examples

SENSe:LTE:ACLR:BANDWIDTH:VIDEO:STATE 1 sets the VBW to automatic (enabled) and is decided by the analysis module.

SENSe:LTE:ACLR:CHANnel:IBANdwidth

Sets or queries the reference channel integration bandwidth for the LTE ACLR display.

Conditions

Measurement views: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:CHANnel:IBANdwidth <value>  
SENSe:LTE:ACLR:CHANnel:IBANdwidth?
```

Arguments

<value>::<NRf> specifies the channel integration bandwidth.

Returns

<NR3>

Examples

SENSe:LTE:ACLR:CHANNEL:IBANDWIDTH? might return 18.000000E+6, indicating that the integration bandwidth is 18 MHz.

SENSe:LTE:ACLR:CHANnel:WIDTh

Sets or queries the reference channel width for the LTE ACLR display.

Conditions

Measurement views: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:CHANnel:WIDTh <value>  
SENSe:LTE:ACLR:CHANnel:WIDTh?
```

Arguments

<value>::<NRf> specifies the reference channel width.

Returns

<NR3>

Examples

SENSe:LTE:ACLR:CHANNEL:WIDTH 5.00000000E+6 sets the reference channel width to 5 MHz.

SENSe:LTE:ACLR:CLEar:RESults (No Query Form)

Clears the results in the LTE ACLR measurement.

Conditions

Measurement views: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:CLEar:RESults
```

Arguments

None

Examples

SENSe:LTE:ACLR:CLEAR:RESULTS clears the results of the LTE ACLR measurement.

SENSe:LTE:ACLR:FREQuency

Sets or queries the measurement center frequency in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:FREQuency <value>  
SENSe:LTE:ACLR:FREQuency?
```

Arguments

<value>: : <NRf> specifies the center frequency

Returns

<NR3>

Examples

SENSe:LTE:ACLR:FREQUENCY 1.000000000E+9 sets the center frequency to 1.0 GHz.

SENSe:LTE:ACLR:MFILter

Sets or queries the shape of the filter for the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:MFILter { GAUSSian | RECTangular }  
SENSe:LTE:ACLR:MFILter?
```

Arguments

GAUSSian: sets the filter shape to Gaussian.

RECTangular: sets the filter shape to rectangular.

Returns

GAUSSIAN: means the filter shape is Gaussian.

RECTangular: means the filter shape is rectangular.

Examples

SENSe:LTE:ACLR:MFILTER RECT sets the filter shape to rectangular.

SENSe:LTE:ACLR:MODE:REALtime

Sets or queries the real-time LTE ACLR measurement mode. When set to real-time, the reference channel and all requested adjacent channel regions are acquired together. When real-time is off, the measurement is done in Swept mode (an acquisition for each adjacent band).

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:MODE:REALtime { OFF | ON | 0 | 1 }  
SENSe:LTE:ACLR:MODE:REALtime?
```

Arguments

OFF or 0 turns off the automatic update.

ON or 1 turns on automatic updates center frequency.

Returns

OFF or 0 means automatic update is off.

ON or 1 means automatic updates are off.

Examples

SENSe:LTE:ACLR:MODE:REALTIME? might return 1 to indicate the real-time checkbox in the LTE ACLR control panel is enabled.

SENSe:LTE:ACLR:NFLoor:ACQuire (No Query Form)

Enables measurement of the noise floor for the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:NFLoor:ACQuire
```

Arguments

None

Examples

SENSe:LTE:ACLR:NFLoor:ACQUIRE will enable measurement of the noise floor in the LTE ACLR measurement.

SENSe:LTE:ACLR:NFLoor:CORReCted? (Query Only)

Returns whether or not noise correction was applied on the last acquisition in the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:NFLoor:CORReCted?
```

Returns

1 means that noise correction was applied on the last acquisition.

0 means that noise correction was not applied on the last acquisition.

Examples

`SENSe:LTE:ACLR:NFLoor:CORRECTED?` might return 1, indicating that noise correction was applied on the last acquisition.

SENSe:LTE:ACLR:NFLoor:STATe

Determines whether to enable or disable the correction for noise floor for the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:NFLoor:STATe { OFF | ON | 0 | 1 }  
SENSe:LTE:ACLR:NFLoor:STATe?
```

Arguments

OFF or 0 disables noise correction in the measurement view.

ON or 1 enables noise correction in the measurement view.

Returns

OFF or 0 means that noise correction is disabled in the measurement view.

ON or 1 means that noise correction is enabled in the measurement view.

Examples

`SENSe:LTE:ACLR:NFLoor:STATE OFF` disables noise correction in the measurement view.

SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution

Sets or queries the resolution bandwidth (RBW) value in the specified row in the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution <value>  
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution?
```


Arguments

<value>: : <NRf> specifies the RBW in the specified row.

Returns

<NR3>

Examples

SENSe:LTE:ACLR:OFFSet4:BANDWIDTH:RESOLUTION 30.000000000E+3 sets the RBW to 30 kHz for row 4.

SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:COUNT

Sets or queries the count for the resolution bandwidths in the specified row in the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:COUNT <value>
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:COUNT?

Arguments

<value>: : <NR1> specifies a count integer

Returns

<NR1>

Examples

SENSe:LTE:ACLR:OFFSet1:BANDWIDTH:RESOLUTION:COUNT 10 sets the count for row 1 to 10.

SENSe:LTE:ACLR:OFFSet<X>:BANDwidth:RESolution:FILTer

Sets or queries the filter bandwidth resolution under Offset & Limit table tab for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Parameter <x> represents the row in the Offsets & Limits table

Group

Sense commands

Syntax

SENSe:LTE:ACLR:OFFSet<X>:BANDwidth:RESolution:FILTer <value>
SENSe:LTE:ACLR:OFFSet<X>:BANDwidth:RESolution:FILTer?

Arguments

<value>::<NRf> specifies the filter bandwidth resolution in the Offset & Limit table.

Returns

<NR3>

Examples

SENSe:LTE:ACLR:OFFSET1:BANDWIDTH:RESOLUTION:FILTER? might return 100.0000000000E+3 indicating the value of filter bandwidth of the first row is 100 kHz.

SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo

Sets or queries the resolution video bandwidth (VBW) value in the specified row in the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo <value>
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo?

Arguments

<value>::<NRf> specifies the VBW in the specifies row.

Returns

<NR3>

Examples

SENSe:LTE:ACLR:OFFSET1:BANDWIDTH:RESOLUTION:VIDEO 40.0000000000E+3 sets the resolution VBW to 40 kHz for row 1.

SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo:STATe

Sets or queries whether to enable or disable the video resolution bandwidth (VBW) in the specified row in the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo:STATe{ 0 | 1 }
SENSe:LTE:ACLR:OFFSet<x>:BANDwidth:RESolution:VIDeo:STATe?

Arguments

0 disables the VBW.

1 enables the VBW.

Returns

0 means the resolution VBW is disabled in the specified row.

1 means the VBW is enabled in the specified row.

Examples

`SENSe:LTE:ACLR:OFFSet1:BANDWIDTH:RESOLUTION:VIDEO:STATE 1` enables the resolution VBW for row 1.

SENSe:LTE:ACLR:OFFSet<x>:DETection

Sets or queries the detection settings for all offsets for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:DETection { AVERage | PEAK }
SENSe:LTE:ACLR:OFFSet<x>:DETection?
```

Arguments

AVERage: Sets the offsets setting Average (VRMS)

PEAK: Sets the offsets setting is the positive peak

Returns

AVERage means the offsets setting Average (VRMS)

PEAK means the offsets setting is the positive peak

Examples

`SENSe:LTE:ACLR:OFFSet<x>:DETECTION AVER` sets the detection settings for all offsets to Average RMS.

SENSe:LTE:ACLR:OFFSet<x>:FREQuency:BANDwidth

Sets or queries the frequency bandwidth value for the specified row of the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:BANDwidth <value>  
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:BANDwidth?
```

Arguments

<value>: : <NRf> specifies the frequency bandwidth value

Returns

<NR3>

Examples

SENSe:LTE:ACLR:OFFSET1:FREQUENCY:BANDWIDTH? might return 4.5150000000E+6, indicating frequency bandwidth value of row 1 in the Offset & Limits table.

SENSe:LTE:ACLR:OFFSet<x>:FREQuency:OFFSet

Sets or queries the frequency offset value of the specified row in the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:OFFSet <value>  
SENSe:LTE:ACLR:OFFSet<x>:FREQuency:OFFSet?
```

Arguments

<value>: : <NRf> specifies the frequency offset value

Returns

<NR3>

Examples

SENSe:LTE:ACLR:OFFSET1:FREQUENCY:OFFSET? might return 5.0000000000E+6, indicating frequency offset value of row 1 in the Offset & Limits table tab.

SENSe:LTE:ACLR:OFFSet<x>:LIMit:ABSolute

Sets or queries the absolute limit value of the row in the Offset & Limit table tab for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:LIMit:ABSolute <value>
SENSe:LTE:ACLR:OFFSet<x>:LIMit:ABSolute?
```

Arguments

<value>: : <NRf> specifies the absolute limit value of the specified row in the Offset & Limit table.

Returns

<NRf>

Examples

SENSe:LTE:ACLR:OFFSET1:LIMIT:ABSOLUTE? might return -6.4500000000, indicating the absolute limit value of row 1 is -6.4500000000 dBm.

SENSe:LTE:ACLR:OFFSet<x>:LIMit:MASK

Sets or queries the limit mask setting for the specified row in the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Parameter <x> represents the row in the Offsets & Limits table

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:LIMit:MASK { ABS | REL | AND | OR }
SENSe:LTE:ACLR:OFFSet<x>:LIMit:MASK?
```

Arguments

ABS specifies the limit mask is set to Absolute.

REL specifies the limit mask is set to Relative

AND specifies the limit mask is set to Absolute AND Relative.

OR specifies the limit mask is set to Absolute OR Relative.

Returns

ABS means that the limit mask is set to Absolute.

REL means that the limit mask is set to Relative

AND means that the limit mask is set to Absolute AND Relative.

OR means that the limit mask is set to Absolute OR Relative.

Examples

SENSe:LTE:ACLR:OFFSET3:LIMIT:MASK REL sets the limit mask for row 3 to Relative.

SENSe:LTE:ACLR:OFFSet<x>:LIMit:RELative

Sets or queries the relative limit value of channel under Offset & Limit table tab for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Parameter <x> represents the row in the Offsets & Limits table

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:LIMit:RELative <value>
SENSe:LTE:ACLR:OFFSet<x>:LIMit:RELative?
```

Arguments

<value>: : <NRf> specifies the relative limit value of the specified row in the Offset & Limit table.

Returns

<NRf>

Examples

SENSe:LTE:ACLR:OFFSET1:LIMIT:RELATIVE? might return -44.2000000000, indicating the relative limit value of row 1 is -44.2000000000 dB.

SENSe:LTE:ACLR:OFFSet<x>:LIMit:SIDE

Sets or queries the side of the offset limit for the specified row in the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Parameter <x> represents the row in the Offsets & Limits table

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:LIMit:SIDE { LEFT | RIGHT | BOTH }
SENSe:LTE:ACLR:OFFSet<x>:LIMit:SIDE?
```

Arguments

LEFT specifies the left offset limit.

RIGHT specifies the right offset limit.

BOTH specifies both sides of the offset limit.

Returns

LEFT means the left side offset limit is used for the specified row. RIGHT means the right side offset limit is used for the specified row. BOTH means both sides of the offset limit are used for the specified row.

Examples

SENSe:LTE:ACLR:OFFSET1:LIMIT:SIDE BOTH specifies the measurement uses both sides of the offset in row 1.

SENSe:LTE:ACLR:OFFSet<x>:STATe

Sets or queries the specified row of the Offsets & Limits table for the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

The parameter <x> represents the row in the Offsets & Limits table.

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:OFFSet<x>:STATe { OFF | ON | 0 | 1 }  
SENSe:LTE:ACLR:OFFSet<x>:STATe?
```

Arguments

OFF or 0 turns off display of the row in the measurement view. ON or 1 turns on display of the row in the measurement view.

Returns

OFF or 0 means the display of the row in the measurement view is off. ON or 1 means the display of the row in the measurement view is on.

Examples

SENSe:LTE:ACLR:OFFSET2:STATE OFF means that the display of row 2 in the Offsets & Limits table.

SENSe:LTE:ACLR:POINTs:COUNT

Sets or queries the number of points used for the trace in the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:POINTs:COUNT <value>  
SENSe:LTE:ACLR:POINTs:COUNT?
```

Arguments

<value>::<NRf> specifies the number of points used for the trace

Returns

<NR1>

Examples

SENSe:LTE:ACLR:POINTS:COUNT? might return P8001, indicating a maximum of 8001 trace points can be used.

SENSe:LTE:ACLR:REference:MAGNitude

Sets or queries the reference power magnitude for the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:REference:MAGNitude <value>  
SENSe:LTE:ACLR:REference:MAGNitude?
```

Arguments

<value>::<NRf> specifies the reference power magnitude

Returns

<NRf>

Examples

SENSe:LTE:ACLR:REFERENCE:MAGNITUDE? might return a -51.057, indicating that the reference power magnitude is -51.057 dBm.

SENSe:LTE:ACLR:REference:MAGNitude:AUTO

Sets or queries the reference magnitude to automatic or manual for the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:REference:MAGNitude:AUTO { 0 | 1 }  
SENSe:LTE:ACLR:REference:MAGNitude:AUTO?
```

Arguments

0 sets reference magnitude to Manual.

1 sets reference magnitude to Automatic.

Returns

0 means the reference magnitude is set to Manual.

1 means the reference magnitude is set to Automatic.

Examples

SENSe:LTE:ACLR:REFERENCE:MAGNITUDE:AUTO 0 sets the reference magnitude to Manual.

SENSe:LTE:ACLR:REference:MAGNitude:DETection

Sets or queries the reference magnitude detection for the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:REference:MAGNitude:DETection { AVERage | PEAK }  
SENSe:LTE:ACLR:REference:MAGNitude:DETection?
```

Arguments

AVER sets reference magnitude detection to Avg(VRMS) PEAK sets reference magnitude detection to +Peak.

Returns

AVER means the reference magnitude detection is set to Avg(VRMS) PEAK means the reference magnitude detection is set to +Peak.

Examples

SENSe:LTE:ACLR:REFERENCE:MAGNITUDE:DETECTION AVER sets the magnitude detection to Avg(RMS).

SENSe:LTE:ACLR:STEP:AUTO

Determines whether to automatically update the center frequency increment/decrement step size in the LTE ACLR display. The step value controls the magnitude of each step when using the front panel controls or arrow key on the keyboard.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:STEP:AUTO { OFF | ON | 0 | 1 }  
SENSe:LTE:ACLR:STEP:AUTO?
```

Arguments

OFF or 0 turns off the automatic update.

ON or 1 turns on automatic updates center frequency.

Returns

OFF or 0 means automatic update is off. ON or 1 means automatic updates are on.

Examples

SENSe:LTE:ACLR:STEP:AUTO ON automatically updates the center frequency.

SENSe:LTE:ACLR:STEP:MAGNitude

Sets or queries the step magnitude for the center frequency in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Sense commands

Syntax

```
SENSe:LTE:ACLR:STEP:MAGNitude <value>  
SENSe:LTE:ACLR:STEP:MAGNitude?
```

Arguments

<value>::<NRf> specifies the center frequency

Returns

<NR3>

Examples

SENSe:LTE:ACLR:STEP:MAGNITUDE 4.000000000E+6 sets the step magnitude to 4 MHz.

SENSe:LTE:ANALysis:AVErage:OVER:OFFSlot:STATe

Determines whether to enable or disable Auto check box of Average over offslot in the Prefs tab of LTE Power vs Time display control panel.

Conditions

Measurement view: LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe:LTE:ANALysis:AVErage:OVER:OFFSlot:STATe {0 | OFF | 1 | ON}  
SENSe:LTE:ANALysis:AVErage:OVER:OFFSlot:STATe?
```

Arguments

0 or OFF disables the Average over offslot check box

1 or ON enables the Average over offslot check box

Returns

<Boolean> 0, 1

Examples

SENSe:LTE:ANALYSIS:AVERAGE:OVER:OFFSLOT:STATE OFF disables the Average over offslot check box.

SENSe]:LTE:ANALysis:EQUALization:STATe

Sets or queries the Enable Equalization state in the Analysis Params tab of the LTE Settings control panel.

Conditions

Measurement view: LTE Constellation, LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe]:LTE:ANALysis:EQUALization:STATe { 0 | 1 }  
SENSe]:LTE:ANALysis:EQUALization:STATe?
```

Arguments

0 disables the Enable Equalization.

1 enables the Enable Equalization.

Returns

0 means that Enable Equalization is disabled. 1 means that Enable Equalization is enabled.

Examples

SENSe:LTE:ANALYSIS:EQUALIZATION:STATE? might return 0, indicating that Enable Equalization is disabled.

SENSe:LTE:ANALysis:LENGth

Sets or queries the Analysis length value in the Analysis Time tab of the LTE Power vs Time display and LTE Constellation display control panels.

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:ANALysis:LENGth <Value>  
SENSe:LTE:ANALysis:LENGth?
```

Arguments

<Value>=<NR2>

Returns

<NR2>

Examples

SENSe:LTE:ANALYSIS:LENGTH? might return 34.2, indicating the analysis length is 34.2.

SENSe:LTE:ANALysis:LENGth:ACTual? (Query Only)

Queries the actual analysis length for the LTE Constellation and LTE Power vs Time displays. A query returns a value in either seconds or symbols.

Conditions

Measurement view: LTE Constellation, LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe:LTE:ANALysis:LENGth:ACTual?
```

Returns

<NRf>

Examples

SENSe:LTE:ANALYSIS:LENGTH:ACTUAL? might return 43, indicating that the actual analysis length is 43 symbols.

SENSe:LTE:ANALysis:LENGth:AUTO

Determines whether to enable or disable the Auto check box for Analysis Length in the Analysis Time tab of the LTE Power vs Time display and LTE Constellation display control panels.

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:ANALysis:LENGth:AUTO {0 | OFF | 1 | ON}  
SENSe:LTE:ANALysis:LENGth:AUTO?
```

Arguments

0 or OFF disables the Auto checkbox of analysis length

1 or ON enables the Auto checkbox of analysis length

Returns

<Boolean> 0, 1

Examples

SENSe:LTE:ANALYSIS:LENGTH:AUTO ON enables the Analysis Length Auto check box.

[SENSe]:LTE:ANALysis:OFFSet

Sets or queries the LTE analysis offset for the LTE Constellation or LTE Power vs Time measurements. The query command returns the result in symbols or seconds, depending on the unit choice selected in the Analysis Time tab of the LTE Settings control panel.

Conditions

Measurement view: LTE Constellation, LTE Power vs Time

Group

Sense commands

Syntax

```
[SENSe]:LTE:ANALysis:OFFSet <value>
```

Arguments

<value> specifies the analysis offset in the Analysis Time tab of the LTE Settings control panel.

Returns

<NRf> Units are determined from the units choice selected in the Analysis Time tab of the LTE Settings control panel.

Examples

`SENSe:LTE:ANALYSIS:OFFSET -50` sets the analysis offset to -50 symbols.

SENSe:LTE:ANALysis:OFFSet:AUTO

Sets or queries the Auto checkbox state for analysis offset. This setting determines if the analysis offset for the LTE Constellation and LTE Power vs Time displays is set automatically or manually.

Conditions

Measurement view: LTE Constellation, LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe:LTE:ANALysis:OFFSet:AUTO { 0 | 1 }
```

Arguments

0 sets the analysis offset to manual (box is unchecked)

1 sets the analysis offset to automatic (checkbox is checked)

Returns

0 means the analysis offset is set to manual (box is unchecked)

1 means the analysis offset is set to automatic (checkbox is checked)

Examples

`SENSe:LTE:ANALYSIS:OFFSet:AUTO 1` sets the analysis offset to automatic.

SENSe:LTE:ANALysis:TIME:UNIT

Sets or queries the unit preference under the Analysis tab of the LTE Settings control panel for the LTE Constellation and LTE Power vs Time displays.

Conditions

Measurement view: LTE Constellation, LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe:LTE:ANALysis:TIME:UNIT { SEC | SYMB }  
SENSe:LTE:ANALysis:TIME:UNIT?
```

Arguments

SEC sets the units to seconds.

SYMB sets the units to symbols.

Returns

SEC means the units are set to seconds.

SYMB means the units are set to symbols.

Examples

SENSe:LTE:ANALYSIS:TIME:UNIT SEC sets the units to seconds.

SENSe:LTE:ANTEнна:PORTs:CHOSen

Sets or queries the chosen port in the Modulation Params tab of the LTE Power vs Time display and LTE Constellation display control panels.

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:ANTEнна:PORTs:CHOSen { ZERO | ONE | TWO | THREE }  
SENSe:LTE:ANTEнна:PORTs:CHOSen?
```

Arguments

{ ZERO | ONE | TWO | THREE }

Returns

<String> (ZERO to THREE)

Examples

SENSe:LTE:ANTENNA:PORTS:CHOSEN ONE sets the chosen port to port 1.

SENSe:LTE:ANTEнна:PORTs:TOTal

Sets or queries the total number of Antenna ports in the Modulation Params tab of the LTE Power vs Time display and LTE Constellation display control panels.

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:ANTEenna:PORTs:TOTal {ONE|TWO|FOUR}  
SENSe:LTE:ANTEenna:PORTs:TOTal?
```

Arguments

{ONE|TWO|FOUR}

Returns

<String> ONE , TWO or FOUR

Examples

SENSe:LTE:ANTENNA:PORTS:TOTAL FOUR sets the total number of Antenna ports to 4.

SENSe:LTE:AUTO:DETECT

Determines whether to enable or disable the Auto check box in the Modulation Params tab of the LTE Power vs Time display and LTE Constellation display control panel to automatically detect.

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:AUTO:DETECT {0 | OFF | 1 | ON}  
SENSe:LTE:AUTO:DETECT?
```

Arguments

ON or 1 to enables the Auto check box

OFF or 0 to disables the Auto check box

Returns

<Boolean> 0, 1

Examples

SENSe:LTE:AUTO:DETECT 1 enables the Auto detect check box.

SENSe:LTE:CHANnel:(BANDwidth|BWIDth)

Sets or queries Channel Bandwidth value in the Modulation Params tab of the LTE Power vs Time display and LTE Constellation display control panels.

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:CHANnel:(BANDwidth|BWIDth) {BW1PT4M|BW3M| BW5M| BW10M| BW15M| BW20M}
SENSe:LTE:CHANnel:(BANDwidth|BWIDth)?
```

Arguments

BW1PT4M sets the value to 1.4MHz

BW3M sets the value to 3 MHz

BW5M sets the value to 5 MHz

BW10M sets the value to 10 MHz

BW15M sets the value to 15 MHz

BW20M sets the value to 20 MHz

Returns

<String> See Arguments

Examples

SENSe:LTE:CHANNEL:(BANDWIDTH|BWIDTH) BW15M sets the Channel Bandwidth to 15 MHz.

SENSe:LTE:CHANnel:BANDwidth

Specifies or queries the channel bandwidth to use for the LTE Constellation or LTE Power vs Time measurements.

Conditions

Measurement view: LTE Constellation, LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe:LTE:CHANnel:BANDwidth { BW5M | BW10M | BW15M | BW20M }
```

Arguments

BW5M, BW10M, BW15M, BW20M each specifies a channel bandwidth to use for the measurement.

Returns

Query returns one of the argument values, indicating the selected channel bandwidth.

Examples

SENSe:LTE:CHANNEL:BANDWIDTH BW5M sets the channel bandwidth to use to 5 MHz.

SENSe:LTE:CHSPectrum:AVERage

Sets or queries how to average waveform in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:AVERage { OFF | TIME | FREQ }  
SENSe:LTE:CHSPepectrum:AVERage?
```

Arguments

OFF disables averaging.

TIME averages the waveform using time samples.

FREQuency averages the waveform using frequency samples.

Returns

OFF means averaging is disabled.

TIME means averaging of the waveform is performed using time samples.

FREQuency means averaging of the waveform is performed using frequency samples.

Examples

SENSe:LTE:CHSPepectrum:AVERage TIME sets the analyzer to average the waveform using time samples.

SENSe:LTE:CHSPepectrum:AVERage:COUNT

Sets or queries the number of traces for averaging in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:AVERage:COUNT <number>  
SENSe:LTE:CHSPepectrum:AVERage:COUNT?
```

Arguments

<number>::<NR1> specifies the average count

Returns

<NR1>

Examples

SENSe:LTE:CHSPepectrum:AVERage:COUNT? might return 10, indicating that 10 is the number of traces for averaging.

SENSe:LTE:CHSPepectrum:BANDwidth:RESolution

Sets or queries the resolution bandwidth (RBW) in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:BANDwidth:RESolution
```

Arguments

<value>: : <NRf> specifies the resolution bandwidth

Returns

<NR3>

Examples

SENSe:LTE:CHSPepectrum:BANDwidth:RESolution? might return 30.0000000E+3, indicating the RBW is 30 kHz.

SENSe:LTE:CHSPepectrum:BANDwidth:RESolution:AUTO

Determines whether to set the resolution bandwidth (RBW) in the LTE Channel Spectrum display automatically or manually.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:BANDwidth:RESolution:AUTO { OFF | ON | 0 | 1 }  
SENSe:LTE:CHSPepectrum:BANDwidth:RESolution:AUTO?
```

Arguments

OFF or 0 sets the RBW to manual.

ON or 1 sets the RBW to automatic.

Returns

OFF or 0 means that the RBW is set to manual.

ON or 1 means that the RBW is set to automatic.

Examples

SENSe:LTE:CHSPepectrum:BANDwidth:RESolution:AUTO 1 sets the RBW to automatic and is decided by the analysis module.

SENSe:LTE:CHSPepectrum:BANDwidth:VIDeo

Sets or queries the video bandwidth (VBW) in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:BANDwidth:VIDeo <value>
```

Arguments

<value>: : <NRf> specifies the video bandwidth

Returns

<NR3>

Examples

SENSe:LTE:CHSPepectrum:BANDWIDTH:VIDEO 3.0000000E+3 sets the VBW to 3 kHz.

SENSe:LTE:CHSPepectrum:BANDwidth:VIDeo:STATe

Sets or queries enabling or disabling the video bandwidth (VBW) in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:BANDwidth:VIDeo:STATe { 0 | 1 }  
SENSe:LTE:CHSPepectrum:BANDwidth:VIDeo:STATe?
```

Arguments

0 disables the VBW.

1 enables the VBW.

Returns

0 means that the VBW is disabled.

1 means that the VBW is enabled.

Examples

SENSe:LTE:CHSPepectrum:BANDWIDTH:VIDEO:STATE 1 sets the VBW to enabled.

SENSe:LTE:CHSPepectrum:CHANnel:BANDwidth

Specifies or queries a nominal channel bandwidth to use for the LTE Channel Spectrum measurements.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:CHANnel:BANDwidth { BW5M | BW10M | BW20M | BW1PT4M | BW3M | BW15M }
```

Arguments

BW5M, BW10M, BW20M, BW1PT4M, BW3M, BW15M each specifies a nominal channel bandwidth to use for the measurement.

Returns

Query returns one of the argument values, indicating the selected nominal channel bandwidth.

Examples

SENSe:LTE:CHSPepectrum:CHANNEL:BANDWIDTH BW20M sets the nominal channel bandwidth to use to 20 MHz.

SENSe:LTE:CHSPepectrum:CLEar:RESults (No Query Form)

Clears the results in the LTE Channel Spectrum measurement.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:CLEar:RESults
```

Arguments

None

Examples

SENSe:LTE:CHSPepectrum:CLEAR:RESULTS clears the results of the LTE Channel Spectrum measurement.

SENSe:LTE:CHSPepectrum:DETection

Sets or queries the trace detection settings for the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:DETection { POS | AVER }  
SENSe:LTE:CHSPepectrum:DETection?
```

Arguments

AVERage: sets the detection setting to Average (VRMS) POS: sets the detection setting to the positive peak

Returns

AVERage means the detection setting is Average (VRMS) POS means the detection setting is positive peak

Examples

SENSe:LTE:CHSPECTRUM:DETECTION POS sets the trace detection settings to +Peak under the Prefs tab.

SENSe:LTE:CHSPepectrum:FREQuency

Sets or queries the measurement center frequency in the LTE Channel Spectrum display.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

SENSe:LTE:CHSPepectrum:FREQuency <value>
SENSe:LTE:CHSPepectrum:FREQuency?

Arguments

<value>::<NRf> specifies the center frequency

Returns

<NR3>

Examples

SENSe:LTE:CHSPECTRUM:FREQUENCY 1.000000000E+9 sets the center frequency to 1.0 GHz.

SENSe:LTE:CHSPepectrum:FREQuency:SPAN

Sets or queries the frequency span in the LTE Channel Spectrum measurement.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

SENSe:LTE:CHSPepectrum:FREQuency:SPAN <value>
SENSe:LTE:CHSPepectrum:FREQuency:SPAN?

Arguments

<value>::<NRf> specifies the frequency span

Returns

<NRf>

Examples

`SENSe:LTE:CHSPECTRUM:FREQUENCY:SPAN` sets the frequency span in the LTE Channel Spectrum display.

SENSe:LTE:CHSPectrum:FREQuency:STEP

Sets or queries the frequency step size in the LTE Channel Spectrum measurement. Programming a specified step size sets `SENSe:LTE:CHSPectrum:FREQuency:STEP:AUTO` to OFF.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPectrum:FREQuency:STEP <value>
SENSe:LTE:CHSPectrum:FREQuency:STEP?
```

Arguments

`<value>::<NRf>` specifies the frequency step size

Returns

`<NR3>`

Examples

`SENSe:LTE:CHSPECTRUM:FREQUENCY:STEP 200.000000000E+3` sets the frequency step size to 200 kHz.

SENSe:LTE:CHSPectrum:FREQuency:STEP:AUTO

Determines whether to set the frequency step size automatically or manually in the LTE Channel Spectrum measurement.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPectrum:FREQuency:STEP:AUTO { OFF | ON | 0 | 1 }
SENSe:LTE:CHSPectrum:FREQuency:STEP:AUTO?
```

Arguments

OFF or 0 sets the frequency step size is set to manual.

ON or 1 sets the frequency step size is set to automatic.

Returns

OFF or 0 means that the frequency step size is set to manual. ON or 1 means that the frequency step size is set to automatic.

Examples

`SENSe:LTE:CHSPECTRUM:FREQUENCY:STEP:AUTO ON` specifies that the frequency step size is set automatically.

SENSe:LTE:CHSPepectrum:POINts:COUNT

Sets or queries the number of points used for the trace in the LTE Channel Spectrum measurement.

Conditions

Measurement view: LTE Channel Spectrum

Group

Sense commands

Syntax

```
SENSe:LTE:CHSPepectrum:POINts:COUNT <value>  
SENSe:LTE:CHSPepectrum:POINts:COUNT?
```

Arguments

`<value>::<NRf>` specifies the number of points used for the trace

Returns

`P<NR1>`

Examples

`SENSe:LTE:CHSPECTRUM:POINTS:COUNT?` might return `P8001`, indicating a maximum of 8001 trace points can be used.

SENSe:LTE:CYCLic:PREFix

Sets or queries the cyclic prefix type in the Modulation Params tab of the LTE Power vs Time display and LTE Constellation display control panels.

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:CYCLic:PREFix {NORM|EXT}  
SENSe:LTE:CYCLic:PREFix?
```

Arguments

`NORM` sets the cyclic prefix to Normal.

`EXT` sets the cyclic prefix to Extended.

Returns

`<String>` NORM or EXT

Examples

`SENSe:LTE:CYCLIC:PREFIX NORM` sets the cyclic prefix to Normal.

SENSe:LTE:FRAMe:STRUcture

Sets or queries the frame structure in the Modulation Params tab of the LTE settings control panel.

Conditions

Measurement view: LTE Constellation and LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe:LTE:FRAMe:STRUcture { FDD | TDD }  
SENSe:LTE:FRAMe:STRUcture?
```

Arguments

FDD

TDD

Returns

FDD TDD

Examples

SENSe:LTE:FRAMe:STRUCTURE FDD sets the frame structure to FDD.

SENSe:LTE:LINK:CONFIguration

Sets or queries Uplink-Downlink value in TDD configuration in the Modulation Params tab of the LTE Power vs Time display and LTE Constellation display control panels.

This happens only when Downlink TDD is Selected as Frame Structure

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:LINK:CONFIguration {ZERO |ONE |TWO |THREE |FOUR|FIVE |SIX}  
SENSe:LTE:LINK:CONFIguration?
```

Arguments

{ZERO |ONE |TWO |THREE |FOUR |FIVE |SIX}

Returns

<String> (Zero to Six)

Examples

SENSe:LTE:LINK:CONFIGURATION ONE sets the Uplink-Downlink value as 1 in TDD configuration.

SENSe:LTE:SUBFrame:CONFIguration

Sets or queries special subframe value in TDD configuration in the Modulation Params tab of the LTE Power vs Time display and LTE Constellation display control panels.

This happens only when Downlink TDD is selected as the Frame Structure

Conditions

Measurement view: LTE Power vs Time, LTE Constellation

Group

Sense commands

Syntax

```
SENSe:LTE:SUBFrame:CONFIguration {ZERO | ONE | TWO | THREE | FOUR | FIVE | SIX | SEVEN | EIGHT | NINE}  
SENSe:LTE:SUBFrame:CONFIguration?
```

Arguments

{ZERO | ONE | TWO | THREE | FOUR | FIVE | SIX | SEVEN | EIGHT | NINE}

Returns

<String> (Zero to Nine)

Examples

SENSe:LTE:SUBFRAME:CONFIGURATION SIX sets the special subframe value to 6 in TDD configuration.

[SENSe]:MCPower:AVERage

Sets or queries the average method in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:AVERage { OFF | TIME | FREQuency }  
[SENSe]:MCPower:AVERage?
```

Arguments

OFF disables averaging.

TIME performs averaging for time samples.

FREQuency performs averaging for frequency samples.

Examples

SENSe:MCPower:AVERAGE TIME performs averaging for time samples.

[SENSe]:MCPower:AVERage:COUNT

Sets or queries the average count in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:AVERage:COUNT <value>  
[SENSe]:MCPower:AVERage:COUNT?
```

Arguments

<value>::<NR1> specifies the average count. Range: 2 to 10000.

Examples

SENSe:MCPower:AVERAGE:COUNT 256 sets the average count to 256.

[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth (RBW). Programming a specified RBW sets [SENSe]:MCPower{BANDwidth|BWIDth}[:RESolution]:AUTO OFF.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution] <value>  
[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution]?
```

Related Commands

[\[SENSe\]:MCPower:{BANDwidth|BWIDth}\[:RESolution\]:AUTO](#) (on page 2203)

Arguments

<value>::<NRf> specifies the RBW. Range: 100 Hz to 5 MHz.

Examples

SENSe:MCPower:BANDWIDTH:RESOLUTION 200kHz sets the RBW to 200 kHz.

[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution]:ACTual? (Query Only)

Queries the actual resolution bandwidth (RBW) in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution]:ACTual?
```

Arguments

None

Returns

<NRf> The actual RBW in Hz.

Examples

SENSe:MCPower:BANDWIDTH:RESOLUTION:ACTUAL? might return 299.624E+3, indicating that the actual RBW is 299.624 kHz.

[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution]:AUTO

Determines whether to set the resolution bandwidth (RBW) automatically or manually.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution]:AUTO { OFF | ON | 0 | 1 }
[SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution]:AUTO?
```

Arguments

OFF or 0 specifies that the resolution bandwidth is set manually using the [SENSe]:MCPower:{BANDwidth|BWIDth}[:RESolution] command.

ON or 1 specifies that the resolution bandwidth is set automatically.

Examples

SENSe:MCPower:BANDWIDTH:AUTO ON sets the resolution bandwidth automatically.

[SENSe]:MCPower:{BANDwidth|BWIDth}:VIDeo

Sets or queries the video bandwidth (VBW). Programming a specified VBW sets [SENSe]:MCPower:{BANDwidth|BWIDth}:VIDeo:STATE OFF.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:{BANDwidth|BWIDth}:VIDeo <value>
[SENSe]:MCPower:{BANDwidth|BWIDth}:VIDeo?
```

Related Commands

[\[SENSe\]:MCPower:{BANDwidth|BWIDth}:VIDeo:STATe](#) (on page 2204)

Arguments

<value>::<NRf> specifies the VBW.

Range: Current RBW/104 (1 Hz minimum) to Current RBW.

Examples

SENSe:MCPower:BANDWIDTH:VIDEO 200kHz sets the VBW to 200 kHz.

[SENSe]:MCPower:{BANDwidth|BWIDth}:VIDeo:STATe

Determines whether to enable the video bandwidth (VBW) in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:{BANDwidth|BWIDth}:VIDeo:STATe { OFF | ON | 0 | 1 }  
[SENSe]:MCPower:{BANDwidth|BWIDth}:VIDeo:STATe?
```

Arguments

OFF or 0 disables the VBW.

ON or 1 enables the VBW.

Examples

SENSe:MCPower:BANDWIDTH:VIDEO:STATE ON enables the VBW.

[SENSe]:MCPower:CHANnel:ADJacent:ADD (No Query Form)

Adds a pair of upper and lower adjacent channels in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:ADJacent:ADD <offset>,<bandwidth>
```

Arguments

<offset>::<NRf> specifies the offset from the center frequency for the adjacent channel.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

`<bandwidth>::<NRF>` specifies the bandwidth of the adjacent channel.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:MCPOWER:CHANNEL:ADJACENT:ADD 200kHz, 80kHz` adds a pair of upper and lower adjacent channels with the offset of ± 200 kHz and the bandwidth of 80 kHz.

[SENSe]:MCPower:CHANnel:ADJacent:DElete (No Query Form)

Deletes a selected adjacent channel in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

`[SENSe]:MCPower:CHANnel:ADJacent:DElete <channel>`

Arguments

`<channel>::<string>` specifies the channel to be deleted.

Specify the channel with "A<n>" for the adjacent channel where <n> represents the channel number (<n> = 1, 2, 3,...). See the example below.

Examples

`SENSe:MCPOWER:CHANNEL:ADJACENT:DElete "A2"` deletes A2 (the adjacent channel 2).

[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>

This command returns the selected adjacent upper and lower limit values. Selection of adjacent channel.

Conditions

Measurement view: P25 MCPR

The parameter <x>=1 to 100.

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>  
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>?
```

Arguments

<x>=1 to 100

Returns

Upper and lower limit values for selected adjacent channels.

Examples

SENSe:MCPower:CHANnel:ADJacent:LIMIts2? returns upper and lower limit values of A2 (Adjacent channel 2).

[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>:ENABLE? (Query Only)

This query returns whether the adjacent channel is selected or not.

Conditions

Measurement view: P25 MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:ADJacent:LIMIts<x>:ENABLE?
```

Returns

0 means the adjacent channel is disabled.

1 means the adjacent channel is enabled.

Examples

If SENSe:MCPower:CHANnel:ADJacent:LIMIts1:ENABLE? returns 1, A1 (adjacent channel 1) is enabled.

[SENSe]:MCPower:CHANnel:FILTer

Sets or queries the adjacent channel filter in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:FILTer { RRCosine | NONE }  
[SENSe]:MCPower:CHANnel:FILTer?
```

Arguments

RRCosine selects the Root-Raised-Cosine filter.

NONE uses no filter.

Examples

`SENSe:MCPOWER:CHANNEL:FILTER RRCosine` selects Root-Raised-Cosine for the adjacent channel filter.

[SENSe]:MCPower:CHANnel:MAIN:{BANDwidth|BWIDth}

Sets or queries the frequency bandwidth of the main channels (all share the same value) in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:MAIN:{BANDwidth|BWIDth} <value>
[SENSe]:MCPower:CHANnel:MAIN:{BANDwidth|BWIDth}?
```

Arguments

<value>::<NRf> specifies the main channel bandwidth.

Range: 1 Hz to full span.

Examples

`SENSe:MCPOWER:CHANNEL:MAIN:BANDWIDTH 4.5MHz` sets the main channel bandwidth to 4.5 MHz.

[SENSe]:MCPower:CHANnel:MAIN:COUNT

Sets or queries the number of main channels in the MCPR measurement. You can use this command to add and remove main channels.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:MAIN:COUNT <value>
[SENSe]:MCPower:CHANnel:MAIN:COUNT?
```

Arguments

<value>::<NRf> specifies the number of main channels. Range: 1 to 99.

Examples

`SENSe:MCPOWER:CHANNEL:MAIN:COUNT 3` sets the the number of main channels to 3.

[SENSe]:MCPower:CHANnel:MAIN:INActive

Makes a specified main channel inactive. You can set it on or off. The query returns all inactive main channels.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:MAIN:INActive <channel>,<boolean>
[SENSe]:MCPower:CHANnel:MAIN:INActive?
```

Arguments

<channel>::<string> specifies the channel to be inactive.

Specify the channel with "M<n>" for the main channel where <n> represents the channel number (<n> = 1, 2, 3,...). See the example below.

<boolean>::={ OFF | ON | 0 | 1 } specifies that the specified channel is inactive (On) or not (Off).

Examples

SENSe:MCPOWER:CHANNEL:MAIN:INACTIVE "M2", ON makes the main channel 2 inactive.

[SENSe]:MCPower:CHANnel:MAIN:SPACing

Sets or queries frequency difference between centers of each main channel in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHANnel:MAIN:SPACing <value>
[SENSe]:MCPower:CHANnel:MAIN:SPACing?
```

Arguments

<value>::<NRf> specifies the spacing between two adjacent main channels.

Range: 1 Hz to 1 GHz.

Examples

SENSe:MCPOWER:CHANNEL:MAIN:SPACING 5MHz sets the main channel spacing to 5 MHz.

[SENSe]:MCPower:CHIPrate

Sets or queries the chip rate in the MCPR measurement. This command is valid when [SENSe]:MCPower:CHANnel:FILTer is set to RRCosine (Root-Raised-Cosine).

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CHIPrate <value>  
[SENSe]:MCPower:CHIPrate?
```

Arguments

<value>::<NRf> specifies the chip rate. Range: 100 Hz to 105 MHz.

Examples

SENSe:MCPower:CHIPRATE 1kHz sets the chip rate to 1 kHz.

[SENSe]:MCPower:CLEar:RESults (No Query Form)

Restarts the average trace.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:CLEar:RESults
```

Arguments

None

Examples

SENSe:MCPower:CLEAR:RESULTS restarts the average trace.

[SENSe]:MCPower:FREQuency

Sets or queries the center frequency in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:FREQuency <value>  
[SENSe]:MCPower:FREQuency?
```

Arguments

<value>::<NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:MCPOWER:FREQUENCY 2.35GHz` sets the center frequency to 2.35 GHz.

[SENSe]:MCPower:FREQUENCY:STEP

Sets or queries the frequency step size. Programming a specified step size sets `[SENSe]:MCPower:FREQUENCY:STEP:AUTO OFF`.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

`[SENSe]:MCPower:FREQUENCY:STEP <value>`
`[SENSe]:MCPower:FREQUENCY:STEP?`

Related Commands

[\[SENSe\]:MCPower:FREQUENCY:STEP:AUTO](#) (on page 2210)

Arguments

`<value>::<NRf>` specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106AB – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:MCPOWER:FREQUENCY:STEP 50kHz` sets the frequency step size to 50 kHz.

[SENSe]:MCPower:FREQUENCY:STEP:AUTO

Determines whether to set the frequency step size automatically or manually in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

`[SENSe]:MCPower:FREQUENCY:STEP:AUTO { OFF | ON | 0 | 1 }`

```
[SENSe]:MCPower:FREQuency:STEP:AUTO?
```

Arguments

OFF or 0 specifies that the frequency step size is set manually using the `[SENSe]:MCPower:FREQuency:STEP` command.

ON or 1 specifies that the frequency step size is set automatically.

Examples

`SENSe:MCPOWER:FREQUENCY:STEP:AUTO ON` specifies that the frequency step size is set automatically.

[SENSe]:MCPower:NFLoor:STaTe

Determines whether to enable correction for noise floor.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:NFLoor:STaTe { OFF | ON | 0 | 1 }  
[SENSe]:MCPower:NFLoor:STaTe?
```

Arguments

OFF or 0 disables correction for noise floor.

ON or 1 enables correction for noise floor.

Examples

`SENSe:MCPOWER:NFLOOR:STATE ON` enables correction for noise floor.

[SENSe]:MCPower:POINts:COUNT

Sets or queries the number of trace points in the MCPR display.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:POINts:COUNT { P801 | P2401 | P4001 | P8001 | P10801 }  
[SENSe]:MCPower:POINts:COUNT?
```

Arguments

P801 | P2401 | P4001 | P8001 | P10801 set the number of trace points.

Examples

`SENSe:MCPOWER:POINTS:COUNT P4001` sets the number of trace points in the MCPR measurement to 4001.

[SENSe]:MCPower:RCHannels? (Query Only)

Queries the power reference in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:RCHannels?
```

Arguments

None

Returns

```
<power_ref>::={ Total | M<x> }
```

where <x> = 1 to 99.

Total indicates that the power reference is the total power of all the active channels.

M<x> indicates that the power reference is the main channel with the index (<x>).

Examples

SENSe:MCPower:RCHANNELS? might return M3, indicating that the power reference is the main channel.

[SENSe]:MCPower:RCHannels:MAIN<x> (No Query Form)

Sets the power reference to the main channel with the index (<x>) in the MCPR measurement.

The parameter <x> = 1 to 99, representing the main channel 1 to 99, respectively. The main channel must be defined using the [:SENSe]:MCPower:CHANnel:MAIN commands.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

```
[SENSe]:MCPower:RCHannels:MAIN<x>
```

Related Commands

[\[SENSe\]:MCPower:CHANnel:MAIN:\[BANDwidth|BWIDth\]](#) (on page 2207)

[\[SENSe\]:MCPower:CHANnel:MAIN:COUNt](#) (on page 2207)

[\[SENSe\]:MCPower:CHANnel:MAIN:INACTive](#) (on page 2207)

[\[SENSe\]:MCPower:CHANnel:MAIN:SPACing](#) (on page 2208)

Arguments

None

Examples

`SENSe:MCPOWER:RCHANNELS:MAIN3` selects Main 3 for the power reference channel.

[SENSe]:MCPower:RCHannels:TOTal (No Query Form)

Sets the power reference to the total power of all the active channels in the MCPR measurement.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

`[SENSe]:MCPower:RCHannels:TOTal`

Arguments

None

Examples

`SENSe:MCPOWER:RCHANNELS:TOTAL` sets the power reference to the total power of all the active channels.

[SENSe]:MCPower:RRCRolloff

Sets or queries the filter parameter (roll-off ratio) for the Root Raised Cosine filter.

Conditions

Measurement views: MCPR

Group

Sense commands

Syntax

`[SENSe]:MCPower:RRCRolloff <value>`
`[SENSe]:MCPower:RRCRolloff?`

Related Commands

[\[SENSe\]:MCPower:CHANnel:FILTer](#) (on page 2206)

Arguments

`<value>::<NRf>` specifies the filter parameter.

Range: 0.001 to 1, 0.0001 step.

Examples

`SENSe:MCPOWER:RRCROLLOFF 0.3` sets the filter parameter to 0.3.

[SENSe]:MEASurement:FREQuency[:SOURce<z>]

Sets or queries the measurement frequency.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:MEASurement:FREQuency[:SOURce<z>] <value>
[SENSe]:MEASurement:FREQuency[:SOURce<z>]?
```

Arguments

<value>::<NRf> specifies the measurement frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:MEASurement:FREQuency:SOURce2? 7.5GHz sets the measurement frequency frequency of Source 2 to 7.5 GHz.

[SENSe]:MEASurement:FREQuency[:SOURce<z>]:CENTer:LOCK

Sets or queries locking the measurement center frequency.

The parameter <z> = 1 to number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Default source is Source 1.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:MEASurement:FREQuency[:SOURce<z>]:CENTer:LOCK { OFF | ON | 0 | 1 }
[SENSe]:MEASurement:FREQuency[:SOURce<z>]:CENTer:LOCK?
```

Arguments

OFF or 0 disables locking the center frequency.

ON or 1 enables locking the center frequency.

Examples

SENSe:MEASurement:FREQuency:SOURce1:CENTer:LOCK ON locks the center frequency.

[SENSe]:MERRor[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Magnitude error versus Time for a selected Measurement view number

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:MERRor[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:MERRor[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents the measurement index based on the number of sources of connected instruments, where the MEASview keyword is optional by default and y is 1

Example

SENSe:MERRor:MEASview1:SELEcted:SOURce? queries the Source for Magnitude error versus Time Measurement View 1.

[SENSe]:NOISe:AVERage:COUNT

This command returns the acquisition counts over which the noise average is computed.

Conditions

Measurement view: Noise Figure

Group

Sense commands

Syntax

```
[SENSe]:NOISe:AVERage:COUNT <integer>
[SENSe]:NOISe:AVERage:COUNT?
```

Arguments

<integer>

Range: 1 to 1000

Returns

<NR3> = a floating point value with an exponent

Examples

SENSe:NOISE:AVERAGE:COUNT? might return 1.0000000000E+3, indicating the average count of the analyzer is set to 1000.

[SENSe]:NOISe:BANDwidth

This command sets or queries the resolution bandwidth (RBW) for the Noise Figure display measurement.

Conditions

Measurement view: Noise Figure

Group

Sense commands

Syntax

```
[SENSe]:NOISe:BANDwidth <NR3>  
[SENSe]:NOISe:BANDwidth?
```

Arguments

<NR3> = a floating point value with an exponent Range: 50 Hz - 10 MHz

Returns

<NR3> = a floating point value with an exponent

Examples

SENSe:NOISE:BANDWIDTH? might return 1.0000000000E+6, indicating that the RBW is 1.00 MHz.

[SENSE]:NOISe:CONTRol:SETTling:OFF[:TIME]

This command sets or queries the analyzer off settle time for the Noise Figure display measurement.

Conditions

Measurement view: Noise Figure

Group

Sense commands

Syntax

```
[SENSE]:NOISe:CONTRol:SETTling:OFF[:TIME] <NR3>  
[SENSE]:NOISe:CONTRol:SETTling:OFF[:TIME]?
```

Related Commands

[\[SENSE\]:NOISe:CONTRol:SETTling:ON\[:TIME\]](#) (on page 2217)

Arguments

<NR3> = a floating point value with an exponent Range: 0 s - 10 ks

Returns

<NR3> = a floating point value with an exponent

Examples

SENSe:NOISE:CONTROL:SETTLING:OFF:TIME? might return 200.0000000000E-3, indicating the the RSA settle time (off) is 200 ms.

[SENSe]:NOISe:CONTRol:SETTling:ON[:TIME]

This command sets or queries the analyzer on settle time for the Noise and Gain display measurements.

Conditions

Measurement views: Noise Figure, Noise Temperature, Y Factor

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CONTRol:SETTling:ON[:TIME] <NR3>  
[SENSe]:NOISe:CONTRol:SETTling:ON[:TIME]?
```

Related Commands

[\[SENSe\]:NOISe:CONTRol:SETTling:OFF\[:TIME\]](#) (on page 2216)

Arguments

<NR3> = a floating point value with an exponent Range: 0 s - 10 ks

Returns

<NR3> = a floating point value with an exponent

Examples

SENSe:NOISE:CONTROL:SETTLING:ON:TIME? might return 50.0000000000E-3, indicating the RSA settle time (on) is 50 ms.

[SENSe]:NOISe:CORRection:ENR:CONSTant

This command sets and queries the excess noise ratio (ENR) constant for the Noise Figure and Gain displays.

Conditions

Measurement view: Noise Figure, Y Factor, Gain, Noise Temperature, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:ENR:CONSTant <NR2>  
[SENSe]:NOISe:CORRection:ENR:CONSTant?
```

Related Commands

[\[SENSe\]:NOISe:CORRection:ENR:MODE](#) (on page 2218)

Arguments

<NR2> = a floating point value without an exponent

Returns

<NR2> = a floating point value without an exponent

Examples

`SENSe:NOISE:CORREction:ENR:CONSTant?` might return `10.0000000000`, indicating that the ENR constant is 10.00 dB.

[SENSe]:NOISe:CORRection:ENR:MODE

This command sets and queries the Noise Source mode for the Noise Figure and Gain displays.

Conditions

Measurement view: Noise Figure, Y Factor, Gain, Noise Temperature, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:ENR:MODE { TABLE | CONSTant }  
[SENSe]:NOISe:CORRection:ENR:MODE?
```

Related Commands

[\[SENSe\]:NOISe:CORRection:ENR:CONSTant](#) (on page 2217)

Arguments

`TABLE` sets the noise source mode to Table.

`CONSTant` sets the noise source mode to Constant.

Returns

`TABL` indicates that the noise source mode is set to Table.

`CONST` indicates that the noise source mode is set to Constant.

Examples

`SENSe:NOISE:CORREction:ENR:MODE?` might return `TABL`, indicating that the noise source mode is set to Table.

[SENSe]:NOISe:CORRection:ENR:TABLE:DATA? (Query Only)

This command queries the Noise Source model, serial number, and table values for frequency and ENR for the Noise Figure and Gain displays.

Conditions

Measurement view: Noise Figure, Y Factor, Gain, Noise Temperature, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:ENR:TABLE:DATA?
```

Related Commands

[\[SENSe\]:NOISe:CORRection:ENR:MODE](#) (on page 2218)

[\[SENSe\]:NOISe:CORRection:ENR:TABLE:ID](#) (on page 2219)

Returns

<string> is the Noise Source model and serial number, as well as the frequency and ENR values for the noise source table.

Examples

SENSe:NOISE:CORRECTION:ENR:TABLE:DATA? might return 346B 10MHz – 18 GHz, 2037A02333, 2900000000, 15, 2900000000, 15, 2900000000, 15, 2900000000, 15, 2900000000, 15, 2900000000, 15, 2900000000, 15, 2900000000, 15, 2900000000, 15. The first two values indicate the Noise Source model and serial numbers. All of the values that follow indicate the frequency (2900000000, meaning 2.90 GHz) and the ENR (15, meaning 15.00 dB) shown in the Noise Source table.

[SENSe]:NOISe:CORRection:ENR:TABLE:ID

This command sets or queries the Noise Source Model for the Noise Figure and Gain displays.

Conditions

Measurement view: Noise Figure, Y Factor, Gain, Noise Temperature, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:ENR:TABLE:ID <Qstring>
[SENSe]:NOISe:CORRection:ENR:TABLE:ID?
```

Related Commands

[\[SENSe\]:NOISe:CORRection:ENR:TABLE:DATA?](#) (on page 2218)

Arguments

<Qstring> = quoted string of ASCII text

Returns

<Qstring> = quoted string of ASCII text

Examples

SENSe:NOISE:CORRECTION:ENR:TABLE:ID? might return “346B 10MHz – 18 GHz”, indicating the Noise Source model is 346B 10 MHz–18 GHz.

[SENSe]:NOISe:CORRection:ENR:TABLE:NEW (No Query Form)

This command sets the Noise Source Model for the Noise Figure and Gain displays.

Conditions

Measurement view: Noise Figure, Y Factor, Gain, Noise Temperature, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:ENR:TABLE:NEW <Qstring>  
[SENSe]:NOISe:CORRection:ENR:TABLE:NEW?
```

Related Commands

[\[SENSe\]:NOISe:CORRection:ENR:TABLE:DATA?](#) (on page 2218)

Arguments

<Qstring> = quoted string of ASCII text

Returns

<Qstring> = quoted string of ASCII text

Examples

SENSe:NOISe:CORRECTION:ENR:TABLE:NEW? might return "346B 10 MHz – 18 GHz", indicating the Noise Source model is 346B 10 MHz–18 GHz.

[SENSe]:NOISe:CORRection:ENR:TABLE:SERial

This command sets or queries the Noise Source serial number for the Noise Figure and Gain displays.

Conditions

Measurement view: Noise Figure, Y Factor, Gain, Noise Temperature, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:ENR:TABLE:SERial <Qstring>  
[SENSe]:NOISe:CORRection:ENR:TABLE:SERial?
```

Related Commands

[\[SENSe\]:NOISe:CORRection:ENR:TABLE:DATA?](#) (on page 2218)

Arguments

<Qstring> = quoted string of ASCII text

Returns

<Qstring> = quoted string of ASCII text

Examples

SENSe:NOISe:CORRECTION:ENR:TABLE:SERIAL? might return "2037A02334", indicating the Noise Source serial number is 2037A02334.

[SENSe]:NOISe:CORRection:TCOLd:ADUT:UREFERENCE

Sets or queries the analyzer to use the reference temperature (K) for the loss at the DUT output in the noise displays.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:TCOLd:ADUT:UREFence { OFF | ON | 1 | 0 }
[SENSe]:NOISe:CORRection:TCOLd:ADUT:UREFence?
```

Arguments

OFF or 0 disables the Use Ref temperature feature for the Loss at DUT Output.

ON or 1 enables the Use Ref temperature feature for the Loss at DUT Output.

Returns

0 means that the Use Ref temperature feature for the Loss at DUT Output is disabled.

1 means that the Use Ref temperature feature for the Loss at DUT Output is enabled.

Examples

SENSe:NOIS:CORR:TCOL:ADUT:UREF? might return 1, indicating that the temperature for the loss at the DUT output is set to Use Reference temperature.

[SENSe]:NOISe:CORRection:TCOLd:ADUT[:VALue]

Sets or queries the temperature value (K) for the loss at the DUT output in the noise displays.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:TCOLd:ADUT[:VALue] <NR3>
[SENSe]:NOISe:CORRection:TCOLd:ADUT[:VALue]?
```

Arguments

<NR3> = floating point value with an exponent.

Range: 0 K to 500 K

Returns

<NR2> = floating point value without an exponent, which is the temperature in Kelvin.

Examples

SENSe:NOIS:CORR:TCOL:ADUT:VAL? might return 100.0000000000, indicating that the temperature for the loss at the DUT output is 100 K.

[SENSe]:NOISe:CORRection:TCOLd:BDUT:UREFence

Sets or queries the analyzer to use the reference temperature (K) for the loss at the DUT input in the noise displays.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, and Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:TCOLd:BDUT:UREFence { OFF | ON | 1 | 0 }
[SENSe]:NOISe:CORRection:TCOLd:BDUT:UREFence?
```

Arguments

OFF or 0 disables the Use Ref temperature feature for the Loss at DUT Input.

ON or 1 enables the Use Ref temperature feature for the Loss at DUT Input.

Returns

0 means that the Use Ref temperature feature for the Loss at DUT Input is disabled.

1 means that the Use Ref temperature feature for the Loss at DUT Input is enabled.

Examples

SENSe:NOIS:CORR:TCOL:BDUT:UREF? might return 1, indicating that the temperature for the loss at the DUT input is set to Use Reference temperature.

[SENSe]:NOISe:CORRection:TCOLd:BDUT[:VALue]

Sets or queries the temperature value (K) for the loss at the DUT input in the noise displays.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:TCOLd:BDUT[:VALue] <NR3>
[SENSe]:NOISe:CORRection:TCOLd:BDUT[:VALue]?
```

Arguments

<NR3> = floating point value with an exponent.

Range: 0 K to 500 K

Returns

<NR2> = floating point value without an exponent, which is the temperature in Kelvin.

Examples

SENSe:NOIS:CORR:TCOL:BDUT:VAL 290 sets the temperature for the loss at the DUT input to 290 K.

[SENSe]:NOISe:CORRection:TCOLd[:REFeRence]

Sets or queries the reference temperature value (K) in the noise display.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:CORRection:TCOLd[:REFerence] <NR3>  
[SENSe]:NOISe:CORRection:TCOLd[:REFerence]?
```

Arguments

<NR3> = floating point value with an exponent.

Range: 0 K to 500 K

Returns

<NR2> = floating point value without an exponent, which is the reference temperature in Kelvin.

Examples

SENSe:NOIS:CORR:TCOL:REF 200 sets the reference temperature to 200 K.

[SENSe]:NOISe:FIGure:POINTs:COUNT (No Query Form)

Sets the number of sample points for the Noise Figure display.

Conditions

Measurement views: Noise Figure

Group

Sense commands

Syntax

```
[SENSe]:NOISe:FIGure:POINTs:COUNT { P801 | P2401 | P4001 | P8001 | P10401 }
```

Arguments

P801 sets the number of sample points to 801.

P2401 sets the number of sample points to 2401.

P4001 sets the number of sample points to 4001.

P8001 sets the number of sample points to 8001.

P10401 sets the number of sample points to 10401.

Examples

SENSe:NOISE:FIGURE:POINTS:COUNT P801 sets the number of sample points to 801.

[SENSe]:NOISe:FREQuency:CENTer

Sets or queries the center frequency value (Hz).

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:FREQuency:CENTer <NRf>  
[SENSe]:NOISe:FREQuency:CENTer?
```

Arguments

<NRf> is the center frequency value in Hz.

Range: 0 Hz to 6.2 GHz

Returns

<NR3> = floating point value with an exponent, which is the center frequency value.

Examples

`SENSe:NOISe:FREQUENCY:CENTER 5.0 GHz` sets the center frequency in the active noise display to 5.0000 GHz.

`SENSe:NOISe:FREQUENCY:CENTER?` might return `6.2000000000E+9`, indicating that the center frequency in the active noise display is 6.2000 GHz.

[SENSe]:NOISe:FREQuency:MODE

Sets or queries the frequency mode in the noise display.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:FREQuency:MODE { TABLE | SINGLE | SWEPT }  
[SENSe]:NOISe:FREQuency:MODE?
```

Arguments

`TABLE`: sets the frequency mode to Frequency Table.

`SINGLE`: sets the frequency mode to Single Frequency.

`SWEPT`: sets the frequency mode to Sweep Frequency.

Returns

`TABL`: means the frequency mode is set to Frequency Table.

`SING`: means the frequency mode is set to Single Frequency.

`SWEP`: means the frequency mode is set to Sweep Frequency.

Examples

`SENSe:NOIS:FREQ:MODE TABL` sets the frequency mode to Frequency Table in the noise display.

[SENSe]:NOISe:FREQuency:SPAN

Sets or queries the frequency Span value (Hz).

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:FREQuency:SPAN <NRf>  
[SENSe]:NOISe:FREQuency:SPAN?
```

Arguments

<NRf> is the frequency Span value in Hz.

Range: 100 Hz to 6.2 GHz

Returns

<NR3> = floating point value with an exponent, which is the frequency Span value.

Examples

`SENSe:NOISe:FREQUENCY:SPAN 3.0 GHz` sets the frequency Span in the active noise display to 3.0000 GHz.

`SENSe:NOISe:FREQUENCY:SPAN?` might return `100.000000000E+3`, indicating that the frequency Span in the active noise display is 100 kHz.

[SENSe]:NOISe:FREQuency:START

Sets or queries the Start Frequency value.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:FREQuency:START <NRf>  
[SENSe]:NOISe:FREQuency:START?
```

Arguments

<NRf> is the Start Frequency value.

Returns

<NR3> = floating point value with an exponent, which is the Start Frequency value.

Examples

`SENSe:NOISe:FREQUENCY:START 1.5 GHz` sets the Start Frequency in the active noise display to 1.5000 GHz.

`SENSe:NOISE:FREQUENCY:START?` might return `1.5000000000E+9`, indicating that the Start Frequency in the active noise display is 1.5000 GHz.

[SENSe]:NOISe:FREQuency:STEPS

Sets or queries the frequency Steps value.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:FREQuency:STEPS <NRf>
[SENSe]:NOISe:FREQuency:STEPS?
```

Arguments

<NRf> is the Steps value.

Range: 2 to 999

Returns

<NRf> is the Steps value.

Examples

`SENSe:NOISE:FREQUENCY:STEPS 11` sets the frequency Steps value in the active noise display to 11.

[SENSe]:NOISe:FREQuency:STOP

Sets or queries the Stop Frequency value.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

```
[SENSe]:NOISe:FREQuency:STOP <NRf>
[SENSe]:NOISe:FREQuency:STOP?
```

Arguments

<NRf> is the Stop Frequency value.

Returns

<NR3> = floating point value with an exponent, which is the Stop Frequency value.

Examples

`SENSe:NOISE:FREQUENCY:STOP 1.5 GHz` sets the Stop Frequency in the active noise display to 1.5000 GHz.

`SENSe:NOISE:FREQUENCY:STOP?` might return `1.5000000000E+9`, indicating that the Stop Frequency in the active noise display is 1.5000 GHz.

[SENSe]:NOISe:FREQuency:TABLE:DATA? (Query Only)

Queries the data in the Frequency Table for the noise display.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

`[SENSe]:NOISe:FREQuency:TABLE:DATA?`

Returns

`<string>` which contains each frequency value (Hz) in the frequency table for the noise display.

Examples

`SENSe:NOISE:FREQUENCY:TABLE:DATA?` might return `"1500000000, 1505000005, 1510000010, 1515000015, 1520000020, 1525000025, 1530000030, 1545000045, 1550000050"`, indicating each frequency in the Frequency Table.

[SENSe]:NOISe:FREQuency:TABLE:NEW (No Query Form)

Creates a new Frequency Table with the specified values for the noise display.

Conditions

Measurement views: Noise Figure, Gain, Noise Temperature, Y Factor, Noise Table

Group

Sense commands

Syntax

`[SENSe]:NOISe:FREQuency:TABLE:NEW <string>`

Arguments

`<string> = "<NR3>,<NR3>,<NR3>,..."`

Examples

`SENSe:NOISE:FREQUENCY:TABLE:NEW "1.2e9,1.5e9,1.452e9"` sets 3 step values in a new Frequency Table to 1.200 GHz, 1.350 GHz, and 1.500 GHz.

[SENSe]:OBWidth:AVERage

Sets or queries whether to enable averaging in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:AVERage { OFF | ON | 0 | 1 }  
[SENSe]:OBWidth:AVERage?
```

Arguments

OFF or 0 disables averaging.

ON or 1 enables averaging.

Examples

SENSe:OBWIDTH:AVERAGE ON enables averaging.

[SENSe]:OBWidth:AVERage:COUNT

Sets or queries the number of measurements for averaging in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:AVERage:COUNT <number>  
[SENSe]:OBWidth:AVERage:COUNT?
```

Arguments

<number>::<NR1> specifies the average count. Range: 2 to 10000.

Examples

SENSe:OBWIDTH:AVERAGE:COUNT 64 sets the average count to 64.

[SENSe]:OBWidth:{BANDwidth|BWIDth}:MEASurement

Sets or queries the measurement bandwidth to determine the total power in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:{BANDwidth|BWIDth}:MEASurement <value>  
[SENSe]:OBWidth:{BANDwidth|BWIDth}:MEASurement?
```

Arguments

<value>::<NRf> specifies the measurement bandwidth.

Range: 100 Hz to 109 MHz.

Examples

`SENSe:OBWIDTH:BANDWIDTH:MEASUREMENT 10MHz` sets the measurement bandwidth to 10 MHz.

[SENSe]:OBWidth:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth (RBW). Programming a specified RBW sets `[SENSe]:OBWidth{BANDwidth|BWIDth}[ :RESolution]:AUTO OFF`.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:{BANDwidth|BWIDth}[ :RESolution] <value>
[SENSe]:OBWidth:{BANDwidth|BWIDth}[ :RESolution]?
```

Related Commands

[\[SENSe\]:OBWidth:{BANDwidth|BWIDth}\[:RESolution\]:AUTO](#) (on page 2230)

Arguments

`<value>::<NRf>` specifies the RBW. Range: 100 Hz to 5 MHz.

Examples

`SENSe:OBWIDTH:BANDWIDTH:RESOLUTION 200kHz` sets the RBW to 200 kHz.

[SENSe]:OBWidth:{BANDwidth|BWIDth}[:RESolution]:ACTual? (Query Only)

Queries the actual resolution bandwidth (RBW) in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:{BANDwidth|BWIDth}[ :RESolution]:ACTual?
```

Arguments

None

Returns

`<NRf>` The actual RBW in Hz.

Examples

SENSe:OBWIDTH:BANDWIDTH:RESOLUTION:ACTUAL? might return 299.624E+3, indicating that the actual RBW is 299.624 kHz.

[SENSe]:OBWidth:{BANDwidth|BWIDth}[:RESolution]:AUTO

Determines whether to set the resolution bandwidth (RBW) automatically or manually in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:{BANDwidth|BWIDth}[:RESolution]:AUTO { OFF | ON | 0 | 1 }
[SENSe]:OBWidth:{BANDwidth|BWIDth}[:RESolution]:AUTO?
```

Arguments

OFF or 0 specifies that the RBW is set manually using the [SENSe]:OBWidth:{BANDwidth|BWIDth}[:RESolution] command.

ON or 1 specifies that the RBW is set automatically.

Examples

SENSe:OBWIDTH:BANDWIDTH:AUTO ON sets the RBW automatically.

[SENSe]:OBWidth:{BANDwidth|BWIDth}:VIDeo

Sets or queries the video bandwidth (VBW). Programming a specified VBW sets [SENSe]:OBWidth{BANDwidth|BWIDth}:VIDeo:STATE OFF.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:{BANDwidth|BWIDth}:VIDeo <value>
[SENSe]:OBWidth:{BANDwidth|BWIDth}:VIDeo?
```

Arguments

<value>::<NRf> specifies the VBW.

Range: Current RBW/104 (1 Hz minimum) to Current RBW.

Examples

SENSe:OBWIDTH:BANDWIDTH:VIDEO 200kHz sets the VBW to 200 kHz.

[SENSe]:OBWidth:{BANDwidth|BWIDth}:VIDeo:STATE

Determines whether to enable the video bandwidth (VBW) in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:{BANDwidth|BWIDTH}:VIDeo:StAtE { OFF | ON| 0 | 1 }  
[SENSe]:OBWidth:{BANDwidth|BWIDTH}:VIDeo:StAtE?
```

Arguments

OFF or 0 disables the VBW.

ON or 1 enables the VBW.

Examples

SENSe:OBWIDTH:BANDWIDTH:VIDEO:STATE ON enables the VBW.

[SENSe]:OBWidth:BOBW:XDBM:MEASurement:DIREction

Sets or queries the measurement direction in the Bluetooth window.

Conditions

Measurement views:Bluetooth 20 dB Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:BOBW:XDBM:MEASurement:DIREction {IN|OUT}  
[SENSe]:OBWidth:BOBW:XDBM:MEASurement:DIREction?
```

Arguments

IN specifies the inward direction

OUT specifies the outward direction.

Examples

SENSe:OBWIDTH:BOBW:XDBM:MEASUREMENT:DIRECTION? might return IN, indicating the measurement direction is set to IN.

[SENSe]:OBWidth:BOBW:XDBM:RANGe

Sets or queries the measurement range in the Bluetooth window.

Conditions

Measurement views:Bluetooth 20 dB Bandwidth

The x dBm option should be selected. If the x dB option is selected, the Range is always set to BOTH.

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:BOBW:XDBM:RANGe {BOTH|LOW|HIGH}  
[SENSe]:OBWidth:BOBW:XDBM:RANGe?
```

Arguments

BOTH specifies both the high and low ranges.

LOW specifies the lower range.

HIGH specifies the higher range.

Examples

`SENSe:OBWIDTH:BOBW:XDBM:RANGE LOW` sets the measurement range to the lower range.

[SENSe]:OBWidth:CLEAr:RESults (No Query Form)

Restarts the average trace. This command is valid when `[SENSe]:OBWidth:AVERage` is set to ON.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:CLEAr:RESults
```

Arguments

None

Examples

`SENSe:OBWIDTH:CLEAR:RESULTS` restarts the average trace.

[SENSe]:OBWidth:FREQuency:CENTer

Sets or queries the center frequency in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:FREQuency:CENTer <value>  
[SENSe]:OBWidth:FREQuency:CENTer?
```

Arguments

`<value>::<NRf>` specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:OBWIDTH:FREQUENCY:CENTER 7.5GHz` sets the center frequency to 7.5 GHz.

[SENSe]:OBWidth:FREQuency:STEP

Sets or queries the frequency step size in the Occupied Bandwidth measurement. Programming a specified step size sets `[SENSe]:OBWidth:FREQuency:STEP:AUTO OFF`.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:FREQuency:STEP <value>
[SENSe]:OBWidth:FREQuency:STEP?
```

Related Commands

[\[SENSe\]:OBWidth:FREQuency:STEP:AUTO](#) (on page 2233)

Arguments

`<value>::<NRf>` specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:OBWIDTH:FREQUENCY:STEP 1kHz` sets the frequency step size to 1 kHz.

[SENSe]:OBWidth:FREQuency:STEP:AUTO

Determines whether to set the frequency step size automatically or manually in the Occupied Bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:FREQuency:STEP:AUTO{OFF|ON|0|1}
```

```
[SENSe]:OBWidth:FREQuency:STEP:AUTO?
```

Arguments

OFF or 0 specifies that the frequency step size is set manually using the `[SENSe]:OBWidth:FREQuency:STEP` command.

ON or 1 specifies that the frequency step size is set automatically.

Examples

`SENSe:OBWIDTH:FREQUENCY:STEP:AUTO ON` specifies that the frequency step size is set automatically.

[SENSe]:OBWidth:PERCent

Sets or queries the occupied bandwidth percent power (power ratio of the occupied bandwidth to the measurement bandwidth).

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:PERCent <value>  
[SENSe]:OBWidth:PERCent?
```

Arguments

`<value>::<NRf>` specifies the occupied bandwidth percent power.

Range: 50 to 99.9%.

Examples

`SENSe:OBWIDTH:PERCENT 98` sets the occupied bandwidth percent power to 98%.

[SENSe]:OBWidth:XDBLevel

Sets or queries the x dB level (how far down from the peak level the bandwidth is measured) in the x dB bandwidth measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Sense commands

Syntax

```
[SENSe]:OBWidth:XDBLevel <value>  
[SENSe]:OBWidth:XDBLevel?
```

Arguments

`<value>::<NRf>` specifies the x dB level. Range: -80 to -1 dB.

Examples

`SENSe:OBWIDTH:XDBLEVEL -10` sets the x dB level to -10 dB.

[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth]

Sets or queries the channel bandwidth in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth] <value>
[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth]?
```

Arguments

`<value>: : <NRf>` specifies the channel bandwidth.

Examples

`SENSe:OFDM:CHANNEL[:BANDWIDTH|BWIDTH] 20E+6` sets the channel bandwidth to 20 MHz.

[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth]:SRATe? (Query Only)

Returns the FFT sample rate for the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth]:SRATe?
```

Arguments

None

Returns

`<NRf>` The sample rate in Hz.

Examples

`SENSe:OFDM:CHANNEL[:BANDWIDTH|BWIDTH]:SRATE?` might return `20E+6`, indicating the sample rate is 20 MHz.

[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth]:STATe

Determines whether the channel bandwidth is on or off in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth]:STATE{OFF|ON|0|1}  
[SENSe]:OFDM:CHANnel[:BANDwidth|BWIDth]:STATE?
```

Arguments

OFF or 0 specifies that the channel bandwidth is off.

ON or 1 specifies that the channel bandwidth is on.

Examples

SENSe:OFDM:CHANNEL[:BANDWIDTH|BWIDTH]:STATE ON sets the channel bandwidth setting to on.

[SENSe]:OFDM:CHANnel:ESTimation

Sets or queries the channel estimation in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:CHANnel:ESTimation{PREamble|PDATA}  
[SENSe]:OFDM:CHANnel:ESTimation?
```

Arguments

PREamble specifies the channel estimation is Preamble.

PDATA specifies the channel estimation is Preamble + Data.

Examples

SENSe:OFDM:CHANNEL:ESTIMATION PDAT sets the channel estimation to Preamble + Data.

[SENSe]:OFDM:CONSte:DETermination

Sets or queries the constellation determination in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:CONSte:DETermination{AUTO|MANual}
```

[SENSe]:OFDM:CONStE:DETermination?

Arguments

AUTO specifies the instrument automatically detects the constellation determination.

MANual allows you to select a manual constellation type.

Examples

SENSe:OFDM:CONStE:DETERMINATION MAN sets the constellation determination so you can select a manual constellation type using the SENSe:OFDM:CONStE:DETermination:MANual command.

[SENSe]:OFDM:CONStE:DETermination:MANual

Sets or queries a manual constellation type. The Constellation determination must be set to Manual using the [SENSe]:OFDM:CONStE:DETermination command.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

[SENSe]:OFDM:CONStE:DETermination:MANual{BPSK|QAM16|QAM64|QPSK}
[SENSe]:OFDM:CONStE:DETermination:MANual?

Related Commands

[\[SENSe\]:OFDM:CONStE:DETermination](#) (on page 2236)

Arguments

BPSK specifies the BPSK constellation type.

QAM16 specifies the QAM16 constellation type.

QAM64 specifies the QAM16 constellation type.

QPSK specifies the QPSK constellation type.

Examples

SENSe:OFDM:CONStE:DETERMINATION:MANUAL QPSK selects the QPSK constellation type.

[SENSe]:OFDM:GUARd:INTerval

Sets or queries the guard interval in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

[SENSe]:OFDM:GUARd:INTerval{FOURth|EIGHth|SIXTeenth|THIRTysecond|USER}

Arguments

FOURth specifies the guard interval is set to 1/4.

EIGHth specifies the guard interval is set to 1/8.

SIXTeenth specifies the guard interval is set to 1/16.

THIRTysecond specifies the guard interval is set to 1/32.

USER specifies a user-defined guard interval.

Examples

SENSe:OFDM:GUARd:INTERVAL THIR sets the guard interval to 1/32.

[SENSe]:OFDM:GUARd:INTerval:USER

Sets or queries a user-defined guard interval. The Guard Interval must be set to USER.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:GUARd:INTerval:USER <value>  
[SENSe]:OFDM:GUARd:INTerval:USER?
```

Related Commands

[\[SENSe\]:OFDM:GUARd:INTerval](#) (on page 2237)

Arguments

<value>::<NRf> specifies the guard interval.

Examples

SENSe:OFDM:GUARd:INTERVAL:USER 3.12 sets the guard interval to 3.12%.

[SENSe]:OFDM:PILot:TRACking:AMPLitude:STATe

Determines whether to select the Amplitude pilot tracking in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:PILot:TRACking:AMPLitude:STATe { OFF | ON | 0 | 1 }  
[SENSe]:OFDM:PILot:TRACking:AMPLitude:STATe?
```

Arguments

OFF or 0 specifies that the Amplitude pilot tracking is off.

ON or 1 specifies that the Amplitude pilot tracking is on.

Examples

SENSe:OFDM:PILOT:TRACKING:AMPLITUDE:STATE ON turns the Amplitude pilot tracking on.

[SENSe]:OFDM:PILot:TRACking:PHASe:STATe

Determines whether to select the Phase pilot tracking in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

[SENSe]:OFDM:PILot:TRACking:PHASe:STATe {OFF|ON|0|1}

Arguments

OFF or 0 specifies that the Phase pilot tracking is off.

ON or 1 specifies that the Phase pilot tracking is on.

Examples

SENSe:OFDM:PILOT:TRACKING:PHASE:STATE ON turns the Phase pilot tracking on.

[SENSe]:OFDM:PILot:TRACking:TIMing:STATe

Determines whether to select the Timing pilot tracking in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

[SENSe]:OFDM:PILot:TRACking:TIMing:STATe {OFF|ON|0|1}

Arguments

OFF or 0 specifies that the Timing pilot tracking is off.

ON or 1 specifies that the Timing pilot tracking is on.

Examples

SENSe:OFDM:PILOT:TRACKING:TIMING:STATE ON turns the Timing pilot tracking on.

[SENSe]:OFDM:RADix (No Query Form)

Sets the radix for the OFDM measurements. This command is effective in the symbol table.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:RADix { BINary | HEX }
```

Arguments

Returns

`BINary` specifies the binary radix.

`HEX` specifies the hexadecimal radix.

Examples

`SENSe:OFDM:RADIX HEX` sets the radix to hexadecimal for the OFDM symbol table.

[SENSe]:OFDM:SCARrier:SPACing

Sets or queries the subcarrier spacing in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SCARrier:SPACing <value>  
[SENSe]:OFDM:SCARrier:SPACing?
```

Arguments

`<value>::<NRf>` specifies the subcarrier spacing.

Examples

`SENSe:OFDM:SCARRIER:SPACING 312.5E+3` sets the subcarrier spacing to 312.5 MHz.

[SENSe]:OFDM:SCARrier:SPACing:STAtE

Determines whether the subcarrier spacing is on or off in the OFDM view

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SCARrier:SPACing:STAtE{OFF|ON|0|1}
```



```
[SENSe]:OFDM:SCARrier:SPACing:STATe?
```

Arguments

OFF or 0 specifies that the subcarrier spacing is off.

ON or 1 specifies that the subcarrier spacing is on.

Examples

SENSe:OFDM:SCARRIER:SPACING:STATE ON sets the subcarrier spacing to on.

[SENSe]:OFDM:SCARriers

Sets or queries the Subcarriers to display in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SCARriers { ALL | PILOt | DATA | RANGE | SINGLE}  
[SENSe]:OFDM:SCARriers?
```

Arguments

ALL specifies that all subcarriers will be displayed.

PILOt specifies that only the pilot subcarriers will be displayed.

DATA specifies that only the data subcarriers will be displayed.

RANGE specifies that the subcarriers within a specified range will be displayed.

SINGLE specifies that only a single subcarrier will be displayed.

Examples

SENSe:OFDM:SCARRIERS ALL sets the OFDM view to display all subcarriers.

[SENSe]:OFDM:SCARriers:RANGe:START

Sets or queries the subcarrier start range in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SCARriers:RANGe:START <value>  
[SENSe]:OFDM:SCARriers:RANGe:START?
```

Related Commands

[\[SENSe\]:OFDM:SCARriers:RANGe:STOP](#) (on page 2242)

Arguments

<NR1>

Examples

`SENSe:OFDM:SCARRIERS:RANGE:START -20` sets the subcarrier start range to -20.

[SENSe]:OFDM:SCARriers:RANGe:STOP

Sets or queries the subcarrier stop range in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

`[SENSe]:OFDM:SCARriers:RANGe:STOP <value>`
`[SENSe]:OFDM:SCARriers:RANGe:STOP?`

Related Commands

[\[SENSe\]:OFDM:SCARriers:RANGe:START](#) (on page 2241)

Arguments

<NR1>

Examples

`SENSe:OFDM:SCARRIERS:RANGE:STOP 20` sets the subcarrier stop range to 20.

[SENSe]:OFDM:SCARriers:SINGle:INDEX

Sets or queries the index of a single subcarrier in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

`[SENSe]:OFDM:SCARriers:SINGle:INDEX <Value>`
`[SENSe]:OFDM:SCARriers:SINGle:INDEX?`

Arguments

<NR1>

Examples

`SENSe:OFDM:SCARRIERS:SINGLE:INDEX -10` sets the single subcarrier index to -10.

[SENSe]:OFDM:FFT:LENGth? (Query Only)

Returns the FFT length for the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:FFT:LENGth?
```

Arguments

None

Returns

<NR1> The FFT length.

Examples

SENSe:OFDM:FFT:LENGTh? might return the FFT length as 64.

[SENSe]:OFDM:STANdard

Sets or queries the OFDM standard.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:STANdard { S802_11 | S802_16 }  
[SENSe]:OFDM:STANdard?
```

Arguments

S802_11 specifies the 802.11a/g/j OFDM standard.

S802_16 specifies the 802.16 (2004) standard.

Examples

SENSe:OFDM:STANDARD S802_16 sets the OFDM standard to 802.16.

[SENSe]:OFDM:SWAP:IQ

Determines whether or not to exchange I and Q data before demodulating.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SWAP:IQ{OFF|ON|0|1}  
[SENSe]:OFDM:SWAP:IQ?
```

Arguments

OFF or 0 uses I and Q data as they are.

ON or 1 exchanges I and Q data.

Examples

SENSe:OFDM:SWAP:IQ ON exchanges I and Q data before demodulating.

[SENSe]:OFDM:SYMBOL:ANALysis:OFFSet

Sets or queries the OFDM symbol analysis offset.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SYMBOL:ANALysis:OFFSet <value>  
[SENSe]:OFDM:SYMBOL:ANALysis:OFFSet?
```

Arguments

<value> specifies the symbol analysis offset as a percentage.

Range 0 to -100%.

Examples

SENSe:OFDM:SYMBOL:ANALYSIS:OFFSET -50 sets the symbol analysis offset to -50%.

[SENSe]:OFDM:SYMBOLs

Sets or queries the symbols to display in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SYMBOLs{ALL|RANGE|SINGLE}  
[SENSe]:OFDM:SYMBOLs?
```

Arguments

ALL specifies that all symbols will be displayed.

RANGe specifies that a range of symbols will be displayed.

SINGLe specifies that single symbol will be displayed.

Examples

SENSe:OFDM:SYMBOLS ALL specifies that all symbols will be displayed in the OFDM views.

[SENSe]:OFDM:SYMBOLs:MAX

Sets or queries the maximum number of symbols to analyze in the OFDM views.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SYMBOLs:MAX <value>  
[SENSe]:OFDM:SYMBOLs:MAX?
```

Arguments

<NR1>

Examples

SENSe:OFDM:SYMBOLS:MAX 50 specifies a maximum of 50 symbols to analyze in the OFDM views.

[SENSe]:OFDM:SYMBOLs:MAX:STATe

Enables or disables the maximum number of symbols to analyze in the OFDM view.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SYMBOLs:MAX:STATe{OFF|ON|0|1}  
[SENSe]:OFDM:SYMBOLs:MAX:STATe?
```

Related Commands

[\[SENSe\]:OFDM:SYMBOLs:MAX](#) (on page 2245)

Arguments

OFF or **0** disables the maximum number of symbols to analyze.

ON or **1** enables the maximum number of symbols to analyze.

Examples

`SENSe:OFDM:SYMBOLS:MAX:STATE ON` enables the number of symbols to analyze in the OFDM view. The number is specified by the `[SENSe]:OFDM:SYMBOLS:MAX` command.

[SENSe]:OFDM:SYMBOLS:RANGe:COUNT

Sets or queries the number of symbols to display in the OFDM view when displaying a range of symbols.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SYMBOLS:RANGe:COUNT<value>
[SENSe]:OFDM:SYMBOLS:RANGe:COUNT?
```

Arguments

<NR1>

Examples

`SENSe:OFDM:SYMBOLS:RANGe:COUNT 25` sets the number of symbols to display to 25.

[SENSe]:OFDM:SYMBOLS:RANGe:START

Sets or queries the symbols start range in the OFDM view when displaying a range of symbols.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SYMBOLS:RANGe:START <value>
[SENSe]:OFDM:SYMBOLS:RANGe:START?
```

Arguments

<NR1>

Examples

`SENSe:OFDM:SYMBOLS:RANGe:START 0` sets the start range to 0.

[SENSe]:OFDM:SYMBOLS:SINGLe:INDEX

Sets or queries the symbol index in the OFDM view when displaying a single symbol.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:SYMBOLs:SINGLE:INDEX <value>  
[SENSe]:OFDM:SYMBOLs:SINGLE:INDEX?
```

Arguments

<NR1>

Examples

SENSe:OFDM:SYMBOLs:SINGLE:INDEX 0 sets the index to 0.

[SENSe]:OFDM:UNIT:FREQuency (No Query Form)

Specifies the frequency units for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:UNIT:FREQuency{FREQuency|SCARrier}
```

Arguments

FREQuency sets the frequency units to frequency.

SCARrier sets the frequency units to subcarriers.

Examples

SENSe:OFDM:UNIT:FREQUENCY FREQ sets the frequency units to frequency.

[SENSe]:OFDM:UNIT:TIME (No Query Form)

Specifies the time units for the OFDM measurement.

Conditions

Measurement views: OFDM

Group

Sense commands

Syntax

```
[SENSe]:OFDM:UNIT:TIME{SEConds|SYMBOLs}
```

Arguments

SEConds sets the time units to seconds.

SYMBOLs sets the time units to symbols.

Examples

SENSe:OFDM:UNIT:TIME SEC sets the time units to seconds.

[SENSe]:P25:ANALysis:OFFSet

Sets or queries the Analysis Offset value from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:ANALysis:OFFSet <value>
```

Arguments

<NRf>

Examples

SENSe:P25:ANALYSIS:OFFSET 2 sets the Analysis Offset value to 2.

[SENSe]:P25:ANALysis:OFFSet:AUTO

Sets or queries the Analysis Offset auto checkbox selection from P25 display.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:ANALysis:OFFSet:AUTO <value>
```

Arguments

0 unchecks the checkbox.

1 checks the checkbox.

Returns

0 or 1, <NRf>

Examples

SENSe:P25:ANALYSIS:OFFSET:AUTO 1 enables the Analysis Offset auto checkbox in P25 display.

[SENSe]:P25([:BANDwidth]):BWIDth):MODE

Sets or queries the Measurement BW (bandwidth) (frequency span) mode as Auto, Manual, or Link to Span.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25([:BANDwidth]:BWIDth):MODE {MANual|AUTO|LSP}
[SENSe]:P25([:BANDwidth]:BWIDth):MODE?
```

Arguments

MANual sets the analyzer to allow for manual selection of the measurement bandwidth. A typical use is setting a narrow measurement bandwidth on a small range of frequencies to examine one signal while rejecting the others that are present in a Spectrum graph.

AUTO sets analyzer to automatically select a measurement bandwidth. The measurement picks a bandwidth based on other parameter settings (such as symbol rate and modulation type).

LSP sets the Measurement BW to Link to Span. This allows you to use the Spectrum display to tune the frequency, view the signal, and then use the Span control to set the measurement bandwidth. This mode emulates legacy instruments.

Returns

MAN means the Measurement BW is set to Manual.

AUTO means the Measurement BW is set to Automatic.

LSP means the Measurement BW is set to Link to Span.

Examples

`SENSe:P25:BAND:MODE?` might return `MAN`, indicating the Measurement BW mode is set to `AUTO`.

[SENSe]:P25([:BANDwidth]:BWIDth):TINterval

Sets or queries the Measurement BW (bandwidth) (frequency span). Setting the Measurement BW changes this setting from Auto to Manual if it is set to Auto before you use the command. A query will not change that setting.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25([:BANDwidth]:BWIDth):TINterval <NRf>
[SENSe]:P25([:BANDwidth]:BWIDth):TINterval?
```

Arguments

<NRf> specifies the measurement bandwidth in kHz.

Returns

<NR3> = a floating point value with an exponent, which is the Measurement BW value in kHz.

Examples

`SENSe:P25:BAND:INT?` might return `153.6000000000E+3`, which indicates the Measurement BW value is 153.6 kHz.

[SENSe]:P25([:BANDwidth]:BWIDth):TINTerval:AUTO

Sets or queries the Measurement BW (bandwidth) (frequency span) mode as Auto or Manual.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25([:BANDwidth]:BWIDth):TINTerval:AUTO {0|1|OFF|ON}
[SENSe]:P25([:BANDwidth]:BWIDth):TINTerval:AUTO?
```

Arguments

OFF or 0 sets Measurement BW to Auto.

ON or 1 sets Measurement BW to Manual.

Returns

0 means Measurement BW is set to Auto.

1 means Measurement BW is set to Manual.

Examples

SENSe:P25:BAND:INT:AUTO? might return 1, indicating the Measurement BW is set to Auto.

[SENSe]:P25:FILTer:MEASurement

Sets or queries the P25 measurements Measurement Filter setting. The User Meas Filter selections are predefined user filters.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:FILTer:MEASurement{ OFF | USER1 | USER2 | USER3 | UOTH | RECT | RRC | RCOS | GAUS |
  HDQPSK_P25 | C4FM_P25}
[SENSe]:P25:FILTer:MEASurement?
```

Arguments

OFF sets the filter to None.

USER1 sets the filter to User Meas Filter 1.

USER2 sets the filter to User Meas Filter 2.

USER3 sets the filter to User Meas Filter 3.

UOTH sets the filter to User other.

RECT sets the filter to Rectangular (only available for Phase 2 HDQPSK modulation type).

RRC sets the filter to Root Raised Cosine (only available for Phase 2 HDQPSK modulation type).

RCOS sets the filter to Raised Cosine (only available for Phase 2 HDQPSK modulation type).

GAUS sets the filter to Gaussian (only available for Phase 2 HDQPSK modulation type).

HDQPSK_P25 sets the filter to HDQPSK-P25 (only available for Phase 2 HDQPSK modulation type)

C4FM_P25 sets the filter to C4FM-P25 (only available for Phase 1 C4FM modulation type)

Returns

OFF means the filter is set to None.

USER1 means the filter is set to User Meas Filter 1.

USER2 means the filter is set to User Meas Filter 2.

USER3 means the filter is set to User Meas Filter 3.

UOTH means the filter is set to User other.

RECT means the filter is set to Rectangular (only available for Phase 2 HDQPSK modulation type).

RRC means the filter is set to Root Raised Cosine (only available for Phase 2 HDQPSK modulation type).

RCOS means the filter is set to Raised Cosine (only available for Phase 2 HDQPSK modulation type).

GAUS means the filter is set to Gaussian (only available for Phase 2 HDQPSK modulation type).

HDQPSK_P25 means the filter is set to HDQPSK-P25 (only available for Phase 2 HDQPSK modulation type)

C4FM_P25 means the filter is set to C4FM-P25 (only available for Phase 1 C4FM modulation type)

Examples

SENSe:P25:FILTer:MEASUREMENT? might return **USER1**, indicating that the Measurement Filter is set to User Meas Filter 1.

[SENSe]:P25:FILTer:REFeRence

Sets or queries the P25 measurements Reference Filter setting. The User Meas Filter selections are predefined user filters.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:FILTer:REFeRence{ OFF | USER1 | USER2 | USER3 | UOTH | RECT | RRC | RCOS | GAUS |
HDQPSK_P25 | C4FM_P25 }
[SENSe]:P25:FILTer:REFeRence?
```

Arguments

OFF sets the filter to None.

USER1 sets the filter to User Meas Filter 1.

USER2 sets the filter to User Meas Filter 2.

USER3 sets the filter to User Meas Filter 3.

UOTH sets the filter to User other.

RECT sets the filter to Rectangular (only available for Phase 2 HDQPSK modulation type).

RRC sets the filter to Root Raised Cosine (only available for Phase 2 HDQPSK modulation type).

RCOS sets the filter to Raised Cosine (only available for Phase 2 HDQPSK modulation type).

GAUS sets the filter to Gaussian (only available for Phase 2 HDQPSK modulation type).

HDQPSK_P25 sets the filter to HDQPSK-P25 (only available for Phase 2 HDQPSK modulation type)

C4FM_P25 sets the filter to C4FM-P25 (only available for Phase 1 C4FM modulation type)

Returns

OFF means the filter is set to None.

USER1 means the filter is set to User Meas Filter 1.

USER2 means the filter is set to User Meas Filter 2.

USER3 means the filter is set to User Meas Filter 3. **UOTH** means the filter is set to User other.

RECT means the filter is set to Rectangular (only available for Phase 2 HDQPSK modulation type).

RCOS means the filter is set to Raised Cosine (only available for Phase 2 HDQPSK modulation type).

GAUS means the filter is set to Gaussian (only available for Phase 2 HDQPSK modulation type).

Examples

SENSe:P25:FILTER:REFERENCE? might return **USER1**, indicating that the Reference Filter is set to User Meas Filter 1.

[SENSe]:P25:FREQuency:ERRor

Sets or queries the P25 Frequency Offset (when Auto is off).

Conditions

Measurement view: Any P25 measurement display Frequency Offset set to manual (Auto off).

Group

Sense commands

Syntax

[SENSe]:P25:FREQuency:ERRor <NR2>

[SENSe]:P25:FREQuency:ERRor?

Related Commands

Arguments

<NR2> = a floating point value without an exponent, which is the fixed frequency offset in Hz.

Returns

<NR2> = a floating point value without an exponent, which is the fixed frequency offset in Hz.

Examples

SENSe:P25:FREQUENCY:ERROR? might return **749.9999390000**, indicating that the frequency offset is 750.0 Hz.

SENSe:P25:FREQUENCY:ERROR 700.99 sets the frequency offset the 701.0 Hz.

[SENSe]:P25:FREQuency:ERRor:AUTO

Sets or queries if the P25 Frequency Error is set to Auto.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:FREQuency:ERRor:AUTO { 0 | 1 | OFF | ON }  
[SENSe]:P25:FREQuency:ERRor:AUTO?
```

Arguments

OFF or 0 means the Auto is off.

ON or 1 means the Auto is on.

Returns

0 means that Auto is off.

1 means Auto is on.

Examples

SENSe:P25:FREQUENCY:ERROR:AUTO? might return 1, indicating that the Frequency Error is set to Auto.

SENSe:P25:FREQUENCY:ERROR:AUTO 0 turns off Auto setting for Frequency Error.

[SENSe]:P25:MODUlation:CHANnel:([BANDwidth]:BWIDth)]? (Query Only)

Queries the actual P25 Preset channel bandwidth.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:MODUlation:CHANnel:([BANDwidth]:BWIDth)]?
```

Returns

Bandwidth in kHz, using "_" to denote ".". For example, 12_5 means 12.5 kHz.

Examples

SENSe:P25:MODU:CHAN:BAND? will return 12_5, indicating that the channel bandwidth is 12.5 kHz.

[SENSe]:P25:MODUlation:STANdard

Sets or queries the P25 modulation standard.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:MODUlation:STANdard{PHASE1|PHASE2}  
[SENSe]:P25:MODUlation:STANdard?
```

Related Commands

[SENSe:P25:MODUlation:TYPE](#) (on page 2254)

Arguments

PHASE1 is the Phase 1 standard.

PHASE2 is the Phase 2 standard.

Returns

PHASE1 is the Phase 1 standard.

PHASE2 is the Phase 2 standard.

Examples

SENSe:P25:MODULATION:STANDARD? might return PHASE2, indicating that the P25 modulation standard is set to Phase 2.

SENSe:P25:MODUlation:TYPE

Sets or queries the P25 modulation type.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
SENSe:P25:MODUlation:TYPE {C4FM|HCPM|HDQPSK}  
SENSe:P25:MODUlation:TYPE?
```

Related Commands

[\[SENSe\]:P25:MODUlation:STANdard](#) (on page 2253)

Arguments

C4FM: this is a Phase 1 modulation standard type. Modulation Phase must be set to PHASE1.

HCPM: this is a Phase 2 modulation standard type. Modulation Phase must be set to PHASE2.

HDQPSK: this is a Phase 2 modulation standard type. Modulation Phase must be set to PHASE2.

Returns

C4FM: this is a Phase 1 modulation standard type.

HCPM: this is a Phase 2 modulation standard type.

HDQPSK: this is a Phase 2 modulation standard type.

Examples

`SENSe:P25:MODULATION:TYPE?` might return `HDQPSK`, indicating that the P25 modulation type is set to HDQPSK, which is a Phase 2 modulation standard.

[SENSe]:P25:SRATe

Sets or queries the Symbol Rate value for the P25 measurements.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:SRATe <value>
[SENSe]:P25:SRATe?
```

Arguments

`<value>` is the symbol rate value in kHz.

Returns

`<NR3>` = a floating point value with an exponent, which is the symbol rate value in kHz.

Examples

`SENSe:P25:SRATE?` might return `6.0000000000E+3`, indicating that the symbol rate is 6 kHz.

[SENSe]:P25:SUMMARY:CLEAr:RESults (No Query Form)

Clears the results of the P25 Summary display.

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:CLEAr:RESults
```

Arguments

None

Examples

`SENSe:P25:SUMMARY:CLEAR:RESULTS` clears the results in the P25 Summary display.

[SENSe]:P25:SUMMARY:LIMIt:FA

Sets or queries for the On/Off state of limit comparison and the upper limit value for Operating Frequency Accuracy. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FA <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIt:FA?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 4

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIt:FA? might return "1,2" <1>, which indicates measurement is enabled (turned on) for limit comparison, and the upper limit for Operating Frequency Accuracy is 2.

[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEViation:AVERage:TERRor:ONE

Sets or queries for the On/Off state of limit comparison and the upper limit value for Average t_error_1. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEViation:AVERage:TERRor:ONE <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEViation:AVERage:TERRor:ONE?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 25

Returns

<NR1>,<NR3>

Examples

SENSE:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:AVERAGE:TERROR:ONE? might return
 "0,25.0000000000E-6",<0> indicating measurement is disabled (turned off) for limit comparison, and the upper limit for Average t_error_1 is <25.0000000000E-6>.

[SENSE]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:AVERAGE:TERROR:ZERO

Sets or queries for the On/Off state of limit comparison and the upper limit value for Average t_error_0. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSE]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:AVERAGE:TERROR:ZERO <NR1>,<NR2>
[SENSE]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:AVERAGE:TERROR:ZERO?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 25

Returns

<NR1>,<NR3>

Examples

SENSE:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:AVERAGE:TERROR:ZERO? might return
 "0,25.0000000000E-6",<0> indicating measurement is disabled (turned off) for limit comparison, and the upper limit for Average t_error_0 is <25.0000000000E-6>.

[SENSE]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:OFF:SLOT

Sets or queries for the On/Off state of limit comparison and the upper limit value for HCPM Transmitter Logic channel offslot. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSE]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:OFF:SLOT <NR1>,<NR2>
[SENSE]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:OFF:SLOT?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to -57

Returns

<NR1>, <NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:OFF:SLOT? might return "0, -57", <0>, which indicates measurement is disabled (turned off) for limit comparison, and the upper limit for HCPM Transmitter Logic channel offslot is <-57>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:PEAK:ACPR

Sets or queries for the On/Off state of limit comparison and the upper limit value for HCPM Transmitter Logic channel Peak ACPR. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:PEAK:ACPR <NR1>, <NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:PEAK:ACPR?

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 35

Returns

<NR1>, <NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:LOGIC:CHANNEL:PEAK:ACPR? might return "0, 35", <0> indicating measurement is disabled (turned off) for limit comparison, and the upper limit for HCPM Transmitter Logic channel Peak ACPR is <35>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PEAK:NEGATIVE:LO

Sets or queries for the On/Off state of limit comparison and the lower limit value for Frequency Deviation, negative peak. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:NEGAtive:LO <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:NEGAtive:LO?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 2544

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PEAK:NEGATIVE:LO? might return "1,2544", <1> indicates measurement is enabled (turned on) for limit comparison, and the lower limit for Frequency Deviation, negative peak, is <2544>.

[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:NEGAtive:UP

Sets or queries for the On/Off state of limit comparison and the upper limit value for Frequency Deviation, negative peak. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:NEGAtive:UP <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:NEGAtive:UP?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 3111

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PEAK:NEGATIVE:UP? might return "1,3111", which indicates measurement is enabled (turned on) for limit comparison, and the upper limit for Frequency Deviation, negative peak, is <3111>.

[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:POSItive:LO

Sets or queries for the On/Off state of limit comparison and the lower limit value for Frequency Deviation, positive peak. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:POSitive:LO <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:POSitive:LO?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 2544

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PEAK:POSITIVE:LO?` might return "1,2544", which indicates measurement is enabled (turned on) for limit comparison and the lower limit for Frequency Deviation, positive peak, is <2544>.

[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:POSitive:UP

Sets or queries for the On/Off state of limit comparison and the upper limit value for Frequency Deviation, positive peak. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:POSitive:UP <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:PEAK:POSitive:UP?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 3111 Hz

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PEAK:POSITIVE:UP?` might return "1,3111" which indicates measurement is enabled (turned on) for limit comparison, and the upper limit for Frequency Deviation, positive peak, is <3111>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:LO

Sets or queries for the On/Off state of limit comparison and the lower limit value for Frequency Deviation, f1/f2/f3/f4 for Phase1 or Phase2. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:LO <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:LO?
```

Arguments

<NR1> =0 to deselect the measurement and 1 to select the measurement.

<NR2> =0 to 2544

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:LO? might return "1,2544", indicating measurement is enabled (turned on) for limit comparison, and the upper limit for Frequency Deviation is <2544>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:LO

Sets or queries for two values namely, the On/Off state of limit comparison and the lower limit value for Frequency deviation, f1/f2/f3/f4 for Phase1 or Phase2. The limit comparison can be enabled (turned On) or disabled (turned off).

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]: F[1/2/3/4]:LO <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]: F[1/2/3/4]:LO?
```

Arguments

<Integer, Integer>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:LO?` returns "1,2544",
 Indicating the measurement is enabled for limit comparison and the lower limit for Frequency deviation is <2544>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP

Sets or queries for the On/Off state of limit comparison and the upper limit value for Frequency Deviation, f1/f2/f3/f4 for Phase1 or Phase2. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP?
```

Arguments

<NR1> =0 to deselect the measurement and 1 to select the measurement.

<NR2> =0 to 3111

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP?` might return "1,3111",
 indicating measurement is enabled (turned on) for limit comparison, and the upper limit for Frequency Deviation is 3111.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP

Sets or queries for two values namely, the On/Off state of limit comparison and the upper limit value for Frequency deviation, f1/f2/f3/f4 for Phase1 or Phase2. The limit comparison can be enabled (turned On) or disabled (turned off).

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP?
```

Arguments

<Integer, Integer>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PHASE[1/2]:F[1/2/3/4]:UP?` returns "1,3111 " Indicating the measurement is enabled for limit comparison and the upper limit for Frequency deviation is <3111>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF

Sets or queries for the On/Off state of limit comparison and the upper limit value for Pmax-off. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF?
```

Arguments

<NR1> =0 to deselect the measurement and 1 to select the measurement.

<NR2> =0 to 4

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF?` might return "0, 4" <0>, indicating measurement is disabled (turned off) for limit comparison, and the upper limit for Pmax-off is <4>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF

Sets or queries for two values namely, the On/Off state of limit comparison and the upper limit value for Pmax-off. The limit comparison can be enabled (turned On) or disabled (turned off).

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF?
```

Arguments

<Integer, Integer>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:OFF?` returns "0, 4", which indicates Measurement is disabled (turned Off) for limit comparison, and the upper limit for Pmax-off is <4>.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON

Sets or queries for the On/Off state of limit comparison and the upper limit value for Pmax-on. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON?
```

Arguments

<NR1> =0 to deselect the measurement and 1 to select the measurement.

<NR2> =0 to 4

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON?` might return "0, 4", indicating measurement is disabled (turned off) for limit comparison, and the upper limit for Pmax-on is 4.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON

Sets or queries for two values namely, the On/Off state of limit comparison and the upper limit value for Pmax-on. The limit comparison can be enabled (turned On) or disabled (turned off).

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON<NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON?
```

Arguments

<Integer, Integer>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:ON?` returns "0, 4", which indicates Measurement is disabled (turned Off) for limit comparison, and the upper limit for Pmax-on is 4.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:SS

Sets or queries for the On/Off state of limit comparison and the upper limit value for Pss-max. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:SS <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:SS?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 1

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMAX:SS?` might return "0, 1", indicating measurement is disabled (turned off) for limit comparison, and the upper limit for Pss-max is 1.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMIN:SS

Sets or queries for the On/Off state of limit comparison and the upper limit value for Pss-min. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMIN:SS <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMIN:SS?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to -3

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:PMIN:SS?` might return "0,-3", indicating measurement is disabled (turned off) for limit comparison, and the upper limit for Pss-min is -3.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:ENCODER

Sets or queries for the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack encoder. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER: AVERAGE:ATTK:ENCODER <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER: AVERAGE:ATTK:ENCODER?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 100

Returns

<NR1>,<NR2>

Examples

`SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:ENCODER?` might return "0,100", indicating measurement is disabled (turned off) for limit comparison, and the upper limit for Transmitter Average Attack encoder is 100.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:ENCODER:BI

Sets or queries for the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack encoder, busy/idle. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER: AVERAGE:ATTK:ENCODER:BI <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER: AVERAGE:ATTK:ENCODER:BI?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 30

Returns

<NR1>, <NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:ENCODER:BI? might return "0, 30", which indicates measurement is disabled (turned off) for limit comparison and the upper limit for Transmitter Average Attack encoder, busy/idle, is 30.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:POWER

Sets or queries for the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack power. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER: AVERAGE:ATTK:POWER <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER: AVERAGE:ATTK:POWER?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 50

Returns

<NR1>, <NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:POWER? might return "0, 50", which indicates measurement is disabled (turned off) for limit comparison and the upper limit for Transmitter Average Attack power is 50.

[SENSe]:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:POWER:BI

Sets or queries for the On/Off state of limit comparison and the upper limit value for Transmitter Average Attack power, busy/idle. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:TRANsmitter: AVERage:ATTK:POWEr:BI <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:TRANsmitter: AVERage:ATTK:POWEr:BI?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 30

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:ATTK:POWER:BI? might return "0,30", which indicates measurement is disabled (turned off) for limit comparison, and the upper limit for Transmitter Average Attack power, busy/idle, is 30.

[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:TRANsmitter: AVERage:THRUpot:DLAY

Sets or queries for the On/Off state of limit comparison and the upper limit value for Transmitter Average throughput delay. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:TRANsmitter: AVERage:THRUpot:DLAY <NR1>,<NR2>
[SENSe]:P25:SUMMARY:LIMIt:FREQuency:DEVIation:TRANsmitter: AVERage:THRUpot:DLAY?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 125

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIT:FREQUENCY:DEVIATION:TRANSMITTER:AVERAGE:THRUPUT:DLAY? might return "0,125", which indicates measurement is disabled (turned off) for limit comparison, and the upper limit for Transmitter Average throughput delay is 125.

[SENSe]:P25:SUMMARY:LIMIt:MF

Sets or queries for the On/Off state of limit comparison and the upper limit value for Modulation Fidelity. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:MF <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIt:MF?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 4

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIt:MF? might return "1, 4", which indicates measurement is enabled (turned on) for limit comparison, and the upper limit for Modulation Fidelity is 4.

[SENSe]:P25:SUMMARY:LIMIt:RF:OUTPower

Sets or queries for the On/Off state of limit comparison and the upper limit value for RF Output Power. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:RF:OUTPower <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIt:RF:OUTPower?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 3

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIt:RF:OUTPOWER? might return "1, 3", which indicates measurement is enabled (turned on) for limit comparison, and the upper limit for RF Output Power is 3.

[SENSe]:P25:SUMMARY:LIMIt:SRA

Sets or queries for the On/Off state of limit comparison and the upper limit value for Symbol Rate Accuracy. The limit comparison can be enabled (turned on) or disabled (turned off).

Conditions

Measurement view: P25 Summary

Group

Sense commands

Syntax

```
[SENSe]:P25:SUMMARY:LIMIt:SRA <NR1>,<NR2>  
[SENSe]:P25:SUMMARY:LIMIt:SRA?
```

Arguments

<NR1> = 0 to deselect the measurement and 1 to select the measurement.

<NR2> = 0 to 10

Returns

<NR1>,<NR2>

Examples

SENSe:P25:SUMMARY:LIMIt:SRA? might return "1,10", which indicates measurement is enabled (turned on) for limit comparison and the upper limit for Symbol Rate Accuracy is 10.

[SENSe]:P25:SYMBOLs:POINTs

Sets or queries the Points/Symbols to display in the P25 measurement view.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:SYMBOLs:POINTs{ONE|TWO|FOUR|EIGHT}  
[SENSe]:P25:SYMBOLs:POINTs?
```

Arguments

ONE set the Points/Symbol trace setting to 1.

TWO set the Points/Symbol trace setting to 2.

FOUR set the Points/Symbol trace setting to 4.

EIGHT set the Points/Symbol trace setting to 8.

Returns

ONE means the Points/Symbol trace setting is set to 1.

TWO means the Points/Symbol trace setting is set to 2.

FOUR means the Points/Symbol trace setting to is set 4.

EIGH means the Points/Symbol trace setting to is set 8.

Examples

`SENSe:P25:SYMBOLS:POINTS?` might return `FOUR`, indicating that the Points/Symbol value is set to 4.

[SENSe]:P25:TEST:PATtern

Sets or returns the test pattern type in the P25 displays.

Conditions

Measurement views: Any Bluetooth display

Group

Sense commands

Syntax

```
[SENSe]:P25:TEST:PATtern{LDEVIation|HDEVIation|TPOTHer}  
[SENSe]:P25:TEST:PATtern?
```

Arguments

`LDEVIation` indicates the low deviation test pattern.

`HDEVIation` indicates the high deviation test pattern.

`TPOTHer` indicates a user defined test pattern.

Examples

`SENSe:P25:TEST:PATTERN?` might return `LDEV`, indicating the selected test pattern type is the low deviation type.

[SENSe]:P25:TIME:UNITs

Sets or queries the fundamental unit of time for the P25 measurements.

Conditions

Measurement view: Any P25 measurement display

Group

Sense commands

Syntax

```
[SENSe]:P25:TIME:UNITs{SEC|SYMB}  
[SENSe]:P25:TIME:UNITs?
```

Arguments

`SEConds` sets the unit of time to seconds.

`SYMBols` sets the unit of time to symbols.

Returns

`SEC` means that the unit if time is set to seconds.

`SYMB` means that the unit if time is set to symbols.

Examples

`SENSe:P25:TIME:UNITs?` might return `SEC`, indicating that the unit of time is set to seconds.

[SENSe]:P25:TRIGgger:MEASurement

Sets or queries the Trigger Measurement from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement <arg1>  
[SENSe]:P25:TRIGgger:MEASurement?
```

Arguments

TATOBSYNC is the Time Alignment (tOB_sync measurement).

TAERR0 is the Time Alignment (t_error_0_calculation).

TAERR1 is the Time Alignment (t_error_1_calculation).

TIMEASNONE is None.

Returns

See Arguments

Examples

SENSe:P25:TRIGGER:MEASUREMENT TATOBSYNC selects the Time Alignment (tOB_sync measurement) option when Modulation Params Standard is Phase2 and Modulation Type is C4FM.

[SENSe]:P25:TRIGgger:MEASurement:TOBSync

Sets or returns the tOB_sync (measured) value in the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement:TOBSync <value>
```

Arguments

None

Examples

SENSe:P25:TRIGGER:MEASUREMENT:TOBSYNC? might return 6.00000000, which is the tOB_sync(measured) value.

[SENSe]:P25:TRIGgger:MEASurement:TOBSync:AUTO

Sets or queries the Auto checkbox selection from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement:TOBSync:AUTO <value>
```

Arguments

0 clears the checkbox.

1 checks the checkbox.

Returns

0 or 1, <NRf>

Examples

`SENSe:P25:TRIGGER:MEASUREMENT:TOBSYNC:AUTO 1` enables the Auto checkbox in Trig Meas tab.

[SENSe]:P25:TRIGgger:MEASurement:TRANSient:FREQuency:BEHAViour

Sets or queries the Trigger Measurements option Phase1-Transient Frequency Behavior from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement:TRANSient:FREQuency:BEHAViour {RISE|FALL}
```

Arguments

`RISE` sets the Transient Frequency Behavior to Off to On.

`FALL` sets the Transient Frequency Behavior to On to Off.

Returns

`RISE` means the Transient Frequency Behavior is Off to On.

`FALL` means the Transient Frequency Behavior is On to Off.

Examples

`SENSe:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY:BEHAVIOUR?` might return `RISE` if the Transient Frequency behavior Off to On option is chosen in the Transient Frequency.

[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAViour:TIME:OFF

Sets or queries the 't off' value when the Transient Frequency option is Transient Frequency Behavior On to Off for Phase1-Transient Frequency Behavior from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency: BEHAViour:TIME:OFF <arg1>  
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAViour:TIME:OFF?
```

Arguments

<arg1>

Returns

<arg1>::<NRf>

Examples

SENSe:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY:BEHAVIOUR:TIME:OFF 2 sets the "t off" value to 2.

[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAViour:TIME:OFF:AUTO

Sets or queries the Auto checkbox selection when Transient Frequency is chosen as Transient Frequency Behavior On to Off from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency: BEHAViour:TIME:OFF:AUTO <value>
```

Arguments

0 unchecks the checkbox.

1 checks the checkbox.

Returns

0 or 1, <NRf>

Examples

`SENSe:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY:BEHAVIOUR:TIME:OFF:AUTO 1` enables the Auto checkbox in Trig measurement tab.

[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAViour:TIME:ON

Sets or queries the 't on' value when the Transient Frequency option is Transient Frequency Behavior Off to On for Phase1-Transient Frequency Behavior from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAViour:TIME:ON <arg1>  
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAViour:TIME:ON?
```

Arguments

<arg1>

Examples

`SENSe:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY:BEHAVIOUR:TIME:ON 2` sets the "t on" value to 2.

[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency:BEHAViour:TIME:ON:AUTO

Sets or queries the Auto checkbox selection when Transient Frequency is chosen as Transient Frequency behavior Off to On from the P25 displays.

Conditions

Measurement views: P25 displays

Group

Sense commands

Syntax

```
[SENSe]:P25:TRIGgger:MEASurement:TRANsient:FREQuency: BEHAViour:TIME:ON:AUTO <value>
```

Arguments

0 unchecks the checkbox.

1 checks the checkbox.

Returns

0 or 1, <NRf>

Examples

`SENSe:P25:TRIGGER:MEASUREMENT:TRANSIENT:FREQUENCY:BEHAVIOUR:TIME:ON:AUTO 1` enables the Auto checkbox in Trig measurement tab.

[SENSe]:PERRor[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Phase error versus Time for a selected Measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Sense commands

Syntax

```
[SENSe]:PERRor[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:PERRor[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

Examples

SENSe:PERRor:MEASview1:SELEcted:SOURce? queries the Source for Phase error versus Time Measurement View 1.

[SENSe]:PHVTime[:MEASview<y>]:CLEar:RESults (No Query Form)

Restarts multi-trace functions (Average and Max/Min Hold).

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:CLEar:RESults
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

SENSe:PHVTIME:MEASview1:CLEar:RESULTS restarts multi-trace functions.

[SENSe]:PHVTime[:MEASview<y>]:FREQuency:CENTer

Sets or queries the center frequency in the Phase versus Time measurement.

NOTE: The center, start and stop frequencies are set interlocking each other with the following relationships: (start frequency) = (center frequency) - (span)/2 and (stop frequency) = (center frequency) + (span)/2.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:CENTer <value>
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:CENTer?
```

Related Commands

[\[SENSe\]:PHVTime\[:MEASview<y>\]:FREQuency:START](#) (on page 2278)

[\[SENSe\]:PHVTime:MEASview<y>:FREQuency:STOP](#) (on page 2280)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:PHVTIME:MEASview1:FREQUENCY:CENTER 7.5GHz sets the center frequency to 7.5 GHz.

[SENSe]:PHVTime[:MEASview<y>]:FREQuency:SPAN

Sets or queries the frequency span in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:SPAN <value>
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:SPAN?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> is the frequency span.

Range: 10 Hz to 40 MHz (Standard) / 110 MHz (Option 110)

Examples

`SENSe:PHVTime:MEASview1:FREQUENCY:SPAN 20MHz` sets the span to 20 MHz.

[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:SPAN:LINK

Sets or queries the frequency span link in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:SPAN:LINK <value>
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:SPAN:LINK?
```

Arguments

OFF or 0 specifies that Link to Span is not checked.

ON or 1 specifies that Link to Span is checked .

Examples

`SENSe:PHVTime:MEASview2:FREQUENCY:SPAN:LINK?` might return 0 or 1 based on condition of Link to Span checkbox.

[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:START

Sets or queries the measurement start frequency (left edge on the graph) in the Phase versus Time measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the

`[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:CENTer` command.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:START <value>
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:START?
```

Related Commands

[\[SENSe\]:PHVTime\[:MEASview<y>\]:FREQUENCY:STOP](#) (on page 2280)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>: : <NRf> is the measurement start frequency.

Range: (center frequency) $\pm$ (span)/2.

Examples

`SENSe:PHVTime:MEASview1:FREQUENCY:START 6.95GHz` sets the start frequency to 6.95 GHz.

[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP

Sets or queries the frequency step size (the amount per press by which the up or down key changes the setting value). Programming a specified step size sets `[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP:AUTO OFF`.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP <value>
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP?
```

Related Commands

[\[SENSe\]:PHVTime\[:MEASview<y>\]:FREQUENCY:STEP:AUTO](#) (on page 2279)

Arguments

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`<value>::<NRf>` specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:PHVTime:MEASview1:FREQUENCY:STEP 1.5kHz` sets the step size to 1.5 kHz.

[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP:AUTO

Determines whether to set the frequency step size automatically or manually.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP:AUTO { OFF | ON | 0 | 1 }
[SENSe]:PHVTime[:MEASview<y>]:FREQUENCY:STEP:AUTO?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 specifies that the frequency step size is set manually using the [SENSe]:PHVTime[:MEASview<y>]:FREQuency:STEP command.

ON or 1 specifies that the frequency step size is set automatically.

Examples

SENSe:PHVTIME:MEASview1:BANDWIDTH:AUTO ON sets the frequency step size automatically.

[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STOP

Sets or queries the measurement stop frequency (right edge of the graph) in the Phase versus Time measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the [SENSe]:PHVTime[:MEASview<y>]:FREQuency:CENTer command.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STOP <value>
[SENSe]:PHVTime[:MEASview<y>]:FREQuency:STOP?
```

Related Commands

[\[SENSe\]:PHVTime\[:MEASview<y>\]:FREQuency:START](#) (on page 2278)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<value>::<NRf> is the measurement stop frequency.

Range: (center frequency) $\pm$ (span)/2.

Examples

SENSe:PHVTIME:MEASview1:FREQUENCY:STOP 7.05GHz sets the stop frequency to 7.05 GHz.

[SENSe]:PHVTime[:MEASview<y>]:MAXTracepoints

Sets or queries the maximum trace points in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Sense commands

Syntax

```
[SENSe]:PHVTime[:MEASview<y>]:MAXTracepoints { ONEK | TENK | HUNDredk | NEVerdecimate }
[SENSe]:PHVTime[:MEASview<y>]:MAXTracepoints?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

ONEK sets the maximum trace points to 1 k.

TENK sets the maximum trace points to 10 k.

HUNDredk sets the maximum trace points to 100 k.

NEVerdecimate never decimates the trace points.

Examples

SENSe:PHVTIME:MEASview1:MAXTRACEPOINTS TENK sets the maximum trace points to 10 k.

[SENSe]:PHVTime[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source with respect to the Phaseversus Time Measurement View number

Conditions

Measurement views: Phase versus Time with specified Measurement view number

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
SENSe:PHVTime[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
SENSe: PHVTime[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

SENSe:PHVTime:MEASview1:SELEcted:SOURce? queries or sets the Source for Phase versus Time Measurement View 1.

[SENSe]:PM:PHASe:OFFSet

Sets or queries the phase offset in the PM measurement.

Conditions

Measurement views: PM

Group

Sense commands

Syntax

```
[SENSe]:PM:PHASe:OFFSet <value>  
[SENSe]:PM:PHASe:OFFSet?
```

Arguments

<value>: : <NRf> specifies the phase offset. Range: –180 to +180 °.

Examples

SENSe:PM:PHASE:OFFSET 10deg sets the phase offset to 10 °.

[SENSe]:PM:PHASe:OFFSet:MARKer (No Query Form)

Sets the phase offset from the selected marker location in the PM measurement.

Conditions

Measurement views: PM

Group

Sense commands

Syntax

```
[SENSe]:PM:PHASe:OFFSet:MARKer
```

Arguments

None.

Examples

SENSe:PM:PHASE:OFFSET:MARKER sets the phase offset from the selected Marker position.

[SENSe]:PM:PHASe:SEARCh:AUTO

Determines whether to detect the phase automatically or manually in the PM measurement.

Conditions

Measurement views: PM

Group

Sense commands

Syntax

```
[SENSe]:PM:PHASe:SEARCh:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:PM:PHASe:SEARCh:AUTO?
```

Arguments

OFF or 0 specifies that the phase offset is set manually using the command [SENSe]:PM:PHASe:OFFSet.

ON or 1 specifies that the phase is detected automatically.

Examples

SENSe:PM:PHASE:SEARCH:AUTO ON specifies that the phase is detected automatically.

[SENSe]:PNOise:AVERage:COUNT

Sets or queries the number of traces to combine for averaging in the phase noise measurement. This command is effective when [SENSe]:PNOise:AVERage:ENABle is set to ON.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:AVERage:COUNT <number>  
[SENSe]:PNOise:AVERage:COUNT?
```

Arguments

<number>::<NR1> specifies the average count. Range: 2 to 10000.

Examples

SENSe:PNOISE:AVERAGE:COUNT 64 sets the average count to 64.

[SENSe]:PNOise:AVERage:ENABle

Determines whether to enable averaging trace in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:AVERage:ENABle {OFF|ON|0|1}  
[SENSe]:PNOise:AVERage:ENABle?
```

Arguments

OFF disables averaging trace.

ON enables averaging trace.

Examples

SENSe:PNOISE:AVERAGE:ENABle ON enables averaging trace.

[SENSe]:PNOise:CARRier:FREQuency:TRACk

Determines whether to enable or disable tracking the carrier frequency in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:CARRier:FREQuency:TRACk {OFF|ON|0|1}  
[SENSe]:PNOise:CARRier:FREQuency:TRACk?
```

Arguments

OFF or 0 disables tracking the carrier frequency.

ON or 1 enables tracking the carrier frequency.

Examples

SENSe:PNOISE:CARRIER:FREQUENCY:TRACK ON enables tracking the carrier frequency.

[SENSe]:PNOise:CARRier:THReshold

Sets or queries the threshold level to detect the carrier in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:CARRier:THReshold <value>  
[SENSe]:PNOise:CARRier:THReshold?
```

Arguments

<value>::<NRf> specifies the threshold level above which the input signal is determined to be a carrier.

Range: -60 to 0 dBm.

Examples

SENSe:PNOISE:CARRIER:THRESHOLD -25 sets the carrier threshold level to -25 dB.

[SENSe]:PNOise:CLEar:RESults (No Query Form)

Restarts the average process, clearing average data and counter.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:CLEar:RESults
```

Arguments

None

Examples

SENSe:PNOISE:CLEAR:RESULTS restarts the average process.

[SENSe]:PNOise:FREQuency:INTEgration:OFFSet:START

Sets or queries the start offset frequency for integration in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:FREQuency:INTEgration:OFFSet:START <value>  
[SENSe]:PNOise:FREQuency:INTEgration:OFFSet:START?
```

Arguments

<value>::<NRf> specifies the start offset frequency for integration.

It must be less than the stop offset frequency. Range: 10 Hz to Stop Offset Frequency – 1 Hz.

Examples

SENSe:PNOISE:FREQUENCY:INTEGRATION:OFFSET:START 100kHz sets the start offset frequency for integration to 100 kHz.

[SENSe]:PNOise:FREQuency:INTEgration:OFFSet:STOP

Sets or queries the stop offset frequency for integration in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:FREQuency:INTEgration:OFFSet:STOP <value>  
[SENSe]:PNOise:FREQuency:INTEgration:OFFSet:STOP?
```

Arguments

<value>::<NRf> specifies the stop offset frequency for integration.

It must be greater than the start offset frequency. Range: 11 Hz to 1 GHz.

Examples

SENSe:PNOISE:FREQUENCY:INTEGRATION:OFFSET:STOP 100MHz sets the stop offset frequency for integration to 100 MHz.

[SENSe]:PNOise:FREQuency:PLOT:OFFSet:START

Sets or queries the start offset frequency for plotting the phase noise trace.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STARt <value>  
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STARt?
```

Arguments

<value>::<NRf> specifies the start offset frequency for the trace plot.

It must be less than the stop offset frequency. Range: 10 Hz to 100 MHz in a tenfold sequence.

Examples

`SENSe:PNOISE:FREQUENCY:PLOT:OFFSET:START 100kHz` sets the start offset frequency for plot to 100 kHz.

[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STOP

Sets or queries the stop offset frequency for plotting the phase noise trace.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STOP <value>  
[SENSe]:PNOise:FREQuency:PLOT:OFFSet:STOP?
```

Arguments

<value>::<NRf> specifies the stop offset frequency for plot.

It must be greater than the start offset frequency. Range: 100 Hz to 1 GHz in a tenfold sequence.

Examples

`SENSe:PNOISE:FREQUENCY:PLOT:OFFSET:STOP 100MHz` sets the stop offset frequency for plot to 100 MHz.

[SENSe]:PNOise:OPTimization

Sets or queries the method of optimizing the gain and input bandwidth in the phase noise measurement.

Conditions

Measurement views: Phase noise

Group

Sense commands

Syntax

```
[SENSe]:PNOise:OPTimization { DRANge | SPEEd }
```

[SENSe]:PNOise:OPTimization?

Arguments

DRANge optimizes the gain and input bandwidth to maximize the dynamic range.

SPEed optimizes the gain and input bandwidth to speed the measurement.

Examples

SENSe:PNOISE:OPTIMIZATION DRANge optimizes the gain and input bandwidth to maximize the dynamic range.

[SENSe]:POWer:UNITs

Sets or queries the fundamental unit of power.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:POWer:UNITs {DBM|DBV|VOLTs|WATTs|DBUW|DBW|DBUV|DBMV|DBUA|DBUV_M|DBUA_M| AMPS}
[SENSe]:POWer:UNITs?

Arguments

The following table lists the arguments.

Power units

Argument	Power unit
DBM	dBm
DBV	dBV
VOLTs	Volts
WATTs	Watts
DBUW	dB μ W
DBW	dBW
DBUV	dB μ V
DBMV	dBmV
DBUA	dB μ A
DBUV_M	dB μ V/m
DBUA_M	dB μ A/m

Argument	Power unit
AMPS	Amps

NOTE: Select dB μ V/m or dB μ A/m unit when using an antenna table.

Examples

SENSe:POWer:UNITs DBM specifies the fundamental unit of power as dBm.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:ALENgtH

Sets or queries the absolute amount of time included in the Frequency-Domain Linearity type measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:ALENgtH <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:ALENgtH?
```

Arguments

<value>::<NRf> specifies the absolute time in seconds for the measurement time.

Range: 1 ns to 100 seconds

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

[SENSe]:PULSe:MEASview2:ANALyze:FDOMain:MEASurement:TIME:ALENgtH 1E-6 sets the measurement time to 1 μ s.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:METHod

Sets or queries the measurement time method for the Frequency-Domain Linearity type measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:METhod { ABSolute | RELative }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:METhod?
```

Arguments

ABSolute specifies the absolute time in seconds based on rising edge of the pulse.

RELative specifies the relative time in percent based on the pulse width and the center of the pulse.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:FDOMain:MEASurement:TIME:METhod REL sets the time method to Relative.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RELENgth

Sets or queries the relative amount of time included in the Frequency-Domain Linearity type measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RELENgth <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RELENgth?
```

Arguments

<value>: : <NRf> specifies the relative time in percent for the measurement time based on the pulse width and centered of the pulse.

Range: 10% to 100%

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:FDOMain:MEASurement:TIME:RELENgth 70 sets the measurement time to 70% of the pulse width.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RLEVel

Sets or queries the measurement reference level for Frequency-Domain Linearity measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RLEVel <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:RLEVel?
```

Arguments

<value>::<NRf> specifies the reference level in percentage as the location on the voltage straight-line approximation of the pulse rising edge.

Range: 50% to 100%

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:FDOMain:MEASurement:TIME:RLEVel 60 sets the reference level to 60% of the rising edge.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:START

Sets or queries the start time for the Frequency-Domain Linearity type measurements. The start time is the amount of time wait after the rising-edge reference before starting to measure.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:START <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:FDOMain:MEASurement:TIME:START?
```

Arguments

<value>::<NRf> specifies the start time in seconds from the reference level of the rising edge of the pulse.

Range: -100 ms to 100 ms

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:FDOMain:MEASurement:TIME:START 1E-6 sets the start time to 1 μ s.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:CORRection:AMPLitude[:STATe]

Enables or disables the corrections for window and for delay of the highest side lobe in the Pulse Impulse Response measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:CORRection:AMPLitude[:STATe] { OFF | ON | 0 | 1 }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:CORRection:AMPLitude[:STATe]?
```

Arguments

OFF or 0 disables amplitude correction in Impulse Response measurements.

ON or 1 enables amplitude correction in Impulse Response measurements.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:IRESPonse:CORRection:AMPLitude:STATe 1 enables amplitude correction.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:KOTime

Sets or queries the Keep-out time in the Pulse Impulse Response measurements. This specifies the width of time around the main lobe that lobes within this time zone are not eligible to be the "highest side lobe."

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:KOTime <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:KOTime?
```

Arguments

<value>::<NRf> specifies the Keep-out time in seconds.

Range: 0 to 100 seconds.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:IRESpOnse:KOTime 0.001 sets the keep-out time to 1 ms.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:MEASurement:TIME:ALENgtH

Sets or queries the absolute amount of time included in the Impulse Response type measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:MEASurement:TIME:ALENgtH <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:MEASurement:TIME:ALENgtH?
```

Arguments

<value>::<NRf> specifies the absolute time in seconds for the measurement time.

Range: 1 ns to 100 seconds.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:IRESPONSE:MEASUREMENT:TIME:ALEN 1E-6 sets the measurement time to 1 μ s.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESpOnse:MEASurement:TIME:METhOd

Sets or queries the measurement time method for the Impulse Response type measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:MEASurement:TIME:METHod { ABSolute | RELative }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:MEASurement:TIME:METHod?
```

Arguments

ABSolute specifies the absolute time in seconds based on rising edge of the pulse.

RELative specifies the relative time in percent based on the pulse width and the center of the pulse.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSE:PULSE:MEASview2:ANALYZE:IRESPONSE:MEASUREMENT:TIME:METHOD REL sets the time method to Relative.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:MEASurement:TIME:REnGth

Sets or queries the relative amount of time included in the Impulse Response type measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:MEASurement:TIME:REnGth <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESPonse:MEASurement:TIME:REnGth?
```

Arguments

<value>::<NRf> specifies the relative time in percent for the measurement time based on the pulse width and centered of the pulse.

Range: 10% to 100%.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

`SENSE:PULSE:MEASview2:ANALYZE:IRESPONSE:MEASUREMENT:TIME:RLENGTH 70` sets the measurement time to 70% of the pulse width.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:RLEVel

Sets or queries the measurement reference level for Impulse Response measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:RLEVel <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:RLEVel?
```

Arguments

`<value>::<NRf>` specifies the reference level in percentage as the location on the voltage straight-line approximation of the pulse rising edge.

Range: 50% to 100%.

`<y> = 1 to 8`; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value is 1.

Returns

`<NRf>`

Examples

`SENSE:PULSE:MEASview2:ANALYZE:IRESPONSE:MEASUREMENT:TIME:RLEVEL 60` sets the reference level to 60% of the rising edge.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:START

Sets or queries the start time for the Impulse Response type measurements. The start time is the amount of time wait after the rising-edge reference before starting to measure.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:START <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:IRESponse:MEASurement:TIME:START?
```

Arguments

<value>: : <NRf> specifies the start time in seconds from the reference level of the rising edge of the pulse.

Range: –100 ms to 100 ms.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSE:PULSE:MEASview2:ANALYZE:IRESPONSE:MEASUREMENT:TIME:START 1E-6 sets the start time to 1 μ s.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel

Sets or queries how to determine the 50% level for the pulsed RF measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel { VOLTagE | POWer }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel?
```

Arguments

VOLTagE uses –6 dB to determine the 50% level.

POWer uses –3 dB to determine the 50% level.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:LEVel POWer sets RF measurements to use –3 dB to determine the 50% level.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:FIFTy

Sets or queries how to determine the 50% level for the pulsed RF measurements. This command is equivalent to the [SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel command.

Conditions

Measurement views: Pulse statistics, Pulse table, Pulse trace

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:FIFTy { VOLTage | POWer }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:FIFTy?
```

Arguments

VOLTage uses -6 dB to determine the 50% level.

POWer uses -3 dB to determine the 50% level.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

SENSe:PULSe:MEASview2:ANALyze:LEVel:FIFTy POWer sets RF measurements to use -3 dB to determine the 50% level.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:HUNDred

Sets or queries how to determine the 100% level in the pulsed RF measurements. This command is equivalent to the [SENSe]:PULSe:ANALyze:LEVel command.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:HUNDred { AVERage | INDependent }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:LEVel:HUNDred?
```

Arguments

AVERage uses the average amplitude calculated for the pulse-on as the 100% reference to measure the rise and fall times.

INDependent uses the amplitudes at the beginning and end of the pulse-on as the 100% references to measure the rise and fall times, respectively

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:LEVel:HUNDRED AVERage uses pulse average amplitude to set the 100% level.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE?

Sets or Queries the Measurement(s) parameter from the Control panel settings of Define tab which is common across the displays Pulse Statistics, Pulse Table, Pulse Trace, Pulse Cumulative Histogram, Pulse Cumulative Statistics.

Conditions

Measurement views: Pulse Statistics, Pulse Table, Pulse Trace, Pulse Cumulative Histogram, Pulse Cumulative Statistics

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE ?
```

Arguments

<arg1> :: {FDL | IMPR | FPD | RIPP | OVER} sets the control panel Measurement(s) parameter of define tab to Freq-domain Linearity or Impulse Response or F P2R Diff, F P2P Diff, Freq Abs, Phase P2R Diff, Phase P2P Diff or Ripple or Overshoot

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<string>

Examples

SENSe:PULSE:ANALYZE:MEASview1:MEASUREMENT:TIME:TYPE FDL sets the control panel Measurement(s) parameter under Define tab to Freq-domain Linearity.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE

Sets or queries the Measurement(s) parameter for the Define tab of the Settings control panel, which is common across the Pulse Statistics, Pulse Table, Pulse Trace, Pulse Cumulative Histogram, and Pulse Cumulative Statistics displays.

Conditions

Measurement views: All Pulsed RF displays (except Pulse-Ogram)

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE { FDL | IMPR | FPD | RIPP | OVER }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:MEASurement:TIME:TYPE ?
```

Arguments

FDL is Freq-domain Linearity

IMPR is Impulse Response

FPD is F P2R Diff

RIPP is ripple

OVER is overshoot

Freq Abs, Phase P2R Diff, Phase P2P Diff

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<string>

Examples

SENSe:PULSE:MEASview1:ANALYZE:MEASUREMENT:TIME:TYPE FDL sets the Measurement(s) parameter in the Define tab of the Settings control panel to Freq-domain Linearity.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:ALENgtH

Sets or queries the absolute amount of time included in the Overshoot measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:ALENgtH <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:ALENgtH?
```

Arguments

<value>::<NRf> specifies the absolute time in seconds for the measurement time.

Range: 1 ns to 100 seconds

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

[SENSe]:PULSE:MEASview2:ANALYZE:OVERSHOOT:MEASUREMENT:TIME:ALENGTH 1E-6 sets the measurement time to 1 μ s.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME: METHod

Sets or queries the measurement time method for the Overshoot measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:METHod { ABSolute | RELative }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:METHod?
```

Arguments

ABSolute specifies the absolute time in seconds based on rising edge of the pulse.

RELative specifies the relative time in percent based on the pulse width and the center of the pulse.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSE:PULSE:MEASview2:ANALYZE:OVERSHOOT:MEASUREMENT:TIME:METHOd REL sets Overshoot measurements to use the relative time method.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RELENgth

Sets or queries the relative amount of time included in the Overshoot measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RELENgth <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RELENgth?
```

Arguments

<value>: : <NRf> specifies the relative time in percent for the measurement time based on the pulse width and centered of the pulse.

Range: 0.01% to 100%.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSE:PULSE:MEASview2:ANALYZE:OVERSHOOT:MEASUREMENT:TIME:RELENGTH 70 sets the measurement time to 70% of the pulse width.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RLEVel

Sets or queries the measurement reference level for the Overshoot measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RLEVel <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:RLEVel?
```

Arguments

<value>::<NRf> specifies the reference level in percentage as the location on the voltage straight-line approximation of the pulse rising edge.

Range: 50% to 100%.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSE:PULSE:MEASview2:ANALYZE:OVERSHOOT:MEASUREMENT:TIME:RLEVEL 60 sets the reference level to 60% of the rising edge.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:START

Sets or queries the start time for the Overshoot measurements. The start time is the amount of time wait after the rising-edge reference before starting to measure.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:START <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:OVERshoot:MEASurement:TIME:START?
```

Arguments

<value>::<NRf> specifies the start time in seconds from the reference level of the rising edge of the pulse.

Range: -100 ms to 100 ms.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSE:PULSE:MEASview2:ANALYZE:OVERSHOOT:MEASUREMENT:TIME:START 1E-6 sets the start time to 1 μ s to 60% of the rising edge.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:PMLocation

Sets or queries the phase measurement location (the position along the pulse tops where the phase is measured) in the pulse-pulse phase measurement.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:PMLocation <value>
[SENSe]:PULSe[:MEASview<y>]:ANALyze:PMLocation?
```

Arguments

<value>::<NRf> specifies the pulse-pulse phase measurement location.

Range: 5 ns to 100 ms.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:PMLocation 1.5ms sets the phase measurement location to 1.5 ms.

[SENSe]:PULSe[:MEASview<y>]:ANALyze:POINt:LOCation

Sets or queries the point location method in the pulsed RF measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:POINt:LOCation { AVERage | INDependent }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:POINt:LOCation?
```

Arguments

AVERage uses the average amplitude calculated for the pulse-on as the 100% reference to measure the rise and fall times.

INDependent uses the amplitudes at the beginning and end of the pulse-on as the 100% references to measure the rise and fall times, respectively.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

```
[SENSe]:PULSe:MEASview2:ANALyze:POINt:LOCation AVERage uses pulse average amplitude to locate points.
```

[SENSe]:PULSe[:MEASview<y>]:ANALyze:RFALI

Sets or queries the threshold levels to measure the rise/fall time.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RFALL { WIDE | NARRow }
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RFALL?
```

Arguments

WIDE selects 10 - 90% to measure the rise/fall time.

NARRow selects 20 - 80% to measure the rise/fall time.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where **MEASview** keyword is optional. Default value is 1.

Returns

<NRf>

Examples

```
SENSe:PULSe:MEASview2:ANALyze:RFALL WIDE selects 10 - 90% to measure the rise/fall time.
```

[SENSe]:PULSe[:MEASview<y>]:ANALyze:RIPPlE

Sets or queries the ripple portion of the pulse top (how much of the beginning and end of the pulse top to exclude from the ripple calculation).

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RIPPlE <value>  
[SENSe]:PULSe[:MEASview<y>]:ANALyze:RIPPlE?
```

Arguments

<value>: : <NRf> specifies the ripple portion of the pulse top.

Range: 10 to 100% in 1% steps.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:ANALyze:RIPPlE 30 sets the ripple portion to 30% of the pulse top.

[SENSe]:PULSe:CARRier:FREQuency? (Query Only)

Queries the carrier frequency.

Conditions

Measurement views: Pulse table

Group

Sense commands

Syntax

```
[SENSe]:PULSe:CARRier:FREQuency?
```

Related Commands

[\[SENSe\]:PULSe:CARRier:OFFSet](#) (on page 2304)

Arguments

None

Returns

<NRf> indicates the actual carrier frequency in Hz.

Examples

SENSe:PULSe:CARRIER:FREQUENCY? might return 2.7000001690E+9, indicating that the pulse carrier frequency is 2.700000169 GHz.

[SENSe]:PULSe[:MEASview<y>]:CARRier:OFFSet

Sets or queries the carrier frequency offset.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:CARRier:OFFSet <value>
[SENSe]:PULSe[:MEASview<y>]:CARRier:OFFSet?
```

Related Commands

[\[SENSe\]:PULSe\[:MEASview<y>\]:CARRier:FREQuency?](#) (on page 2303)

Arguments

<value>::<NRf> specifies the carrier frequency offset.

Range: -50 kHz to +50 kHz.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:CARRier:OFFSet 2.5kHz sets the offset frequency to 2.5 kHz to the carrier.

[SENSe]:PULSe[:MEASview<y>]:CARRier:SEARch

Sets or queries how to detect the carrier in the pulsed RF measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:CARRier:SEARch { AUTO | MANual}
[SENSe]:PULSe[:MEASview<y>]:CARRier:SEARch?
```

Arguments

AUTO specifies that the carrier is detected automatically.

MANual specifies that the carrier frequency offset is set manually, using the [SENSe]:PULSe:CARRier:OFFSet command.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:CARRier:SEARCh AUTO specifies that the carrier is detected automatically.

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:BIN:COUNT

Sets the Bins value in Histogram settings table in the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Sense commands

Syntax

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:BIN:COUNT <arg1>

Arguments

<arg1> <arg1> 100 sets the bin's value in the histogram settings table to 100 which is under Histogram Settings table in Pulse Cumulative Histogram control panel.

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf1>

Examples

SENSe:PULSE:CUMULATIVE:HISTOGRAM:MEASview1:BIN:COUNT 100 sets the bin's value in the histogram table to 100.

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:CLEar:RESults (Query Only)

Clears all scalar results in the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Sense commands

Syntax

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:CLEar:RESults

Arguments

The parameter $\langle y \rangle = 1$ to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

SENSe:PULSE:CUMULATIVE:HISTOGRAM:MEASview1:CLEAR:RESULTS clears the result in Cumulative Histogram display.

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:MODE

Sets the Histogram settings mode to Auto or Manual in the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Sense commands

Syntax

```
SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]:MODE <arg1>
```

Arguments

$\langle \text{arg1} \rangle$ $\langle \text{arg1} \rangle$ AUTO or MAN sets the histogram settings mode to Auto or Manual which is under Histogram Settings table in Pulse Cumulative Histogram control panel.

Returns

$\langle \text{string} \rangle$

Examples

SENSe:PULSE:CUMULATIVE:HISTOGRAM:MEASview1:MODE AUTO sets the histogram settings mode to Auto.

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:ORDinate (Query Only)

Sets or queries the Histogram readout in the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Sense commands

Syntax

```
SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]:ORDinate <arg1>
SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]:ORDinate?
```

Arguments

$\langle \text{arg1} \rangle$ $\langle \text{arg1} \rangle$ COUN or PERC sets the histogram readout to Count or % which is under Prefs tab in Pulse Cumulative Histogram control panel.

The parameter $\langle y \rangle = 1$ to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<string>

Examples

SENSe:PULSe:CUMULATIVE:HISTOGRAM:MEASview1:ORDINATE ORDINATE COUN sets the histogram readout to Count.

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLier:ORDinate

Sets the outlier readout in the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Sense commands

Syntax

SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]:OUTLIER:ORDINATE <arg1>

Arguments

<arg1> <arg1> COUN or PERC sets the outlier readout to Count or % which is under Prefs tab in Pulse cumulative histogram control panel.

Returns

<string>

Examples

SENSe:PULSe:CUMULATIVE:HISTOGRAM:OUTLIER:MEASview1:ORDINATE COUN sets the outlier readout to Count.

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:SETtings:APPLY (No Query Form)

Applies the new settings to the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Sense commands

Syntax

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:SETtings:APPLY

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

SENSe:PULSe:CUMULative:HISTOGRAM:MEASview1:SETTINGS:APPLY applies new settings to the Cumulative Histogram display under Histogram Settings table in Pulse Cumulative Histogram control panel.

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:XLIMit

Sets the Xlimit in Histogram settings table in the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Sense commands

Syntax

[SENSe]:PULSe:CUMulative:HISTogram[:MEASview<y>]:XLIMit <arg1>,<arg2>,<arg3>,<arg4>

Arguments arg1

arg1 can have one of the following result types:

{ AVERage | PPOWer | ATX | WIDTH | RISE | FALL | RINTerval | RRATe | DUTPct | DUTRatio | RIPPlE | RIPDb | DROop | DRODb | OVERshoot | OVEDb | PPPHase | PPFRequency | RMSFReqerror | MFReqerror | RMSPherror | MPHerror | FRDeviation | FDELta | PHDeviation | IRAMplitude | TIME | IRTime | PPPD | PPFD | FABS }

arg2

0 unchecks the box

1 checks the box.

Where

<arg1> is the Pulse result type.

<arg2> is the active flag which enables the limit state ON.

<arg3> is the minimum value.

<arg4> is the maximum value.

Examples

SENSe:PULSe:CUMULative:HISTOGRAM:MEASview1:XLIMIT AVG,0,10,65 sets the Pulse result type, Active flag, Minimum value and Maximum value in the histogram table.

SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]:SELEcted:SOURce

Returns the Source number of specified Cumulative Histogram trace

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]:SELEcted:SOURce {"Source 1"|"Source 2"|"Source 3"|"Source 4"}
SENSe:PULSe:CUMulative:HISTogram[:MEASview<y>]:SELEcted:SOURce? (QUERY)
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf> Source Number of the specified Spectrogram trace

Examples

SENSe:PULSe:CUMulative:HISTogram:MEASview1:SELEcted:SOURce? might return Source 2 for the trace of Cumulative Histogram measurement view 1.

[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:CLEar:REsults

Clears all scalar results in the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Sense commands

Syntax

```
[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:CLEar:REsults
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

SENSe:PULSe:CUMulative:STATistics:MEASview1:CLEar:REsults clears the result in Cumulative Statistics display.

[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:SELEcted:SOURce

Sets or queries the selected source for Pulse Cumulative statistics measurment.

Conditions

Measurement views: Pulse Cumulative Statistics

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:PULSe:CUMulative:STATistics[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

```
{"Source 1" | "Source 2" | "Source 3" | "Source 4"}
```

Examples

SENSe:PULSe:CUMulative:STATistics:MEASview1:SELEcted:SOURce? might return source 3, which indicates the channel of measurement source for RF data type.

[SENSe]:PULSe[:MEASview<y>]:DETEct:MEASurement

Determines whether or not to set the maximum number of pulses to measure within the analysis time.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:DETEct:MEASurement { OFF | ON | 0 | 1 }
[SENSe]:PULSe[:MEASview<y>]:DETEct:MEASurement?
```

Arguments

OFF or 0 measures all pulses (max. 1000) in the analysis time.

ON or 1 specifies that the maximum number of pulses is set manually, using the [SENSe]:PULSe:DETEct:NUMBer command.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:DETEct:MEASurement ON specifies that the maximum number of pulses is set manually.

[SENSe]:PULSe[:MEASview<y>]:DETEct:NUMBer

Sets or queries the maximum number of pulses to measure within the analysis time when [SENSe]:PULSe:DETEct:MEASurement is On.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:DETECT:NUMBER <value>
[SENSe]:PULSe[:MEASview<y>]:DETECT:NUMBER?
```

Arguments

<value>::<NRf> specifies the maximum number of pulses to measure within the analysis time. Range: 1 to 1000.

If the analysis time contains fewer pulses than this number, all of these are measured.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:DETECT:NUMBER 850 sets the maximum number of pulses to 850.

[SENSe]:PULSe[:MEASview<y>]:DETECT:NUMBER:THRESHOLD

Sets or queries the power threshold to detect pulses.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:DETECT:NUMBER:THRESHOLD <value>
[SENSe]:PULSe[:MEASview<y>]:DETECT:NUMBER:THRESHOLD?
```

Arguments

<value>::<NRf> specifies the power threshold to detect pulses.

Range: -70 to 0 dB.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:DETECT:NUMBER:THRESHOLD -20 sets the power threshold to -20 dB.

[SENSe]:PULSe[:MEASview<y>]:DETECT:TIME[:THReshold]

Sets or queries the minimum off-time between pulses.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:DETECT:TIME[:THReshold] <value>
[SENSe]:PULSe[:MEASview<y>]:DETECT:TIME[:THReshold]?
```

Arguments

<value>::<NRf> specifies the minimum off-time between pulses.

Range: 1 ns to 100 ms.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:DETECT:TIME:THReshold 1.5ms sets the time threshold to 1.5 ms.

[SENSe]:PULSe[:MEASview<y>]:FILTER:{BANDwidth|BWIDth}

```
[SENSe]:PULSe[:MEASview<y>]:FILTER:{BANDwidth | BWIDth}
```

Sets or queries the filter or acquisition bandwidth when [SENSe]:PULSe:FILTER:MEASurement is set to GAUSSian or NONE (No filter), respectively.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:FILTER:{BANDwidth|BWIDth} <value>
[SENSe]:PULSe[:MEASview<y>]:FILTER:{BANDwidth|BWIDth}?
```

Related Commands

[\[SENSe\]:PULSe:FILTER:MEASurement](#) (on page 2313)

Arguments

<value>::<NRf> specifies the filter/acquisition bandwidth depending the [SENSe]:PULSe:FILTER:MEASurement setting. The table below shows the setting range. You can enter any value, but it is rounded up to the next valid number.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

[SENSe]:PULSe:FILTer:MEASurement	Range
GAUSSian	100 Hz to 20 MHz (Standard) / 100 Hz to 55 MHz (Option 110) in 1-2-3-5 sequence.
NONE	152, 305, 610, 1.22 k, 2.44 k, 4.88 k, 9.76 k, 19.3 k, 39 k, 78 k, 156 k, 312 k, 625 k, 1.25 M, 2.5 M, 5 M, 10 M, 20 M, 40 MHz, and optionally 60 M and 110 MHz (Option 110).

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:FILTer:BANDwidth 10MHz sets the filter bandwidth to 10 MHz.

[SENSe]:PULSe[:MEASview<y>]:FILTer:MEASurement

Sets or queries the measurement filter in the pulsed RF measurements.

Conditions

Measurement views: Pulse statistics, Pulse table, Pulse trace

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:FILTer:MEASurement { GAUSSian | NONE | MAXRtbw }
[SENSe]:PULSe[:MEASview<y>]:FILTer:MEASurement?
```

Related Commands

[\[SENSe\]:PULSe\[:MEASview<y>\]:FILTer {BANDwidth|BWIDth}](#) (on page 2312)

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

GAUSSian uses the Gaussian filter in the pulsed RF measurements. Use the

[SENSe]:PULSe[:MEASview<y>]:FILTer:{BANDwidth|BWIDth} command to set the filter bandwidth.

NONE uses no filter. Use the [SENSe]:PULSe[:MEASview<y>]:FILTer:{BANDwidth|BWIDth} command to set the acquisition bandwidth.

MAXRtbw uses no filter. The acquisition bandwidth is fixed to the maximum real-time bandwidth: 40 MHz (Standard) or 110 MHz (Option 110).

Examples

SENSe:PULSe:MEASview1:FILTer:MEASUREMENT GAUSSian uses the Gaussian filter in the pulsed RF measurements.

[SENSe]:PULSe[:MEASview<y>]:FREference:AUTO

Determines whether to estimate the pulse frequency reference automatically or manually in the pulsed RF measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:FREference:AUTO { OFF | ON | 0 | 1 }
[SENSe]:PULSe[:MEASview<y>]:FREference:AUTO?
```

Arguments

OFF or 0 estimates the frequency reference manually. Use the [SENSe]:PULSe:FREference:OFFSet command to set the frequency offset.

ON or 1 estimates the frequency reference automatically.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe[:MEASview2]:FREference:AUTO ON specifies that the maximum number of pulses is set manually.

[SENSe]:PULSe[:MEASview<y>]:FREference:CSLope

Sets or queries the Chirp Slope.

Chirp Slope is used when the Modulation Type is set to Linear Chirp. When set, this also changes the Chirp Slope to manual mode. When chirp slope is in auto mode, the query returns the estimated chirp slope.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:FREference:CSLope <value>
[SENSe]:PULSe[:MEASview<y>]:FREference:CSLope?
```

Arguments

<value>: = NRf specifies the chirp slope in Hz/μs.

Range: -100 GHz/μs to 100 GHz/μs.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

`SENSe:PULSe:MEASview2:FREference:CSLoPe 1E6` sets the chirp slope to 1 MHz/μs.

[SENSe]:PULSe[:MEASview<y>]:FREference:CSLoPe:AUTO

Sets or queries enabling automatic Chirp Slope estimating in the pulsed RF measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:FREference:CSLoPe:AUTO { OFF | ON | 0 | 1 }
[SENSe]:PULSe[:MEASview<y>]:FREference:CSLoPe:AUTO?
```

Arguments

OFF or 0 estimates the chirp slope manually. Use the `[SENSe]:PULSe[:MEASview<y>]:FREference:CSLoPe` command to set the chirp slope.

ON or 1 estimates the chirp slope automatically.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

`SENSe:PULSe:MEASview2:FREference:CSLoPe:AUTO ON` sets the chirp slope to auto mode.

[SENSe]:PULSe[:MEASview<y>]:FREference:OFFSet

Sets or queries the frequency reference offset. This command is valid when

`[SENSe]:PULSe[:MEASview<y>]:FREference:AUTO` is set to OFF.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:FREference:OFFSet <value>
[SENSe]:PULSe[:MEASview<y>]:FREference:OFFSet?
```

Arguments

<value>: : <NRf> specifies the frequency reference offset.

Range: -50 kHz to +50 kHz.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:FREference:OFFSet 2.5kHz sets the frequency offset to 2.5 kHz to the reference.

[SENSe]:PULSe[:MEASview<y>]:MODulation:TYPE

Sets or queries the modulation type in the pulsed RF measurements. This command is equivalent to the [SENSe]:REANalyze:NEXT command.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:MODulation:TYPE { CWConst | CWCHange | LCHirp | OTHer}
[SENSe]:PULSe[:MEASview<y>]:MODulation:TYPE?
```

Arguments

CWConst selects the CW (continuous wave) with constant phase.

CWCHange selects the CW (continuous wave) with changing phase.

LCHirp selects the linear chirp.

OTHer selects other.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:MODulation:TYPE CWCHang selects the CW with changing phase as the modulation type.

[SENSe]:PULSe[:MEASview<y>]:STATistics:SELEcted:SOURce

Sets or queries selected source for pulse statistics measurement.

Conditions

Measurement views: Pulse Statistics

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:STATistics:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4" }
[SENSe]:PULSe[:MEASview<y>]:STATistics:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:STATistics:SELEcted:SOURce? queries the source of the Pulse Statistics Measurement View 2.

[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:FILTer:SHAPE

Sets or queries the type of Filter shape from Analysis tab of Frequency vs Time from the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Sense commands

Syntax

```
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:FILTer:SHAPE <arg1>
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:FILTer:SHAPE?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<arg1> is KAIS or UNIF or BH4B or FLAT or HAMM

Where

UNIF is Uniform (none).

BH4B is Blackman-Harris 4B.

FLAT is Flat - Top (CW ampl).

KAIS is Kaiser (RBW).

HAMM is Hamming.

Returns

<string> KAIS or UNIF or BH4B or FLAT or HAMM

Examples

SENSe:PULSe:OGRAM:MEASview1:ANALysis:FVTime:FILTer:SHApe KAIS sets the Analysis Filter shape to Kaiser(RBW).

[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:SPECTrum:ANALysis:REGion

Sets or queries the Spectrum Analysis region from Analysis tab of Frequency vs Time in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Sense commands

Syntax

```
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:SPECTrum:ANALysis:REGion <arg1>
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:SPECTrum:ANALysis:REGion?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<arg1> is ATIM or POT or IND

Where

ATIM is Use Analysis Time settings.

POT is Pulse ON Time.

IND is Independent.

Returns

<string> ATIM or POT or IND

Examples

SENSe:PULSe:OGRAM:MEASview1:ANALysis:FVTime:SPECTrum:ANALysis:REGion ATIM sets the Spectrum Analysis region to Use Analysis Time settings option.

[SENSe]:PULSe:OGRAM[:MEASview<y>]:SELEcted:SOURce

Returns the Source number of specified pulso-gram trace.

Conditions

Measurement views: Pulse-Ogram

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:PULSe:OGRAM[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4" }
[SENSe]:PULSe:OGRAM[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

```
{"Source 1" | "Source 2" | "Source 3" | "Source 4" }
```

Examples

SENSe:PULSe:OGRAM:MEASview1:SELEcted:SOURce? queries the source of the PulseOgram measurement view 1.

[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:ONTime:LENGth

Sets or queries the OnTime value from Analysis tab of Frequency vs Time in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Sense commands

Syntax

```
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:ONTime:LENGth <value>
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:ONTime:LENGth?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> = <NRf>

Returns

<NRf> specifies the ON time in seconds.

Examples

SENSe:PULSe:OGRAM:MEASview<y>:ANALysis:FVTime:ONTime:LENGth? might return 10E-6s.

[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:INDependent:START

Sets or queries the independent spectrum start time from Analysis tab of Frequency vs Time in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Sense commands

Syntax

```
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:INDePendent:StARt <value>
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:INDePendent:StARt?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

<value> = <NRf>

Returns

<NRf> specifies the independent spectrum start time in seconds.

Examples

SENSe:PULSe:OGRAM:MEASview1:ANALysis:FVTime:INDePendent:StARt? might return 10E-6s.

[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:INDePendent:LENGth

Sets or queries the independent spectrum length from Analysis tab of Frequency vs Time in the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Sense commands

Syntax

```
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:INDePendent:LENGth <value>
[SENSe]:PULSe:OGRAM[:MEASview<y>]:ANALysis:FVTime:INDePendent:LENGth?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> = <NRf>

Returns

<NRf> specifies the independent spectrum length in seconds.

Examples

SENSe:PULSe:OGRAM:MEASview1:ANALysis:FVTime:INDePendent:LENGth? might return 10E-6s.

[SENSe]:PULSe[:MEASview<y>]:SIGNal:TYPE

Sets or queries the signal type in the pulsed RF measurements.

Conditions

Measurement views: Pulse Statistics with specified Measurement view number, Pulse table, Pulse trace with specified Measurement view number

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:SIGNal:TYPE { CWConst | CWCHange | LCHirp | OTHER}
[SENSe]:PULSe[:MEASview<y>]:SIGNal:TYPE?
```

Arguments

CWConst selects CW (continuous wave) with constant phase.

CWCHange selects CW (continuous wave) with changing phase.

LCHirp selects linear chirp.

OTHER selects other.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:SIGNal:TYPE CWCHange selects the CW with changing phase as the signal type.

[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:ORDinate

Sets or queries the Histogram Y unit. This command is valid when **DISPlay:PULSe:STATistics:PLOT** is set to Histogram.

Conditions

Measurement views: Pulse statistics

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:ORDinate { PERCent | COUNT }
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:ORDinate?
```

Arguments

PERCent sets the Histogram plot Y axis to the percentage of points.

COUNT sets the Histogram plot Y axis to the number of points in the bin.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:STATistics:HISTogram:ORDinate PERCENT sets the histogram Y axis to percent.

[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts

Sets or queries the number of bins in the Histogram plot.

Conditions

Measurement views: Pulse statistics

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts <value>  
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts?
```

Arguments

<value> ::= <NRf> specifies the number of histogram bins.

Range: 5 to 10000

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:STATistics:HISTogram:POINts 10 sets the number of histogram bins to 10.

[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts:AUTO

Sets or queries enabling automatic Histogram plot bins count.

Conditions

Measurement views: Pulse statistics

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:PULSe[:MEASview<y>]:STATistics:HISTogram:POINts:AUTO?
```

Arguments

OFF or 0 sets the number of bins manually by the [SENSe]:PULSe:STATistics:HISTogram:POINts command.

ON or 1 sets the number of bins to the number of pulses/10.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSe:MEASview2:STATistics:HISTogram:POINTs:AUTO 1 sets the number of histogram bins based on number of pulses.

[SENSe]:PULSe[:MEASview<y>]:STATistics:IN:LINear:SCALE

Sets or queries the "Calculate statistics in linear scale" selection from the display.

Conditions

Measurement views: Pulse Cumulative Statistics, Pulse Statistics

Group

Sense commands

Syntax

```
[SENSe]:PULSe[:MEASview<y>]:STATistics:IN:LINear:SCALE { 0 | OFF | 1 | ON}
[SENSe]:PULSe[:MEASview<y>]:STATistics:IN:LINear:SCALE?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

0 or OFF unchecks the box and disables the calculate function

1 or ON checks the box and enables the calculate function

Returns

<Boolean>, 0 or 1

Examples

SENSe:PULSe:MEASview1:STATistics:IN:LINear:SCALE 1 enables the Calculate statistics in linear scale (for results in log).

[SENSe]:PULSe:TRACe[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of the selected Measurement view in pulse trace.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:PULSe:TRACe[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:PULSe:TRACe[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:PULSE:TRACE:MEASVIEW1:SELECTED:SOURCE? queries the source of the pulse trace measurement view 1.

[SENSe]:PULSe:RESult[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of the selected Measurement view in pulse Result.

Conditions

Measurement views: Pulse Result with specified Measurement view number

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:PULSe:RESult[:MEASview<y>]:SELEcted:SOURce {"Source1"|"Source2"|"Source3"|"Source4"}
[SENSe]:PULSe:RESult[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y>=1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1

Examples

[SENSe]:PULSe:RESult[:MEASview1:SELEcted:SOURce? Queries the Source of the spectrum Measurement View 1.

[SENSe]:REANalyze (No Query Form)

Sets all measurements to reanalyze the last acquisition.

NOTE: hg is an overlapped command, which does not finish executing before the next command starts executing. Use the *OPC(?) and *WAI commands to synchronize all pending operations to the execution of this command.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze
```

Related Commands

[*OPC](#) (on page 1580)

[*WAI](#) (on page 2746)

Arguments

None

Examples

`SENSe:REANALYZE` reanalyzes all measurements using the current acquisition.

[SENSe]:REANalyze:ACQuisition:SETTings? (Query Only)

Queries the settings of all acquisitions.

Conditions

Measurement views: All

Group

Sense commands

Syntax

`[SENSe]:REANalyze:ACQuisition:SETTings?`

[SENSe]:REANalyze:ALL:LOOP (No Query Form)

Replay all selected records/frames in a continuous loop.

Conditions

Measurement views: All

Group

Sense commands

Syntax

`[SENSe]:REANalyze:ALL:LOOP`

[SENSe]:REANalyze:CURRent (No Query Form)

Replay the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

`[SENSe]:REANalyze:CURRent`

[SENSe]:REANalyze:CURRent:ACQuisition? (Query Only)

Queries the Acquisition record identifier (ID) of the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:CURRent:ACQuisition?

[SENSe]:REANalyze:CURRent:FRAMe? (Query Only)

Queries the Frame identifier (ID) of the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:CURRent:FRAMe?

[SENSe]:REANalyze:CURRent (No Query Form)

Replay the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:CURRent

[SENSe]:REANalyze:CURRent:TIMeStamp? (Query Only)

Queries the time stamp of the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:CURRent:TIMeStamp?

[SENSe]:REANalyze:DELeTe:DATA (No Query Form)

Deletes all acquisition data.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:DELeTe:DATA

[SENSe]:REANalyze:FIRSt (No Query Form)

Replays (reanalyzes) the first item in the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:FIRSt

[SENSe]:REANalyze:LAST (No Query Form)

Replays (reanalyzes) the last item in the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:LAST

[SENSe]:REANalyze:NEXT (No Query Form)

Replays (reanalyzes) the next item in the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:NEXT

[SENSe]:REANalyze:PAUSE

Sets or queries the reanalysis paused state.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:PAUSE {OFF | ON | 0 | 1 }  
[SENSe]:REANalyze:PAUSE?
```

Arguments

ON or 1 pauses (blocks) any acquisition until current reanalysis is completed.

OFF or 0 disables the reanalysis pause mode.

[SENSe]:REANalyze:PREVIOUS (No Query Form)

Replays (reanalyzes) the previous item in the currently selected acquisition (or frame).

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:PREVIOUS
```

[SENSe]:REANalyze:SElect:ACQuisition:DATA:TYPE

Sets or queries the acquisition data type.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:ACQuisition:DATA:TYPE {SPECTra | IQ }  
[SENSe]:REANalyze:SElect:ACQuisition:DATA:TYPE?
```

Arguments

SPECTra sets the acquisition data type as DPX spectra data.

IQ sets the acquisition data type a IQ data.

Examples

SENSe:REANALYZE:SELECT:ACQUISITION:DATA:TYPE IQ sets the acquisition data type to IQ data.

[SENSe]:REANalyze:SElect:ACQuisition:FIRSt? (Query Only)

Queries the first selectable acquisition Start or Stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:ACQuisition:FIRSt?

Related Commands

[\[SENSe\]:REANalyze:SElect:ACQuisition:FIRSt:TIMestamp?](#) (on page 2329)

[SENSe]:REANalyze:SElect:ACQuisition:FIRSt:TIMestamp? (Query Only)

Queries the time stamp of the first selectable acquisition history Start or Stop value in the currently selected acquisition set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:ACQuisition:FIRSt:TIMestamp?

Related Commands

[\[SENSe\]:REANalyze:SElect:ACQuisition:FIRSt?](#) (on page 2328)

[SENSe]:REANalyze:SElect:ACQuisition:LAST? (Query Only)

Queries the last selectable acquisition Start or Stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:ACQuisition:LAST?

Related Commands

[\[SENSe\]:REANalyze:SElect:ACQuisition:LAST:TIMestamp?](#) (on page 2329)

[SENSe]:REANalyze:SElect:ACQuisition:LAST:TIMestamp? (Query Only)

Queries the time stamp of the last selectable acquisition Start or Stop value in the currently selected set.

Conditions

Measurement views: All

Group

Programmer Manual

WWW.TEK.COM | 2329

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:ACQuisition:LAST:TIMestamp?
```

Related Commands

[\[SENSe\]:REANalyze:SElect:ACQuisition:LAST?](#) (on page 2329)

[SENSe]:REANalyze:SElect:ACQuisition:START

Sets or queries the Acquisition Start value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:ACQuisition:START <value>  
[SENSe]:REANalyze:SElect:ACQuisition:START?
```

Arguments

<value>::<NR1> is an integer in the range from one to the number of acquisitions in the acquisition history.

[SENSe]:REANalyze:SElect:ACQuisition:START:TIMestamp? (Query only)

Queries the time stamp of the current Acquisition Start selection. It is the time stamp of the first frame of the selected acquisition, if FastFrame is enabled.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:ACQuisition:START:TIMestamp?
```

[SENSe]:REANalyze:SElect:ACQuisition:STOP

Sets or queries the Acquisition Stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:ACQuisition:STOP <value>  
[SENSe]:REANalyze:SElect:ACQuisition:STOP?
```

Arguments

<value>: : <NR1> is an integer in the range from one to the number of acquisitions in the acquisition history.

[SENSe]:REANalyze:SElect:ACQuisition:STOP:TIMestamp? (Query Only)

Queries the time stamp of the current Acquisition Stop selection. This is the time stamp of the last frame of the selected acquisition, if FastFrame is enabled.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:ACQuisition:STOP:TIMestamp?
```

[SENSe]:REANalyze:SElect:ALL (No Query Form)

Selects all acquisitions and frames in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:ALL
```

[SENSe]:REANalyze:SElect:FRAME:FIRSt? (Query Only)

Queries the first available Frame Start or Stop value available in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:FRAME:FIRSt?
```

Related Commands

[\[SENSe\]:REANalyze:SElect:FRAME:FIRSt:TIMestamp?](#) (on page 2332)

[SENSe]:REANalyze:SElect:FRAMe:FIRSt:TIMestamp? (Query Only)

Queries the time stamp of the first available frame of the first available Acquisition Start or Stop value available in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:FRAMe:FIRSt:TIMestamp?

Related Commands

[\[SENSe\]:REANalyze:SElect:FRAMe:FIRSt?](#) (on page 2331)

[SENSe]:REANalyze:SElect:FRAMe:LAST? (Query Only)

Queries the last available Frame Start or Stop value available in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:FRAMe:LAST?

Related Commands

[\[SENSe\]:REANalyze:SElect:FRAMe:LAST:TIMestamp?](#) (on page 2332)

[SENSe]:REANalyze:SElect:FRAMe:LAST:TIMestamp? (Query Only)

Queries the time stamp of the last available frame of the last available Acquisition Start or Stop value available in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:FRAMe:LAST:TIMestamp?

Related Commands

[\[SENSe\]:REANalyze:SElect:FRAMe:LAST?](#) (on page 2332)

[SENSe]:REANalyze:SElect:FRAMe:START

Sets or queries the Frame Start value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:FRAMe:START <value>  
[SENSe]:REANalyze:SElect:FRAMe:START?
```

Arguments

<value>::<NR1> is an integer in the range from one to the number of fast frames.

[SENSe]:REANalyze:SElect:FRAMe:START:TIMESTAMP? (Query Only)

Queries the time stamp of the current Frame Start selection. This is the time stamp of the Frame Start frame of the acquisition start acquisition, if FastFrame is enabled.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:FRAMe:START:TIMESTAMP?
```

[SENSe]:REANalyze:SElect:FRAMe:STOP

Sets or queries the frame stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:FRAMe:STOP <value>  
[SENSe]:REANalyze:SElect:FRAMe:STOP?
```

Related Commands

[\[SENSe\]:REANalyze:SElect:FRAMe:STOP:TIMESTAMP?](#) (on page 2333)

Arguments

<value>: : <NR1> is an integer in the range from one to the number of fast frames.

[SENSe]:REANalyze:SElect:FRAMe:STOP:TIMestamp? (Query Only)

Queries the time stamp of the current frame stop selection. It is the time stamp of the frame Stop frame of the Acquisition Stop acquisition if FastFrame is enabled.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:FRAMe:STOP:TIMestamp?

Related Commands

[\[SENSe\]:REANalyze:SElect:FRAMe:STOP](#) (on page 2333)

[SENSe]:REANalyze:SElect:SPECTra:ACQquisition:ALL (No Query Form)

Selects all spectra acquisitions and frames in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:SPECTra:ACQquisition:ALL

[SENSe]:REANalyze:SElect:SPECTra:ACQquisition:CURRent:ACQquisition? (Query Only)

Queries the acquisition record identifier (ID) of the currently selected acquisition.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:SPECTra:ACQquisition:CURRent:ACQquisition?

Returns

<ID Number> ::= <NR1> the record identifier number of the current acquisition.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:CURRENT:ACQUISITION? might return 848 indicating that the current acquisition record number is 848.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:CURRent:TIMestamp? (Query Only)

Queries the time stamp of the currently selected acquisition.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:CURRent:TIMestamp?

Returns

<time stamp> ::= <string> The current time stamp value.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:CURRENT:TIMESTAMP? might return "10/10/2011 10:57:55.93" indicating that the current time stamp recorded on October 10, 2011 was 10 hours, 57 minutes, and 55.93 seconds.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRSt? (Query Only)

Queries the first selectable acquisition start or stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRSt?

Returns

<ID Number> ::= <NR1> the record identifier number of the current acquisition.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:FIRST? might return 1 indicating that the first selectable acquisition start or stop value was 1.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRSt:TIMestamp? (Query Only)

Queries the time stamp of the first selectable acquisition history start or stop value in the currently selected acquisition set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:FIRSt:TIMestamp?
```

Returns

<time stamp> ::= <string> The first time stamp value.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:FIRST:TIMESTAMP? might return "10/10/2011 10:57:41:58", indicating that the first time stamp recorded on October 10, 2011 was 10 hours, 57 minutes, and 41.58 seconds.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST? (Query Only)

Queries the last selectable acquisition start or stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST?
```

Returns

<ID Number> ::= <NR1> the record identifier number of the current acquisition.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:LAST? might return 1, indicating that the last selectable acquisition start or stop value was 1.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST:TIMestamp? (Query Only)

Queries the time stamp of the last selectable acquisition start or stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:LAST:TIMestamp?
```

Returns

<time stamp> ::= <string> The last time stamp value.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:LAST:TIMESTAMP? might return "10/10/2011 10:57:41.58" indicating that the last time stamp recorded on October 10, 2011 was 10 hours, 57 minutes, and 41.58 seconds.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START

Sets or queries the acquisition start value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START <value>  
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START?
```

Arguments

<value> ::= <NR1> is an integer in the range from one to the number of acquisitions in the acquisition history.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:START? might return 1.0000000000, indicating the start value was 1.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START:TIMestamp? (Query Only)

Queries the time stamp of the current acquisition start selection.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:START:TIMestamp?
```

Returns

<time stamp> ::= <string> The start time stamp value.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:START:TIMESTAMP? might return "10/10/2011 10:57:41:58" indicating that the time stamp of the acquisition start selection recorded on October 10, 2011 was 10 hours, 57 minutes, and 41.58 seconds.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP

Sets or queries the acquisition stop value in the currently selected set.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP <value>  
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP?
```

Arguments

<value> ::= <NR1> is an integer in the range from one to the number of acquisitions in the acquisition history.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:STOP? might return 1.0000000000, indicating the stop value was 1.

[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP:TIMestamp? (Query Only)

Queries the time stamp of the current acquisition stop selection.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SElect:SPECTra:ACQuisition:STOP:TIMestamp?
```

Returns

<time stamp> ::= <string> The stop time stamp value.

Examples

SENSe:REANALYZE:SELECT:SPECTRA:ACQUISITION:STOP:TIMESTAMP? might return "10/10/2011 10:57:41:58" indicating that the time stamp of stop selection recorded on October 10, 2011 was 10 hours, 57 minutes, and 41.58 seconds.

[SENSe]:REANalyze:SPEed

Sets or queries the time delay value inserted between reanalysis of frames or acquisitions.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:SPEed <value>  
[SENSe]:REANalyze:SPEed?
```

Arguments

<value>::<NR1> is an integer in the range of zero (for no delay) to four (for a maximum delay of about one second).

[SENSe]:REANalyze:STOP (No Query Form)

Stops the current reanalysis. The command will block until the current reanalysis has completed and stopped.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:STOP
```

[SENSe]:REANalyze:TIMestamp:DECimal

Sets or queries the number of values to the right of the decimal point to include in all time stamps.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:REANalyze:TIMestamp:DECimal <value>  
[SENSe]:REANalyze:TIMestamp:DECimal?
```

Arguments

<value>::<NR1> is an integer in the range of one to nine.

SENSe:ROSCillator:EXTernal:TIME

Sets or queries the timing reference.

For the RSA7100A (Option GPS required): The default timing reference source upon launch of SignalVu-PC is system time. If you change the timing reference source from the default to one of the externally generated sources (GPS, PPS, IRIG-B) without a valid signal, the time will remain system time.

If you set the source to GPS, PPS, or IRIG-B after launch of SignalVu-PC (thus changing the time from the default system time), and then disconnect from that source or otherwise lose the lock to that source, the time used will be that of the previous externally generated source. This will remain so until you set a different source with a valid signal.

Group

Sense commands

Syntax

```
SENSe:ROSCillator:EXternal:TIME {PPS | IBAM | IBDC | GPS | SYStem}  
SENSe:ROSCillator:EXternal:TIME?
```

Related Commands

[SENSe:ROSCillator:EXternal:TIME:STATus?](#) (on page 2340)

Arguments

PPS is a 1PPS signal

IBAM is an IRIG-B AM signal

IBDC is an IRIG-B DC signal

GPS is a GNSS signal

SYStem is the CTRL7100A (PC) time

Returns

One of the following: PPS, IBAM, IBDC, GPS, SYStem

Examples

SENSe:ROSCILLATOR:EXTERNAL:TIME PPS sets the system time to 1 PPS.

SENSe:ROSCillator:EXternal:TIME:STATus? (Query Only)

Queries if the timing reference source is locked or unlocked.

Group

Sense commands

Syntax

```
SENSe:ROSCillator:EXternal:TIME:STATus?
```

Related Commands

[SENSe:ROSCillator:EXternal:TIME](#) (on page 2339)

Returns

0 means the timing source is unlocked.

1 means the timing source is locked.

Examples

`SENSe:ROSCILLATOR:EXTERNAL:TIME:STATUS?` might return 1, indicating the timing source is locked. This is indicated in the UI on the Timing Reference tab by a green checked box next to Valid Timing Source.

[SENSe]:ROSCillator:SOURce

Sets or queries the frequency reference oscillator source.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:ROSCillator:SOURce { INTernal | EXTernal }
[SENSe]:ROSCillator:SOURce?
```

Related Commands

[SENSe:ROSCillator:EXTernal:TIME:STATus?](#) (on page 2340)

Arguments

`INTernal` specifies that the analyzer uses the 10 MHz internal oscillator.

`EXTernal` specifies that the analyzer uses the external reference signal. Use the Ref In connector on the rear panel to input the signal.

Selecting `EXTernal` initiates an attempt to lock the internal reference oscillator to the external reference signal. If the signal is not connected or is at an invalid frequency or amplitude, an error (2028, "External frequency reference signal not valid. Using internal reference") is returned. If not able to lock to the external reference, an error (2029, "Unable to lock to external frequency reference. Using internal reference.") is returned.

Examples

`SENSe:ROSCILLATOR:SOURCE INTernal` uses the 10 MHz internal oscillator for the frequency reference.

[SENSe]:SEM:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth (RBW) of the reference channel.

NOTE: In Real-time operation this sets the RBW for the reference and all offset channels.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:{BANDwidth|BWIDth}[:RESolution] <value>
[SENSe]:SEM:{BANDwidth|BWIDth}[:RESolution]?
```

Arguments

`<value>::<NRf>` specifies the resolution bandwidth.

Examples

`SENSe:SEM:BANDWIDTH:RESOLUTION 200kHz` sets the resolution bandwidth to 200 kHz.

[SENSe]:SEM:{BANDwidth|BWIDth}:VIDeo

Sets or queries the video bandwidth (VBW) of the reference channel.

NOTE: In Real-time operation this sets the RBW for the reference and all offset channels.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:{BANDwidth|BWIDth}:VIDeo <value>
[SENSe]:SEM:{BANDwidth|BWIDth}:VIDeo?
```

Arguments

<value>::<NRf> specifies the video bandwidth.

Range: Current RBW/104 (1 Hz minimum) to current RBW.

Examples

`SENSe:SEM:{BANDWIDTH|BWIDTh}:VIDeo 200kHz` sets the video bandwidth to 200 kHz.

[SENSe]:SEM:{BANDwidth|BWIDth}:VIDeo:STATe

Sets or queries the state of the video bandwidth (VBW) of the reference channel.

NOTE: In Real-time operation this sets the VBW state for the reference and all offset channels.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:{BANDwidth|BWIDth}:VIDeo:STATe { OFF | ON | 0 | 1 }
[SENSe]:SEM:{BANDwidth|BWIDth}:VIDeo:STATe?
```

Arguments

OFF or 0 turns the video bandwidth filter off.

ON or 1 turns the video bandwidth filter on.

[SENSe]:SEM:CHANnel:FILTer

Sets or queries the reference Channel Filter.

NOTE: In Real-time operation the channel filter is always forced to None.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:CHANnel:FILTer { RRC | NONE }  
[SENSe]:SEM:CHANnel:FILTer?
```

Arguments

RRC selects the Root-Raised-Cosine filter.

NONE uses no filter.

Examples

SENSe:SEM:CHANNEL:FILTER RRCosine selects Root-Raised-Cosine for the reference Channel Filter.

[SENSe]:SEM:CHANnel:IBANdwidth

Sets or queries the reference channel integration bandwidth.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:CHANnel:IBANdwidth <value>  
[SENSe]:SEM:CHANnel:IBANdwidth?
```

Arguments

<value>::<NRf> integration bandwidth

Returns

Examples

SENSe:SEM:CHANNEL:IBANDWIDTH? might return 18.000000E+6, indicating that the integration bandwidth is 18 MHz.

[SENSe]:SEM:CHANnel:WIDTh

Sets or queries the reference Channel bandwidth.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:CHANnel:WIDTh <value>  
[SENSe]:SEM:CHANnel:WIDTh?
```

Arguments

<value>::<NRf> specifies the filter bandwidth.

Examples

SENSe:SEM:CHANNEL:WIDTH 30kHz sets the filter bandwidth to 30 kHz.

[SENSe]:SEM:CHIPrate

Sets or queries the Chip rate.

Use the [SENSe]:SEM:CHANnel:FILTer command to set the reference Channel Filter to RRC (Root-Raised Cosine).

NOTE: Applies in Swept operation only.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:CHIPrate <value>  
[SENSe]:SEM:CHIPrate?
```

Arguments

<value>::<NRf> specifies the chip rate.

Examples

SENSe:SEM:CHIPRATE 3.84MHZ sets the Chip rate to 3.84 MHz.

[SENSe]:SEM:CLEar:RESults (No Query Form)

Clears the results in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:CLEar:RESults
```

Arguments

None

Examples

`SENSe:SEM:CLEAR:RESULTS` clears the results in the measurement.

[SENSe]:SEM:FREQuency

Sets or queries the measurement frequency.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:FREQuency <value>  
[SENSe]:SEM:FREQuency?
```

Arguments

`<value>::<NRf>` specifies the center frequency.

Examples

`[SENSe]:SEM:FREQUENCY 1.0GHZ` sets the center frequency to 1.0 GHz.

[SENSe]:SEM:FREQuency:SPAN? (Query Only)

Returns the frequency span.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:FREQuency:SPAN?
```

Arguments

None

Returns

`<NRf>` frequency span.

Examples

`SENSe:SEM:FREQUENCY:SPAN?` might return `100.00000E+6`, indicating that the frequency span is 100 MHz.

[SENSe]:SEM:MFILter

Sets or queries the shape of the filter.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:MFIltEr { GAUSSsian | RECTangular }  
[SENSe]:SEM:MFIltEr?
```

Arguments

GAUSSsian sets the filter shape to Gaussian.

RECTangular sets the filter shape to Rectangular.

Examples

SENSe:SEM:MFIltER RECTangular sets the filter shape to Rectangular.

[SENSe]:SEM:MODE:REALtime

Sets or queries the Real-time SEM measurement mode.

NOTE: In real-time mode SEM is measured using real-time acquisition data.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:MODE:REALtime { OFF | ON | 0 | 1 }  
[SENSe]:SEM:MODE:REALtime?
```

Arguments

ON or 1 turns the SEM real-time measurement mode on.

OFF or 0 turns the SEM real-time measurement mode off.

[SENSe]:SEM:MTYPE

Sets or queries the measurement type.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:MTYPE { TPOW | PSD | PEAK }
```

Arguments

TPOW specifies the Total Power measurement.

PSD specifies the Peak Spectral Density measurement in dBm/Hz.

PEAK specifies a Peak power measurement.

Examples

SENSe:SEM:MTYPE PEAK sets the measurement type to Peak.

[SENSe]:SEM:OFFSet:DETection

Sets or queries the detection settings for all offsets.

NOTE: In Real-time operation the offset and reference detection settings are forced equal.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet:DETection { AVERage | PEAK }
[SENSe]:SEM:OFFSet:DETection?
```

Arguments

AVERage indicates the Offsets setting is Average (VRMS).

PEAK indicates the Offsets setting is the positive peak.

Examples

SENSe:SEM:OFFSet:DETection AVER sets the detection settings for all offsets to Average RMS.

[SENSe]:SEM:OFFSet<x>:BANDwidth:FILTer? (Query Only)

Returns the bandwidth filter setting for specified row in the Offsets & Limits table. The filter setting is equal to the Resolution Bandwidth (RBW) value times the number of resolution bandwidths. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:BANDwidth:FILTer?
```

Arguments

None

Returns

<value>::<NRf> is the filter bandwidth setting.

Examples

SENSe:SEM:OFFSet3:BANDwidth:FILTer might return 30.0E+3, indicating that the filter bandwidth for row 3 is 30 kHz.

[SENSe]:SEM:OFFSet<x>:BANDwidth[:RESolution]

Sets or queries the resolution bandwidth for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table. See the [\[SENSe\]:SEM:\[BANDwidth|BWIDth\]:\[RESolution\]](#) (on page 2341) command.

NOTE: In Real-time operation the RBW values for each offset and the reference are set equal to the All Channels RBW setting.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:BANDwidth[:RESolution] <value>
[SENSe]:SEM:OFFSet<x>:BANDwidth[:RESolution]?
```

Returns

<value>::<NRf> specifies the resolution bandwidth.

Examples

SENSe:SEM:OFFSet4:BANDwidth 30kHz sets the resolution bandwidth in row 4 to 30 kHz.

[SENSe]:SEM:OFFSet<x>:BANDwidth:RESolution:COUNT

Sets or queries the count of Resolution Bandwidths (RBWs) for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

NOTE: In Real-time operation the RBW count is always forced to 1.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:BANDwidth:RESolution:COUNT <value>
[SENSe]:SEM:OFFSet<x>:BANDwidth:RESolution:COUNT?
```

Arguments

<value> specifies the count number of RBWs.

Examples

SENSe:SEM:OFFSet1:BANDwidth:RESolution:COUNT 10 sets the count for row 1 to 10.

[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo

Sets or queries the video bandwidth setting for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table. See the [\[SENSe\]:SEM:{BANDwidth|BWIDth}:VIDeo](#) (on page 2342) command.

NOTE: In Real-time operation the VBW values for each offset and the reference are set equal to the All Channels VBW setting.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo <value>
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo?
```

Arguments

<value>::<NRf> specifies the video bandwidth setting.

Examples

SENSe:SEM:OFFSet3:BANDwidth:VIDeo 300 sets the video bandwidth for row 3 to 300 Hz.

[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo:STATe

Sets or queries the state of the video bandwidth for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table. See the [\[SENSe\]:SEM:{BANDwidth|BWIDth}:VIDeo:STATe](#) (on page 2342) command.

NOTE: In Real-time operation the VBW state values for each offset and the reference are set equal to the All Channels VBW state setting.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo:STATe { OFF | ON | 0 | 1 }
[SENSe]:SEM:OFFSet<x>:BANDwidth:VIDeo:STATe?
```

Arguments

OFF or 0 turns the video bandwidth filter off.

ON or 1 turns the video bandwidth filter on.

Examples

SENSe:SEM:OFFSet3:BANDwidth:VIDeo:STATe ON turns on the video bandwidth filter for row 3 in the table.

[SENSe]:SEM:OFFSet<x>:FREQuency:STARt

Sets or queries the start frequency for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:FREQuency:STARt <value>  
[SENSe]:SEM:OFFSet<x>:FREQuency:STARt?
```

Arguments

<value>::<NRf> specifies the start frequency.

Examples

SENSe:SEM:OFFSet1:FREQuency:STARt 2.876MHZ sets the start frequency in row 1 to 2.876 MHz.

[SENSe]:SEM:OFFSet<x>:FREQuency:STOP

Sets or queries the stop frequency for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:FREQuency:STOP <value>  
[SENSe]:SEM:OFFSet<x>:FREQuency:STOP?
```

Arguments

<value>::<NRf> specifies the stop frequency.

Examples

SENSe:SEM:OFFSet1:FREQuency:STOP 3.485MHZ sets the stop frequency in row 1 to 3.485 MHz.

[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:SAME

Sets or queries the state of the limits for the absolute start and stop settings for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:SAME { OFF | ON | 0 | 1 }
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:SAME?
```

Arguments

OFF or 0 indicates the start and stop limits are different.

ON or 1 indicates the state and stop limits are the same.

Examples

SENSe:SEM:OFFSet2:LIMIT:ABSolute:SAME ON sets the absolute start and stop limits for row 2 to the same values.

[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:START

Sets or queries the absolute power start limit for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:START <value>
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:START?
```

Arguments

<value>::<NRf> specifies the power in dBm.

Examples

SENSe:SEM:OFFSet1:LIMIT:ABSolute:START -71.10 sets the absolute start power limit for row 1 to -71.10 dBm.

[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:STOP

Sets or queries the absolute power stop limit for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:STOP <value>
[SENSe]:SEM:OFFSet<x>:LIMIT:ABSolute:STOP?
```

Arguments

<value>::<NRf> specifies the power in dBm.

Examples

`SENSe:SEM:OFFSet<x>:LIMIT:ABSolute:STOP -55.80` sets the absolute stop power limit for row 1 to -55.80 dBm.

[SENSe]:SEM:OFFSet<x>:LIMIT:MASK

Sets or queries the limit mask setting for the specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:MASK { ABS | REL | AND | OR }
[SENSe]:SEM:OFFSet<x>:LIMIT:MASK?
```

Arguments

ABS specifies the limit mask is set to Absolute.

REL specifies the limit mask is set to Relative

AND specifies the limit mask is set to Absolute AND Relative.

OR specifies the limit mask is set to Absolute OR Relative.

Examples

`SENSe:SEM:OFFSet3:LIMIT:MASK REL` sets the limit mask for row 3 to Relative.

[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:SAME

Sets or queries the state of the limits for the relative start and stop settings for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:SAME { OFF | ON | 0 | 1 }
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:SAME?
```

Arguments

OFF or **0** indicates the start and stop limits are different.

ON or **1** indicates the state and stop limits are the same.

Examples

`SENSe:SEM:OFFSet2:LIMIT:RELative:SAME ON` sets the relative start and stop limits for row 2 to the same values.

[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:START

Sets or queries the relative power start limit for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:START <value>  
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:START?
```

Arguments

<value>::<NRf> specifies the power in dB.

Examples

SENSe:SEM:OFFSet1:LIMIT:RELative:START -35.5 sets the relative start power limit for row 1 to -35.5 dB.

[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:STOP

Sets or queries the relative power stop limit for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:STOP <value>  
[SENSe]:SEM:OFFSet<x>:LIMIT:RELative:STOP?
```

Arguments

<value>::<NRf> specifies the power in dB.

Examples

SENSe:SEM:OFFSet1:LIMIT:RELative:STOP -35.5 sets the relative stop power limit for row 1 to -35.5 dB.

[SENSe]:SEM:OFFSet<x>:LIMIT:SIDE

Sets or queries the side of the offset limit for specified row in the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:LIMIT:SIDE { LEFT | RIGHT | BOTH}
[SENSe]:SEM:OFFSet<x>:LIMIT:SIDE?
```

Arguments

LEFT specifies the left offset limit.

RIGHT specifies the right offset limit.

BOTH specifies both sides of the offset limit.

Examples

SENSe:SEM:OFFSet1:LIMIT:SIDE BOTH specifies the measurement uses both sides of the offset in row 1.

[SENSe]:SEM:OFFSet<x>:STATe (No Query Form)

Determines whether to display the specified row of the Offsets & Limits table. The parameter <x> represents the row in the Offsets & Limits table.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:OFFSet<x>:STATe { OFF | ON | 0 | 1 }
```

Arguments

OFF or 0 turns off the display of the row in the measurement view.

ON or 1 displays the row in the measurement view.

Examples

SENSe:SEM:OFFSet2:STATe OFF the display of row 2 in the measurement view.

[SENSe]:SEM:POINTs:COUNT

Sets or queries the maximum number of trace points per range.

NOTE: In Swept operation this is the number of trace points per range. In Real-time operation it is the number of trace points in the entire trace.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:POINTs:COUNT <value>
```

```
[SENSe]:SEM:POINTs:COUNT?
```

Arguments

None

Returns

P<NR1> number of points per range.

Examples

SENSe:SEM:POINTS:COUNT? might return P8001, indicating a maximum of 8001 trace points.

[SENSe]:SEM:PRESet (No Query Form)

Defines the standard protocol settings for the Spectral Emissions Mask measurement.

NOTE: This is an obsolete command.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:PRESet { "3GPP Downlink" | "WLAN 802.11g" | "WiMax 802.16 (ETSI)" }
```

Arguments

"3GPP Downlink" specifies the 3GPP Downlink standard.

"WLAN 802.11g" specifies the IEEE 802.11 standard for WLAN communications.

"WiMax 802.16 (ETSI)" specifies the WiMAX 802.16 (ETSI) standard. Quotes must be included with the arguments.

Examples

SENSe:SEM:PRESET WLAN (802.11g) presets the SEM measurement to the IEEE 802.11 standard for WLAN communications.

[SENSe]:SEM:REFerence:AUTO

Determines whether to automatically update the Power Reference in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:REFerence:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:SEM:REFerence:AUTO?
```

Arguments

OFF or 0 turns off the automatic update.

ON or 1 automatically updates the reference power.

Examples

SENSe:SEM:REFERENCE:AUTO ON automatically updates the reference power in the measurement.

[SENSe]:SEM:REFeRence:DETection

Sets or returns the reference channel detection setting.

NOTE: In Real-time operation the offset and reference detection settings are forced equal.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:REFeRence:DETection { AVERage | PEAK }  
[SENSe]:SEM:REFeRence:DETection?
```

Arguments

AVERage indicates the reference channel detection setting is Average (VRMS).

PEAK indicates the reference channel detection setting is the positive peak.

Examples

SENSe:SEM:REFERENCE:DETECTION AVER sets the reference channel detection setting to Average RMS.

[SENSe]:SEM:REFeRence[:MAGNitude]

Sets or queries the reference power magnitude.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:REFeRence[:MAGNitude] <value>  
[SENSe]:SEM:REFeRence[:MAGNitude]?
```

Arguments

<value>::<NRf> specifies the magnitude in dBm.

Examples

SENSe:SEM:REFERENCE[:MAGNITUDE]? might return a magnitude of -51.057.

[SENSe]:SEM:RRCRolloff

Sets or queries the filter parameter (roll-off ratio) for the Root Raised Cosine filter.

NOTE: Applies in Swept operation only.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:RRCRolloff <value>  
[SENSe]:SEM:RRCRolloff?
```

Arguments

<value>::<NRf> specifies the filter parameter.

Range: 0.001 to 1, 0.001 step.

Examples

SENSe:SEM:RRCROLLOFF 0.22 sets the filter parameter to 0.22.

[SENSe]:SEM:STEP:AUTO

Determines whether to automatically update the center frequency increment/decrement step size in the Spectral Emissions Mask measurement. The Step value controls the magnitude of each step when using the front panel controls or arrow keys on the keyboard.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:STEP:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:SEM:STEP:AUTO?
```

Related Commands

[\[SENSe\]:SEM:STEP\[:MAGNitude\]](#) (on page 2358)

Arguments

OFF or 0 turns off the automatic update.

ON or 1 automatically updates center frequency.

Examples

SENSe:SEM:STEP:AUTO ON automatically updates the center frequency.

[SENSe]:SEM:STEP[:MAGNitude]

Sets or queries the step magnitude for the center frequency in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:STEP[:MAGNitude] <value>  
[SENSe]:SEM:STEP[:MAGNitude]?
```

Related Commands

[\[SENSe\]:SEM:STEP:AUTO](#) (on page 2357)

Arguments

<value>::<NRf> specifies the step setting.

Examples

SENSe:SEM:STEP[:MAGNITUDE] 4MHZ sets the step magnitude to 4 MHz.

[SENSe]:SEM:WIDTH:DEFinition

Sets or queries the offset definition of the measurement type in the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Sense commands

Syntax

```
[SENSe]:SEM:WIDTH:DEFinition {C2C | C2E | E2C | E2E}  
[SENSe]:SEM:WIDTH:DEFinition?
```

Arguments

C2C defines the offset from the reference frequency center to the offset center.

C2E defines the offset from the reference frequency center to the offset edge.

E2C defines the offset from the reference frequency edge to the offset center.

E2E defines the offset from the reference frequency edge to the offset edge.

Examples

SENSe:SEM:WIDTH:DEFINITION C2C specifies the offset limit from the center of the reference frequency to the center of the offset.

[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth (RBW). Programming a specified RBW sets `SENSe:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO OFF`.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution] <value>
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]?
```

Related Commands

[\[SENSe\]:SGRam\[:MEASview<y>\]:{BANDwidth|BWIDth}:RESolution:AUTO](#) (on page 2360)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>::<NRf> specifies the RBW. Range: 1 Hz to 10 MHz.

Returns

<NRf> specifies the RBW.

Examples

`[SENSe]:SGRam:MEASview1:BANDwidth:RESolution 200kHz` sets the RBW to 200 kHz.

[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:ACTual (Query Only)

Queries the actual resolution bandwidth (RBW) in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:ACTual?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> The actual RBW in Hz.

Examples

SENSe:SGRam:MEASview1:BANDwidth:RESolution:ACTual? might return 299.624E+3, indicating that the actual RBW is 299.624 kHz.

[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO

Determines whether to set the resolution bandwidth (RBW) automatically or manually in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO { OFF | ON | 0 | 1 }
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 specifies that the resolution bandwidth is set manually using the [SENSe]:DPX:{BANDwidth|BWIDth}:ACTual? command.

ON or 1 specifies that the resolution bandwidth is set automatically.

Returns

```
{ OFF | ON | 0 | 1 }
```

Examples

SENSe:SGRam:MEASview1:BANDwidth:RESolution:AUTO ON sets the resolution bandwidth automatically.

[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:MODE

Determines whether to enable or disable the RBW processing in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:MODE { OFF | ON | 0 | 1 }
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:MODE?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 disables the RBW processing. You can select the FFT window using the [SENSe:SGRam\[:MEASview<y>\]:FFT:WINDow](#) (on page 2365) command.

ON or 1 enables the RBW processing. Refer to the [SENSe:SGRam:MEASview<y>:BANDwidth:RESolution](#) (on page 2359) command to set the RBW.

Returns

{ OFF | ON | 0 | 1 }

Examples

SENSe:SGRam:MEASview1:BANDwidth:RESolution:MODE ON enables the RBW processing.

[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo

Sets or queries the video bandwidth (VBW). Programming a specified VBW sets `SENSe:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATE` OFF.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo <value>
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo?
```

Related Commands

[SENSe:SGRam\[:MEASview<y>\]:{BANDwidth|BWIDth}:VIDeo:STATE](#) (on page 2361)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>::<NRf> specifies the VBW.

Range: Current RBW/104 (1 Hz minimum) to Current RBW.

Returns

<NRf> specifies the VBW.

Examples

SENSe:SGRam:MEASview1:BANDwidth:VIDeo 200kHz sets the VBW to 200 kHz.

[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATE

Determines whether to enable or disable the video bandwidth (VBW) in the spectrogram measurement.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATe { OFF | ON | 0 | 1 }
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATe?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 disables the VBW.

ON or 1 enables the VBW.

Returns

{ OFF | ON | 0 | 1 }

Examples

SENSe:SGRam:MEASview1:BANDwidth:VIDeo:STATe ON enables the VBW.

[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:OPTimization

Sets or queries the method of optimizing the gain and input bandwidth in the Spectrogram measurement.

Conditions

Measurement view: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:OPTimization { BEST | AUTO | MAXDynrange | MINNoise | MINTime }
[SENSe]:SGRam[:MEASview<y>]:{BANDwidth|BWIDth}:OPTimization?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

BEST - BEST (Best for multiple displays) causes the instrument to evaluate all the open displays and select an Acquisition Bandwidth wide enough to satisfy as many measurements as possible

AUTO - AUTO sets the gain and input bandwidth for an optimized trade-off of the competing performance choices.

MAXDynrange - MAXDynrange optimizes the gain and input bandwidth to maximize the dynamic range.

MINNoise - MINNoise optimizes the gain and input bandwidth to minimize noise.

MINTime - MINTime optimizes the gain and input bandwidth to minimize sweep time.

Returns

{ BEST | AUTO | MAXDynrange | MINNoise | MINTime }

Examples

SENSe:SGRam:MEASview1:BANDwidth:OPTimization? might return AUTO, which optimizes automatically the gain and input.

[SENSe]:SGRam[:MEASview<y>]:COLor

Sets or queries the color palette of three-dimensional graphs.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:COLor { RED | GREen | BLUe | CYAN | BCYan| YELLow | MAGenta | GRAY |
    TEMPerature | SPECtral }
[SENSe]:SGRam[:MEASview<y>]:COLor?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

The following table lists the arguments.

Color palette for spectrogram

Argument	Palette
RED	Red
GREen	Green
BLUe	Blue
CYAN	Cyan
BCYan	Binary cyan
YELLow	Yellow
MAGenta	Magenta
GRAY	Gray
TEMPerature	Temperature
SPECTral	Spectral

Returns

{ RED | GREen | BLUe | CYAN | BCYan| YELLow | MAGenta | GRAY | TEMPerature | SPECtral }

Examples

`SENSe:SGRam:MEASview1:COLor TEMPerature` selects the temperature color palette.

[SENSe]:SGRam[:MEASview<y>]:COLor:MAXimum

Sets or queries the maximum value of the color axis in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:COLor:MAXimum <value>
[SENSe]:SGRam[:MEASview<y>]:COLor:MAXimum?
```

Related Commands

[SENSe:SGRam\[:MEASview<y>\]:COLor:MINimum](#) (on page 2364)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the maximum value of the color axis.

Range: -100 to +100 dBm.

Returns

<NRf> specifies the maximum value of the color axis.

Examples

`SENSe:SGRam:MEASview1:COLor:MAXimum 10` sets the maximum value of the color axis to 10 dBm.

[SENSe]:SGRam[:MEASview<y>]:COLor:MINimum

Sets or queries the minimum value of the color axis in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:COLor:MINimum <value>
[SENSe]:SGRam[:MEASview<y>]:COLor:MINimum?
```

Related Commands

[SENSe:SGRam\[:MEASview<y>\]:COLor:MAXimum](#) (on page 2364)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the minimum value of the color axis.

Range: -100 to +100 dBm.

Returns

<NRf> specifies the minimum value of the color axis.

Examples

SENSe:SGRam:MEASview1:COLor:MINimum 10 sets the minimum value of the color axis to 10 dBm.

[SENSe]:SGRam[:MEASview<y>]:CLEar:RESults (No Query Form)

Restarts multi-trace functions (Average and Max/Min Hold).

Conditions

Measurement view: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:CLEar:RESults
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

SENSe:SGRam:MEASview1:CLEar:RESults clears the results of spectrogram and restarts multi-trace functions.

[SENSe]:SGRam[:MEASview<y>]:FFT:WINDow

Sets or queries the FFT window in the spectrogram. This command is equivalent to

SENSe:SGRam[:MEASview<y>]:FILTer:SHAPE.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FFT:WINDow { KAISer | MIL6db | CISPr | BH4B | UNIFORM | FLATtop |
HANNing }
[SENSe]:SGRam[:MEASview<y>]:FFT:WINDow?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

KAISer selects the Kaiser (RBW) window.

MIL6db selects the -6 dB RBW (MIL) window.

CISPr selects the CISPR window.

BH4B selects the Blackman-Harris 4B type window.

UNIFORM selects the uniform window.

FLATtop selects the flat-top window.

HANNing selects the Hanning window.

Returns

{ KAISer | MIL6db | CISPr | BH4B | UNIFORM | FLATtop | HANNing }

Examples

SENSe:SGRam:MEASview1:FFT:WINDOW HANNing selects the Hanning window.

[SENSe]:SGRam[:MEASview<y>]:FILTer[:SHAPE]

Sets or queries the filter shape in the spectrogram. This command is equivalent to

SENSe:SGRam[:MEASview<y>]:FFT:WINDOW.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FILTer[:SHAPE] { KAISer | MIL6db | CISPr | BH4B | UNIFORM | FLATtop |
HANNing }
[SENSe]:SGRam[:MEASview<y>]:FILTer[:SHAPE]?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

KAISer selects the Kaiser (RBW) window.

MIL6db selects the -6 dB RBW (MIL) window.

CISPr selects the CISPR window.

BH4B selects the Blackman-Harris 4B type window.

UNIFORM selects the uniform window.

FLATtop selects the flat-top window.

HANNing selects the Hanning window.

Returns

{ KAISer | MIL6db | CISPr | BH4B | UNIFORM | FLATtop | HANNing }

Examples

SENSe:SGRam:MEASview1:FILTer:SHAPE HANNing selects the Hanning window.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:CENTer

Sets or queries the center frequency in the spectrogram.

NOTE: The center, start and stop frequencies are set interlocking each other with the following relationships: (start frequency) = (center frequency) - (span)/2 and (stop frequency) = (center frequency) + (span)/2.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:CENTer <value>
[SENSe]:SGRam[:MEASview<y>]:FREQuency:CENTer?
```

Related Commands

[\[SENSe\]:SGRam\[:MEASview<y>\]:FREQuency:START](#) (on page 2369)

[\[SENSe\]:SGRam\[:MEASview<y>\]:FREQuency:STOP](#) (on page 2371)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Returns

<NRf> specifies the center frequency.

Examples

SENSe:SGRam:MEASview1:FREQuency:CENTer 7.5GHz sets the center frequency to 7.5 GHz.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN

Sets or queries the frequency span in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN <value>
```

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the frequency span.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Returns

<NRf> specifies the frequency span.

Examples

SENSe:SGRam:MEASview1:FREQuency:SPAN 20MHz sets the span to 20 MHz.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio

Sets or queries the ratio of span to RBW (Resolution Bandwidth) in the spectrogram. This command is valid when SENSe:SGRam[:MEASview<y>]:BANDwidth:RESolution:AUTO is set to On.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio <value>
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the ratio of span to RBW. Range: 20 to 1000.

Programming a specified ratio sets the RBW (= span/ratio), which is rounded down to the nearest valid value.

Returns

<NRf> specifies the ratio of span to RBW.

Examples

SENSe:SGRam:MEASview1:FREQuency:SPAN:BANDwidth:RESolution:RATio 200 sets the ratio to 200, setting the RBW to 200 kHz for the span of 40 MHz.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:MAXimum (No Query Form)

Sets the frequency range to the maximum real-time span in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:SPAN:MAXimum
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

SENSe:SGRam:MEASview1:FREQuency:SPAN:MAXimum sets the frequency range to the maximum real-time span.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:START

Sets or queries the measurement start frequency (left edge of the graph) in the spectrogram.

The center, start and stop frequencies are set interlocking each other. Refer to the [SENSe:SGRam\[:MEASview<y>\]:FREQuency:CENTer](#) (on page 2367) command.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:START <value>
[SENSe]:SGRam[:MEASview<y>]:FREQuency:START?
```

Related Commands

[\[SENSe\]:SGRam\[:MEASview<y>\]:FREQuency:STOP](#) (on page 2371)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> is the measurement start frequency.

Range: (center frequency) $\pm$ (span)/2.

Returns

<NRf> specifies the measurement start frequency.

Examples

`SENSe:SGRam:MEASview1:FREQuency:StARt 6.95GHz` sets the start frequency to 6.95 GHz.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP

Sets or queries the frequency step size. Programming a specified step size sets

`[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP:AUTO OFF`.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP <value>
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP?
```

Related Commands

[\[SENSe\]:SGRam\[:MEASview<y>\]:FREQuency:STEP:AUTO](#) (on page 2370)

Arguments

`<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

`<value>::<NRf>` specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Returns

`<NRf>` specifies the frequency step size.

Examples

`SENSe:SGRam:MEASview1:FREQuency:STEP 1kHz` sets the frequency step size to 1 kHz.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP:AUTO

Determines whether to set the frequency step size automatically or manually in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP:AUTO { OFF | ON | 0 | 1 }
```

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STEP:AUTO?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 specifies that the frequency step size is set manually using the
SENSe:SGRam[:MEASview<y>]:FREQuency:STEPsize command.

ON or 1 specifies that the frequency step size is set automatically.

Returns

```
{ OFF | ON | 0 | 1 }
```

Examples

SENSe:SGRam:MEASview1:FREQuency:STEP:AUTO ON specifies that the frequency step size is set automatically.

[SENSe]:SGRam[:MEASview<y>]:FREQuency:STOP

Sets or queries the measurement stop frequency (right edge of the graph) in the spectrogram.

The center, start and stop frequencies are set interlocking each other. Refer to the
[\[SENSe\]:SGRam\[:MEASview<y>\]:FREQuency:CENTer](#) (on page 2367) command.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STOP <value>  
[SENSe]:SGRam[:MEASview<y>]:FREQuency:STOP?
```

Related Commands

[\[SENSe\]:SGRam\[:MEASview<y>\]:FREQuency:START](#) (on page 2369)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: :<NRf> is the measurement stop frequency.

Range: (center frequency) $\pm$ (span)/2.

Returns

<NRf> specifies the measurement stop frequency.

Examples

SENSe:SGRam:MEASview1:FREQuency:STOP 7.05GHz sets the stop frequency to 7.05 GHz.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:MODE

Sets or queries the vertical mode.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:MODE {NORMal | MONitor}
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:MODE?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

NORMal indicates the instrument is set to normal mode.

MONitor indicates the instrument is set to Spectrum Monitor mode.

Returns

{NORMal | MONitor}

Examples

SENSe:SGRam:MEASview1:TIME:SCALE:MODE MONITOR set the instrument to Spectrum Monitor mode.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap

Sets or queries the Overlap. Note that changing this value may change the time per division value (DISPlay:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision).

Conditions

Measurement view: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap <value>
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> = <NRf> specifies the overlap.

Returns

<NRf> specifies the overlap.

Examples

SENSe:SGRam:MEASview1:TIME:SCALE:OVERlap 1.0E-1 sets the overlap to 0.1.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap:PERCent

Sets or queries the Overlap in percent. Note that changing this value may change the time per division

SENSe:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision value.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap:PERCent <value>
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:OVERlap:PERCent?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: :<NRf> specifies the overlap in percent.

Returns

<NRf> specifies the overlap in percent.

Examples

SENSe:SGRam:MEASview1:TIME:SCALE:OVERlap:PERCent 1.0E1 sets the overlap to 10%.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision

Sets or queries the vertical Time/division value. Note that changing this value may change the

DISPlay:SGRam[:MEASview<y>]:TIME:OVERlap:PERCent value.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision <value>
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:DIVision?
```

Related Commands

[DISPlay:SGRam\[:MEASview<y>\]:TIME:OVERlap:PERCent](#) (on page 999)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: :<NRf> specifies the time per division in seconds.

Returns

<NRf> specifies the overlap in percent.

Examples

SENSe:SGRam:MEASview1:TIME:SCALE:PER:DIVision? might return 1.116000000E-3.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:ZOOM

Sets or queries the zoom scale in the scale tab of spectrogram.

Conditions

Measurement view: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:ZOOM <value>  
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:ZOOM?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> = <NRf> specifies the zoom scale value.

Returns

<NRf> specifies the overlap.

Examples

SENSe:SGRam:MEASview1:TIME:SCALE:ZOOM 2 sets the zoom scale to 2.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:AUTO

Sets the scale to autoscale in the spectrogram.

Conditions

Measurement view: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:AUTO
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

None

Examples

`SENSe:SGRam:MEASview1:TIME:SCALE:AUTO` sets the scale to auto.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START

Sets or queries the start time in the spectrogram.

Conditions

Measurement view: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START <value>
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value> = <NRf> specifies the start time in seconds.

Returns

<NRf> specifies the start time in seconds.

Examples

`SENSe:SGRam:MEASview1:TIME:SCALE:START?` might return 1E-6 s.

[SENSe]:SGRam[:MEASview<y>]:SELEcted:SOURce

Returns the Source number of specified Spectrogram trace.

Conditions

Measurement view: Spectrogram

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:SELEcted:SOURce {"Source 1"|"Source 2"|"Source 3"|"Source 4"}
[SENSe]:SGRam[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

```
{"Source 1"|"Source 2"|"Source 3"|"Source 4"}
```

Examples

SENSe:SGRam:MEASview1:SELEcted:SOURce? might return Source 2 for the trace of Spectrogram measurement view 1.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:MINutes

Sets or queries the Spectrum Monitor mode Time/Update value for minutes.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:MINutes <value>  
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:MINutes?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> sets the time/update value in minutes.

Returns

<NRf> specifies the time/update value in minutes.

Examples

SENSe:SGRam:MEASview1:TIME:SCALE:PER:UPDate:MINutes 1E1 sets the Time/update minutes value to 10.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:SEConds

Sets or queries the Spectrum Monitor mode Time/Update value for seconds.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:SEConds <value>  
[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:PER:UPDate:SEConds?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> sets the time/update value in seconds.

Returns

<NRf> specifies the time/update value in seconds.

Examples

`SENSe:SGRam:MEASview1:TIME:SCALE:PER:UPDate:SEConds 1E1` sets the Time/update seconds value to 10.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:SPECtrums:PERLine (Query Only)

Queries the Spectrums/Line value.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

`[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:SPECtrums:PERLine?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<NRf> specifies Spectrum/Line value.

Examples

`SENSe:SGRam:MEASview1:TIME:SCALE:SPECtrums:PERLine?` might return a 1.0000000000 as a response.

[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START:DIVisions

Sets or queries the Vertical offset or Position in divisions.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

`[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START:DIVisions <value>`
`[SENSe]:SGRam[:MEASview<y>]:TIME[:SCALE]:START:DIVisions?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> sets the vertical offset value in divisions. Range is -130,000 to +130,000.

Returns

<NRf> specifies vertical offset value in divisions.

Examples

`SENSe:SGRam:MEASview1:TIME:SCALE:START:DIVisions 10` sets the vertical offset to 10 divisions

[SENSe]:SGRam[:MEASview<y>]:WATerfall:DIRection

Sets or queries the direction of the Waterfall (3-D spectrogram) display.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:WATerfall:DIRection { NW | NE }  
[SENSe]:SGRam[:MEASview<y>]:WATerfall:DIRection?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

NW sets the display direction to northwest.

NE sets the display direction to northeast.

Returns

{ NW | NE }

Examples

`SENSe:SGRam:MEASview1:WATerfall:DIRection NW` sets the waterfall display direction to northwest.

[SENSe]:SGRam[:MEASview<y>]:WATerfall:ENABLE

Sets or queries the Waterfall (3-D spectrogram) display.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

```
[SENSe]:SGRam[:MEASview<y>]:WATerfall:ENABLE { OFF | ON | 0 | 1 }  
[SENSe]:SGRam[:MEASview<y>]:WATerfall:ENABLE?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 disables the Waterfall display.

ON or 1 enables the Waterfall display.

Returns

{ OFF | ON | 0 | 1 }

Examples

SENSe:SGRam:MEASview1:WATerfall:ENABle ON enables the 3-D Waterfall display.

[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALe]:AUTO (No Query Form)

Rescales the height axis automatically to fit the waveform to the screen in the 3-D Waterfall display.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALe]:AUTO

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

SENSe:SGRam:MEASview1:WATerfall:Y:SCALe:AUTO rescales the height scale automatically to fit the waveform to the 3-D Waterfall display.

[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALe]:OFFSet

Sets or queries the height offset (the value at the top edge of the vertical axis) of the 3-D Waterfall display.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALe]:OFFSet <value>
[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALe]:OFFSet?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: :<NRf> specifies the height (vertical) offset. Range: -270 to +150 dBm.

Returns

<NRf> specifies the height (vertical) offset.

Examples

`SENSe:SGRam:MEASview1:WATerfall:Y:SCALE:OFFSET 12.5` sets the offset to 12.5 dB in the 3-D Waterfall display.

[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE]:RESet (No Query Form)

Resets the height scale of the 3-D Waterfall display to the default values: Height position= 0 dB and Height scale = 100 dB

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

`[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE]:RESet`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Examples

`SENSe:SGRam:MEASview1:WATerfall:Y:SCALE:RESEt` rescales the height scale automatically to fit the waveform to the 3-D Waterfall display.

[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE]

Sets or queries the height (vertical) range of the Waterfall (3-D spectrogram) display.

Conditions

Measurement views: Spectrogram

Group

Sense commands

Syntax

`[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE] <value>`
`[SENSe]:SGRam[:MEASview<y>]:WATerfall:Y[:SCALE]?`

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NRf> specifies the vertical range. Range: 0.1 to 200 dB. The amplitude unit is set by the `[SENSe]:POWer:UNITs` command.

You can omit the unit in the argument. When you include the unit in the argument, only dB is available. For the amplitude units Watts, Volts, and Amps, omit the unit in the argument.

Returns

<NRf> specifies the vertical range.

Examples

`SENSe:SGRam:MEASview1:WATERfall:Y:SCALE 100dB` sets the height range to 100 dB in the 3-D Waterfall display.

[SENSe]:SIGNAlpath:PRIority

Sets or queries the signal path priority for the measurements.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlpath:PRIority { RF | LF }  
[SENSe]:SIGNAlpath:PRIority?
```

Arguments

RF sets the signal path to high frequency range.

LF sets the signal path to low frequency range.

Examples

`SENSe:SIGNALPATH:PRIORITY LF` sets the low frequency signal path when measurements are completely within LF frequency range.

[SENSe]:SIGNAlvu:ACQuisition:CONTrol:HORizontal

Sets or queries the other acquisition or Horizontal settings. When the checkbox is checked, the SignalVu controls the Horizontal settings of oscilloscope.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition:CONTrol:HORizontal?  
[SENSe]:SIGNAlvu:ACQuisition:CONTrol:HORizontal { OFF | ON | 0 | 1 }
```

Arguments

OFF or **0** disables Horizontal settings checkbox.

ON or **1** enables Horizontal settings checkbox.

Returns

0 disables Horizontal settings checkbox.

1 enables Horizontal settings checkbox.

Examples

`SENSe:SIGNALvu:ACQuisition:CONTRol:HORizontal OFF` disables the Horizontal settings from the SignalVu.

[SENSe]:SIGNALvu:ACQuisition:CONTRol:SAMPlE:RATE

Sets or queries the Sample rate, when the checkbox is checked, the SignalVu controls the Sample rate of the oscilloscope.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNALvu:ACQuisition:CONTRol:SAMPlE:RATE?  
[SENSe]:SIGNALvu:ACQuisition:CONTRol:SAMPlE:RATE { OFF | ON | 0 | 1 }
```

Arguments

OFF or 0 disables Sample rate checkbox.

ON or 1 enables Sample rate checkbox.

Returns

0 disables Sample rate checkbox.

1 enables Sample rate checkbox.

Examples

`SENSe:SIGNALvu:ACQuisition:CONTRol:SAMPlE:RATE OFF` disables the Sample rate from the SignalVu.

[SENSe]:SIGNALvu:ACQuisition:CONTRol:SOURce<x>:STATe

Sets or queries the Source checkbox state of measurement source for RF, I & Q, Diff I & Q data type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNALvu:ACQuisition:CONTRol:SOURce<x>:STATe?  
[SENSe]:SIGNALvu:ACQuisition:CONTRol:SOURce<x>:STATe { OFF | ON | 0 | 1 }
```

Arguments

<x>=1 to 8 representing Range of source

OFF or 0 disables Source State.

ON or 1 enables Source State.

Returns

0 disables Source State.

1 enables Source State.

Examples

`SENSe:SIGNAlvu:ACQuisition:CONTRol:SOURcel:STATe OFF` disables Source State.

[SENSe]:SIGNAlvu:ACQuisition:CONTRol:TRIGger:POSition

Sets or queries the Trigger position, when the checkbox is checked, the SignalVu controls the Trigger position of oscilloscope.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

`[SENSe]:SIGNAlvu:ACQuisition:CONTRol:TRIGger:POSition?`

`[SENSe]:SIGNAlvu:ACQuisition:CONTRol:TRIGger:POSition { OFF | ON | 0 | 1 }`

Arguments

OFF or 0 disables Trigger position checkbox.

ON or 1 enables Trigger position checkbox.

Returns

0 disables Trigger position checkbox.

1 enables Trigger position checkbox.

Examples

`SENSe:SIGNAlvu:ACQuisition:CONTRol:TRIGger:POSition OFF` disables the Trigger position from the SignalVu.

[SENSe]:SIGNAlvu:ACQuisition:CONTRol:VERTical

Sets or queries the Vertical settings, when the checkbox is checked, the SignalVu controls the vertical settings of the oscilloscope.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

`[SENSe]:SIGNAlvu:ACQuisition:CONTRol:VERTical?`

`[SENSe]:SIGNAlvu:ACQuisition:CONTRol:VERTical { OFF | ON | 0 | 1 }`

Arguments

OFF or 0 disables Vertical settings checkbox.

ON or 1 enables Vertical settings checkbox.

Returns

0 disables Vertical settings checkbox.

1 enables Vertical settings checkbox.

Examples

SENSe:SIGNALvu:ACQuisition:CONTRol:VERTical OFF disables Vertical settings from the SignalVu.

[SENSe]:SIGNAlvu:ACQuisition:DIGitizer:SAMPlE:RATE

Sets or queries the oscilloscope Sample rate from the Acquisition control panel oscilloscope settings of the SignalVu.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition:DIGitizer:SAMPlE:RATE?  
[SENSe]:SIGNAlvu:ACQuisition:DIGitizer:SAMPlE:RATE
```

Arguments

<value>::<NRf> specifies the sample rate.

Range: 3.125 S/s to 100 GS/s.

Returns

<NRf> specifies the sample rate.

Examples

SENSe:SIGNALvu:ACQuisition:DIGitizer:SAMPlE:RATE 50E+9 sets the oscilloscope sample rate to 50 GS/s.

[SENSe]:SIGNAlvu:ACQuisition:DIGitizer:SAMPlE:RATE:AUTO

Determines whether to set the oscilloscope Sample rate automatically or manually from the Acquisition control panel oscilloscope settings of the SignalVu.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition:DIGitizer:SAMPlE:RATE:AUTO?  
[SENSe]:SIGNAlvu:ACQuisition:DIGitizer:SAMPlE:RATE:AUTO { OFF | ON | 0 | 1 }
```

Arguments

OFF or 0 specifies the oscilloscope sample rate is set manually.

ON or 1 specifies the oscilloscope sample rate is set automatically.

Examples

SENSe:SIGNAlvu:ACQuisition:DIGitizer:SAMPle:RATE:AUTO ON sets the oscilloscope Sample rate automatically.

[SENSe]:SIGNAlvu:ACQuisition:GLOBal:REFlevel

Sets or queries the Global Reference level.

Conditions

Should be connected to MSO/LPD to Set or Query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition:GLOBal:REFlevel? (Query)  
[SENSe]:SIGNAlvu:ACQuisition:GLOBal:REFlevel <value>
```

Arguments

<value>::<NRf> specifies the global reference level

Range: {-130 to 30} in dBm

Returns

<NRf>

Examples

SENSe:SIGNAlvu:ACQuisition:GLOBal:REFlevel? might return 5, which indicates the global ref level value is 5.

[SENSe]:SIGNAlvu:ACQuisition:INPuttype:REFlevel

Sets or queries the Reference Level input type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition:INPuttype:REFlevel? (Query)  
[SENSe]:SIGNAlvu:ACQuisition:INPuttype:REFlevel {PERChannel | PERSource | GLOBal}
```

Arguments

PERChannel sets the Input Reflevel to Per Channel.

PERSource sets the Input Reflevel to Per Source.

GLOBal sets the Input Reflevel to Global.

Examples

`SENSe:SIGNALvu:ACQuisition:INPuttype:REFlevel PERChannel` sets input reflevel to per channel.

[SENSe]:SIGNALvu:ACQuisition:IQ:CALibrate (No query form)

Starts the IQ calibration.

Conditions

Should be connected to MSO/LPD/SX.

Group

Sense commands

Syntax

`SENSe:SIGNALvu:ACQuisition:IQ:CALibrate`

Examples

`SENSe:SIGNALvu:ACQuisition:IQ:CALibrate` starts the IQ calibration.

[:SENSe]:SIGNALvu:ACQuisition:NULL:IQ:OFFSet:CLEAR

Use this command to clear Null IQ offset values that were calculated using Calibrate IQ.

Related Commands

[\[SENSe\]:SIGNALvu:ACQuisition\[:SOURce<x>\]:CALibrate:IQ](#) (on page 2389)

Conditions

Should be connected to MSO/LPD/SX to query.

Group

Sense commands

Syntax

`[ :SENSe]:SIGNALvu:ACQuisition:NULL:IQ:OFFSet:CLEAR`

Examples

`:SENSe:SIGNALvu:ACQuisition:NULL:IQ:OFFSet:CLEAR`

[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:COUPling

Sets or queries the per channel coupling of the measurement. The parameter <x>=1 to 8 represents the channel index.

Conditions

Should be connected to MSO/LPD set or query.

This cmd is query only in case of SX.

Group

Sense commands

Syntax

```
:SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:COUPling {AC | DC}
:SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:COUPling? (Query)
```

Argument

AC sets the specified channel to AC coupling.

DC sets the specified channel to DC coupling.

Examples

SENSe:SIGNALvu:ACQuisition:PER:CHANnel1:COUPling AC sets coupling of channel 1 to AC.

[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:DESkew

Sets or queries the per channel Deskew of the measurement. The parameter <x>=1 to 8 represents the channel index.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

```
[ :SENSe ]:SIGNALvu:ACQuisition:PER:CHANnel<x>:DESkew <value>
[ :SENSe ]:SIGNALvu:ACQuisition:PER:CHANnel<x>:DESkew? (Query)
```

Argument

<value>::<NRf> specifies the deskew.

Returns

<NRf>

Examples

SENSe:SIGNALvu:ACQuisition:PER:CHANnel:DESkew:RF 125.0000000000E-9 sets the deskew of channel measurement to 125 ns.

[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:EXTattn

Sets or queries the per channel External attenuation of the measurement. The parameter <x>=1 to 8 represents the channel index.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

```
[ :SENSe ]:SIGNALvu:ACQuisition:PER:CHANnel<x>:EXTattn <value>
[ :SENSe ]:SIGNALvu:ACQuisition:PER:CHANnel<x>:EXTattn? (Query)
```

Argument

<value>::<NRf> specifies the external attenuation.

Returns

<NRf>

Examples

`SENSe:SIGNALvu:ACQuisition:PER:CHANnel1:EXTattn:RF 30.0000000000` sets external attenuation of channel measurement to 30 dB.

SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:INSTrument:BWIDth (Query only)

Queries the per channel instrument bandwidth of the measurement. The parameter <x>=1 to 8 represents the channel index.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

`SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:INSTrument:BWIDth? (Query)`

Returns

<NRf>

Examples

`SENSe:SIGNALvu:ACQuisition:PER:CHANnel1:INSTrument:BWIDth? 500.0000E+06` indicates that instrument bandwidth of channel 1 is 500 MHz.

[:SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:REFlevel

Sets or queries per channel reference level of the measurement. The parameter <x>=1 to 8 represents the channel index.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

`[ :SENSe ]:SIGNALvu:ACQuisition:PER:CHANnel<x>:REFlevel<value>`

`[ :SENSe ]:SIGNALvu:ACQuisition:PER:CHANnel<x>:REFlevel? (Query)`

Argument

`<value>: : <NRf>` specifies the reference level.

Returns

<NRf>

Examples

`SENSe:SIGNALvu:ACQuisition:PER:CHANnel1:REFlevel 20.0000000000`, sets the reference level of the channel 1 measurement to 20 dB.

[SENSe]:SIGNALvu:ACQuisition:PER:CHANnel<x>:TERMination

Sets or queries the per channel termination of the measurement. The parameter <x>=1 to 8 represents the channel index.

Conditions

Should be connected to MSO/LPD/SX to set or query.

Group

Sense commands

Syntax

`SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:TERMination {FIFTyohms|ONEMegohms}`
`SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:TERMination? (Query)`

Argument

`FIFTyohms` sets the channel input resistance as 50 Ω.

`ONEMegaohms` sets the channel input resistance to 1 MΩ.

Returns

<NRf>

Examples

`SENSe:SIGNALvu:ACQuisition:PER:CHANnel<x>:TERMination FIFTyohms` sets the termination of the Channel 1 to 50 ohms.

[SENSe]:SIGNALvu:ACQuisition:RESet (No query form)

Clears the acquisition data and restarts the SignalVu acquisitions from the oscilloscope.

Conditions

Should be connected to MSO/LPD/SX.

Group

Sense commands

Syntax

`SENSe:SIGNALvu:ACQuisition:RESet`

Examples

`SENSe:SIGNALvu:ACQuisition:RESet` resets the Signalvu acquisitions from the oscilloscope.

[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CALibrate:IQ

Use this command to perform null IQ offset operation for each source. It is effective from the next acquisition.

The parameter <x>=1 to 8 represents the number of sources.

Related Commands

[SENSe:SIGNAlvu:ACQuisition:NULL:IQ:OFFSet:CLEAR](#) (on page 2386)

Conditions

Should be connected to MSO/LPD/SX to query.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition[:SOURce<x>]:CALIbrate:IQ
```

Examples

```
SENSe:SIGNAlvu:ACQuisition:SOURce1:CALIbrate:IQ
```

[SENSe]:SIGNAlvu:ACQuisition[:SOURce<x>]:CHANnel[:RF]

Sets or queries the channel of measurement source for RF data type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition[:SOURce<x>]:CHANnel[:RF] {"CH1" | "CH2" | "CH3" | "CH4" | "CH5" | "CH6" | "CH7" | "CH8"}
```

```
[SENSe]:SIGNAlvu:ACQuisition[:SOURce<x>]:CHANnel[:RF]? (Query)
```

Arguments

The parameter <x>=1 to 8 representing Range of Source.

Examples

SENSe:SIGNAlvu:ACQuisition:SOURce1:CHANnel:RF? might return CH1, which indicates the channel of measurement source for RF data type.

[SENSe]:SIGNAlvu:ACQuisition[:SOURce<x>]:CHANnel:I

Sets or queries the channel of measurement source for I data type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:SIGNAlvu:ACQuisition[:SOURce<x>]:CHANnel:I {"CH1" | "CH2" | "CH3" | "CH4" | "CH5" | "CH6" | "CH7" | "CH8"}
```

```
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:I? (Query)
```

Arguments

The parameter <x>=1 to 8 representing Range of Source.

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:CHANnel:I? might return CH1, which indicates the channel of measurement source for I data type.

[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:Q

Sets or queries the channel of measurement source for Q data type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:Q {"CH1" | "CH2" | "CH3" | "CH4" | "CH5" | "CH6" | "CH7" | "CH8"}
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:Q? (Query)
```

Arguments

The parameter <x>=1 to 8 representing Range of source.

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:CHANnel:Q? might return CH1, which indicates the channel of measurement source for Q data type.

[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IPLus

Sets or queries the channel of measurement source for IPlus data type .

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IPLus {"CH1" | "CH2" | "CH3" | "CH4" | "CH5" | "CH6" | "CH7" | "CH8"}
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IPLus? (Query)
```

Arguments

The parameter <x>=1 to 8 representing Range of source.

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:CHANnel:IPLus? might return CH1, which indicates the channel of measurement source IPLus data type.

[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IMINus

Sets or queries the channel of measurement source for IMinus data type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IMINus {"CH1" | "CH2" | "CH3" | "CH4" | "CH5" | "CH6" | "CH7" | "CH8"}
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:IMINus? (Query)
```

Arguments

The parameter <x>=1 to 8 representing Range of source.

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:CHANnel:IMINus? might return CH1, which indicates the channel of measurement source for IMinus data type.

[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QPLus

Sets or queries the channel of measurement source for QPlus data type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QPLus {"CH1" | "CH2" | "CH3" | "CH4" | "CH5" | "CH6" | "CH7" | "CH8" }
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QPLus? (Query)
```

Arguments

The parameter <x>=1 to 8 representing Range of source.

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:CHANnel:QPLus? might return CH1, which indicates the channel of measurement source for QPlus data type.

[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QMINus

Sets or queries the channel of measurement source for QMinus data type.

Conditions

Should be connected to MSO/LPD to Set or Query.

Source keyword is optional, if not present Source1 will be default source.

Group

Sense commands

Syntax

```
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QMINus {"CH1" | "CH2" | "CH3" | "CH4" | "CH5" | "CH6" | "CH7" | "CH8"}
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:CHANnel:QMINus? (Query)
```

Arguments

The parameter <x>=1 to 8 representing Range of source.

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:CHANnel:QMINus? might return CH1, which indicates the channel of measurement source for QMinus data type.

[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INJEctionside

Sets or queries the downconverter injection side. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to set or query.

Source keyword is optional, if not present, Source1 will be default source.

Group

Sense commands

Syntax

```
:SENSe:SIGNALvu:ACQuisition:SOURce<x>:DOWNconverter:INJEctionside {LOWI | HIGH }
:SENSe:SIGNALvu:ACQuisition:SOURce<x>:DOWNconverter:INJEctionside? (Query)
```

Examples

ACQuisition:SOURce1:DOWNconverter:INJEctionside? might return LOWI, which indicates the downconverter injection side set to low.

[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MAXFreq

Sets or queries the maximum range of the instrument bandwidth. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to set or query.

Source keyword is optional, if not present, Source1 will be default source.

Group

Sense commands

Syntax

```
[[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MAXFreq <value>
[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MAXFreq? (Query)
```

Argument

<value>::<NRf> specifies the minimum value of the instrument bandwidth being used.

Returns

<NRf>

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:DOWNconverter:INSTrument:BANDwidth:MaxFreq? might return 7.5000000000E+9, which indicates the maximum range of the instrument bandwidth.

[[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MINFreq

Sets or queries the minimum range of instrument bandwidth. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to set or query.

Source keyword is optional, if not present, Source1 will be default source.

Group

Sense commands

Syntax

```
[[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MINFreq <value>
[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:INSTrument:BANDwidth:MINFreq? (Query)
```

Argument

<value>::<NRf> specifies the minimum value of the instrument bandwidth being used.

Returns

<NRf>

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:DOWNconverter:INSTrument:BANDwidth:MINFreq? might return 0 Hz, which indicates the minimum range of the instrument bandwidth.

[[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:LOFreq

Sets or queries the downconverter LO frequency. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to set or query.

Source keyword is optional, if not present, Source1 will be default source.

Syntax

```
[[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:LOFReq <value>
[:Senses]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:LOFReq? (Query)
```

Argument

<value>::<NRf> specifies the LO frequency.

Returns

<NRf>

Examples

:SENSe:SIGNALvu:ACQuisition:SOURce1:DOWNconverter:LOFReq 3.000000000E+9 sets the LO frequency to 3 GHz.

[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:STaTe

Sets or queries the downconverter state. The parameter <x>=1 to 8 represents the range of the source.

Conditions

Should be connected to MSO/LPD/RSA/SX to set or query.

Source keyword is optional, if not present, Source1 will be default source.

Group

Sense commands

Syntax

```
[[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:STaTe{ TRUE | FALSE}
[:SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:DOWNconverter:STaTe? (Query)
```

Examples

:SENSe:SIGNALvu:ACQuisition:SOURce1:DOWNconverter:STaTe TRUE enables the downconverter for Source 1.

[SENSE]:SIGNALvu:ACQuisition[:SOURce<x>]:PERSrc:REFlevel

Sets or queries the Reference level Per source .

Conditions

Should be connected to MSO/LPD to Set or Query.

Group

Sense comands

Syntax

```
[ [SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:PERSrc:REFlevel? (Query)
```

```
[SENSe]:SIGNALvu:ACQuisition[:SOURce<x>]:PERSrc:REFlevel <Value>
```

Arguments

<value>::<NRf> specifies the global reference level

Range: {-130 to 30} in dBm

Returns

<NRf>

Examples

SENSe:SIGNALvu:ACQuisition:SOURce1:PERSrc:REFlevel? might return 5, which indicates the ref level value of source 1 is 5.

[SENSe]:SPECTrum[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of the selected Measurement view in pulse trace

Conditions

Measurement views: Spectrum with specified Measurement view number

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:SELEcted:SOURce {"Source1" | "Source2" | ""Source3" | "Source4" }
[SENSe]:SPECTrum[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

<y>=1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1

Examples

:SENSe:SPECTrum:TRACE:MEASVIEW1:SELEcted:SOURce? queries the Source of the Spectrum Measurement View 1.

[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth (RBW). Programming a specified RBW sets

```
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO OFF.
```

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution] <value>
```

```
[SENSe]:SPECTrum[:MEASview<y>][:{BANDwidth|BWIDth}[:RESolution]]?
```

Related Commands

[\[SENSe\]:SPECTrum\[:MEASview<y>\]\[:{BANDwidth|BWIDth}\[:RESolution\]:AUTO](#) (on page 2397)

Arguments

<value>::<NRf> specifies the RBW. Range: 1 Hz to 10 MHz.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSE:SPECTRUM:MEASVIEW2:BANDWIDTH:RESOLUTION 200kHz sets the RBW to 200 kHz.

[SENSe]:SPECTrum[:MEASview<y>][:{BANDwidth|BWIDth}[:RESolution]:ACTual? (Query Only)

Queries the actual resolution bandwidth (RBW) in the spectrum measurement.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>][:{BANDwidth|BWIDth}[:RESolution]:ACTual?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> The actual RBW in Hz.

Examples

SENSE:SPECTRUM:MEASVIEW2:BANDWIDTH:RESOLUTION:ACTUAL? might return 299.624E+3, indicating that the actual RBW is 299.624 kHz.

[SENSe]:SPECTrum[:MEASview<y>][:{BANDwidth|BWIDth}[:RESolution]:AUTO

Determines whether to set the resolution bandwidth (RBW) automatically or manually in the spectrum measurement.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO { OFF| ON | 0 | 1 }
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO?
```

Arguments

OFF or 0 specifies that the resolution bandwidth is set manually using the [SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution] command.

ON or 1 specifies that the resolution bandwidth is set automatically.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSE:SPECTRUM:MEASVIEW2:BANDWIDTH:RESOLUTION:AUTO ON sets the resolution bandwidth automatically.

[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:MODE

Determines whether to enable or disable the RBW process.

NOTE: This is an obsolete command.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:MODE { OFF| ON | 0 | 1 }
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:MODE?
```

Arguments

OFF or 0 disables the RBW process. You can select the FFT window using the [SENSe]:SPECTrum[:MEASview<y>]:FFT:WINDow command.

ON or 1 enables the RBW process. Refer to the [SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution] command to set the RBW.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSE:SPECTRUM:MEASVIEW2:BANDWIDTH:RESOLUTION:MODE ON enables the RBW process.

[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo

Sets or queries the video bandwidth (VBW). Programming a specified VBW sets

```
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATE OFF.
```

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo <value>
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo?
```

Arguments

<value>::<NRf> specifies the VBW.

Range: Current RBW/104 (1 Hz minimum) to Current RBW.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSE:SPECTRUM:MEASVIEW2:BANDWIDTH:VIDEO 200kHz sets the VBW to 200 kHz.

[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATe

Determines whether to enable or disable the video bandwidth (VBW) in the spectrum measurement.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATe { OFF | ON | 0 | 1 }
[SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}:VIDeo:STATe?
```

Arguments

OFF or 0 disables the VBW.

ON or 1 enables the VBW.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSE:SPECTRUM:MEASVIEW2:BANDWIDTH:VIDEO:STATE ON enables the VBW.

[SENSe]:SPECTrum[:MEASview<y>]:CLEar:RESults (No Query Form)

Restarts multi-trace functions (Average and Max/Min Hold).

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:CLEAr:RESults
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:CLEAr:RESults restarts multi-trace functions.

[SENSe]:SPECTrum[:MEASview<y>]:FFT:WINDow

Sets or queries the FFT window in the spectrum measurement. This command is equivalent to

```
[SENSe]:SPECTrum[:MEASview<y>]:FILTer[:SHAPE].
```

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FFT:WINDow { KAISer | MIL6db | CISPr | BH4B | UNIFORM | FLATtop |  
HANNing }  
[SENSe]:SPECTrum[:MEASview<y>]:FFT:WINDow?
```

Arguments

KAISer selects the Kaiser (RBW) window.

MIL6db selects the -6 dB RBW (MIL) window.

CISPr selects the CISPR window.

BH4B selects the Blackman-Harris 4B type window.

UNIFORM selects the uniform window.

FLATtop selects the flat-top window.

HANNing selects the Hanning window.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASVIEW2:FFT:WINDOW HANNing selects the Hanning window.

[SENSe]:SPECTrum[:MEASview<y>]:FILTer[:SHAPE]

Sets or queries the filter shape in the spectrum measurement. This command is equivalent to

```
[SENSe]:SPECTrum[:MEASview<y>]:FFT:WINDow.
```

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FILTer[:SHApe] { KAISer | MIL6db | CISPr | BH4B | UNIFORM | FLATtop
| HANNing }
[SENSe]:SPECTrum[:MEASview<y>]:FILTer[:SHApe]?
```

Arguments

KAISer selects the Kaiser (RBW) window.

MIL6db selects the -6 dB RBW (MIL) window.

CISPr selects the CISPR window.

BH4B selects the Blackman-Harris 4B type window.

UNIFORM selects the uniform window.

FLATtop selects the flat-top window.

HANNing selects the Hanning window.

Examples

`SENSe:SPECTRUM:MEASVIEW1:FILTER:SHAPE HANNing` selects the Hanning window.

[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:CENTer

Sets or queries the center frequency in the spectrum measurement.

NOTE: The center, start and stop frequencies are set interlocking each other with the following relationships: (start frequency) = (center frequency) - (span)/2 and (stop frequency) = (center frequency) + (span)/2.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:CENTer <value>
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:CENTer?
```

Related Commands

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:START](#) (on page 2403)

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:STOP](#) (on page 2405)

Arguments

`<value>::<NRf>` specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSE:SPECTRUM:MEASVIEW2:FREQUENCY:CENTER 7.5GHz sets the center frequency to 7.5 GHz..

[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN

Sets or queries the frequency span in the spectrum measurement.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN <value>
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN?
```

Arguments

<value>: : <NRf> specifies the frequency span.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSE:SPECTrum:MEASview2:FREQuency:SPAN 20MHz sets the span to 20 MHz

[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN: BANDwidth[:RESolution]:RATio

Sets or queries the ratio of span to RBW (Resolution Bandwidth) in the spectrum measurement. This command is valid when [SENSe]:SPECTrum[:MEASview<y>]:{BANDwidth|BWIDth}[:RESolution]:AUTO is set to On.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio <value>
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:SPAN:BANDwidth[:RESolution]:RATio?
```

Arguments

<value>: : <NRf> specifies the ratio of span to RBW. Range: 20 to 1000. Programming a specified ratio sets the RBW (= span/ratio), which is rounded down to the nearest valid value.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:FREQuency:SPAN:BANDwidth:RESolution:RATio 200 sets the ratio to 200, setting the RBW to 200 kHz for the span of 40 MHz.

[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:START

Sets or queries the measurement start frequency (left edge on the graph) in the spectrum measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the [\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:CENTer](#) (on page 2401) command.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:START <value>
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:START?
```

Related Commands

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:STOP](#) (on page 2405)

Arguments

<value>: : <NRf> is the measurement start frequency.

Range: (center frequency) $\pm$ (span)/2.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:FREQuency:START 6.95GHz sets the start frequency to 6.95 GHz.

[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP

Sets or queries the frequency step size (the amount per press by which the up or down key changes the setting value). Programming a specified step size sets [SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP:AUTO OFF.

The center, start and stop frequencies are set interlocking each other. Refer to the [\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:CENTer](#) (on page 2401) command.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP <value>
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP?
```

Related Commands

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:STEP:AUTO](#) (on page 2404)

Arguments

<value>::<NRf> specifies the frequency step size.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:FREQuency:STEP 1.5kHz sets the step size to 1.5 kHz.

[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP:AUTO

Determines whether to set the frequency step size automatically or manually.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP:AUTO { OFF | ON | 0 | 1 }
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP:AUTO?
```

Arguments

OFF or 0 specifies that the frequency step size is set manually using the [SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STEP command.

ON or 1 specifies that the frequency step size is set automatically.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:FREQuency:STEP:AUTO ON sets the frequency step size automatically

[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STOP

Sets or queries the measurement stop frequency (right edge on the graph) in the spectrum measurement.

The center, start and stop frequencies are set interlocking each other. Refer to the [\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:CENTer](#) (on page 2401) command.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STOP <value>
[SENSe]:SPECTrum[:MEASview<y>]:FREQuency:STOP?
```

Related Commands

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:FREQuency:START](#) (on page 2403)

Arguments

<value>::<NRf> is the measurement start frequency.

Range: (center frequency) ± (span)/2.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:FREQuency:STOP 7.05 sets the stop frequency to 7.05 GHz.

[SENSe]:SPECTrum[:MEASview<y>]:LENGth

Sets or queries the spectrum length when [SENSe]:SPECTrum:TIME:MODE is INDependent. Programming a specified length sets [SENSe]:SPECTrum[:MEASview<y>]:LENGth:AUTO OFF.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:LENGth <value>
[SENSe]:SPECTrum[:MEASview<y>]:LENGth?
```

Related Commands

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:LENGth:AUTO](#) (on page 2406)

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:START](#) (on page 2408)

Arguments

<value>::<NRf> specifies the spectrum length.

Range: 0 to [(acquisition length) - (spectrum start)].

If [(spectrum start) + (spectrum length)] > (acquisition length), the actual spectrum length is reduced to the acquisition length.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:LENGth 38.5us sets the spectrum length to 38.5 μ s.

[SENSe]:SPECTrum[:MEASview<y>]:LENGth:ACTual (Query Only)

Queries the actual spectrum length.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:SPECTrum[:MEASview<y>]:LENGth:ACTual?

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

<NRf> Actual spectrum length in seconds.

Examples

SENSe:SPECTrum:MEASview2:LENGth:ACTual? might return 6.337E-6, indicating that the actual spectrum length is 6.337 μ s

[SENSe]:SPECTrum[:MEASview<y>]:LENGth:AUTO

Sets or queries the spectrum length mode (automatic or manual) when [SENSe]:SPECTrum:TIME:MODE is INDependent.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:SPECTrum[:MEASview<y>]:LENGth:AUTO { OFF | ON | 0 | 1 }
[SENSe]:SPECTrum[:MEASview<y>]:LENGth:AUTO?

Arguments

OFF or 0 sets the spectrum length manually, using the [SENSe]:SPECTrum:LENGth command.

ON or 1 sets the spectrum length automatically.

Examples

SENSe:SPECTRUM:MEASview1:LENGTH:AUTO ON sets the spectrum length automatically.

[SENSe]:SPECTrum[:MEASview<y>]:MAX:SPAN (No Query Form)

Sets the frequency span to the maximum full span instead of the maximum real-time span. The maximum span depends on the model.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:MAX:SPAN
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:MAX:SPAN sets the frequency span to the maximum span.

[SENSe]:SPECTrum[:MEASview<y>]:POINTS:COUNT

Sets or queries the number of sample points on the signal spectrum.

Conditions

Measurement views: Spectrum

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:POINTS:COUNT { P801 | P1601 | P2401 | P3201 | P4001 | P6401 | P8001 | P10401 }
[SENSe]:SPECTrum[:MEASview<y>]:POINTS:COUNT?
```

Arguments

P801 sets the number of sample points to 801.

P1601 sets the number of sample points to 1601.

P2401 sets the number of sample points to 2401.

P3201 sets the number of sample points to 3201.

P4001 sets the number of sample points to 4001.

P6401 sets the number of sample points to 6401.

P8001 sets the number of sample points to 8001.

P10401 sets the number of sample points to 10401.

The parameter $\langle y \rangle = 1$ to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTrum:MEASview2:POINTs:COUNT P801 sets the number of sample points to 801.

[SENSe]:SPECTrum[:MEASview<y>]:START

Sets or queries the spectrum offset time when [SENSe]:SPECTrum[:MEASview<y>]:TIME:MODE is INDependent.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:START <value>
[SENSe]:SPECTrum[:MEASview<y>]:START?
```

Related Commands

[\[SENSe\]:SPECTrum\[:MEASview<y>\]:LENGth](#) (on page 2405)

Arguments

$\langle \text{value} \rangle :: \langle \text{NRf} \rangle$ specifies the spectrum offset time.

Range: 0 to the acquisition length.

If $[(\text{spectrum start}) + (\text{spectrum length})] > (\text{acquisition length})$, the actual spectrum length is reduced to the acquisition length.

The parameter $\langle y \rangle = 1$ to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTRUM:MEASview1:START 23.5us sets the analysis offset to 23.5 μs .

[SENSe]:SPECTrum[:MEASview<y>]:START:AUTO

Sets or queries the spectrum offset mode (automatic or manual) when [SENSe]:SPECTrum[:MEASview<y>]:TIME:MODE is INDependent.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:START:AUTO { OFF | ON | 0 | 1 }
[SENSe]:SPECTrum[:MEASview<y>]:START:AUTO?
```


Arguments

OFF or 0 sets the spectrum offset manually.

ON or 1 sets the spectrum length automatically.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTRUM:MEASview1:START:AUTO ON sets the spectrum offset automatically.

[SENSe]:SPECTrum[:MEASview<y>]:TIME:MODE

Sets or queries the spectrum time parameter mode (automatic or manual).

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SPECTrum[:MEASview<y>]:TIME:MODE { INDependent | COMMon }
[SENSe]:SPECTrum[:MEASview<y>]:TIME:MODE?
```

Related Commands

[\[SENSe\]:ANALysis](#) (on page 1992) commands

Arguments

INDependent sets the spectrum time parameters manually, using the [SENSe]:SPECTrum:START and [SENSe]:SPECTrum:LENGth commands.

COMMon sets the spectrum time parameters automatically using the analysis time settings.

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

SENSe:SPECTRUM:MEASview1:TIME:MODE COMMon sets the spectrum time parameters automatically.

[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}

Sets or queries the channel bandwidth for the carrier as power reference. This command is valid when [SENSe]:SPURious:REFErence is set to CARRier.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth} <value>
```

```
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}?
```

Arguments

<value>::<NRf> specifies the channel bandwidth.

Range: 100 Hz to 40 MHz (Standard) / 110 MHz (Option 110).

Examples

SENSe:SPURIOUS:CARRIER:BANDWIDTH 20MHz sets the channel bandwidth to 20 MHz.

[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}:INTegration

Sets or queries the integration bandwidth to calculate the carrier power. This command is valid when

[SENSe]:SPURious:REFeRence is set to CARRier.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}:INTegration <value>
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}:INTegration?
```

Arguments

<value>::<NRf> specifies the integration bandwidth.

Range: 100 Hz to 40 MHz (Standard) / 110 MHz (Option 110).

Examples

SENSe:SPURIOUS:CARRIER:BANDWIDTH:INTEGRATION 2MHz sets the integration bandwidth to 2 MHz.

[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth (RBW) to measure the carrier power. This command is valid when

[SENSe]:SPURious:REFeRence is set to CARRier. Programming a specified RBW sets

[SENSe]:SPURious:CARRIER:BANDwidth[RESolution]:AUTO OFF.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}[:RESolution] <value>
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}[:RESolution]?
```

Related Commands

[\[SENSe\]:SPURious:CARRier:{BANDwidth|BWIDth}\[:RESolution\]:AUTO](#) (on page 2411)

Arguments

<value>: : <NRf> specifies the RBW. Range: 1 Hz to 10 MHz.

Examples

SENSe:SPURIOUS:CARRIER:BANDWIDTH:RESOLUTION 200kHz sets the RBW to 200 kHz.

[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}[:RESolution]:AUTO

Determines whether to set the resolution bandwidth (RBW) automatically or manually when the power reference is set to carrier ([SENSe]:SPURious:REFeRence is set to CARRier) in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}[:RESolution]: AUTO { OFF | ON | 0 | 1 }
[SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}[:RESolution]: AUTO?
```

Arguments

OFF or 0 specifies that the resolution bandwidth is set manually using the [SENSe]:SPURious:CARRier:{BANDwidth|BWIDth}[:RESolution] command.

ON or 1 specifies that the resolution bandwidth is set automatically.

Examples

SENSe:SPURIOUS:CARRIER:BANDWIDTH:RESOLUTION:AUTO ON sets the resolution bandwidth automatically.

[SENSe]:SPURious:CARRier:DETection

Sets or queries the carrier detection method. This command is valid when [SENSe]:SPURious:REFeRence is set to CARRier.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:CARRier:DETection { AVERage | PEAK | AVGLog}
[SENSe]:SPURious:CARRier:DETection?
```

Arguments

AVERage selects the average detection.

PEAK selects the peak detection.

AVGLog selects the average (of logs) detection.

Examples

`SENSe:SPURIOUS:CARRIER:DETECTION PEAK` selects the peak detection.

[SENSe]:SPURious:CARRier:FREQuency

Sets or queries the carrier frequency in the Spurious measurement. This command is valid when `[SENSe]:SPURious:REFeRence` is set to `CARRier`.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:CARRier:FREQuency <value>
[SENSe]:SPURious:CARRier:FREQuency?
```

Arguments

`<value>::<NRf>` specifies the carrier frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

`SENSe:SPURIOUS:CARRIER:FREQUENCY 7.5GHz` sets the carrier frequency to 7.5 GHz.

[SENSe]:SPURious:CARRier:THReshold

Sets or queries the threshold level to detect the carrier in the Spurious measurement. This command is valid when `[SENSe]:SPURious:REFeRence` is set to `CARRier`.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:CARRier:THReshold <value>
[SENSe]:SPURious:CARRier:THReshold?
```

Arguments

`<value>::<NRf>` specifies the threshold level above which the input signal is determined to be a carrier. Range: -170 to +50 dBm. The unit can be changed by the `[SENSe]:POWer:UNITs` or `UNIT:POWer` command.

Examples

`SENSe:SPURIOUS:CARRIER:THRESHOLD -25` sets the carrier threshold level to -25 dBm.

[SENSe]:SPURious:CLEar:RESults (No Query Form)

Restarts multi-trace functions (Average and Max Hold).

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

`[SENSe]:SPURious:CLEar:RESults`

Arguments

None

Examples

`SENSe:SPURIOUS:CLEAR:RESULTS` restarts multi-trace functions.

[SENSe]:SPURious[:FREQuency]:OVERlap? (Query Only)

Queries whether any of the frequency ranges (A to T) overlap, including the carrier when

`[SENSe]:SPURious:REFeRence` is set to `CARRier`.

NOTE: If there are any overlaps between the ranges, the measurement will not run correctly.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

`[SENSe]:SPURious[:FREQuency]:OVERlap?`

Arguments

None

Returns

0 (no overlap) or 1 (overlap).

Examples

`SENSe:SPURIOUS:FREQUENCY:OVERLAP?` might return 1, indicating that some frequency ranges overlap.

[SENSe]:SPURious:LIST

Sets or queries how to list the spurious signals in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:LIST { ALL | OVERlimit }  
[SENSe]:SPURious:LIST?
```

Arguments

ALL lists all of the detected spurious signals.

OVERlimit lists the spurious signals exceeding the limits. Use the [SENSe]:SPURious:RANGe<x>:LIMIT command group to set the limits.

Examples

SENSe:SPURIOUS:LIST ALL lists all of the detected spurious signals.

[SENSe]:SPURious:MODE

Sets or queries the frequency range mode in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:MODE { MULTi | SINGLE }  
[SENSe]:SPURious:MODE?
```

Arguments

MULTi displays all of the ranges that are enabled. Use the [SENSe]:SPURious:RANGe<x>:STATe command to enable the range.

SINGLE displays only the range that the selected spurious signal is in. Use the DISPlay:SPURious:SElect:NUMBer command to select the spurious signal.

Examples

SENSe:SPURIOUS:MODE MULTi displays all of the enabled ranges.

[SENSe]:SPURious:OPTimization

Sets or queries the method of optimizing the gain and input bandwidth in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:OPTimization { AUTO | MINTime | MAXDynrange | MINNoise }
[SENSe]:SPURious:OPTimization?
```

Arguments

AUTO optimizes automatically the gain and input bandwidth.

MINTime optimizes the gain and input bandwidth to minimize sweep time.

MAXDynrange optimizes the gain and input bandwidth to maximize the dynamic range.

MINNoise optimizes the gain and input bandwidth to minimize noise.

Examples

SENSe:SPURIOUS:OPTIMIZATION AUTO optimizes automatically the gain and input bandwidth.

[SENSe]:SPURious:POINTs:COUNT

Sets or queries the number of sample points on the spectrum trace per range in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:POINTs:COUNT { P801 | P2401 | P4001 | P8001 | P10401 }
[SENSe]:SPURious:POINTs:COUNT?
```

Arguments

P801 sets the trace points to 801 per range.

P2401 sets the trace points to 2401 per range.

P4001 sets the trace points to 4001 per range.

P8001 sets the trace points to 8001 per range.

P10401 sets the trace points to 10401 per range.

Examples

SENSe:SPURIOUS:POINTS:COUNT P801 sets the trace points to 801 per range.

[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo

Sets or queries the video bandwidth (VBW) in the specified frequency range. Programming a specified VBW sets

```
[SENSe]:SPURious:BANDwidth:VIDeo STATE OFF.
```

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo <value>
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo?
```

Related Commands

[\[SENSe\]:SPECtrum:{BANDwidth|BWIDth}:VIDeo:STATE](#) (on page 2399)

Arguments

<value>: : <NRf> specifies the VBW.

Range: Current RBW/104 (1 Hz minimum) to Current RBW.

Examples

SENSe:SPURIOUS:RANGE1:BANDWIDTH:VIDEO 200kHz sets the VBW to 200 kHz for Range A.

[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo:STATE

Determines whether to enable or disable the video bandwidth (VBW) in the specified frequency range.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo:STATE { OFF | ON | 0 | 1 }
[SENSe]:SPURious:RANGe<x>:BANDwidth:VIDeo:STATE?
```

Arguments

OFF or 0 disables the VBW.

ON or 1 enables the VBW.

Examples

SENSe:SPURIOUS:RANGE1:BANDWIDTH:VIDEO:STATE ON enables the VBW for Range A.

[SENSe]:SPURious:RANGe<x>:DETection

Sets or queries the spurious detection method in the specified frequency range. The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:DETection { AVERage | PEAK | QUASipeak | CAVerage | CPEak | AVGLog }
[SENSe]:SPURious:RANGe<x>:DETection?
```


Arguments

AVERage selects the average detection.

PEAK selects the peak detection.

QUASipeak selects the quasi-peak detection.

CAVerage selects the CISPR average detection.

CPEak selects the CISPR peak detection.

AVGLog selects the average (of logs) detection.

Examples

SENSe:SPURIOUS:RANGe1:DETECTION PEAK selects the peak detection for Range A.

[SENSe]:SPURious:RANGe<x>:EXCursion

Sets or queries the excursion level (how far down the signal must drop between spurious emissions) in the specified frequency range.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:EXCursion <value>
[SENSe]:SPURious:RANGe<x>:EXCursion?
```

Arguments

<value>::<NRf> specifies the excursion level. A signal with amplitude less than the excursion level is considered to be a noise. Range: 1 to 50 dB.

Examples

SENSe:SPURIOUS:RANGe1:EXCURSION 8 sets the excursion level to 8 dB.

[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]

Sets or queries the filter shape to search the specified frequency range for spurious signals.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE] { RBW | MIL6db | CISPr }
[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]?
```

Arguments

RBW selects the RBW filter.

MIL6db selects the -6 dB RBW (MIL) filter.

CISPr selects the CISPR filter.

Examples

SENSe:SPURious:RANGe1:FILTeR:SHAPE CISPr uses the CISPR filter in Range A.

[SENSe]:SPURious:RANGe<x>:FILTeR[:SHAPE]:BANDwidth

Sets or queries the filter bandwidth to search the specified frequency range for spurious signals.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:FILTeR[:SHAPE]:BANDwidth <value>
[SENSe]:SPURious:RANGe<x>:FILTeR[:SHAPE]:BANDwidth?
```

Arguments

<value>::<NRf> specifies the filter bandwidth.

The setting range varies depending on the center frequency and trace detector when using the CISPR filters and detectors. Otherwise, the bandwidth minimum is a function of the span (= (stop frequency) - (start frequency)) of the range and the maximum is fixed at 5 MHz.

By default, the value is set automatically ([SENSe]:SPURious:RANGe<x>:FILTeR[:SHAPE]:BANDwidth:AUTO is ON). When the detection is set to CISPR QPk ([SENSe]:SPURious:RANGe<x>:DETection is QUASipeak), only one value is allowed, which is set automatically.

Examples

SENSe:SPURious:RANGe1:FILTeR:SHAPE:BANDWIDTH 200kHz sets the filter bandwidth to 200 kHz for Range A.

[SENSe]:SPURious:RANGe<x>:FILTeR[:SHAPE]:BANDwidth:AUTO

Determines whether to set the filter bandwidth automatically or manually for the specified frequency range in the Spurious measurement.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:FILTeR[:SHAPE]:BANDwidth:AUTO { OFF | ON | 0 | 1 }
```

[SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth:AUTO?

Arguments

OFF or 0 specifies that the filter bandwidth is set manually using the [SENSe]:SPURious:RANGe<x>:FILTer[:SHAPE]:BANDwidth command.

ON or 1 specifies that the filter bandwidth is set automatically.

Examples

SENSe:SPURIOUS:RANGE1:FILTER:SHAPE:BANDWIDTH:AUTO ON sets the filter bandwidth automatically for Range A.

[SENSe]:SPURious:RANGe<x>:FREQuency:START

Sets or queries the start frequency of the specified range in the Spurious measurement.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

NOTE: The frequency ranges must not be overlapped. Use the [SENSe]:SPURious[:FREQuency]:OVERlap? query to check whether there is any overlap.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

[SENSe]:SPURious:RANGe<x>:FREQuency:START <value>
[SENSe]:SPURious:RANGe<x>:FREQuency:START?

Arguments

<value>::<NRf> specifies the start frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Examples

SENSe:SPURIOUS:RANGE1:FREQUENCY:START 1.615GHz sets the start frequency of Range A to 1.615 GHz.

[SENSe]:SPURious:RANGe<x>:FREQuency:STOP

Sets or queries the stop frequency of the specified range in the Spurious measurement.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

NOTE: The frequency ranges must not be overlapped. Use the [SENSe]:SPURious[:FREQuency]:OVERlap? query to check whether there is any overlap.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:FREQuency:STOP <value>
[SENSe]:SPURious:RANGe<x>:FREQuency:STOP?
```

Arguments

<value>: : <NRf> specifies the stop frequency.

Range:

- RSA5103B – 0 to 3 GHz
- RSA5106B – 0 to 6.2 GHz
- RSA5115B – 0 to 15 GHz
- RSA5126B – 0 to 26.5 GHz

Examples

SENSe:SPURIOUS:RANGE1:FREQUENCY:STOP 1.715GHz sets the stop frequency of Range A to 1.715 GHz.

[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:START

Sets or queries the absolute amplitude of the limits at the start (left edge) of the specified range in the Spurious measurement. This command is valid when [SENSe]:SPURious:RANGe<x>:LIMit:MASK is set to ABS, AND, or OR.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:START <value>
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:START?
```

Arguments

<value>: : <NRf> specifies the absolute start amplitude of the limits.

Range: -170 to +50 dBm.

The unit can be changed by the [SENSe]:POWER:UNITs or UNIT:POWER command.

Examples

SENSe:SPURIOUS:RANGE1:LIMIT:ABSOLUTE:START -30 sets the absolute start amplitude of the limits for Range A to -30 dBm.

[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STOP

Sets or queries the absolute amplitude of the limits at the stop (right edge) of the specified range in the Spurious measurement. This command is valid when [SENSe]:SPURious:RANGe<x>:LIMit:MASK is set to ABS, AND, or OR.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STOP <value>
[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STOP?
```

Related Commands

[\[SENSe\]:POWer:UNITs](#) (on page 2287)

[UNIT:POWer](#) (on page 2745)

Arguments

<value>::<NRf> specifies the absolute stop amplitude of the limits.

Range: -170 to +50 dBm.

The unit can be changed by the `[SENSe]:POWer:UNITs` or `UNIT:POWer` command.

Examples

`SENSe:SPURIOUS:RANGE1:LIMIT:ABSOLUTE:STOP -10` sets the absolute stop amplitude of the limits for Range A to -10 dBm.

[SENSe]:SPURious:RANGe<x>:LIMit:MASK

Sets or queries the limit mask function mode for the specified range in the Spurious measurement.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:LIMit:MASK{ABS|REL|AND|OR|OFF}
[SENSe]:SPURious:RANGe<x>:LIMit:MASK?
```

Arguments

The following table lists the arguments.

Limit mask mode

Argument	Description
ABS	Failure is detected when one of the spurious signals is larger than the absolute amplitude limit.
REL	Failure is detected when one of the spurious signals is larger than the relative amplitude limit.

Argument	Description
AND	Failure is detected when one of the spurious signals is larger than the absolute AND relative amplitude limits.
OR	Failure is detected when one of the spurious signals is larger than the absolute OR relative amplitude limit.
OFF	Disables the mask.

To set the absolute amplitude limits, use the `[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:START` and `[SENSe]:SPURious:RANGe<x>:LIMit:ABSolute:STOP` commands.

To set the relative amplitude limits, use the `[SENSe]:SPURious:RANGe<x>:LIMit:RELative:START` and `[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STOP` commands.

Examples

`SENSe:SPURIOUS:RANGE1:LIMIT:MASK ABS` specifies that failure is detected when one of the spurious signals is larger than the absolute amplitude limit in Range A.

[SENSe]:SPURious:RANGe<x>:LIMit:RELative:START

Sets or queries the relative amplitude of the limits at the start (left edge) of the specified range in the Spurious measurement. This command is valid when `[SENSe]:SPURious:RANGe<x>:LIMit:MASK` is set to REL, AND, or OR.

The parameter `<x>` = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:START <value>
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:START?
```

Arguments

`<value>::<NRf>` specifies the relative start amplitude of the limits.

Range: -100 to 0 dB.

Use the `[SENSe]:SPURious:REFeRence` command to select the power reference.

Examples

`SENSe:SPURIOUS:RANGE1:LIMIT:RELATIVE:START -30` sets the relative start amplitude of the limits for Range A to -30 dB.

[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STOP

Sets or queries the relative amplitude of the limits at the stop (right edge) of the specified range in the Spurious measurement. This command is valid when `[SENSe]:SPURious:RANGe<x>:LIMit:MASK` is set to REL, AND, or OR.

The parameter `<x>` = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STOP <value>
[SENSe]:SPURious:RANGe<x>:LIMit:RELative:STOP?
```

Arguments

<value>: : <Nrf> specifies the relative stop amplitude of the limits.

Range: -100 to 0 dB.

Use the [SENSe]:SPURious:REFErence command to select the power reference.

Examples

SENSe:SPURIOUS:RANGE1:LIMIT:RELATIVE:STOP -10 sets the relative stop amplitude of the limits for Range A to -10 dB.

[SENSe]:SPURious:RANGe<x>:STATe

Determines whether to enable or disable the frequency range in the Spurious measurement.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:STATe { OFF | ON | 0 | 1 }
[SENSe]:SPURious:RANGe<x>:STATe?
```

Arguments

OFF or 0 disables the frequency range.

ON or 1 enables the frequency range.

Examples

SENSe:SPURIOUS:RANGE1:STATE ON enables Range A.

[SENSe]:SPURious:RANGe<x>:THReshold

Sets or queries the threshold level to detect spurious signals in the specified frequency range.

The parameter <x> = 1 to 20, representing Range A to T, respectively.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:RANGe<x>:THReshold <value>
[SENSe]:SPURious:RANGe<x>:THReshold?
```

Arguments

<value>: : <NRf> specifies the threshold level above which the signal is determined to be spurious. Range: -50 to +30 dBm.

The unit can be changed by the [SENSe]:POWer:UNITs or UNIT:POWer command.

Examples

SENSe:SPURIOUS:RANGE1:THRESHOLD -25 sets the threshold level to -25 dBm in Range A.

[SENSe]:SPURious:REference

Sets or queries the power reference in the Spurious measurement.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:REFeRence { CARRier | MANual | NONE }
[SENSe]:SPURious:REFeRence?
```

Arguments

CARRier uses the carrier as the power reference.

MANual sets the power reference using the [SENSe]:SPURious:REFeRence:MANual:POWer command.

NONE uses no reference.

Examples

SENSe:SPURIOUS:REFERENCE CARRier uses the carrier as the power reference.

[SENSe]:SPURious:REference:MANual:POWer

Sets or queries the reference power level in the Spurious measurement. This command is valid when [SENSe]:SPURious:REFeRence is set to MANual.

Conditions

Measurement views: Spurious

Group

Sense commands

Syntax

```
[SENSe]:SPURious:REFeRence:MANual:POWer <value>
[SENSe]:SPURious:REFeRence:MANual:POWer?
```


Arguments

<value>: : <Nrf> specifies the reference power level. Range: -170 to +50 dBm.

The unit can be changed by the [SENSe]:POWer:UNITs or UNIT:POWer command.

Examples

SENSe:SPURIOUS:REFERENCE:MANUAL:POWER -25 sets the reference power level to -25 dBm.

[SENSe]:SQUality[:MEASview<y>]:EVM:ALL[:STATe]

Sets or queries whether or not the display of both EVM and Offset EVM results is enabled. Offset EVM appears only for OQPSK and SOQPSK modulation types.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Sense commands

Syntax

```
[SENSe]:SQUality[:MEASview<y>]:EVM:ALL[:STATe]
[SENSe]:SQUality[:MEASview<y>]:EVM:ALL[:STATe]?
```

Arguments

OFF or 0 disables the local lockout operation.

ON or 1 enables the local lockout operation.

[SENSe]:SQUality[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Signal quality for a selected Measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal Quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:SQUality[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:SQUality[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

Examples

SENSe:SQUality:MEASview1:SELEcted:SOURce? queries the Source for Signal quality Measurement View 1.

[SENSe]:STABle[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Symbol table for a selected Measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Symbol table

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod symbol table).

Source cannot be changed when the acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:STABle [:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:STABle [:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on the number of sources of connected instrument, where MEASview keyword is optional by default and y is 1.

Examples

SENSe:STABle:MEASview1:SELEcted:SOURce? queries the Source for Symbol table Measurement View 1.

[SENSe]:SVPC:ACQuisition:CONTrol:TRIGger

Sets or queries the Trigger Settings checkbox state.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
[SENSe]:SVPC:ACQuisition:CONTrol:TRIGger { OFF | ON | 0 | 1 }
[SENSe]:SVPC:ACQuisition:CONTrol:TRIGger?
```

Arguments

OFF or 0 disables the Trigger Settings.

ON or 1 enables the Trigger Settings.

Examples

`SENSe:SVPC:ACQuisition:CONTRol:TRIGger ON` enables the Trigger setting.

[SENSe]:SVPC:ACQuisition:CONTRol:CHANnel

Sets or queries the Channel Settings checkbox state.

Conditions

Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]: SVPC:ACQuisition:CONTRol:CHANnel { OFF | ON | 0 | 1 }
```

Arguments

OFF or 0 disables the channel settings.

ON or 1 enables the channel settings.

Examples

`SENSe: SVPC:ACQuisition:CONTRol:CHANnel ON` enables the Channel Settings.

[SENSe]:SVPC:ACQuisition:FFRame:ACTual? (Query only)

Queries the actual number of Fast Frames.

Conditions

Requires an RSA/MSO be connected with SVPC. Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SVPC:ACQuisition:FFRame:ACTual?
```

Arguments

None

Returns

<NR1> The actual number of Fast Frames.

Examples

`SENSe: SVPC:ACQuisition:FFRame:ACTual?` might return 178, indicating that the actual number of Fast Frames is 178.

[SENSe]:SVPC:ACQuisition:FFRame:LIMit

Sets or queries the limit number of Fast Frames.

Conditions

Requires an RSA/MSO be connected with SignalVu-PC. Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SVPC:ACQuisition:FFRame:LIMit
[SENSe]:SVPC:ACQuisition:FFRame:LIMit?
```

Arguments

<value>::<NR1> specifies the fast frame limit. Range: 1 to 65535 frames.

Where

1 to 65535 frames for RSA 5000A series. For others, the range is 1 to 220 -1 frames.

Examples

SENSe: SVPC:ACQUISITION:FFRAME:LIMIT 500 sets the Fast Frame limit to 500.

[SENSe]:SVPC:ACQuisition:FFRame:STaTe

Determines whether to enable or disable the Fast Frame.

Conditions

Requires an RSA/MSO be connected with SVPC. Measurement views: All

Group

Sense commands

Syntax

```
[SENSe]:SVPC:ACQuisition:FFRame:STaTe { OFF | ON | 0 | 1 }
[SENSe]:SVPC:ACQuisition:FFRame:STaTe?
```

Arguments

OFF or 0 disables the Fast Frame.

ON or 1 enables the Fast Frame.

Examples

SENSe: SVPC:ACQUISITION:FFRAME:STATE ON enables the Fast Frame.

[SENSe]:TDIaGram[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Source of Trellis diagram for a selected Measurement view number.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Trellis diagram).

Source cannot be changed when the acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:TDIagram [:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:TDIagram [:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1.

Examples

SENSe:TDIagram:MEASview1:SELEcted:SOURce? queries the Source for Trellis diagram Measurement View 1.

SENSe:TOFF:POWEr:SPECTral:DENSity

Sets or queries the limit set for comparison of the Toff power spectral density value in the Limits tab of the LTE Power vs Time display settings control panel.

Conditions

Measurement view: LTE Power vs Time

Group

Sense commands

Syntax

```
SENSe:TOFF:POWEr:SPECTral:DENSity <value>
SENSe:TOFF:POWEr:SPECTral:DENSity?
```

Arguments

<value>::<NRf> specifies the Toff power spectral density value.

Returns

<NRf>

Examples

SENSe:TOFF:POWEr:SPECTRAL:DENSITY? might return -83.000000000, indicating that the Toff power spectral density is set to -83 dBm.

[SENSe]:TOVerview[:MEASview<y>]:FREQuency:CENTer

Sets or queries the center frequency in the time overview.

Conditions

Measurement views: Time overview

Group

Sense commands

Syntax

```
[SENSe]:TOVerview[:MEASview<y>]:FREQuency:CENTer <value>
[SENSe]:TOVerview[:MEASview<y>]:FREQuency:CENTer?
```

Arguments

<value>: : <NRf> specifies the center frequency.

Range:

- RSA5103B – 1 to 3 GHz
- RSA5106B – 1 to 6.2 GHz
- RSA5115B – 1 to 15 GHz
- RSA5126B – 1 to 26.5 GHz

Returns

<NRf>

Examples

SENSe:TOVERVIEW:MEASVIEW1:FREQUENCY:CENTER 7.5GHz sets the center frequency to 7.5 GHz.

[SENSe]:TOVerview[:MEASview<y>]:MAXTracepoints

Sets or queries the maximum trace points in the time overview.

Conditions

Measurement views: Time overview

Group

Sense commands

Syntax

```
[SENSe]:TOVerview[:MEASview<y>]:MAXTracepoints { ONEK | TENK | HUNDredk | NEVerdecimate }
[SENSe]:TOVerview[:MEASview<y>]:MAXTracepoints?
```

Arguments

ONEK sets the maximum trace points to 1 k.

TENK sets the maximum trace points to 10 k.

HUNDredk sets the maximum trace points to 100 k.

NEVerdecimate never decimates the trace points.

Returns

<NRf>

Examples

SENSe:TOVERVIEW:MEASVIEW1:MAXTRACEPOINTS TENK sets the maximum trace points to 10 k.

[SENSe]:TOVerview[:MEASview<y>]:TIME:PER:DIVision

This command sets or queries the time per division (dB/div) value in the Time Overview display.

Conditions

Measurement view: Time Overview

Group

Sense commands

Syntax

```
[SENSe]:TOVerView[:MEASview<y>]:TIME:PER:DIVision <NRf>
[SENSe]:TOVerView[:MEASview<y>]:TIME:PER:DIVision?
```

Arguments

<NRf> is the dB/div value.

Range: .01 to 20

Returns

<NR2> = floating point value without an exponent, which is the time per division value.

Examples

SENSe:TOVerView:MEASVIEW1:TIME:PER:DIV might return 10.0000000000, indicating that the time per division value is set to 10.0 dB.

[SENSe]:TOVerView[:MEASview<y>]:SELEcted:SOURce

Sets or queries the Measurement view number for the Time Overview Display.

Conditions

Measurement view: Time overview with specified Measurement view number

Source cannot be changed when acquisition or analysis is in progress. Stop the acquisition and change the Source.

Group

Sense commands

Syntax

```
[SENSe]:TOVerView[:MEASview<y>]:SELEcted:SOURce {"Source 1" | "Source 2" | "Source 3" | "Source 4"}
[SENSe]:TOVerView[:MEASview<y>]:SELEcted:SOURce?
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

SENSe:TOVERVIEW:MEASVIEW1:SELECTED:SOURCE? gives the Measurement view number for the Time overview source.

[SENSe]:TRACe:SPURious:COUNt:RESet (No Query Form)

Clears the multi-function (Max Hold or Average) data and counter and restarts the process in the Spurious view.

Conditions

Measurement view: Spurious Display

Group

Sense commands

Syntax

```
[SENSe]:TRACe:SPURious:COUNT:RESet
```

Arguments

None

Returns

None

Examples

`SENSe:TRACE:SPURIOUS:COUNT:RESET` clears the multi-function data and counter and restarts the process.

[SENSe]:TRACe<x>:SPURious:COUNT

Sets and queries the count value for the selected trace in the Spurious measurement.

Conditions

Measurement view: Spurious Display

Group

Sense commands

Syntax

```
[SENSe]:TRACe<x>:SPURious:COUNT <value>  
[SENSe]:TRACe<x>:SPURious:COUNT
```

Arguments

<x> = 1,2,3,4 is the Trace

<value> = < NR1> Range is 1 to 10000

Returns

<NR1>

Examples

`SENSe:TRACe4:SPURious:COUNT 60` sets the count value to 60 for Trace 4.

[SENSe]:TRACe<x>:SPURious:COUNT:ENABLE

Determines whether to enable or disable the count check box for the specified trace in the Spurious measurement.

Conditions

Measurement view: Spurious Display

Group

Sense commands

Syntax

```
[SENSe]:TRACe<x>:SPURious:COUNT:ENABle {0 | OFF | 1 | ON}  
[SENSe]:TRACe<x>:SPURious:COUNT:ENABle?
```

Arguments

<x> = 1,2,3,4 is the Trace

ON or 1 to enable the count check box

OFF or 0 to disable the count check box

Returns

<Boolean> 0, 1

Examples

SENSe:TRACe2:SPURious:COUNT:ENABle ON enables the count check box for Trace 2.

[SENSe]:TRACe<x>:SPURious:ENABle

Determines whether to enable or disable show check box for the specified trace in the Spurious measurement.

Conditions

Measurement view: Spurious Display

Group

Sense commands

Syntax

```
[SENSe]:TRACe<x>:SPURious:ENABle {0 | OFF | 1 | ON}  
[SENSe]:TRACe<x>:SPURious:ENABle?
```

Arguments

<x> = 1,2,3,4 is the Trace

ON or 1 to enable the show check box

OFF or 0 to disable the show check box

Returns

<Boolean> 0, 1

Examples

SENSe:TRACe2:SPURious:ENABle 1 enables the show check box for Trace 2.

[SENSe]:TRACe<x>:SPURious:FREeze

Determines whether to enable or disable the freeze check box for the specified trace in the Spurious measurement.

Conditions

Measurement view: Spurious Display

Group

Sense commands

Syntax

```
[SENSe]:TRACe<x>:SPURious:FREeze {0 | OFF | 1 | ON}  
[SENSe]:TRACe<x>:SPURious:FREeze?
```

Arguments

<x> = 1,2,3,4 is the Trace

ON or 1 to enable the freeze check box

OFF or 0 to disable the freeze check box

Returns

<Boolean> 0, 1

Examples

SENSe:TRACe3:SPURious:FREeze ON enables the freeze check box for Trace 3.

[SENSe]:TRACe<x>:SPURious:FUNction

Sets and queries the required function for the selected trace in Spurious measurement.

Conditions

Measurement view: Spurious Measurement Display

Group

Sense commands

Syntax

```
[SENSe]:TRACe<x>:SPURious:FUNction {NONE | MAXH | AVER | AVGL}  
[SENSe]:TRACe<x>:SPURious:FUNction?
```

Arguments

<x> = 1,2,3,4 is the Trace

"NONE" to select Normal

"MAXH" to select Max Hold

"AVER" to select Avg (VRMS)

"AVGL" to select Avg (of logs)

Returns

<String> NONE or MAXH or AVER or AVGL

Examples

SENSe:TRACe1:SPURious:FUNction NONE sets the function to Normal for Trace 1.

[SENSe]:TRACe<x>:SPURious:SElect

Sets the specified trace as the active trace in the Spurious display. The query returns the active trace.

Conditions

Measurement view: Spurious Display

Group

Sense commands

Syntax

```
[SENSe]:TRACe<x>:SPURious:SElect  
[SENSe]:TRACe<x>:SPURious:SElect?
```

Arguments

<x> = 1,2,3,4 is the Trace

Returns

<Boolean> 0, 1

Examples

SENSe:TRACe2:SPURious:SElect sets Trace 2 as the active trace.

SENSe:TXGain:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the resolution bandwidth.

Conditions

Measurement view: Transmission Gain

Group

Sense commands

Syntax

```
SENSe:TXGain:{BANDwidth|BWIDth}[:RESolution] <value>  
SENSe:TXGain:{BANDwidth|BWIDth}[:RESolution]?
```

Arguments

<value>::=<NRf> specifies the RBW. Range: 1 kHz to 1 MHz.

Returns

See Arguments.

Examples

SENSe:TXGain:BANDwidth:RESolution 200E3 sets the RBW to 200 kHz.

SENSe:TXGain:FREQuency:CENTer

Sets or queries the frequency at the center of the selected Span.

Conditions

Measurement view: Transmission Gain

Group

Sense commands

Syntax

```
SENSe:TXGain:FREQuency:CENTer <value>  
SENSe:TXGain:FREQuency:CENTer?
```

Arguments

<value>: :=<NRf> specifies the center frequency.

Range: 1 kHz to 1 MHz.

Returns

See Arguments.

Examples

SENSe:TXGAIN:FREQUENCY:CENTER 1E9 sets the center frequency to 1 GHz.

SENSe:TXGain:FREQuency:POINTs

Sets or queries the number of frequency steps in the measurement range.

Conditions

Measurement view: Transmission Gain

Group

Sense commands

Syntax

```
SENSe:TXGain:FREQuency:POINTs <value>  
SENSe:TXGain:FREQuency:POINTs?
```

Arguments

<value>: :=<NR1> specifies number of frequency steps.

Returns

See Arguments.

Examples

SENSe:TXGAIN:FREQUENCY:POINTS 101 sets the number of frequency steps to 101.

SENSe:TXGain:FREQuency:SPAN

Sets or queries the difference between the start and stop frequencies (span).

Conditions

Measurement view: Transmission Gain

Group

Sense commands

Syntax

```
SENSe:TXGain:FREQuency:SPAN <value>  
SENSe:TXGain:FREQuency:SPAN?
```

Arguments

<value>: :=<NR1> specifies the frequency span.

Returns

See Arguments.

Examples

SENSe:TXGAIN:FREQUENCY:SPAN 100E6 sets the frequency span to 100 MHz.

SENSe:TXGain:FREQuency:STARt

Sets or queries the lowest frequency in the span.

Conditions

Measurement view: Transmission Gain

Group

Sense commands

Syntax

```
SENSe:TXGain:FREQuency:STARt <value>  
SENSe:TXGain:FREQuency:STARt?
```

Related Commands

[SENSe:TXGain:FREQuency:STOP](#) (on page 2438)

Arguments

<value>: :=<NR1> specifies the lowest frequency in the span.

Returns

See Arguments.

Examples

SENSe:TXGAIN:FREQUENCY:START 1E9 sets the lowest frequency to 1 GHz.

SENSe:TXGain:FREQuency:STEP

Sets or queries the frequency increment. Measurements are made at frequency points from Start Freq to Stop Freq in Step Size increments.

Conditions

Measurement view: Transmission Gain

Group

Sense commands

Syntax

```
SENSe:TXGain:FREQuency:STEP <value>  
SENSe:TXGain:FREQuency:STEP?
```

Arguments

<value>: :=<NRf> specifies the frequency increment.

Returns

See Arguments.

Examples

SENSe:TXGAIN:FREQUENCY:STEP 1E6 sets the frequency increment to 1 MHz.

SENSe:TXGain:FREQuency:STOP

Sets or queries the highest frequency in the span.

Conditions

Measurement view: Transmission Gain

Group

Sense commands

Syntax

```
SENSe:TXGain:FREQuency:STOP <value>  
SENSe:TXGain:FREQuency:STOP?
```

Related Commands

[SENSe:TXGain:FREQuency:START](#) (on page 2437)

Arguments

<value>: :=<NRf> specifies the highest frequency.

Returns

See Arguments.

Examples

SENSe:TXGAIN:FREQUENCY:STOP 2E9 sets the highest frequency to 2 GHz.

[SENSe]:USETtings (No Query Form)

Updates the analyzer settings. This command is useful when you need to set the analyzer including the RF attenuation before taking data acquisition. Unless this command is executed, the attenuation value is not set until acquisition is taken.

Conditions

Measurement views: All

Group

Sense commands

Syntax

[SENSe]:USETtings

Arguments

None

Examples

SENSe:USETTINGS updates settings.

[SENSe]:WLAN:AD:ANALysis:BLOCKwise:CORRection:STATe

Enables or disables the Enable Blockwise Correction check box in the Adv Params tab of the Settings control panel for the 802.11ad displays.

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

[SENSe]:WLAN:AD:ANALysis:BLOCKwise:CORRection:STATe { 0 | OFF | 1 | ON }
[SENSe]:WLAN:AD:ANALysis:BLOCKwise:CORRection:STATe?

Arguments

0 or OFF disables Blockwise Correction (unchecks check box)

1 or ON enables Blockwise Correction (checks check box)

Returns

<Boolean> 0,1

Examples

SENSe:WLAN:AD:ANALYSIS:BLOCKWISE:CORRECTION:STATE 1 enables Blockwise Correction.

[SENSe]:WLAN:AD:ANALysis:DC:OFFSet:CORRection:STATe

Enables or disables the Enable DC Offset Correction check box for all 802.11ad measurement views (set in the Advanced Params tab of the Settings control panel).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

[SENSe]:WLAN:AD:ANALysis:DC:OFFSet:CORRection:STATe {0 | OFF| 1 | ON }
[SENSe]:WLAN:AD:ANALysis:DC:OFFSet:CORRection:STATe?

Arguments

0 or OFF disables Enable DC Offset Correction (unchecks check box)

1 or ON enables Enable DC Offset Correction (checks check box)

Returns

<Boolean> 0,1

Examples

SENSe:WLAN:AD:ANALYSIS:DC:OFFSET:CORRECTION:STATE 0 disables the Enable DC Offset Correction check box.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:CONVergence

Sets or queries the Convergence value (set in the Advanced Params tab of the Settings control panel) for the 802.11ad displays.

(If you have SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ad measurement views.

It is applicable only when ADAPtive is set as the Adaptive Equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:CONVergence<value>  
[SENSe]:WLAN:AD:ANALysis:EQUALizer:CONVergence?
```

Arguments

<value>=<NRf>

Returns

<NRf>

Examples

SENSe:WLAN:AD:ANALYSIS:EQUALIZER:CONVERGENCE? might return 2.000E-3, indicating the Convergence value is 2.000E-3.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:LENGth

Sets or queries the adaptive equalizer Length (set in the Advanced Params tab of the Settings control panel) for the 802.11ad displays.

(If you have SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ad measurement views

Only applies when ADAPtive is set as the Adaptive Equalizer

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:LENGth <value>  
[SENSe]:WLAN:AD:ANALysis:EQUALizer:LENGth?
```

Arguments

<value>=<NR1>

Returns

<NR1>

Examples

SENSe:WLAN:AD:ANALYSIS:EQUALIZER:LENGTH 25 will set the Length to 25.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:MODE

Sets or queries the equalizer mode (set in the Advanced Params tab of the Settings control panel) for the 802.11ad displays.

(If you have SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ad measurement views

It is applicable only when ADAPtive is set as the Adaptive Equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:MODE {TRA | HOLD}  
[SENSe]:WLAN:AD:ANALysis:EQUALizer:MODE?
```

Arguments

TRA will set the mode to Train

HOLD will set the mode to Hold

Returns

<String> = TRA or HOLD

Examples

SENSe:WLAN:AD:ANALYSIS:EQUALIZER:MODE TRA sets the equalizer mode to Train.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:RESet (No Query Form)

Resets the equalization value (button in the Advanced Params tab of the Settings control panel) for the 802.11ad displays.

(If you have SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ad measurement views

Only applies when ADAPtive is set as the Adaptive Equalizer

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:RESet
```

Arguments

None

Returns

None

Examples

`SENSe:WLAN:AD:ANALYSIS:EQUALIZER:RESET` resets the equalization value.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:TAPS

Sets or queries the Taps value in the Advanced Params tab of the Settings control panel for the 802.11ad displays.

(If you have SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ad measurement views

Only applies when ADAPtive is set as the Adaptive Equalizer

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TAPS <value>  
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TAPS?
```

Arguments

<value>=<NR1>

Returns

<NR1>

Examples

`SENSe:WLAN:AD:ANALYSIS:EQUALIZER:TAPS 56` sets the Tap value to 56.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:TSRatio

Sets or queries the Taps/Symbols value (set in the Advanced Params tab of the Settings control panel) for the 802.11ad displays.

(If you have SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ad measurement views

It is applicable only when ADAPtive is set as the Adaptive Equalizer

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TSRatio { ONE | TWO | FOUR }
```

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TSRatio?
```

Arguments

ONE, TWO, FOUR

Returns

<String> = either ONE, TWO, or FOUR

Examples

SENSe:WLAN:AD:ANALYSIS:EQUALIZER:TSRATIO might return FOUR, indicating the Taps/Symbols value is 4.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:TYPE

It sets or Queries the Equalizer to OFF, Non Adaptive Equalizer and Adaptive Equalizer in the settings control panel common to all the WLAN 802.11ad displays.

Conditions

Measurement views: All WLAN 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TYPE {NONE | NONA | ADAPtive}
```

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TYPE?
```

Arguments

NONE will set the Equalizer to OFF.

NONA will set the Equalizer to Non Adaptive Equalizer.

ADAPtive will set the Equalizer to Adaptive Equalizer.

Examples

SENSe:WLAN:AD:ANALYSIS:EQUALIZER:TYPE NONA will set the Equalizer to Non Adaptive Equalizer.

[SENSe]:WLAN:AD:ANALysis:EQUALizer:TYPE

Sets or queries the Equalizer type in the 802.11ad measurement views.

(If you have SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TYPE { NONE | NONA | ADAPtive }  
[SENSe]:WLAN:AD:ANALysis:EQUALizer:TYPE?
```

Arguments

NONE will set the Equalizer to OFF

NONA will set the Equalizer to Non Adaptive Equalizer

ADAPtive will set the Equalizer to Adaptive Equalizer

Returns

<String> NONE or NONA or ADAPtive

Examples

SENSe:WLAN:AD:ANALYSIS:EQUALIZER:TYPE ADAPtive will set the equalizer to Adaptive Equalizer.

[SENSe]:WLAN:AD:ANALysis:HANDle:MULTi:PATH:CHANnel:STATe

By enabling this flag, severe multipath can be equalized. By default this flag is set to 0.

Conditions

Measurement views: All WLAN 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:HANDle:MULTi:PATH:CHANnel:STATe {0| 1}  
[SENSe]:WLAN:AD:ANALysis:HANDle:MULTi:PATH:CHANnel:STATe?
```

Arguments

0 severe multipath cannot be equalized (checkbox is unchecked)

1 severe multipath can be equalized (checkbox is checked)

Returns

0 or 1, <NRf>

Examples

SENSe:WLAN:AD:ANALYSIS:HANDLE:MULTI:PATH:CHANNEL:STATE 1 equalizes the severe multipath.

[SENSe]:WLAN:AD:ANALysis:LENGth

Specifies the length of the analysis period to be used in all the 802.11ad measurement views (set in the Analysis Time tab of the Settings control panel). The analysis length is specified in either symbols or seconds, depending on the Units setting.

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:LENGth <value>  
[SENSe]:WLAN:AD:ANALysis:LENGth?
```

Arguments

<value>=<NRf>

Returns

<NRf> = analysis length. The minimum value depends on the modulation type

Examples

SENSe:WLAN:AD:ANALYSIS:LENGTH 24.7835200000E-6 sets the analysis length to 24.784 μ s.

[SENSe]:WLAN:AD:ANALysis:LENGth:ACTual? (Query Only)

Returns the value of the actual analysis length for the 802.11ad measurement views (in the Analysis Time tab of the Settings control panel).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:LENGth:ACTual?
```

Arguments

None

Returns

<NRf> = actual analysis length in seconds

Examples

SENSe:WLAN:AD:ANALYSIS:LENGTH:ACTUAL? might return 2.840E-6, indicating that the actual analysis length is 2.840 μ s.

[SENSe]:WLAN:AD:ANALysis:LENGth:AUTO

Enables or disables the Auto checkbox state for analysis length in all the 802.11ad displays (set in the Analysis Time tab of the Settings control panel). This setting determines if the analysis length display is set automatically (enabled) or manually (disabled).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:LENGth:AUTO {0 | OFF | 1 | ON}
[SENSe]:WLAN:AD:ANALysis:LENGth:AUTO?
```

Arguments

0 or OFF sets the analysis length to manual (box is unchecked)

1 or ON sets the analysis length to automatic (box is checked)

Returns

<Boolean> 0,1

Examples

SENSe:WLAN:AD:ANALYSIS:LENGTH:AUTO ON sets the analysis length value automatically based on the requirements of the selected display.

[SENSe]:WLAN:AD:ANALysis:OFFSet

Sets or queries the analysis offset value in all the 802.11ad measurement displays (set in the Analysis Time tab in the Settings control panel). The query command returns the result in symbols or seconds, depending on the unit choice selected in the Analysis Time tab of the Settings control panel.

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:OFFSet <value>
[SENSe]:WLAN:AD:ANALysis:OFFSet?
```

Arguments

<value>=<Nrf>

Returns

<Nrf> = analysis offset

Examples

SENSe:WLAN:AD:ANALYSIS:OFFSET -1.2E-6 sets the analysis offset to -1.200 μ s.

[SENSe]:WLAN:AD:ANALysis:OFFSet:AUTO

Enables or disables the Auto check box for analysis offset in all the 802.11ad measurement views (set in the Analysis Time tab of the Settings control panel). This setting determines if the analysis offset displays is set automatically (enabled) or manually (disabled).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:OFFSet:AUTO {0 | OFF | 1 | ON}  
[SENSe]:WLAN:AD:ANALysis:OFFSet:AUTO?
```

Arguments

0 or OFF sets the analysis offset to disabled (box is unchecked)

1 or ON sets the analysis offset to enabled (box is checked)

Returns

<Boolean> 0,1

Examples

SENSe:WLAN:AD:ANALYSIS:OFFSET:AUTO 1 sets the analysis offset to automatic.

[SENSe]:WLAN:AD:ANALysis:SWAP:IQ

Sets or queries whether or not to swap I and Q data.

Conditions

Measurement views: All WLAN 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:SWAP:IQ {0 | 1}  
[SENSe]:WLAN:AD:ANALysis:SWAP:IQ?
```

Arguments

0 does not swap I and Q data (checkbox is unchecked.)

1 swaps I and Q data (checkbox is checked.)

Returns

0 or 1, <NRf>

Examples

SENSe:WLAN:AD:ANALYSIS:SWAP:IQ 1 swaps I and Q data.

[SENSe]:WLAN:AD:ANALysis:TIME:UNITs

Sets or queries the analysis time units for all 802.11ad measurement views (set in the Analysis Time tab of the Settings control panel).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:ANALysis:TIME:UNITs {SEC, SYMB}  
[SENSe]:WLAN:AD:ANALysis:TIME:UNITs?
```

Arguments

SEC sets the time units to seconds

SYMB sets the time units to symbols

Returns

See Arguments

Examples

SENSe:WLAN:AD:ANALYSIS:TIME:UNITs SEC sets the analysis time units to seconds.

[SENSe]:WLAN:AD(:BANDwidth|:BWIDth):MODE

Sets or queries the measurement BW mode in all the 802.11ad measurement displays (set in the Analysis Params tab in the Settings control panel).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD(:BANDwidth|:BWIDth):MODE { MAN | AUTO | LSP}  
[SENSe]:WLAN:AD(:BANDwidth|:BWIDth):MODE?
```

Arguments

MAN sets the mode to Manual

AUTO sets the mode to Auto

LSP sets the mode to Link to Span

Returns

See Arguments

Examples

`SENSe:WLAN:AD(:BANDWIDTH|:BWIDTh):MODE LSP` will set the Measurement BW mode to Link to Span.

[SENSe]:WLAN:AD(:BANDwidth|:BWIDth):TINterval

Sets or queries the Measurement BW in all the 802.11ad measurement displays (set in the Analysis Params tab in the Settings control panel).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD(:BANDwidth|:BWIDth):TINterval <value>
[SENSe]:WLAN:AD(:BANDwidth|:BWIDth):TINterval?
```

Arguments

<value>=<NRf>

Returns

<NRf> = Measurement BW value in Hz

Examples

`SENSe:WLAN:AD:BANDWIDTH:TINTERVAL 5` will set the Measurement BW to 5 Hz.

[SENSe]:WLAN:AD:EVM:BURSt:COUNT

Sets or queries the total number of bursts to be analyzed (set in the EVM tab of the Settings control panel) for the display.

Conditions

Measurement views: 802.11ad Constellation, EVM vs Time, and Summary view

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:EVM:BURSt:COUNT <value>
[SENSe]:WLAN:AD:EVM:BURSt:COUNT?
```

Arguments

<value>=<NR1> Range 1 to 99

Returns

<NR1> = number of bursts

Examples

`SENSe:WLAN:AD:EVM:BURST:COUNT?` might return 20, indicating the total number of bursts to be analyzed is 20.

[SENSe]:WLAN:AD:EVM:BURSt:COUNT:ENABle

Enables or disables the Max Bursts to Avg check box in the EVM tab of the Settings control panel for the display.

Conditions

Measurement views: 802.11ad Constellation, EVM vs Time, and Summary view

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:EVM:BURSt:COUNT:ENABle {0 | OFF | 1 | ON }  
[SENSe]:WLAN:AD:EVM:BURSt:COUNT:ENABle?
```

Arguments

0 or OFF disables the Max Bursts to Avg (unchecks check box)

1 or ON enables the Max Bursts to Avg (checks check box)

Returns

<Boolean> 0,1

Examples

SENSe:WLAN:AD:EVM:BURST:COUNT:ENABLE? might return 1, indicating the Max Bursts to Avg option is enabled.

[SENSe]:WLAN:AD:EVM:DATA:ANALyze:ALL:SYMBols

Enables or disables the Analyze All check box in the EVM tab of the Settings control panel for the display. When the Analyze All check box is enabled, all the data symbols are analyzed and the data start value is always 0.

Conditions

Measurement views: 802.11ad Constellation, EVM vs Time, and Summary view

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:EVM:DATA:ANALyze:ALL:SYMBols { 0 | OFF | 1 | ON }  
[SENSe]:WLAN:AD:EVM:DATA:ANALyze:ALL:SYMBols?
```

Arguments

0 or OFF disables Analyze All (unchecks check box)

1 or ON enables Analyze All (checks check box)

Returns

<Boolean> 0,1

Examples

SENSe:WLAN:AD:EVM:DATA:ANALYZE:ALL:SYMBOLS? might return 0, indicating that the Data start and Data length values are considered for current analysis.

[SENSe]:WLAN:AD:EVM:DATA:LENGth

Sets or queries the length value (set in the EVM tab of the Settings control panel) in the display.

Conditions

Measurement views: 802.11ad Constellation, EVM vs Time, and Summary view

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:EVM:DATA:LENGth <value>  
[SENSe]:WLAN:AD:EVM:DATA:LENGth?
```

Arguments

<value>=<NR1>

Returns

<NR1> = length value

Examples

SENSe:WLAN:AD:EVM:DATA:LENGTH 1000, indicating that analysis should happen for 1000 symbols in the acquired data region.

[SENSe]:WLAN:AD:EVM:DATA:STARt

Sets or queries the start value (set in the EVM tab of the Settings control panel) for the display.

Conditions

Measurement views: 802.11ad Constellation, EVM vs Time, and Summary view

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:EVM:DATA:STARt <value>  
[SENSe]:WLAN:AD:EVM:DATA:STARt?
```

Arguments

<value>=<NR1>

Returns

<NR1> = start value

Examples

SENSe:WLAN:AD:EVM:DATA:START 5 indicates that analysis should begin at the 5th symbol.

[SENSe]:WLAN:AD:EVM:UNITs

Sets or queries the EVM units in the EVM tab of the Settings control panel.

Conditions

Measurement views: 802.11ad Constellation, EVM vs Time, and Summary views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:EVM:UNITs { DB | PERC}  
[SENSe]:WLAN:AD:EVM:UNITs?
```

Arguments

DB will set the EVM units to decibels

PERC will set the EVM units to percent

Returns

See Arguments

Examples

SENSe:WLAN:AD:EVM:UNITs PERC sets the EVM units to percent.

[SENSe]:WLAN:AD:FILTer:ALPHa

Sets or queries the Filter Parameter for all 802.11ad measurement views, which is applicable when RRC is set as the measurement filter type (in the Modulation Params tab of the Settings control panel).

Conditions

Measurement views: All WLAN 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:FILTer:ALPHa <value>  
[SENSe]:WLAN:AD:FILTer:ALPHa?
```

Arguments

<value>=<NRf>

Returns

<NRf> = filter parameter

Examples

SENSe:WLAN:AD:FILTer:ALPHA 254.0000000000E-3 will set the filter parameter to 0.254.

[SENSe]:WLAN:AD:FILTer:MEASurement

Sets or queries the measurement filter in all the 802.11ad measurement views (set in the Modulation Params tab of the Settings control panel).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:FILTer:MEASurement { OFF | RRC }  
[SENSe]:WLAN:AD:FILTer:MEASurement?
```

Arguments

OFF sets the filter to None

RRC sets the filter to Root raised cosine

Returns

See Arguments

Examples

SENSe:WLAN:AD:FILTER:MEASUREMENT might return RRC, indicating that the measurement filter is set to Root Raised Cosine.

[SENSe]:WLAN:AD:FREQuency:ERRor

Sets or queries the frequency error value in all the 802.11ad measurement views (set in the Analysis Params tab of the Settings control panel).

Conditions

Measurement views: All WLAN 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:FREQuency:ERRor <value>  
[SENSe]:WLAN:AD:FREQuency:ERRor?
```

Arguments

<value>=<NRf>

Returns

<NRf> = frequency error in Hz

Examples

SENSe:WLAN:AD:FREQUENCY:ERROR 6 will set the frequency error to 6.000 Hz.

[SENSe]:WLAN:AD:FREQuency:ERRor:AUTO

Enables or disables the Auto check box state for frequency error in all the 802.11ad displays in the Analysis Params tab of the Settings control panel. This setting determines whether the frequency error is set automatically (enabled) or manually (disabled).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:FREQuency:ERRor:AUTO { 0 | OFF | 1 | ON }  
[SENSe]:WLAN:AD:FREQuency:ERRor:AUTO?
```

Arguments

OFF or 0 disables Frequency Error Auto (Manual mode)

ON or 1 enables Frequency Error Auto (Auto mode)

Returns

<Boolean> 0, 1

Examples

SENSe:WLAN:AD:FREQUENCY:ERROR:AUTO OFF disables the automatic mode for frequency error.

[SENSe]:WLAN:AD:MODUlation

Sets or queries the standard modulation type in all the 802.11ad measurement views (set in the Modulation Params tab of the Settings control panel).

Conditions

Measurement views: All 802.11ad measurement views

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:MODUlation {SC,CPHY}  
[SENSe]:WLAN:AD:MODUlation?
```

Arguments

SC will set the standard to Single Carrier

CPHY will set the standard to control Phy

Returns

See Arguments

Examples

SENSe:WLAN:AD:MODULATION SC will set the standard modulation type to Single Carrier.

[SENSe]:WLAN:AD:SUMMAry:CLEar:RESults (No Query Form)

Clears all scalar results in the display.

Conditions

Measurement view: 802.11ad Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:SUMMARY:CLEar:RESults
```

Arguments

None

Returns

None

Examples

`SENSe:WLAN:AD:SUMMARY:CLEAR:RESULTS` clears the result in the 802.11ad Summary display.

[SENSe]:WLAN:AD:SUMMARY:LIMIt:EVM

Sets or queries EVM limit value (set in the Limit tab in the Settings control panel) for the display. This value is the threshold for pass or fail.

Conditions

Measurement view: 802.11ad Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:SUMMARY:LIMIt:EVM <Arg1,Arg2>  
[SENSe]:WLAN:AD:SUMMARY:LIMIt:EVM?
```

Arguments

<Arg1> = OFF or 0 (disables EVM limit) or ON or 1 (enables EVM limit)

<Arg2> = limit value (Range: 0 to -160)

Returns

<Boolean> 0,1 and <NRf> (0 to -160)

Examples

`SENSe:WLAN:AD:SUMMARY:LIMIT:EVM 1,-30` enables the EVM limit and sets the limit to -30.

[SENSe]:WLAN:AD:SUMMARY:LIMIt:FREQuency:ERROr

Sets or queries the frequency error limit (set in the Limit tab of the Settings control panel) for the display. This value is the threshold for pass or fail.

Conditions

Measurement view: 802.11ad Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AD:SUMMARY:LIMIt:FREQuency:ERRor <Arg1,Arg2>  
[SENSe]:WLAN:AD:SUMMARY:LIMIt:FREQuency:ERRor?
```

Arguments

<Arg1> = OFF or 0 (disables Freq Error Limit) or ON or 1 (enables Freq Error Limit)

<Arg2> = limit value

Returns

<Boolean> 0,1

Examples

SENSe:WLAN:AD:SUMMARY:LIMIT:FREQUENCY:ERROR 0,60 disables the Freq Error Limit and sets the limit to 60.

[SENSe]:WLAN:ANALysis:LENGth

Specifies the length of the analysis period to use in the WLAN analysis time settings. Analysis length is specified in either symbols or seconds, depending on the Units setting. Use [SENSe]:WLAN:UNIT:TIME to set the units.

Programming a specified length sets [SENSe]:WLAN:ANALysis:AUTO to OFF.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:ANALysis:LENGth <NRf>  
[SENSe]:WLAN:ANALysis:LENGth?
```

Arguments

Floating point number that specifies the analysis length.

Range: The minimum value depends on the modulation type.

Examples

SENSe:WLAN:ANALYSIS:LENGTH 25.625e-6 sets the analysis length to 25.625 μ s.

[SENSe]:WLAN:ANALysis:LENGth:ACTual? (Query Only)

Returns the value of the actual analysis length for the WLAN analysis time settings.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

[SENSe]:WLAN:ANALysis:LENGth:ACTual?

Returns

Floating point number that represents the actual analysis length in seconds.

Examples

SENSe:WLAN:ANALYSIS:LENGTH:ACTUAL? might return 25.625E-6, indicating that the actual analysis length is 25.625 μ s.

[SENSe]:WLAN:ANALysis:LENGth:AUTO

Sets the analysis length value based on the requirements of the selected display. To set the analysis length manually, use the command.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

[SENSe]:WLAN:ANALysis:LENGth:AUTO {0|1|OFF|ON}
[SENSe]:WLAN:ANALysis:LENGth:AUTO?

Arguments

ON or 1 sets the analysis length value based on the requirements of the selected display.

OFF or 0 turns this function off.

Examples

SENSe:WLAN:ANALYSIS:LENGTH:AUTO ON sets the analysis length value automatically based on the requirements of the selected display.

[SENSe]:WLAN:ANALysis:OFFSet

Specifies or queries the analysis offset in the symbol interval in WLAN analysis parameters. This value is a percentage of the Guard Interval. The allowable range is -100% to 0%. -100% positions the FFT to start at the beginning of the Guard Interval, 0% positions it to start at the end of the Guard Interval. The default value is -50% which usually gives the best measurement results.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:ANALysis:OFFSet <NR1>  
[SENSe]:WLAN:ANALysis:OFFSet?
```

Arguments

Integer that represents the analysis offset in the symbol interval, in percent terms.

Examples

`SENSe:WLAN:ANALYSIS:OFFSET -50` sets the analysis offset in the symbol interval to -50%.

[SENSe]:WLAN:AY:ANALysis:BLOCKwise:CORRection:STATe

Set or query the state of the block wise data analysis (disabled or enabled).

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:BLOCKwise:CORRection:STATe { OFF | ON | 0 | 1 }  
[SENSe]:WLAN:AY:ANALysis:BLOCKwise:CORRection:STATe?
```

Arguments

0 or OFF disables block wise correction.

1 or ON enables block wise correction.

Returns

0 or OFF means block wise correction is turned off.

1 or ON means block wise correction is turned on.

Examples

`SENSe:WLAN:AY:ANAL:BLOC:CORR:STAT 1` turns on block wise correction.

`SENSe:WLAN:AY:ANAL:BLOC:CORR:STAT?` may return 0, which means block wise correction is turned off.

[SENSe]:WLAN:AY:ANALysis:EQUALizer:CONVergence

Set or query the Convergence value (set in the Advanced Parameters tab of the Settings control panel) for the 802.11ay displays.

Conditions

Measurement views: All 802.11ay

It is applicable only when Adaptive is set as the Adaptive Equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:EQUAlizer:CONVergence <value>
[SENSe]:WLAN:AY:ANALysis:EQUAlizer:CONVergence?
```

Arguments

<value>: :=<Nrf> is the Convergence value.

Returns

<Nrf>

Examples

SENSe:WLAN:AY:ANAL:EQUA:CONV 2.000e-3 sets the Convergence value to 2.000e-3.

SENSe:WLAN:AY:ANAL:EQUA:CONV? may return 2.000e-3, indicating the Convergence value is 2.000e-3.

[SENSe]:WLAN:AY:ANALysis:DC:OFFSet:CORRection:STATe

Set or query the state of the Enable DC Offset Correction checkbox (checked or unchecked) in the Settings control panel common to all the WLAN 802.11ay displays.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:DC:OFFSet:CORRection:STATe { OFF | ON | 0 | 1 }
[SENSe]:WLAN:AY:ANALysis:DC:OFFSet:CORRection:STATe?
```

Arguments

0 or OFF turns off Enable DC Offset Correction.

1 or ON turns on Enable DC Offset Correction.

Returns

0 or OFF means that Enable DC Offset Correction is disabled.

1 or ON means that Enable DC Offset Correction is enabled.

Examples

SENSe:WLAN:AY:ANAL:DC:OFFS:CORR:STAT 0 unchecks the Enable DC Offset Correction checkbox.

SENSe:WLAN:AY:ANAL:DC:OFFS:CORR:STAT? may return 1, which means that the Enable DC Offset Correction checkbox is checked

[SENSe]:WLAN:AY:ANALysis:EQUAlizer:LENGth

Set or query the Adaptive Equalizer Length (set in the Advanced Parameters tab of the Settings control panel) for the 802.11ay displays.

If you use SignalVu for scopes, this command is only available for the SignalVu version 3.10.0030 and above.)

Conditions

Measurement views: All 802.11ay

Only applies when adaptive is set as the adaptive equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:EQUAlizer:LENGth <value>
[SENSe]:WLAN:AY:ANALysis:EQUAlizer:LENGth?
```

Arguments

<value>: : =<NR1> is the Adaptive Equalizer Length value.

Returns

<NR1>

Examples

SENSe:WLAN:AY:ANAL:EQUA:LENG 25 sets Adaptive Equalizer Length to 25.

SENSe:WLAN:AY:ANAL:EQUA:LENG? may return 25, which indicates that Adaptive Equalizer Length is 25.

[SENSe]:WLAN:AY:ANALysis:EQUAlizer:MODE

Set or query the Equalizer Mode (set in the Advanced Parameters tab of the Settings control panel) for 802.11ay displays.

If you use SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.

Conditions

Measurement views: All 802.11ay

It is applicable only when Adaptive is set as the Adaptive Equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:EQUAlizer:MODE { TRA | HOLD }
[SENSe]:WLAN:AY:ANALysis:EQUAlizer:MODE?
```

Arguments

TRA sets mode to Train.

HOLD sets mode to Hold.

Returns

<string> = TRA or HOLD

Examples

SENSe:WLAN:AY:ANAL:EQUA:MODE TRA sets the Equalizer Mode to Train.

SENSe:WLAN:AY:ANAL:EQUA:MODE? may return HOLD, which indicates that the Equalizer Mode is Hold.

[SENSe]:WLAN:AY:ANALysis:EQUALizer:RESet (No Query Form)

Reset the Equalization value (button in the Advanced Parameters tab of the Settings control panel) for the 802.11ay displays.

If you use SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.

Conditions

Measurement views: All 802.11ay

It is applicable only when Adaptive is set as the Adaptive Equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:EQUALizer:RESet
```

Arguments

None

Examples

`SENSe:WLAN:AY:ANAL:EQUA:RES` resets the Equalization value.

[SENSe]:WLAN:AY:ANALysis:EQUALizer:TAPS

Set or query the Taps value in the Advanced Parameters tab of the Settings control panel for the 802.11ay displays.

If you use SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.

Conditions

Measurement views: All 802.11ay

It is applicable only when Adaptive is set as the Adaptive Equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TAPS <value>  
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TAPS?
```

Arguments

`<value>::=<NR1>` is the Taps value.

Returns

`<NR1>`

Examples

`SENSe:WLAN:AY:ANAL:EQUA:TAPS 56` sets the Taps value to 56.

`SENSe:WLAN:AY:ANAL:EQUA:TAPS?` may return 56, which means that the Taps value is 56.

[SENSe]:WLAN:AY:ANALysis:EQUALizer:TSRatio

Set or query the Taps/Symbols value (set in the Advanced Parameters tab of the Settings control panel) for the 802.11ay displays.

If you use SignalVu for scopes, this command is only available for SignalVu version 3.10.0030 and above.

Conditions

Measurement views: All 802.11ay

It is applicable only when Adaptive is set as the Adaptive Equalizer.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TSRatio { ONE | TWO | FOUR }  
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TSRatio?
```

Arguments

ONE, TWO, FOUR

Returns

<string> = ONE, TWO, or FOUR

Examples

SENSe:WLAN:AY:ANAL:EQUA:TSR ONE sets the Taps/Symbols value to 1.

SENSe:WLAN:AY:ANAL:EQUA:TSR? may return FOUR, indicating the value of Taps/Symbols is 4.

[SENSe]:WLAN:AY:ANALysis:EQUALizer:TYPE

Set or query whether the Equalizer is set to OFF, Nonadaptive (NONA), or Adaptive (ADAPtive) in the settings control panel common to all the WLAN 802.11ay displays.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TYPE { NONE | NONA | ADAPtive }  
[SENSe]:WLAN:AY:ANALysis:EQUALizer:TYPE?
```

Arguments

NONE sets the equalizer to OFF.

NONA sets the equalizer to nonadaptive.

ADAPtive sets the equalizer to adaptive.

Returns

NONE means that the equalizer is set to OFF.

NONA means that the equalizer is set to Nonadaptive.

ADAPtive means that the equalizer is set to Adaptive.

Examples

SENSe:WLAN:AY:ANAL:EQUAL:TYPE ADAPtive sets the equalizer to Adaptive

SENSe:WLAN:AY:ANAL:EQUAL:TYPE? may return NONE, which means that the equalizer is set to OFF.

[SENSe]:WLAN:AY:ANALysis:LENGth

Set or query the length value of the analysis period to be used in the WLAN 802.11ay analysis time settings.

The analysis length is specified in symbols or seconds, depending on the units setting.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

[SENSe]:WLAN:AY:ANALysis:LENGth <NRf>

[SENSe]:WLAN:AY:ANALysis:LENGth?

Arguments

<NRf> is the floating point number that specifies the analysis length.

Range: the minimum value depends on the modulation type. Units: μ s or s (seconds)

Returns

<NRf>

Examples

SENSe:WLAN:AY:ANAL:LENG 24.7835200000e-6 sets the analysis length 24.784 μ s.

SENSe:WLAN:AY:ANAL:LENG? may return 24.7835200000e-6, which means that the analysis length is 24.784 μ s.

[SENSe]:WLAN:AY:ANALysis:LENGth:ACTual? (Query Only)

Query the value of the actual analysis length for the WLAN 802.11ay analysis time settings.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

[SENSe]:WLAN:AY:ANALysis:LENGth:ACTual?

Returns

<NRf>

Units: μ s or s (seconds)

Examples

`SENSe:WLAN:AY:ANAL:Leng:ACT?` may return `2.840e-6`, indicating that the actual analysis length is 2.840 μ s.

[SENSe]:WLAN:AY:ANALysis:LENGth:AUTO

Set or query the state of the analysis length (enabled or disabled) based on the requirements of the selected display.

To set the analysis length value manually, use this command.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:LENGth:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:WLAN:AY:ANALysis:LENGth:AUTO?
```

Arguments

ON or 1 enables analysis length.

OFF or 0 disables analysis length.

Returns

ON or 1 sets analysis length to automatic (box is checked).

OFF or 0 sets analysis length to manual (box is unchecked).

Examples

`SENSe:WLAN:AY:ANAL:Leng:AUTO ON` sets analysis length automatically.

`SENSe:WLAN:AY:ANAL:Leng:AUTO?` may return OFF, which means analysis length is turned off.

[SENSe]:WLAN:AY:ANALysis:OFFSet

Set or query the value of the Analysis Offset for all the WLAN 802.11ay displays. The value is located under the Settings control panel in all WLAN 802.11ay displays.

The query returns the result in symbols or seconds, based on the unit choice selected in the analysis time tab in the WLAN 802.11ay settings control panel.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:OFFSet <value>  
[SENSe]:WLAN:AY:ANALysis:OFFSet?
```


Arguments

<value>: :=<NRf> sets the analysis offset in the Analysis Time tab of the WLAN 802.11ay Settings control panel.

Units: μ s or s (seconds)

Returns

<NRf>

Examples

SENSe:WLAN:AY:ANAL:OFFS -1.2e-6 sets the Analysis Offset to -1.200 μ s.

SENSe:WLAN:AY:ANAL:OFFS? may return -1.2e-6, which means that the analysis offset is -1.200 μ s.

[SENSe]:WLAN:AY:ANALysis:OFFSet:AUTO

Sets or query the state of the Auto checkbox (enabled or disabled) for the analysis offset.

This setting determines if the analysis offset displays is set automatically or manually.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:OFFSet:AUTO { OFF | ON | 0 | 1 }
[SENSe]:WLAN:AY:ANALysis:OFFSet:AUTO?
```

Arguments

0 or OFF sets the analysis offset to manual (box is unchecked).

1 or ON sets the analysis offset to automatic (box is checked).

Returns

0 or OFF means that the analysis offset is manual.

1 or ON means that the analysis offset is automatic.

Examples

SENSe:WLAN:AY:ANAL:OFFS:AUTO 1 sets the analysis offset to automatic.

SENSe:WLAN:AY:ANAL:OFFS:AUTO? may return 0, which means that the analysis offset to manual.

[SENSe]:WLAN:AY:ANALysis:SFO:TRACk:STATe

Set or query the state of the SFO Tracker. When enabled, the SFO Tracker estimates and corrects Symbol Timing/Frequency errors for each Data/GI block. When disabled, it performs a single shot correction for the entire packet, which is based on the value estimated from the STF Region.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:SFO:TRACk:STATe { OFF | ON | 0 | 1 }
```

Arguments

0 or OFF disables the SFO Tracker.

1 or ON enables the SFO Tracker.

Returns

0 or OFF means the SFO Tracker is turned off.

1 or ON means the SFO Tracker is turned on.

Examples

SENSe:WLAN:AY:ANAL:SFO:TRAC:STAT 0 turns off the SFO Tracker, performing a single shot correction for the entire data packet.

SENSe:WLAN:AY:ANAL:SFO:TRAC:STAT? may return 1, which indicates that the SFO Tracker is turned on, correcting Symbol Timing and Frequency errors for each Data/GI block in the packet.

[SENSe]:WLAN:AY:ANALysis:SWAP:IQ

Set or query the state of the Maximum Bursts to Average option (enabled or disabled) in the WLAN 802.11ay Summary setting control panel.

Conditions

Measurement views: WLAN 802.11ay Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:SWAP:IQ { OFF | ON | 0 | 1 }  
[SENSe]:WLAN:AY:ANALysis:SWAP:IQ?
```

Arguments

OFF or 0 disables Maximum Bursts to Average.

1 or ON enables Maximum Bursts to Average.

Returns

0 or OFF means Maximum Bursts to Average is turned off.

1 or ON means Maximum Bursts to Average is turned on.

Examples

SENSe:WLAN:AY:ANAL:SWAP:IQ 0 disables the IQ Swap for the WLAN 802.11ay Summary display.

SENSe:WLAN:AY:ANAL:SWAP:IQ? may return 1, which indicates that the IQ Swap is enabled for the WLAN 802.11ay Summary display.

[SENSe]:WLAN:AY:ANALysis:TIME:UNITs

Set or query the type of time units in the WLAN 802.11ay settings.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:TIME:UNITs { SEC | SYMB }  
[SENSe]:WLAN:AY:ANALysis:TIME:UNITs?
```

Arguments

SEC sets time units to seconds.

SYMB sets time units to symbols.

Returns

SEC means that time units are set to seconds.

SYMB means that time units are set to symbols.

Examples

SENSe:WLAN:AY:ANAL:TIM:UNIT SEC sets time units to seconds.

SENSe:WLAN:AY:ANAL:TIM:UNIT? may return SYMB, which means that time units are set to symbols.

[SENSe]:WLAN:AY:ANALysis:TRACk:EQ:STATe

Set or query the state of the LMS Tracking Equalizer. When enabled, it performs LMS Tracking Equalization for each Data/GI block. When disabled, it provides a single shot tracking and equalization for the entire packet.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:ANALysis:TRACk:EQ:STATe { OFF | ON | 0 | 1 }  
[SENSe]:WLAN:AY:ANALysis:TRACk:EQ:STATe?
```

Arguments

0 or OFF disables the LMS Tracking Equalizer.

1 or ON enables the LMS Tracking Equalizer.

Returns

0 or OFF means the LMS Tracking Equalizer is turned off.

1 or ON means the LMS Tracking Equalizer is turned on.

Examples

`SENSe:WLAN:AY:ANAL:TRAC:EQ:STAT 1` turns on the LMS Tracking Equalizer for each Data/GI block.

`SENSe:WLAN:AY:ANAL:TRAC:EQ:STAT?` may return 0, which indicates that the LMS Tracking Equalizer is turned off.

[SENSe]:WLAN:AY(:BANDwidth|:BWIDth):MODE

Set or query the mode of the Measurement BW in the Settings control panel common to all WLAN 802.11ay displays.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY(:BANDwidth|:BWIDth):MODE { MAN | AUTO | LSP}
[SENSe]:WLAN:AY(:BANDwidth|:BWIDth):MODE?
```

Arguments

Select one of the below arguments:

Argument	Description
MANual	Allows manual selection of the measurement bandwidth. A typical use is setting a narrow measurement bandwidth on a small range of frequencies to examine one signal, while rejecting the others that are present in a spectrum graph.
AUTO	Automatically selects a measurement bandwidth. The measurement chooses a bandwidth, based on other parameter settings, such as symbol rate and modulation type.
LSP	Sets the Measurement BW to Link to Span. This allows you to use the spectrum display to tune the frequency, view the signal, and then use span control to set the measurement bandwidth. This mode emulates legacy instruments.

Returns

See Arguments.

Examples

`SENSe:WLAN:AY:BAND:MODE LSP` sets the Measurement BW mode to Link to Span.

`SENSe:WLAN:AY:BAND:MODE?` may return `AUTO`, which means that the Measurement BW Mode automatically selects a measurement bandwidth.

[SENSe]:WLAN:AY(:BANDwidth|:BWIDth):TINTerval

Set or query the value of the Measurement Bandwidth (BW) present in the settings control panel common to all the WLAN 802.11ay displays.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY(:BANDwidth|:BWIDth):TINTerval <value>
[SENSe]:WLAN:AY(:BANDwidth|:BWIDth):TINTerval?
```

Arguments

<value>: :<NRf> specifies the measurement bandwidth.

Range: 1 to 100 Hz

Returns

<NR3>

Examples

SENSe:WLAN:AY:BAND:BWID:TINT 5 sets the Measurement Bandwidth value to 5 Hz.

SENSe:WLAN:AY:BAND:BWID:TINT? may return 22, which indicates that the Measurement Bandwidth value is 22 Hz.

[SENSe]:WLAN:AY:CHbw

Set or query the type of channel bandwidth present in the settings control panel common to all WLAN 802.11ay displays.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:CHbw { BW1X | BW2X }
[SENSe]:WLAN:AY:CHbw?
```

Arguments

BW1X sets the channel bandwidth to 2.16 GHz.

BW2X sets the channel bandwidth to 4.32 GHz.

Units: GHz

Returns

BW1X means that the channel bandwidth is 2.16 GHz.

BW2X means that the channel bandwidth is 4.32 GHz.

Examples

SENSe:WLAN:AY:CH BW1X sets the channel bandwidth to 2.16 GHz.

SENSe:WLAN:AY:CH? may return BW2X, which indicates that the channel bandwidth is 4.32 GHz.

[SENSe]:WLAN:AY:DUPBand

Set or query the band (Upper or Lower) that is showing the results when a nonEDMG Duplicate mode is detected with 11ay SC 4.32 GHz BW settings.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:DUPBand { LOWer | UPPer }  
[SENSe]:WLAN:AY:DUPBand?
```

Arguments

LOWer sets the band to 2G-L for all open displays and updates the results.

UPPer sets the band to 2G-U for all open displays and updates the results.

Returns

LOWer means that the band is set to 2G-L for all open displays

UPPer sets the band to 2G-U for all open displays.

Examples

SENSe:WLAN:AY:DUPB UPPer sets the band to 2G-U for all open displays.

SENSe:WLAN:AY:DUPB? may return **LOWer**, which indicates that 2G-L band is set for all open displays.

[SENSe]:WLAN:AY:EVM:BURSt:COUNT

Set or query the total burst count to be analyzed.

Conditions

Measurement views: WLAN 802.11ay Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:EVM:BURSt:COUNT <value>  
[SENSe]:WLAN:AY:EVM:BURSt:COUNT?
```

Arguments

<value>: :=<NR1> is the total burst count.

Returns

<NR1>

Examples

SENSe:WLAN:AY:EVM:BURSt:COUN 20 sets the total burst count to be analyzed to 20.

SENSe:WLAN:AY:EVM:BURSt:COUN? may return 20, which indicates that the total burst count to be analyzed is 20.

[SENSe]:WLAN:AY:EVM:BURSt:COUNT:ENABle

Set or query the state of the Maximum Bursts to Average option (enabled or disabled) in the WLAN 802.11ay Summary setting control panel.

Conditions

Measurement views: WLAN 802.11ay Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:EVM:BURSt:COUNT:ENABle { OFF | ON | 0 | 1 }  
[SENSe]:WLAN:AY:EVM:BURSt:COUNT:ENABle?
```

Arguments

0 or OFF disables Maximum Bursts to Average.

1 or ON enables Maximum Bursts to Average .

Returns

0 or OFF means that Maximum Bursts to Average is turned off.

1 or ON means that Maximum Bursts to Average is turned on.

Examples

SENSe:WLAN:AY:EVM:BURSt:COUN:ENAB 0 turns off Maximum Bursts to Average option.

SENSe:WLAN:AY:EVM:BURSt:COUN:ENAB? may return 1, which indicates that Maximum Bursts to Average option is turned on.

[SENSe]:WLAN:AY:EVM:DATA:ANALyze:ALL:SYMBols

Set or query whether the Analyze All option is enabled or disabled. When enabled, it allows all available data symbols to be analyzed.

Data Start and Data Length values are considered for current analysis. When using standard preset, it defaults to unchecked mode.

Conditions

Measurement views: WLAN 802.11ay Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:EVM:DATA:ANALyze:ALL:SYMBols { OFF | ON | 0 | 1 }  
[SENSe]:WLAN:AY:EVM:DATA:ANALyze:ALL:SYMBols?
```

Arguments

0 or OFF disables Analyze All.

1 or ON enables Analyze All.

Returns

0 or OFF means that Analyze All is turned off.

1 or ON means that Analyze All is turned on.

Examples

`SENSe:WLAN:AY:EVM:DATA:ANAL:ALL:SYMB 1` enables data start and data length values to be considered for current analysis.

`SENSe:WLAN:AY:EVM:DATA:ANAL:ALL:SYMB?` may return 0, indicating that data start and data length values are considered for current analysis.

[SENSe]:WLAN:AY:EVM:DATA:LENGth

Set or query whether the Analyze All checkbox is checked or unchecked. When enabled, all data symbols are analyzed and the data start value is always 0.

Conditions

Measurement views: WLAN 802.11ay Constellation, WLAN 802.11ay EVM versus Time and WLAN 802.11ay Summary displays

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:EVM:DATA:LENGth <value>
[SENSe]:WLAN:AY:EVM:DATA:LENGth?
```

Arguments

`<value>: :=<NR1>` is the number of symbols to be analyzed.

Returns

`<NR1>`

Examples

`SENSe:WLAN:AY:EVM:DATA:LENG 1000` sets the analysis to occur for 1000 symbols.

`SENSe:WLAN:AY:EVM:DATA:LENG?` may return 1000, which means that the analysis occurs for 1000 symbols.

[SENSe]:WLAN:AY:EVM:DATA:STARt

Set or query whether the Analyze All checkbox is checked or unchecked. When enabled, all data symbols are analyzed and the data start value is always 0.

Conditions

Measurement views: WLAN 802.11ay Constellation, WLAN 802.11ay EVM versus Time and WLAN 802.11ay Summary displays

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:EVM:DATA:STARt <value>
[SENSe]:WLAN:AY:EVM:DATA:STARt?
```


Arguments

<value>: :=<NRf> is the symbol number.

Returns

<NRf>

Examples

SENSe:WLAN:AY:EVM:DATA:STAR 5 sets data analysis to begin at the 5th symbol.

SENSe:WLAN:AY:EVM:DATA:STAR? may return 5, which indicates that data analysis begins at the 5th symbol.

[SENSe]:WLAN:AY:EVM:UNITs

Set or query the type of EVM units (dB or percent).

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:EVM:UNITs { DB | PERC }  
[SENSe]:WLAN:AY:EVM:UNITs?
```

Arguments

DB sets EVM units to dB.

PERC sets EVM units to %.

Returns

DB means that EVM units are in dB.

PERC means that EVM units are in %.

Examples

SENSe:WLAN:AY:EVM:UNIT PERC sets EVM units to percent (%).

SENSe:WLAN:AY:EVM:UNIT? may return DB, which indicates that EVM unit are in dB.

[SENSe]:WLAN:AY:FILTer:ALPHa

Set or query the value of the filter parameter, which is applicable when RRC is set as the measurement filter type.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:FILTer:ALPHa <value>  
[SENSe]:WLAN:AY:FILTer:ALPHa?
```

Arguments

<value>: :=<NRf> is the filter parameter value.

Returns

<NRf>

Examples

SENSe:WLAN:AY:FILT:ALPH 254.0000000000e-3 sets the filter parameter value to 0.254.

SENSe:WLAN:AY:FILT:ALPH? may return 254.0000000000e-3, which means that the filter parameter value is 254.0000000000e-3.

[SENSe]:WLAN:AY:FILT:MEASurement

Set or query type of the WLAN 802.11ay measurement filter setting.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:FILT:MEASurement { OFF | RRC }  
[SENSe]:WLAN:AY:FILT:MEASurement?
```

Arguments

OFF sets the measurement filter settings to None.

RRC sets the measurement filter settings to Root Raised Cosine.

Returns

OFF means that the measurement filter settings is set to None.

RRC means that the measurement filter settings is set to Root Raised Cosine.

Examples

SENSe:WLAN:AY:FILT:MEAS OFF sets the measurement filter settings to None.

SENSe:WLAN:AY:FILT:MEAS? may return RRC, which means that the measurement filter settings is Root Raised Cosine.

[SENSe]:WLAN:AY:FREQuency:ERRor

Set or query the value of the frequency error present in the Settings control panel common to all WLAN 802.11ay displays.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:FREQuency:ERRor <value>  
[SENSe]:WLAN:AY:FREQuency:ERRor?
```

Arguments

<value>: :=<NRf> is the frequency error value.

Range: -2.5 to 2.5 Hz

Returns

<NRf>

Examples

SENSe:WLAN:AY:FREQ:ERR 6 sets the frequency error value to 6.000 Hz.

SENSe:WLAN:AY:FREQ:ERR? may return 5, which means that the frequency error value is 5.000 Hz.

[SENSe]:WLAN:AY:FREQuency:ERRor:AUTO

Set or query the state of the Auto checkbox (enabled or disabled) for frequency errors in the settings control panel common to all WLAN 802.11ay displays.

This setting determines if the frequency error is set automatically or manually.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:FREQuency:ERRor:AUTO { OFF | ON | 0 | 1 }  
[SENSe]:WLAN:AY:FREQuency:ERRor:AUTO?
```

Arguments

OFF or 0 disables the automatic frequency error mode (and sets the manual mode).

ON or 1 enables the automatic frequency error (and sets the auto mode).

Returns

OFF or 0 means that the automatic frequency error mode is disabled.

ON or 1 means that the automatic frequency error is enabled.

Examples

SENSe:WLAN:AY:FREQ:ERR:AUTO OFF disables the frequency error mode and sets the manual mode.

SENSe:WLAN:AY:FREQ:ERR:AUTO? may return ON, which means that the frequency error mode is automatic.

[SENSe]:WLAN:AY:MODUlation

Set or query the type of modulation present in the settings control panel that is common to all WLAN 802.11ay displays.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:MODulation AYSC  
[SENSe]:WLAN:AY:MODulation?
```

Arguments

AYSC sets the standard to 802.11ay Single Carrier.

Returns

AYSC

Examples

SENSe:WLAN:AY:MOD AYSC sets the modulation type to Single Carrier.

SENSe:WLAN:AY:MOD? may return AYSC, which means the modulation type is Single Carrier.

[SENSe]:WLAN:AY:Region

Set or query EDMG or PreEDMG region in the Settings control panel when 11ay 4.32 GHz BW is selected.

Conditions

Measurement views: All WLAN 802.11ay

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:Region { EDMG | PRE1edmg | PRE2edmg }  
[SENSe]:WLAN:AY:Region?
```

Arguments

Select one of the below arguments:

Argument	Description
EDMG	Sets the region to EDMG for all open displays.
PRE1edmg	Sets the region to PRE1edmg for all open displays.
PRE2edmg	Sets the region to PRE2edmg for all open displays.

Returns

See Arguments.

Examples

SENSe:WLAN:AY:REG EDMG sets the region to EDMG for all open displays when 11ay 4.32 GHz BW is selected.

SENSe:WLAN:AY:REG? may return PRE1, which indicates that the region is set to PRE1edmg for all open displays when 11ay 4.32 GHz BW is selected.

[SENSe]:WLAN:AY:SUMMary:CLEar:RESults (No Query Form)

Clears all Scalar results in the Summary display.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:SUMMary:CLEar:RESults
```

Arguments

None

Examples

SENSe:WLAN:AY:SUMM:CLE:RES clears all Scalar results.

[SENSe]:WLAN:AY:SUMMary:LIMIt:EVM

Set or query the EVM Limit value (arg1), which is located under the limit tab in the Summary control panel, and the EVM Limit status (arg2) as disabled or enabled.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:SUMMary:LIMIt:EVM <arg1,arg2>
```

```
[SENSe]:WLAN:AY:SUMMary:LIMIt:EVM?
```

Arguments

Number of arguments is two: <arg1,arg2>. Units: dB or %.

<arg1>:

OFF or 0 disables EVM Limit.

ON or 1 enables EVM Limit.

<arg2>:

Sets the limit EVM limit value to show pass/fail statuses for the EVM measurement result.

You must select the units (dB or %) in the EVM tab.

Returns

0 or 1, <NRf>

Examples

`SENSe:WLAN802_11ad:SUMM:LIMI:EVM 1,-30`, where `<arg1>` is 1, which indicates that Limit is enabled for the EVM Limit comparison and `<arg2>` is -30, which sets the EVM Limit value at -30%.

`SENSe:WLAN802_11ad:SUMM:LIMI:EVM?` may return 0, which indicates that Limit is disabled for EVM Limit comparison and sets the EVM Limit value at -30 dB.

[SENSe]:WLAN:AY:SUMMAry:LIMIt:FREQuency:ERROr

Set or query the Frequency Error Limit value (`arg1`), which is located under the limit tab in the Summary control panel, and the Frequency Error Limit status (`arg2`) as disabled or enabled.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Sense commands

Syntax

```
[SENSe]:WLAN:AY:SUMMAry:LIMIt:FREQuency:ERROr <arg1,arg2>
[SENSe]:WLAN:AY:SUMMAry:LIMIt:FREQuency:ERROr?
```

Arguments

Number of arguments is two: `<arg1,arg2>`. Units: ppm.

<arg1>:

OFF or 0 turns off Frequency Error Limit.

ON or 1 turns on Frequency Error Limit.

<arg2>:

Specifies show pass/fail statuses for the Frequency Error Limit value.

Returns

0 or 1, `<NRf>`

Examples

`SENSe:WLAN:AY:SUMM:LIMI:FREQ:ERRO 1,20` where `<arg1>` is 1, which indicates that Limit is enabled for Frequency Error Limit comparison, and `<arg2>` is 20, which sets the Frequency Error Limit value at 20 ppm.

`SENSe:WLAN:AY:SUMM:LIMI:FREQ:ERRO?` may return 1, 20, where 1 indicates that Limit is enabled for Frequency Error Limit comparison and 20 indicates that the frequency error limit value is 20 ppm.

[SENSe]:WLAN:BURSt

Specifies the burst to measure when multiple bursts are present in an acquisition, in the WLAN analysis parameters. The index number of the first burst is 1, second burst is 2, etc.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:BURSt <NR1>  
[SENSe]:WLAN:BURSt?
```

Arguments

Integer that specifies which burst to measure when multiple bursts are present in an acquisition.

Examples

`SENSe:WLAN:BURST 3` sets the burst to measure in the presence of multiple bursts to the third burst.

[SENSe]:WLAN:CHANnel[:BANDwidth[:BWIDth]

Specifies or queries a nominal channel bandwidth to use for the WLAN measurements.

To automatically set the subcarrier spacing for the WLAN measurements, use the command

```
[SENSe]:WLAN:SCARriers:SPACing:AUTO.
```

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:CHANnel[:BANDwidth[:BWIDth] {BW5|BW10|BW20|BW40|BW80|BW160}  
[SENSe]:WLAN:CHANnel[:BANDwidth[:BWIDth]?
```

Arguments

BW5, BW10, BW20, BW40, BW80, BW160 specify a nominal channel bandwidth to use for the WLAN measurements.

Returns

Query returns one of the argument values indicating the selected nominal channel BW.

Examples

`SENSe:WLAN:CHANNEL:BANDWIDTH BW20` sets the nominal channel bandwidth to use to 20 MHz.

[SENSe]:WLAN:EQUalizer:TRaining

Specifies the method to use for estimating channel frequency response and equalization for WLAN measurments (either PREamble or PDATa). This control can be used to diagnose changes in frequency response over the signal packet.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:EQUalizer:TRaining {PREamble|PDATa}  
[SENSe]:WLAN:EQUalizer:TRaining?
```

Arguments

PREamble The instrument uses only the Preamble to estimate channel frequency response. This response is then used to equalize the entire signal packet.

PDATa Preamble plus data. The instrument makes an initial channel frequency response estimate from the Preamble. Then it estimates the channel response for each data symbol using the decoded data content to derive equalization for each symbol individually. This allows compensation for time-varying channel response over the packet.

Examples

SENSe:WLAN:EQUALIZER:TRAINING PREAMBLE sets the method used to estimate channel frequency response and equalization to Preamble.

[SENSe]:WLAN:FFT:LENGth? (Query Only)

Returns the fixed FFT length for the WLAN measurements.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:FFT:LENGth?
```

Returns

Integer that represents the fixed FFT length for the WLAN measurements.

Examples

SENSe:WLAN:FFT:LENGTH? might return the fixed FFT length as 64.

[SENSe]:WLAN:FFT:SRATe? (Query Only)

Returns the FFT sample rate for the WLAN measurements, in samples per second, based on the bandwidth or subcarrier setting.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:FFT:SRATe?
```


Returns

Floating point number that represents the FFT sample rate in MS/s.

Examples

`SENSe:WLAN:FFT:SRATE?` might return `20.000e+6`, which represents an FFT sample rate of 20.000 MS/s.

[SENSe]:WLAN:FREQuency:ERRor

Sets or queries the frequency error in the WLAN analysis parameters. The entered value is used by the analysis as a fixed frequency offset. This is useful when

the exact frequency offset of the signal is known. To set the frequency error automatically, use the command `[SENSe]:WLAN:FREQuency:ERRor:AUTO`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:FREQuency:ERRor <NRf>  
[SENSe]:WLAN:FREQuency:ERRor?
```

Arguments

Floating point number that represents the fixed frequency offset.

Examples

`SENSe:WLAN:FREQUENCY:ERROR 0.02` sets the frequency error to 0.02.

[SENSe]:WLAN:FREQuency:ERRor:AUTO

Turns on the automatic determination of the frequency error in the WLAN analysis parameters. To enter a value manually when Auto is turned off, use the command `[SENSe]:WLAN:FREQuency:ERRor`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:FREQuency:ERRor:AUTO {0|1|OFF|ON}  
[SENSe]:WLAN:FREQuency:ERRor:AUTO?
```

Arguments

OFF or 0 sets the frequency error manually, using the `[SENSe]:WLAN:FREQuency:ERRor` command.

ON or 1 sets the frequency error automatically.

Examples

`SENSe:WLAN:FREQUENCY:ERROR:AUTO ON` turns on automatic determination of the frequency error.

[SENSe]:WLAN:GUARd:INTERval

Sets or queries the Guard Interval to use in the input signal in the WLAN measurements.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:GUARd:INTERval {AUTO|FOURth|EIGHth}  
[SENSe]:WLAN:GUARd:INTERval?
```

Arguments

`AUTO` Auto from SIG uses the Guard Interval value extracted from the signal

`FOURth` specifies the guard interval as 1/4.

`EIGHth` specifies the guard interval as 1/8.

Examples

`SENSe:WLAN:GUARD:INTERVAL FOUR` sets the guard interval to 1/4.

[SENSe]:WLAN:MODulation:DETECT:QAM1024

Sets or queries whether or not 1024QAM detection is enabled.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:MODulation:DETECT:QAM1024 { 0 | 1 }  
[SENSe]:WLAN:MODulation:DETECT:QAM1024?
```

Arguments

0 means detection is disabled.

1 means detection is enabled.

Returns

See Arguments

Examples

`SENSe:WLAN:MODulation:MANual DSSS1` specifies to use DSSS1 fixed modulation regardless of the signal content.

[SENSe]:WLAN:MODulation:MANual

Specifies to use a fixed modulation type, regardless of the signal content, in the WLAN analysis parameters.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:MODulation:MANual {BPSK |QPSK |QAM16 |QAM64|QAM256 |QAM1024 |DSSS1 |DSSS2 |CCK5 |
CCK11}
[SENSe]:WLAN:MODulation:MANual?
```

Arguments

BPSK |QPSK |QAM16 |QAM64 |QAM256 |QAM1024| DSSS1 |DSSS2| CCK5 |CCK11 are fixed modulation types.

Examples

`SENSe:WLAN:MODulation:MANual DSSS1` specifies to use DSSS1 fixed modulation regardless of the signal content.

[SENSe]:WLAN:MODulation:SOURce

Specifies the method of data symbol modulation identification in the WLAN analysis parameters (either Auto Detect, Manual, or Auto from SIG).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:MODulation:SOURce [AUTO|MANual|SIG]
[SENSe]:WLAN:MODulation:SOURce?
```

Arguments

AUTO Auto Detect estimates the modulation from the data symbol IQ content.

MANual Manual allows specifying a fixed modulation type regardless of the signal content, using the command

```
[SENSe]:WLAN:MODulation:MANual.
```

SIG Auto from SIG sets the modulation as indicated by the embedded SIG preamble symbol format data.

Examples

`SENSe:WLAN:MODULATION:SOURCE MANUAL` enables you to specify a fixed modulation type regardless of the signal content, using the command `[SENSe]:WLAN:MODulation:DETECT:QAM1024`.

[SENSe]:WLAN:PILot:TRACking:AMPLitude:STATe

Specifies to use the pilot subcarrier to correct amplitude variations over the packet for WLAN measurements. Note: the default setting is 0 (false).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:PILot:TRACking:AMPLitude:STATe {0|1|OFF|ON}  
[SENSe]:WLAN:PILot:TRACking:AMPLitude:STATe?
```

Arguments

ON or 1 specifies to use the Amplitude pilot subcarrier to correct amplitude variation over the packets.

OFF or 0 specifies that the Amplitude pilot subcarrier is off.

Examples

SENSe:WLAN:PILOT:TRACKING:AMPLITUDE:STATE ON specifies to use the pilot subcarrier to correct variations.

[SENSe]:WLAN:PILot:TRACking:PHASe:STATe

Specifies to use the pilot subcarrier to correct phase variations over the packet, in WLAN measurements. Note: the default setting is 1 (true).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:PILot:TRACking:PHASe:STATe {0|1|OFF|ON}  
[SENSe]:WLAN:PILot:TRACking:PHASe:STATe?
```

Arguments

ON or 1 specifies to use the pilot subcarrier to correct phase variations over the packet.

OFF or 0 specifies that the pilot subcarrier is off.

Examples

SENSe:WLAN:PILOT:TRACKING:PHASE:STATE ON specifies to use the pilot subcarrier to correct phase variations over the packet.

[SENSe]:WLAN:PILot:TRACking:TIMing:STATe

Specifies to use the pilot subcarrier to correct timing variations over the packet, in WLAN measurements. Note: the default setting is 0 (false).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:PILot:TRACking:TIMing:STATe {0|1|OFF|ON}  
[SENSe]:WLAN:PILot:TRACking:TIMing:STATe?
```

Arguments

ON or 1 specifies to use the pilot subcarrier to correct timing variations over the packet.

OFF or 0 specifies that the pilot subcarrier is off.

Examples

SENSe:WLAN:PILOT:TRACKING:TIMING:STATE ON specifies to use the pilot subcarrier to correct timing variations over the packet.

[SENSe]:WLAN:RADix

Specifies or queries the format for displaying the symbol values in the WLAN setting preferences (either binary or HEX).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:RADix {BINary|HEX}  
[SENSe]:WLAN:RADix?
```

Arguments

BINary specifies to display the symbol values in binary format.

HEX specifies to display the symbol values in HEX format.

Examples

SENSe:WLAN:RADIX HEX specifies to display the symbol values in HEX format.

[SENSe]:WLAN:SCARriers

Sets or queries which subcarriers to display in the WLAN view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SCARriers {ALL|PILOts|DATA|RANGe|SINGle}  
[SENSe]:WLAN:SCARriers?
```

Arguments

ALL specifies that all subcarriers will be displayed.

PILOt specifies that only the pilot subcarriers will be displayed.

DATA specifies that only the data subcarriers will be displayed.

RANGe specifies that the subcarriers within a specified range will be displayed.

SINGle specifies that only a single subcarrier will be displayed.

Examples

SENSe:WLAN:SCARRIERS ALL sets the WLAN view to display all subcarriers.

[SENSe]:WLAN:SCARriers:RANGe:START

Sets or queries the start value of the subcarrier range to be displayed in the WLAN view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SCARriers:RANGe:START <NR1>  
[SENSe]:WLAN:SCARriers:RANGe:START?
```

Arguments

Integer

Examples

SENSe:WLAN:SCARRIERS:RANGE:START 20 sets the subcarrier start range to 20.

[SENSe]:WLAN:SCARriers:RANGe:STOP

Sets or queries the stop value of the subcarrier range to be displayed in the WLAN view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SCARriers:RANGe:STOP <NR1>  
[SENSe]:WLAN:SCARriers:RANGe:STOP?
```

Arguments

Integer

Examples

SENSe:WLAN:SCARRIERS:RANGE:STOP 25 sets the subcarrier stop range to 25.

[SENSe]:WLAN:SCARriers:SINGLE:INDEX

Specifies or queries the single subcarrier to display in the WLAN view.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SCARriers:SINGLE:INDEX <NR1>  
[SENSe]:WLAN:SCARriers:SINGLE:INDEX?
```

Arguments

Integer

Examples

SENSe:WLAN:SCARRIERS:SINGLE:INDEX -10 sets the single subcarrier for display to -10.

[SENSe]:WLAN:SCARriers:SPACing

Sets or queries the subcarrier spacing in the WLAN measurements.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SCARriers:SPACing <NRf>  
[SENSe]:WLAN:SCARriers:SPACing?
```

Arguments

NR3 is a floating point number that specifies the subcarrier spacing.

Returns

`SENSe:WLAN:SCARriers:SPACing 312.5E+3` sets the subcarrier spacing to 312.5 kHz.

[SENSe]:WLAN:SCARriers:SPACing:AUTO

When turned on, automatically sets the subcarrier spacing in the WLAN measurements.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SCARriers:SPACing:AUTO {0|1|OFF|ON}  
[SENSe]:WLAN:SCARriers:SPACing:AUTO?
```

Arguments

OFF or 0 turns the automatic subcarrier spacing off.

ON or 1 turns the automatic subcarrier spacing on.

Examples

`SENSe:WLAN:SCARriers:SPACing:AUTO ON` turns the automatic subcarrier spacing on.

[SENSe]:WLAN:SIGNAL:STANDARD:TYPE

Sets or queries the WLAN signal standard.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Additionally, the N argument requires Option 24, and the AC argument requires Option 25.

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SIGNAL:STANDARD:TYPE {A|B|G|J|P|N|AC}  
[SENSe]:WLAN:SIGNAL:STANDARD:TYPE?
```

Arguments

A sets the WLAN signal standard to 802.11a.

B sets the WLAN signal standard to 802.11b.

G sets the WLAN signal standard to 802.11g.

J sets the WLAN signal standard to 802.11j.

P sets the WLAN signal standard to 802.11p.

N sets the WLAN signal standard to 802.11n. Requires Option 24 in addition to Option 23.

AC sets the WLAN signal standard to 802.11ac. Requires Option 25 in addition to Option 23.

Examples

`SENSe:WLAN:SIGNAL:STANDARD:TYPE G` sets the WLAN signal standard to 802.11g.

[SENSe]:WLAN:SubCARrier:DERotation

Turning on this state allows some displays to show subcarriers with or without the Gamma subcarrier phase rotation removed. Gamma phase rotation is applied to 802.11n and 802.11ac subcarriers in defined subranges depending on the Channel Bandwidth selected (only for Channel Bandwidths of 40 MHz and above).

When derotation is turned off, the rotation is not removed, which provides a direct view of the physical modulation on the channel. With derotation turned on, the rotation is removed, allowing easier decoding of the underlying data content.

Only the Constellation and Symbol Table results are affected by this control.

NOTE: This control is only shown for 802.11n and 802.11ac standard selections for channel bandwidths greater than or equal to 40 MHz. It is not present for all others.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SubCARrier:DERotation {0|1|OFF|ON}
[SENSe]:WLAN:SubCARrier:DERotation?
```

Arguments

OFF or **0** turns the subcarrier derotation off.

ON or **1** turns the subcarrier derotation on.

Examples

`SENSe:WLAN:SUBCARRIER:DEROTATION ON` turns the subcarrier derotation on.

[SENSe]:WLAN:SUMMARY:CLEar:RESults (No Query Form)

Clears the results in the WLAN Summary measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

`[SENSe]:WLAN:SUMMARY:CLEAr:RESults`

Arguments

None

Examples

`SENSe:WLAN:SUMMARY:CLEAR:RESULTS` clears the results in the measurement.

[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT

Specifies the maximum number of bursts to average for the WLAN Summary EVM display. The burst average function must be enabled using the command `[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT:ENABle`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

`[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT <NR1>`

`[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT?`

Arguments

Integer

Examples

`SENSe:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT 12` sets the maximum number of bursts to average to 12.

[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT:ENABle

Enables the burst average function in the WLAN Summary EVM settings. To specify the maximum number of bursts to average, use the command `[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT`.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

`[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT:ENABle {0|1|OFF|ON}`

`[SENSe]:WLAN:SUMMARY:EVM:RMS:AVERAge:COUNT:ENABle?`

Arguments

`ON` or `1` turns the burst average function on.

`OFF` or `0` turns the burst average function off.

Examples

`SENSe:WLAN:SUMMARY:EVM:RMS:AVERAGE:COUNT:ENABLE ON` turns the burst average function on.

[SENSe]:WLAN:SWAP:IQ

Specifies to swap the I and Q components of a signal in the WLAN analysis parameters. Doing so compensates the input signal for spectral inversion.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SWAP:IQ {0|1|OFF|ON}
[SENSe]:WLAN:SWAP:IQ?
```

Arguments

`OFF` or `0` turns the Swap I and Q function off.

`ON` or `1` turns the Swap I and Q function on.

Examples

`SENSe:WLAN:SWAP:IQ ON` swaps the I and Q components of the signal.

[SENSe]:WLAN:SYMBOLs|CHIPs

Specifies or queries which symbols or chips are displayed in the WLAN Symbol Table.

Use `CHIPs` for 802.11b and `SYMBOLs` for all other standards. The `DAT`, `PRAM` and `HEAD` enumerations apply to 802.11b only.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SYMBOLs|CHIPs {ALL|RANGe|SINGLe|DAT|PRAM|HEAD}
[SENSe]:WLAN:SYMBOLs|CHIPs?
```

Arguments

`ALL` specifies that all symbols or chips will be displayed.

`RANGe` specifies that a range of symbols or chips will be displayed.

`SINGLe` specifies that single symbols or chips will be displayed.

`DAT` specifies that the Data symbols or chips will be displayed. Applies to 802.11b only.

PRAM specifies that Preamble symbols or chips will be displayed. Applies to 802.11b only.

HEAD specifies that Header symbols or chips will be displayed. Applies to 802.11b only.

Examples

SENSe:WLAN:SYMBOLS ALL specifies that all symbols or chips will be displayed in the WLAN Symbol Table.

[SENSe]:WLAN:SYMBOLs|CHIPs:MAX

Sets or queries the value for the maximum number of symbols/chips to analyze for the WLAN Symbol Table.

Use CHIPs for 802.11b and SYMBOLs for all other standards.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SYMBOLs|CHIPs:MAX <NR1>  
[SENSe]:WLAN:SYMBOLs|CHIPs:MAX?
```

Arguments

Integer

Examples

SENSe:WLAN:SYMBOLS:MAX 50 specifies a maximum value of 50 symbols to analyze for the WLAN Symbol Table.

[SENSe]:WLAN:SYMBOLs|CHIPs:MAX:STATe

Turns on or off the “maximum data symbols to analyze” feature for the WLAN Symbol Table. To specify the maximum number of symbols/chips to analyze, use the command.

Use CHIPs for 802.11b and SYMBOLs for all other standards.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SYMBOLs|CHIPs:MAX:STATe {0|1|OFF|ON}  
[SENSe]:WLAN:SYMBOLs|CHIPs:MAX:STATe?
```

Arguments

ON or 1 turns on the “maximum data symbols to analyze” feature.

OFF or 0 disables the “maximum data symbols to analyze” feature.

Examples

`SENSe:WLAN:SYMBOLS:MAX:STATE ON` turns on “maximum data symbols to analyze” feature for the WLAN Symbol Table.

[SENSe]:WLAN:SYMBOLS|CHIPS:RANGE:COUNT

Sets or queries the number of symbols or chips to display when displaying a range results in the WLAN Symbol Table.

Use `CHIPS` for 802.11b and `SYMBOLS` for all other standards.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SYMBOLS|CHIPS:RANGE:COUNT <NR1>  
[SENSe]:WLAN:SYMBOLS|CHIPS:RANGE:COUNT?
```

Arguments

Integer that represents the number of symbols/chips to display

Examples

`SENSe:WLAN:SYMBOLS:RANGE:COUNT 4` sets the number of symbols or chips to display to 4 in the WLAN Symbol Table.

[SENSe]:WLAN:SYMBOLS|CHIPS:RANGE:START

Sets or queries the symbols/chips start value when displaying a range of results in the WLAN Symbol Table.

Use `CHIPS` for 802.11b and `SYMBOLS` for all other standards.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SYMBOLS|CHIPS:RANGE:START <NR1>  
[SENSe]:WLAN:SYMBOLS|CHIPS:RANGE:START?
```

Arguments

Integer

Examples

`SENSe:WLAN:SYMBOLS:RANGE:START 40` sets the start value of the range to 40.

[SENSe]:WLAN:SYMBOLs|CHIPs:RANGe:STOP

Sets or queries the symbols or chips stop value when displaying a range of results in the WLAN Symbol Table.

Use `CHIPs` for 802.11b and `SYMBOLs` for all other standards.

Conditions

Measurement view: `WLAN`

This command requires `WLAN Measurements`

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SYMBOLs|CHIPs:RANGe:STOP <NR1>  
[SENSe]:WLAN:SYMBOLs|CHIPs:RANGe:STOP?
```

Arguments

Integer

Examples

`SENSe:WLAN:SYMBOLs:RANGe:STOP 60` sets the stop value of the range to 60.

[SENSe]:WLAN:SYMBOLs|CHIPs:SINGLe:INDEX

Sets or queries the symbol or chip to use when displaying results from a single symbol in the WLAN Symbol Table.

Use `CHIPs` for 802.11b and `SYMBOLs` for all other standards.

Conditions

Measurement view: `WLAN`

This command requires `WLAN Measurements`

Group

Sense commands

Syntax

```
[SENSe]:WLAN:SYMBOLs|CHIPs:SINGLe:INDEX <NR1>  
[SENSe]:WLAN:SYMBOLs|CHIPs:SINGLe:INDEX?
```

Arguments

Integer

Examples

`SENSe:WLAN:CHIPs:SINGLe:INDEX 26` specifies to display symbol 26.

[SENSe]:WLAN:UNIT:FREQuency

Specifies or queries whether the displayed frequency units are frequency (Hz) or subcarrier in the WLAN settings.

Conditions

Measurement view: `WLAN`

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:UNIT:FREQuency {FREQuency|SCARrier}  
[SENSe]:WLAN:UNIT:FREQuency?
```

Arguments

FREQuency specifies that the displayed frequency units will be Hz.

SCARrier specifies that the displayed frequency units will be subcarrier.

Examples

SENSe:WLAN:UNIT:FREQUENCY **FREQ** specifies that the frequency units in the display will be Hz.

[SENSe]:WLAN:UNIT:TIME

Specifies or queries whether the displayed time units are seconds, symbols or chips in the WLAN settings. Chips is only a valid option for 802.11b, and Symbols is valid for all other standards.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Sense commands

Syntax

```
[SENSe]:WLAN:UNIT:TIME {SEConds|SYMBOLs|CHIPs}  
[SENSe]:WLAN:UNIT:TIME?
```

Arguments

SEConds specifies that the displayed time units are to be seconds

SYMBOLs specifies that the displayed time units are to be symbols

CHIPs specifies that the displayed time units are to be chips (valid only for 802.11b)

Examples

SENSe:WLAN:UNIT:TIME **SYMBOLS** specifies that the displayed time units are to be symbols.

SOURce:TXGain:POWer

Sets or queries the output power level of the tracking generator.

Conditions

Measurement view: Transmission Gain

Group

Source commands

Syntax

SOURce:TXGain:POWer <value>

Arguments

<value>: :=<NRf> is the tracking generator output power.

Range: –3 dBm to –43 dBm.

Returns

See Arguments.

Examples

SOURCE:TXGAIN:POWER -10 sets the tracking generator output power to –10 dBm.

*SRE

Sets or queries the value of the Service Request Enable Register (SRER).

Refer to [Status and Events](#) (on page 2746) for the register information.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*SRE <value>

*SRE?

Related Commands

[*CLS](#) (on page 705)

[*ESE](#) (on page 1097)

[*ESR?](#) (on page 1098)

[*STB?](#) (on page 2496)

Arguments

<value>: :=<NR1> is a value in the range from 0 to 255.

The binary bits of the SRER are set according to this value.

Using an out-of-range value causes an execution error.

Examples

*SRE48 sets binary 00110000 in the bits of the SRER.

*SRE? might return 32, indicating that binary value 00100000 has been set in the bits of the SRER.

*STB? (Query Only)

Returns the contents of the Status Byte Register (SBR) in the status/event reporting structure using the Master Summary Status (MSS) bit. Refer to [Status and Events](#) (on page 2746) for the register information.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*STB?

Related Commands

[*CLS](#) (on page 705)

[*ESE](#) (on page 1097)

[*ESR?](#) (on page 1098)

[*SRE](#) (on page 2496)

Arguments

None

Returns

<NR1> representing the contents of the SBR as a decimal number.

Examples

*STB? might return 96, indicating that the SBR contains binary 0110 0000.

Status commands

STATus:ACPower:EVENTs? (Query Only)

Returns the current events and status conditions for the Channel power and ACPR measurement.

Conditions

Measurement views: Channel power and ACPR

Group

Status commands

Syntax

STATus:ACPower:EVENTs?

Arguments

None

Returns

<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]}"}

Where

<ecode>: : <NR1> is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:ACPOWER:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:{AM|FM|PM}:EVENTs? (Query Only)

Returns the current events and status conditions for the AM/FM/PM measurement.

Conditions

Measurement views: AM, FM, PM

Group

Status commands

Syntax

`STATus:{AM|FM|PM}:EVENTs?`

Arguments

None

Returns

`<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:AM:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually in the AM measurement.

STATus:AUDio:SPECTrum:EVENTs? (Query Only)

Returns the current events and status conditions for the audio measurement.

Conditions

Measurement views: Audio Spectrum

Group

Status commands

Syntax

`STATus:AUDio:SPECTrum:EVENTs?`

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where:

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:AUDIO:SPECTRUM:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:AUDio:SUMMARY:EVENTs? (Query Only)

Returns the current events and status conditions for the audio measurement.

Conditions

Measurement views: Audio Summary

Group

Status commands

Syntax

```
STATus:AUDio:SUMMARY:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where:

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event.

If there is no error, the response is 0, "No events to report".

Examples

STATUS:AUDIO:SUMMARY:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:AVTime[:MEASview<y>]:EVENTs? (Query Only)

Returns the current events and status conditions for the Amplitude versus Time measurement.

Conditions

Measurement views: Amplitude versus Time

Group

Status commands

Syntax

```
STATUS:AVTime[:MEASview<y>]:EVENTs?
```

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
<ecode>,"<edesc>[<info>]"{,<ecode>,"<edesc>[:<info>]"} }
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<info>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:AVTIME:MEASVIEW1:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually for Amplitude versus Time Measurement View 1.

STATus:BIBEmissions:EVENTs? (Query Only)

Returns the current events and status conditions for the Bluetooth InBand Emission measurement.

Conditions

Measurement views: Bluetooth InBand Emission

Group

Status commands

Syntax

```
STATus:BIBEmissions:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[,<info>]"{,"<edesc>[,<info>]"} }
```

Where:

<ecode> ::= <NR1> is the error/event code (-32768 to 32767).

<edesc> ::= <string> is the description on the error/event.

`<info> ::= <string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:BIBEMISSIONS:EVENTS?` might return 0 indicating no events to report.

STATus:BLUEtooth:CONSt:EVENTs? (Query Only)

Returns the current events and status conditions for the Bluetooth Constellation measurement.

Conditions

Measurement views: Bluetooth Constellation

Group

Status commands

Syntax

`STATus:BLUEtooth:CONSt:EVENTs?`

Arguments

None

Returns

`<code>, "<edesc>[<info>]" {, <code>, "<edesc>[<info>]"}`

Where

`<code> ::= <NR1>` is the error/event code (-32768 to 32767).

`<edesc> ::= <string>` is the description of the error/event.

`<info> ::= <string>` is the additional information of the error/event.

Examples

`STATus:BLUEtooth:CONSt:EVENTs?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:BLUEtooth:EDIAGram:EVENTs? (Query Only)

Returns the current events and status conditions for the eye diagram measurement.

Conditions

Measurement views: Bluetooth Eye Diagram

Group

Status commands

Syntax

`STATus:BLUEtooth:EDIAGram:EVENTs?`

Arguments

None

Returns

```
<ecode>, "<edesc>[<einfo>"]{, <ecode>,<edesc>[<einfo>"]}
```

Where

<ecode> ::= <NR1> is the error/event code (-32768 to 32767).

<edesc> ::= <string> is the description of the error/event.

<einfo> ::= <string> is the additional information of the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:BLUEtooth:EDIagram:EVENTs? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATUS:BLUEtooth:FDVTime:EVENTs? (Query Only)

Returns the current events and status conditions for the Frequency Deviation versus Time measurement.

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Status commands

Syntax

```
STATUS:BLUEtooth:FDVTime:EVENTs?
```

Arguments

None

Returns

```
<ecode>, "<edesc>[,<einfo>"]{, "<edesc>[,<einfo>"]}
```

Where:

<ecode> ::= <NR1> is the error/event code (-32768 to 32767).

<edesc> ::= <string> is the description on the error/event.

<einfo> ::= <string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:BLUEtooth:FDVTime:EVENTs? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATUS:BLUEtooth:SUMMARY:EVENTs (Query Only)

Returns the current events and Status conditions for the Bluetooth Summary measurements.

Conditions

Measurement view: Bluetooth Summary display

Group

Status commands

Syntax

STATus:BLUETOOTH:SUMMARY:EVENTs?

Arguments

None

Returns

<ecode>, "<edesc> [<einfo>] "{, <ecode>, "<edesc>[:<einfo>]"} where

<ecode>:: <NR1> is the error/event code (-32768 to 32767).

<edesc>:: <String> is the description of the error/event.

<einfo>:: <String> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:BLUETOOTH:SUMMARY:EVENTS? might return 12026, "Acq Sampling params: manual control".

STATus:CCDF:EVENTs? (Query Only)

Returns the current events and status conditions for the CCDF measurement.

Conditions

Measurement views: CCDF

Group

Status commands

Syntax

STATus:CCDF:EVENTs?

Arguments

None

Returns

<ecode>, "<edesc> [<einfo>] "{, <ecode>, "<edesc>[:<einfo>]"} where

Where

<ecode>:: <NR1> is the error/event code (-32768 to 32767).

<edesc>:: <string> is the description on the error/event.

<einfo>:: <string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:CCDF:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:CONSte[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the constellation measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Status commands

Syntax

```
STATus:CONSte[:MEASview<y>]:EVENTs?
```

Arguments

None

Returns

```
<ecode>,<edesc>[:<einfo>]"{,<ecode>,<edesc>[:<einfo>]}"}
```

Where

<ecode>::<NR1> is the error or event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error or event. If there is no error, the response is 0, "No events to report".

Examples

STATus:CONSte:MEASview2:EVENTs? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually for measview 2 of constellation.

STATus:DIQVtime[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the Demod I&Q versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Status commands

Syntax

```
STATus:DIQVtime[:MEASview<y>]:EVENTs?
```


Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error or event code (-32768 to 32767).

<edesc>::<string> is the description on the error or event.

<einfo>::<string> is the additional information on the error or event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:DIQVtime:MEASview1:EVENTs? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually for measurement view 1.

STATus:DPX:EVENTs? (Query Only)

Returns the current events and status conditions for the DPX, Spectrum measurement.

Conditions

Measurement views: DPX, Spectrum

Group

Status commands

Syntax

```
STATus:DPX:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:DPX:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:EDiagram[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the eye diagram measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Status commands

Syntax

```
STATus:EDiagram[:MEASview<y>]:EVENTs?
```

Arguments

None

Returns

```
<ecode>, "<edesc> [<einfo>] "{, <ecode>, "<edesc> [:<einfo>] "{}
```

Where

<ecode>::<NR1> is the error or event code (-32768 to 32767).

<edesc>::<string> is the description on the error or event.

<einfo>::<string> is the additional information on the error or event.

If there is no error, the response is 0, "No events to report".

Examples

STATus:EDiagram:MEASview2:EVENTs? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:EMC:EVENTs? (Query Only)

Returns the current events and status conditions for the EMC display.

Conditions

Measurement view: EMC - EMI Display

Group

Status commands

Syntax

```
STATus:EMC:EVENTs?
```

Arguments

None

Returns

```
<ecode>, "<edesc> [<einfo>] "{, <ecode>, "<edesc> [:<einfo>] "{}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:EMC:EVENTS? might return 11037, "Ext corrections enabled for traces."

STATus:EVM[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the EVM versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod EVM versus Time).

Group

Status commands

Syntax

STATus:EVM[:MEASview<y>]:EVENTs?

Arguments

None

Returns

<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}

Where

<ecode>::<NR1> is the error or event code (-32768 to 32767).

<edesc>::<string> is the description on the error or event.

<einfo>::<string> is the additional information on the error or event. If there is no error, the response is 0, "No events to report".

Examples

STATus:EVM:MEASview2:EVENTs? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:FDVTime[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the Frequency deviation versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Status commands

Syntax

STATus:FDVTime:MEASview<y>:EVENTs?

Arguments

None

Returns

<ecode>, "<edesc> [<einfo>] "{, <ecode>, "<edesc> [:<einfo>] "{}

Where

<ecode>: :<NR1> is the error or event code (-32768 to 32767).

<edesc>: :<string> is the description on the error or event.

<einfo>: :<string> is the additional information on the error or event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:FDVTIME:MEASview2:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:{FSETtling|PSETtling}:EVENTs? (Query Only)

Returns the current events and status conditions for the specified settling time measurement.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Status commands

Syntax

STATus:{FSETtling|PSETtling}:EVENTs?

Arguments

None

Returns

<ecode>, "<edesc> [<einfo>] "{, <ecode>, "<edesc> [:<einfo>] "{}

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description on the error/event.

<einfo>: :<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:{FSETTLING|PSETTLING}:EVENTS?` might return 2048, "Done saving - restart with Stop, then Run", indicating that the acquisition has been completed.

STATus:FVTime[:MEASview<y>]:EVENTs? (Query Only)

Returns the current events and status conditions for the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Status commands

Syntax

`STATus:FVTime[:MEASview<y>]:EVENTs?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

`<ecode>, "<edesc> [<einfo>"] {, <ecode>, "<edesc> [:<einfo>"] }`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:FVTIME:MEASview1:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:IQVTime[:MEASview<y>]:EVENTs? (Query Only)

Returns the current events and status conditions for the RF I&Q versus Time measurement.

Conditions

Measurement views: RF I&Q versus Time

Group

Status commands

Syntax

`STATus:IQVTime[:MEASview<y>]:EVENTs?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description on the error/event.

<einfo>: :<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:IQVTIME:MEASview1:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:LTE:ACLR:EVENTs? (Query Only)

Returns the current events and status conditions for the LTE ACLR measurement.

Conditions

Measurement view: LTE ACLR

Group

Status commands

Syntax

STATus:LTE:ACLR:EVENTs?

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description of the error/event.

<einfo>: :<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:LTE:ACLR:EVENTS? might return 12006, "Not aligned",2008,"Not calibrated",12007,"unaligned data",12009,"Data from uncalibrated instrument".

STATus:LTE:CHSPpectrum:EVENTs? (Query Only)

Returns the current events and status conditions for the LTE Channel Spectrum measurement.

Conditions

Measurement view: LTE Channel Spectrum

Group

Status commands

Syntax

STATus:LTE:CHSPectrum:EVENTs?

Returns

<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description of the error/event.

<einfo>: :<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:LTE:CHSPECTRUM:EVENTS? might return 12006,"Not aligned",2008,"Not calibrated".

STATus:LTE:CONStE:EVENTs? (Query Only)

Returns the current events and status condition for the LTE Constellation measurement.

Conditions

Measurement view: LTE Constellation

Group

Status commands

Syntax

STATus:LTE:CONStE:EVENTs?

Returns

<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description of the error/event.

<einfo>: :<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:LTE:CONStE:EVENTS? might return 12006,"Not aligned",2008,"Not calibrated",11090,"Recovery done on PSS/SSS on the center 62, "106 - AnaSynchronization Sequence not found".

STATus:LTE:PVTime:EVENTs? (Query Only)

Returns the current events and status conditions for the LTE Power vs Time measurement.

Conditions

Measurement view: LTE Power vs Time

Group

Status commands

Syntax

STATus:LTE:PVTime:EVENTs?

Returns

<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description of the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:LTE:PVTIME:EVENTS? might return 12006,"Not aligned",2008,"Not calibrated".

STATus:MCPower:EVENTs? (Query Only)

Returns the current events and status conditions for the MCPR (multi-carrier ACPR) measurement.

Conditions

Measurement views: MCPR

Group

Status commands

Syntax

STATus:MCPower:EVENTs?

Arguments

None

Returns

<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:MCPOWER:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:MERRor[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the Magnitude error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Magnitude error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Status commands

Syntax

STATUS:MERRor[:MEASview<y>]:EVENTs?

Arguments

None

Returns

<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]}"}

Where

<ecode>::<NR1> is the error or event code (-32768 to 32767).

<edesc>::<string> is the description on the error or event.

<einfo>::<string> is the additional information on the error or event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:MERRor:MEASview2:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATUS:OBWidth:EVENTs? (Query Only)

Returns the current events and status conditions for the Occupied Bandwidth (OBW) measurement.

Conditions

Measurement views: Occupied Bandwidth

Group

Status commands

Syntax

STATUS:OBWidth:EVENTs?

Arguments

None

Returns

<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]}"}

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:OBWIDTH:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:OFDM:CONStE:EVENTs? (Query Only)

Returns the current events and status condition for the OFDM Constellation measurement.

Conditions

Measurement views: OFDM

Group

Status commands

Syntax

`STATus:OFDM:CONStE:EVENTs?`

Arguments

None

Returns

`<ecode>, "<edesc>[<einfo>]" {, <ecode>, "<edesc>[:<einfo>]" }`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:OFDM:CONStE:EVENTs?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:OFDM:EVM:EVENTs? (Query Only)

Returns the current events and status condition for the OFDM EVM (Error Vector Magnitude) versus Time measurement.

Conditions

Measurement views: OFDM

Group

Status commands

Syntax

`STATus:OFDM:EVM:EVENTs?`

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:OFDM:EVM:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:OFDM:MERRor:EVENTs? (Query Only)

Returns the current events and status condition for the OFDM Magnitude versus Time measurement.

Conditions

Measurement views: OFDM

Group

Status commands

Syntax

STATus:OFDM:MERRor:EVENTs?

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:OFDM:MERROR:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:OFDM:PERRor:EVENTs? (Query Only)

Returns the current events and status condition for the OFDM Phase error versus Time measurement.

Conditions

Measurement views: OFDM

Group

Status commands

Syntax

`STATUS:OFDM:PERRor:EVENTs?`

Arguments

None

Returns

`<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:OFDM:PERRor:EVENTs?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATUS:OFDM:POWer:EVENTs? (Query Only)

Returns the current events and status condition for the OFDM Power measurement.

Conditions

Measurement views: OFDM

Group

Status commands

Syntax

`STATUS:OFDM:POWer:EVENTs?`

Arguments

None

Returns

`<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:OFDM:POWER:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:OFDM:STABle:EVENTs? (Query Only)

Returns the current events and status condition for the OFDM Symbol table measurement.

Conditions

Measurement views: OFDM

Group

Status commands

Syntax

`STATus:OFDM:STABle:EVENTs?`

Arguments

None

Returns

`<ecode>,<edesc>[<einfo>]"{,<ecode>,<edesc>[:<einfo>]}"}`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:OFDM:STABle:EVENTs?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:OPERation:CONDition? (Query Only)

Returns the contents of the Operation Condition Register (OCR).

Conditions

Measurement views: All

Group

Status commands

Syntax

`STATus:OPERation:CONDition?`

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the OCR.

Examples

STATUS:OPERATION:CONDITION? might return 16, showing that the bits in the OCR have the binary value 0000000000010000, which means the analyzer is in measurement.

STATus:OPERation:ENABLE

Sets or queries the enable mask of the Operation Enable Register (OENR) which allows true conditions in the Operation Event Register to be reported in the summary bit.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:OPERation:ENABLE <bit_value>  
STATus:OPERation:ENABLE?
```

Arguments

<bit_value>::<NR1> is the enable mask of the OENR. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the OENR. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:OPERATION:ENABLE1 enables the ALIGning bit.

STATUS:OPERATION:ENABLE? might return 1, showing that the bits in the OENR have the binary value 00000000 00000001, which means that the ALIGning bit is valid.

STATus:OPERation[:EVENT]? (Query Only)

Returns the contents of the Operation Event Register (OEVr). Reading the OEVr clears it.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:OPERation[:EVENT]?
```

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the OEVR.

Examples

STATUS:OPERATION:EVENT? might return 1, showing that the bits in the OEVR have the binary value 00000000 00000001, which means that the ALIGNing bit is set.

STATus:OPERation:NTRansition

Sets or queries the negative transition filter value of the Operation Transition Register (OTR).

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:OPERation:NTRansition <bit_value>  
STATus:OPERation:NTRansition?
```

Arguments

<bit_value>::<NR1> is the negative transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the OTR. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:OPERATION:NTRANSITION#H0011 sets the negative transition filter value to #H0011.

STATUS:OPERATION:NTRANSITION? might return 17.

STATus:OPERation:PTRansition

Sets or queries the positive transition filter value of the Operation Transition Register (OTR).

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:OPERation:PTRansition <bit_value>  
STATus:OPERation:PTRansition?
```

Arguments

<bit_value>::<NR1> is the positive transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the OTR. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:OPERATION:PTRANSITION 0 sets the positive transition filter value to 0.

STATUS:OPERATION:PTRANSITION? might return 0.

STATus:P25:EDiagram:EVENTs? (Query Only)

Returns the current events and status conditions for the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Status commands

Syntax

STATus:P25:EDiagram:EVENTs?

Returns

```
<ecode>,<edesc>[<einfo>]"{"<ecode>,<edesc>[:<einfo>]"}
```

Where:

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description of the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:P25:EDIAGRAM:EVENTS? might return 12026,"Acq Sampling Parma's: Manual control", indicating that the sampling parameters are controlled Manually.

STATus:P25:SUMMary:EVENTs (Query Only)

Returns the current events and status conditions for the Summary measurement.

Conditions

Measurement views: P25 Summary

This command requires P25 Measurements.

Group

Status commands

Syntax

STATus:P25:SUMMary:EVENTs

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}
```

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description of the error/event.

<einfo>: :<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:P25:SUMMARY:EVENTS? might return 12026 "Acquisition Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:PERRor[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the Phase error versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Status commands

Syntax

```
STATus:PERRor[:MEASview<y>]:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}
```

Where

<ecode>: :<NR1> is the error or event code (-32768 to 32767).

<edesc>: :<string> is the description on the error or event.

<einfo>: :<string> is the additional information on the error or event. If there is no error, the response is 0, "No events to report".

Examples

STATus:PERRor:MEASview2:EVENTs? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually for measurement view 2.

STATus:PHVTime[:MEASview<y>]:EVENTs? (Query Only)

Returns the current events and status conditions for the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Status commands

Syntax

```
STATus:PHVTime[:MEASview<y>]:EVENTs?
```

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

```
<ecode>,"<edesc>[<einfo>]"{, <ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:PHVTIME:MEASview1:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:PNOise:EVENTs? (Query Only)

Returns the current events and status conditions for the phase noise measurement.

Conditions

Measurement views: Spurious

Group

Status commands

Syntax

```
STATus:PNOise:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{, <ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

`<info>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:PNOISE:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:PRESet (No Query Form)

Presets the SCPI enable registers and transition registers.

Conditions

Measurement views: All

Group

Status commands

Syntax

`STATus:PRESet`

Arguments

None

Examples

`STATUS:PRESET` presets the SCPI enable registers and transition registers.

STATus:PULSe:CUMulative:HISTogram[:MEASview<y>]:EVENTs (Query Only)

Returns the current events and status conditions for the Cumulative Histogram display.

Conditions

Measurement views: Cumulative Histogram with the specified Measurement View Number

Group

Status commands

Syntax

`STATus:PULSe:CUMulative:HISTogram[:MEASview<y>]:EVENTs?`

Arguments

The parameter `<y>` = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<code>,"<edesc>[<info>"]{,<code>,"<edesc>[:<info>"]}`

Where

`<code>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description of the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:PULSe:CUMulative:HISTogram:MEASview1:EVENTS? might return 0, "No events to report".

STATUS:PULSe:CUMulative:STATistics[:MEASview<y>]:EVENTs (Query Only)

Returns the current events and status conditions for the Cumulative Statistics display.

Conditions

Measurement views: Pulse Cumulative Statistics

Group

Status commands

Syntax

STATUS:PULSe:CUMulative:STATistics[:MEASview<y>]:EVENTs?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description of the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:PULSe:CUMulative:STATistics:MEASview1:EVENTs? might return 0, "No events to report".

STATUS:PULSe:OGRAM[:MEASview<y>]:EVENTs (Query Only)

Returns the current events and status conditions for the Pulse-Ogram display.

Conditions

Measurement views: Pulse-Ogram

Group

Status commands

Syntax

STATUS:PULSe:OGRAM[:MEASview<y>]:EVENTs?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

```
<code>,"<edesc>[<info>"]{,<code>,"<edesc>[:<info>"]}
```

Where

<code>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description of the error/event.

<info>::<string> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:PULSe:OGRAM:MEASview1:EVENTs? might return 0, "No events to report".

STATus:PULSe:RESult:EVENTs? (Query Only)

Returns the current events and status conditions for the pulse table measurement.

Conditions

Measurement views: Pulse table

Group

Status commands

Syntax

```
STATUS:PULSe:RESult:EVENTs?
```

Arguments

None

Returns

```
<code>,"<edesc>[<info>"]{,<code>,"<edesc>[:<info>"]}
```

Where

<code>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<info>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:PULSE:RESULT:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:PULSe:STATistics[:MEASview<y>]:EVENTs? (Query Only)

Returns the current events and status conditions for the pulse statistics measurement.

Conditions

Measurement views: Pulse statistics

Group

Status commands

Syntax

`STATUS:PULSE:STATistics[:MEASview<y>]:EVENTs?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Returns

`<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:PULSE:STATistics:MEASview1:EVENTs?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATUS:PULSE:TRACE[:MEASview<y>]:EVENTs

Returns the current events and status conditions for the pulse trace measurement.

Conditions

Measurement views: Pulse trace with specified Measurement view number

Group

Status commands

Syntax

`STATUS:PULSE:TRACE[:MEASview<y>]:EVENTs?`

Arguments

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

`<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}`

Where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:PULSE:TRACE:MEASVIEW1:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually on pulse trace measurement view 1.

STATus:QUEStionable:CALibration:CONDition? (Query Only)

Returns the contents of the questionable calibration condition register.

Conditions

Measurement views: All

Group

Status commands

Syntax

STATus:QUEStionable:CALibration:CONDition?

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the questionable calibration condition register.

Examples

STATUS:QUESTIONABLE:CALIBRATION:CONDITION? might return 16384, showing that the bits in the questionable calibration condition register have the binary value 01000000 00000000, which means the Alignment Needed bit is set.

STATus:QUEStionable:CALibration:ENABLE

Sets or queries the enable mask of the questionable calibration enable register which allows true conditions in the questionable calibration event register to be reported in the summary bit.

Conditions

Measurement views: All

Group

Status commands

Syntax

STATus:QUEStionable:CALibration:ENABLE <bit_value>
STATus:QUEStionable:CALibration:ENABLE?

Arguments

<bit_value>::<NR1> is the enable mask of the questionable calibration enable register. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the questionable calibration enable register. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:QUESTIONABLE:CALIBRATION:ENABLE 16384 enables the Alignment Needed bit.

`STATUS:QUESTIONABLE:CALIBRATION:ENABLE?` might return 16384, showing that the bits in the questionable calibration enable register have the binary value 01000000 00000000, which means that the Calibration Summary bit is valid.

STATus:QUEStionable:CALibration[:EVENT]? (Query Only)

Returns the contents of the questionable calibration event register. Reading the register clears it.

Conditions

Measurement views: All

Group

Status commands

Syntax

`STATus:QUEStionable:CALibration[:EVENT]?`

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the questionable calibration event register.

Examples

`STATUS:QUESTIONABLE:CALIBRATION:EVENT?` might return 16384, showing that the bits in the questionable calibration event register have the binary value 01000000 00000000, which means that the Calibration Summary bit is set.

STATus:QUEStionable:CALibration:NTRansition

Sets or queries the negative transition filter value of the questionable calibration transition register.

Conditions

Measurement views: All

Group

Status commands

Syntax

`STATus:QUEStionable:CALibration:NTRansition <bit_value>`
`STATus:QUEStionable:CALibration:NTRansition?`

Arguments

<bit_value>::<NR1> is the negative transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the questionable calibration transition register. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

`STATUS:QUESTIONABLE:CALIBRATION:NTRANSITION #H4000` sets the negative transition filter value to #H4000.

STATUS:QUESTIONABLE:CALIBRATION:NTRANSITION? might return 16384.

STATus:QUEStionable:CALibration:PTRansition

Sets or queries the positive transition filter value of the questionable calibration transition register.

Conditions

Measurement views: All

Group

Status commands

Syntax

STATus:QUEStionable:CALibration:PTRansition <bit_value>
STATus:QUEStionable:CALibration:PTRansition?

Arguments

<bit_value>::<NR1> is the positive transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the questionable calibration transition register. Range: 0 to 32767
(The most-significant bit cannot be set true.)

Examples

STATUS:QUESTIONABLE:CALIBRATION:PTRANSITION 0 sets the positive transition filter value to 0.

STATUS:QUESTIONABLE:CALIBRATION:PTRANSITION? might return 0.

STATus:QUEStionable:CONDition? (Query Only)

Returns the contents of the Questionable Condition Register (QCR).

Conditions

Measurement views: All

Group

Status commands

Syntax

STATus:QUEStionable:CONDition?

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the QCR.

Examples

STATUS:QUESTIONABLE:CONDITION? might return 256, showing that the bits in the QCR have the binary value 00000001 00000000, which means the Calibration Summary bit is set.

STATus:QUEStionable:ENABle

Sets or queries the enable mask of the Questionable Enable Register (QENR) which allows true conditions in the Questionable Event Register to be reported in the summary bit.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:ENABle <bit_value>  
STATus:QUEStionable:ENABle?
```

Arguments

<bit_value>::<NR1> is the enable mask of QENR. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the QENR. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:QUESTIONABLE:ENABLE 256 enables the Calibration Summary bit.

STATUS:QUESTIONABLE:ENABLE? might return 256, showing that the bits in the QENR have the binary value 00000001 00000000, which means that the Calibration Summary bit is valid.

STATus:QUEStionable[:EVENT]? (Query Only)

Returns the contents of the Questionable Event Register (QEVr). Reading the QEVr clears it.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable[:EVENT]?
```

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the QEVr.

Examples

STATUS:QUESTIONABLE:EVENT? might return 256, showing that the bits in the QEVr have the binary value 00000001 00000000, which means that the Calibration Summary bit is set.

STATus:QUEStionable:FREQuency:CONDition? (Query Only)

Returns the contents of the questionable frequency condition register.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:FREQuency:CONDition?
```

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the questionable frequency condition register.

Examples

STATus:QUESTIONABLE:FREQUENCY:CONDITION? might return 512, showing that the bits in the questionable frequency condition register have the binary value 00000010 00000000, which means the Locked To External Ref bit is set.

STATus:QUEStionable:FREQuency:ENABle

Sets or queries the enable mask of the questionable frequency enable register which allows true conditions in the questionable frequency event register to be reported in the summary bit.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:FREQuency:ENABle <bit_value>  
STATus:QUEStionable:FREQuency:ENABle?
```

Arguments

<bit_value>::<NR1> is the enable mask of the questionable frequency enable register. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the questionable frequency enable register. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATus:QUESTIONABLE:FREQUENCY:ENABle 512 enables the Locked To External Ref bit.

STATus:QUESTIONABLE:FREQUENCY:ENABle? might return 512, showing that the bits in the questionable calibration enable register have the binary value 00000010 00000000, which means that the Locked To External Ref bit is valid.

STATus:QUEStionable:FREQuency[:EVENT]? (Query Only)

Returns the contents of the questionable frequency event register. Reading the register clears it.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:FREQuency[:EVENT]?
```

Arguments

None

Returns

<NR1> is a decimal number showing the contents of the questionable frequency event register.

Examples

STATus:QUESTIONABLE:FREQUENCY:EVENT? might return 512, showing that the bits in the questionable frequency event register have the binary value 00000010 00000000, which means that the Locked To External Ref bit is set.

STATus:QUEStionable:FREQuency:NTRansition

Sets or queries the negative transition filter value of the questionable frequency transition register.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:FREQuency:NTRansition <bit_value>  
STATus:QUEStionable:FREQuency:NTRansition?
```

Arguments

<bit_value>::<NR1> is the negative transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the questionable frequency transition register. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATus:QUESTIONABLE:FREQUENCY:NTRANSITION #H0200 sets the negative transition filter value to #H0200.

STATus:QUESTIONABLE:FREQUENCY:NTRANSITION? might return 512.

STATus:QUEStionable:FREQuency:PTRansition

Sets or queries the positive transition filter value of the questionable frequency transition register.

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:FREQuency:PTRansition <bit_value>  
STATus:QUEStionable:FREQuency:PTRansition?
```

Arguments

<bit_value>::<NR1> is the positive transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the questionable frequency transition register. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:QUESTIONABLE:FREQUENCY:PTRANSITION 0 sets the positive transition filter value to 0.

STATUS:QUESTIONABLE:FREQUENCY:PTRANSITION? might return 0.

STATus:QUEStionable:NTRansition

Sets or queries the negative transition filter value of the Questionable Transition Register (QTR).

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:NTRansition <bit_value>  
STATus:QUEStionable:NTRansition?
```

Arguments

<bit_value>::<NR1> is the negative transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the QTR. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:QUESTIONABLE:NTRANSITION #H0020 sets the negative transition filter value to #H0020.

STATUS:QUESTIONABLE:NTRANSITION? might return 32.

STATus:QUEStionable:PTRansition

Sets or queries the positive transition filter value of the Questionable Transition Register (QTR).

Conditions

Measurement views: All

Group

Status commands

Syntax

```
STATus:QUEStionable:PTRansition <bit_value>
STATus:QUEStionable:PTRansition?
```

Arguments

<bit_value>::<NR1> is the positive transition filter value. Range: 0 to 65535.

Returns

<NR1> is a decimal number showing the contents of the QTR. Range: 0 to 32767 (The most-significant bit cannot be set true.)

Examples

STATUS:QUESTIONABLE:PTRANSITION 0 sets the positive transition filter value to 0.

STATUS:QUESTIONABLE:PTRANSITION? might return 0.

STATus:SEM:EVENTs? (Query Only)

Returns the current events and status conditions for the Spectral Emissions Mask measurement.

Conditions

Measurement views: Spectral Emissions Mask

Group

Status commands

Syntax

```
STATus:SEM:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:SEM:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:SGRAM[:MEASview<y>]:EVENTs (Query Only)

Returns the current events and status conditions for the spectrogram measurement.

Conditions

Measurement views: Spectrogram

Group

Status commands

Syntax

STATus:SGRAM[:MEASview<y>]:EVENTs?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

Returns

<ecode>, "<edesc> [<einfo>]" {, <ecode>, "<edesc> [:<einfo>]" }

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description on the error/event.

<einfo>: :<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATus:SGRAM:MEASview1:EVENTs? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:SPECTrum[:MEASview<y>]:EVENTs? (Query Only)

Returns the current events and status conditions and status conditions for the spectrum measurement.

Conditions

Measurement views: Spectrum

Group

Status commands

Syntax

STATus:SPECTrum[:MEASview<y>]:EVENTs?

Arguments

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>: : <NR1> is the error/event code (-32768 to 32767).

<edesc>: : <string> is the description on the error/event.

<einfo>: : <string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:SPECTRUM:MEASVIEW2:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:SPURious:EVENTs ? (Query Only)

Returns the current events and status conditions for the Spurious measurement.

Conditions

Measurement view: Spurious Display

Group

Status commands

Syntax

```
STATus:SPURious:EVENTs ?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

where

<ecode>: : <NR1> is the error/event code (-32768 to 32767).

<edesc>: : <String> is the description of the error/event.

<einfo>: : <String> is the additional information on the error/event If there is no error, then response is 0, "No events to report."

Examples

STATUS:SPURIOUS:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:SQUality[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the signal quality measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Signal quality

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Signal quality).

Group

Status commands

Syntax

```
STaTus:SQuality[:MEASview<y>]:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STaTus:SQuality:MEASview1:EVENTs? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually for measurement view1.

STaTus:TDIagram[:MEASview<y>]:EVENTs? (Query only)

Returns the current events and status conditions for the trellis diagram measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Trellis diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Trellis diagram).

Group

Status commands

Syntax

```
STaTus:TDIagram[:MEASview<y>]:EVENTs?
```

Arguments

None

Returns

```
<ecode>,"<edesc>[<einfo>"]{,<ecode>,"<edesc>[:<einfo>"]}
```

Where

`<ecode>::<NR1>` is the error or event code (-32768 to 32767).

`<edesc>::<string>` is the description on the error or event.

`<einfo>::<string>` is the additional information on the error or event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:TDIagram:MEASview2:EVENTs?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATUS:TXGain:EVENTs? (Query Only)

Queries events for the Transmission Gain display.

Conditions

Measurement view: Transmission Gain

Group

Status commands

Syntax

`STATUS:TXGain:EVENTs?`

Returns

Examples

`STATUS:TXGAIN:EVENTS?`

STATUS:WLAN:AD:CONStE:EVENTs? (Query Only)

Queries the current events and status conditions for the Constellation measurement display.

Conditions

Measurement view: 802.11ad Constellation

Group

Status commands

Syntax

`STATUS:WLAN:AD:CONStE:EVENTs?`

Arguments

None

Returns

`<ecode>,"<edesc>[<einfo>]"{,<ecode>,"<edesc>[:<einfo>]"}`

where

`<ecode>::<NR1>` is the error/event code (-32768 to 32767).

`<edesc>::<String>` is the description of the error/event.

`<info>:: <String>` is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

`STATUS:WLAN:AD:CONSTE:EVENTS?` might return 12056,"Warm-up period", indicating the error code is 12056 and the description of that error code is "Warm up period".

STATus:WLAN:AD:EVM:EVENTs? (Query Only)

Returns the current events and status conditions for the EVM vs Time measurement.

Conditions

Measurement views: 802.11ad EVM vs Time

Group

Status commands

Syntax

`STATus:WLAN:AD:EVM:EVENTs?`

Arguments

None

Returns

`<code>,<edesc>[<info>]"{,<code>,<edesc>[:<info>]}"}`

where

`<code>:: <NR1>` is the error/event code (-32768 to 32767).

`<edesc>:: <String>` is the description of the error/event.

`<info>:: <String>` is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

`STATUS:WLAN:AD:EVM:EVENTS?` might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:AD:SUMMARY:EVENTs (Query Only)

Returns the current events and status conditions for the 802.11ad Summary display.

Conditions

Measurement view: 802.11ad Summary

Group

Status commands

Syntax

`STATus:WLAN:AD:SUMMARY:EVENTs`

Arguments

None

Returns

```
<ecode>, "<edesc> [<einfo>]" {, <ecode>, "<edesc>[:<einfo>]" }
```

where

<ecode>:: <NR1> is the error/event code (-32768 to 32767).

<edesc>:: <String> is the description of the error/event.

<einfo>:: <String> is the additional information on the error/event. If there is no error, then response is 0, "No events to report."

Examples

STATUS:WLAN:AD:SUMMARY:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:AY:CONStE:EVENTs? (Query Only)

Query the current Events and Status conditions in the Constellation display.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Status commands

Syntax

STATus:WLAN:AY:CONStE:EVENTs?

Returns

```
<ecode>, "<edesc> [<einfo>]", {<ecode>, "<edesc>[:<einfo>]" }
```

where:

<ecode>::=<NR1> is the error/event code (Range: -32768 to 32767)

<edesc>::=<string> is the description of the error/event.

<einfo>::=<string> is the additional information on the error/event. If there are no errors, then the response will be 0, "No events to report."

Examples

STAT:WLAN:AY:CONS:EVEN? may return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:AY:EVM:EVENTs? (Query Only)

Query the current events and status conditions for the EVM versus time measurement.

Conditions

Measurement views: 802.11ay Analysis EVM

Group

Status commands

Syntax

STATus:WLAN:AY:EVM:EVENTs?

Returns

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

where:

<ecode> ::= <NR1> is the error/event code (-32768 to 32767).

<edesc> ::= <string> is the description of the error/event.

<einfo> ::= <string> is the additional information on the error/event. If there are no errors, the response is 0, "No events to report".

Examples

STAT:WLAN:AY:EVM:EVENT? may return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:AY:SUMMARY:EVENTs? (Query Only)

Query the current Events and Status conditions for the Summary measurement view.

Conditions

Measurement view: 802.11ay Analysis Summary

Group

Status commands

Syntax

STATus:WLAN:AY:SUMMARY:EVENTs?

Returns

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

where:

<ecode> ::= <NR1> is the Error/Event Code. Range: -32768 to 32767.

<edesc> ::= <string> is the Description of the Error/Event.

<einfo> ::= <string> is the additional information about the Error/Event. If there are no errors, then the response is 0, "No events to report".

Examples

STAT:WLAN:AY:SUMM:EVENT? may return 12026, "Acq Sampling Params: manual control", indicating that sampling parameters are controlled manually.

STATus:WLAN:CONStellation:EVENTs? (Query Only)

Returns the current instrument status concatenated with WLAN constellation-specific event information.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

STATus:WLAN:CONStE:EVENTs?

Returns

ASCII string representation of instrument status as follows:

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:WLAN:CONSTE:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:CRESponse:EVENTs? (Query Only)

Returns the current events and status conditions for the WLAN Channel Response display.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

STATus:WLAN:CRESponse:EVENTs?

Returns

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:WLAN:CRES:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:EVM:EVENTs? (Query Only)

Returns the current instrument status concatenated with WLAN EVM-specific event information.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

STATus:WLAN:EVM:EVENTs?

Returns

ASCII string representation of instrument status as follows:

```
<ecode>,"<edesc>[<einfo>]" {,<ecode>,"<edesc>[:<einfo>]" }
```

Where

<ecode>: : <NR1> is the error/event code (-32768 to 32767).

<edesc>: : <string> is the description on the error/event.

<einfo>: : <string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATus:WLAN:EVM:EVENTS? might return 12026,"Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:MERRor:EVENTs? (Query Only)

Returns the current instrument status concatenated with WLAN Magnitude Error-specific event information.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

STATus:WLAN:MERRor:EVENTs?

Returns

```
<ecode,"<edesc>[<einfo>]" {,<ecode>,"<edesc>[:<einfo>]" }
```

Where:

<ecode>: : <NR1> is the error/event code (-32768 to 32767).

<edesc>: : <string> is the description on the error/event.

`<info>:: <string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:WLAN:MERR:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:PERRor:EVENTs? (Query Only)

Returns instrument status concatenated with WLAN Phase Error-specific event information.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

`STATus:WLAN:PERRor:EVENTs?`

Returns

ASCII string representation of instrument status as follows:

```
<ecode>, "<edesc> [<info>]" {, <ecode>, "<edesc>[:<info>]" }
```

Where

`<ecode>:: <NR1>` is the error/event code (-32768 to 32767).

`<edesc>:: <string>` is the description on the error/event.

`<info>:: <string>` is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

`STATUS:WLAN:PERR:EVENTS?` might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:PVTime:EVENTs? (Query Only)

Returns the current instrument status concatenated with WLAN Power vs. Time-specific event information.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

ASCII string representation of instrument status as follows:

```
<ecode>, "<edesc> [<info>]" {, <ecode>, "<edesc>[:<info>]" }
```


Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event.

If there is no error, the response is 0, "No events to report".

Examples

STATUS:WLAN:PVT:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:STABLE:EVENTs? (Query Only)

Returns instrument status concatenated with WLAN Symbol Table-specific event information.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

STATus:WLAN:STABLE:EVENTs?

Returns

ASCII string representation of instrument status as follows:

```
<ecode>,"<edesc>[<einfo>]"{"<ecode>,"<edesc>[:<einfo>]"}
```

Where

<ecode>::<NR1> is the error/event code (-32768 to 32767).

<edesc>::<string> is the description on the error/event.

<einfo>::<string> is the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Examples

STATUS:WLAN:STABLE:EVENTS? might return 12026, "Acq Sampling Params: manual control", indicating that the sampling parameters are controlled manually.

STATus:WLAN:SUMMARY:EVENTs? (Query Only)

Returns the current events and status conditions for the WLAN summary measurement.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Status commands

Syntax

STaTus:WLAN:SUMMaRy:EvENts?

Arguments

None

Returns

<ecode>, "<edesc>[<einfo>]" {, <ecode>, "<edesc>[<einfo>]"}

Where

<ecode>::<NR1> the error/event code (-32768 to 32767).

<edesc>::<string> the description on the error/event.

<einfo>::<string> the additional information on the error/event. If there is no error, the response is 0, "No events to report".

Returns the contents of the Status Byte Register (SBR) in the status/event reporting structure using the Master Summary Status (MSS) bit. Refer to [Status and Events](#) (on page 2746), for the register information.

System commands

SYSTem:ANTenna:AMPLifier? (Query Only)

Queries the status of the antenna amplifier.

Conditions

Requires an RSA306B/500A/600A instrument with an antenna.

Group

System commands

Syntax

SYSTem:ANTenna:AMPLifier?

Returns

1 or ON means amplifier is on.

0 or OFF means amplifier is off.

SYSTem:ANTenna:CAPabilities:REPort? (Query Only)

Queries the selected antenna capabilities for the items.

Conditions

Requires an RSA306B/500A/600A instrument with an antenna.

Group

System commands

Syntax

SYSTem:ANTenna:CAPabilities:REPort?

Returns

ReportsNothing = 1, ReportsAzimuth = 2, ReportsElevation = 4,
ReportsActiveMode = 8, ReportsBandChange = 16, ReportsRollAngle = 32,
ReportsButtonPresses = 64

Examples

SYSTEM:ANTENNA:CAPABILITIES:REPORT? might return 126 when the set to Simulator. This is 64+32+16+8+4+2.

SYSTEM:ANTENNA:CAPABILITIES:REPORT? might return 6, which indicates capabilities of azimuth and elevation reporting.

SYSTem:ANTenna:CATalog? (Query Only)

Queries the catalog of antennas. Use the SYSTem:ANTenna:SElected command to select an antenna from the catalog.

Conditions

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

SYSTem:ANTenna:CATalog?

Returns

<string>,<string> is a list of antennas in the catalog.

Examples

SYSTEM:ANTENNA:CATALOG? might return "Alaris DF-A0047","Simulator".

SYSTem:ANTenna:CONNect (No Query Form)

Initiates antenna connection.

Conditions

Requires antenna or antenna simulator mode. Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

SYSTem:ANTenna:CONNect { 1 | 0 }

Arguments

1 or ON connects antenna.

0 or OFF does not connect antenna.

SYSTem:ANTenna:DATA? (Query Only)

Queries the true north azimuth, uncorrected compass bearing, elevation, and roll values of the antenna.

Conditions

Antenna mode must be set to Simulator to report roll value.

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

SYSTem:ANTenna:DATA?

Related Commands

[SYSTem:ANTenna:SETDATA](#) (on page 2552)

Returns

<numeric>::<NR3>

<numeric>, <numeric>, <numeric>, <numeric>

Examples

SYSTem:ANTenna:DATA? might return 65.6509800000, 54.2109800000, 37.8086400000, indicating the true north azimuth is 65.6°, the uncorrected compass bearing is 54.2°, and the elevation is 37.8°.

SYSTem:ANTenna:DECLination? (Query Only)

Queries current calculated declination.

Conditions

Requires an RSA306B/500A/600A instrument with an antenna.

Group

System commands

Syntax

SYSTem:ANTenna:DECLination?

Returns

<NR2> is the calculated declination.

Examples

SYSTem:ANTenna:DECLINATION? might return 10.0, indicating that the calculated declination is 10.0°.

SYSTem:ANTenna:DECLination:USER

Sets or queries the manually entered declination.

Conditions

Requires an RSA306B/500A/600A instrument with an antenna.

Group

System commands

Syntax

```
SYSTem:ANTenna:DECLination:USER <NR2>  
SYSTem:ANTenna:DECLination:USER?
```

Related Commands

[SYSTem:ANTenna:DECLination:USER:STATE](#) (on page 2549)

Arguments

<NR2> is the manually entered declination.

Returns

<NR2> is the manually entered declination.

Examples

SYSTem:ANTenna:DECLINATION:USER? might return 10.0000000000, indicating that the manually forced declination is set to 10.0°.

SYSTem:ANTenna:DECLination:USER:STATE

Sets or queries to force declination.

Conditions

Requires an RSA306B/500A/600A instrument with an antenna.

Group

System commands

Syntax

```
SYSTem:ANTenna:DECLination:USER:STATE { 1 | 0 | ON | OFF }  
SYSTem:ANTenna:DECLination:USER:STATE?
```

Related Commands

[SYSTem:ANTenna:DECLination:USER](#) (on page 2548)

Arguments

1 or ON forces the declination to a user entered value.

0 or OFF sets the declination to not be forced.

Returns

1 or ON means the declination is set to a manually entered value.

0 or OFF means the declination is not forced.

SYSTem:ANTenna:FREQuency:BAND? (Query Only)

Queries the currently selected frequency band for the antenna, assuming that it has the ability to report back which band is selected.

Conditions

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:ANTenna:FREQuency:BAND?`

Returns

It returns 0 for all currently available antennas (and the Simulator), because they do not have the ability to report back which band is selected.

Examples

`SYSTEM:ANTENNA:FREQUENCY:BAND?`

SYSTem:ANTenna:MANufacturer? (Query Only)

Queries the antenna manufacturer.

Conditions

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:ANTenna:MANufacturer?`

Returns

`<string>`

Examples

`SYSTEM:ANTENNA:MANUFACTURER?` might return "Alaris".

SYSTem:ANTenna:MODEL? (Query Only)

Queries the antenna model.

Conditions

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:ANTenna:MODEL?`

Returns

`<string>`

Examples

`SYSTEM:ANTENNA:MODEL?` might return "DF-A0047".

SYSTem:ANTenna:OPTions? (Query Only)

Queries the antenna options.

Conditions

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

```
SYSTem:ANTenna:OPTions?
```

Returns

<string>

Examples

SYSTem:ANTENNA:OPTIONS? might return "None".

SYSTem:ANTenna:SElected

Sets or queries the selected antenna.

Conditions

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

```
SYSTem:ANTenna:SElected <string>  
SYSTem:ANTenna:SElected?
```

Related Commands

[SYSTem:ANTenna:CATalog?](#) (on page 2547)

Arguments

<string> is an item from the antenna catalog.

Alaris DF-A0047 sets analyzer to Alaris antenna. Simulator sets the analyzer to the simulated antenna.

Returns

"None" means the analyzer is set to no antenna.

"Alaris DF-A0047" means the analyzer is set to the Alaris antenna. "Simulator" means the analyzer is set to the simulated antenna.

Examples

SYSTem:ANTENNA:SELECTED? might return "Alaris DF-A0047", indicating that the antenna selection is set to the Alaris DF-A0047.

SYSTem:ANTenna:SERial? (Query Only)

Queries the antenna serial number.

Conditions

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

SYSTem:ANTenna:SERial?

Returns

<string>

Examples

SYSTEM:ANTENNA:SERIAL? might return "A22500".

SYSTem:ANTenna:SETDATA (No Query Form)

Sets the amplifier, true north azimuth, uncorrected compass bearing, elevation, and roll values of the antenna.

Conditions

Antenna mode must be set to Simulator to report roll value.

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

SYSTem:ANTenna:SETDATA <boolean>,<numeric>,<numeric>,<numeric>,<numeric>

Related Commands

[SYSTem:ANTenna:DATA?](#) (on page 2547)

Arguments

<boolean> is { 1 | 0 | ON | OFF }

<numeric>::<NR3>

Examples

SYSTEM:ANTENNA:SETDATA 1,65.6509800000,54.2109800000,37.8086400000 will set the amplifier to ON (1), the true north azimuth to 65.6°, the uncorrected compass bearing to 54.2°, and the elevation to 37.8°.

SYSTem:BATTery:CCYClE? (Query Only)

Queries the battery charge cycle.

Conditions

Requires an RSA500A series instrument with a battery installed.

Group

System commands

Syntax

SYSTem:BATTeRy:CCYClE?

Returns

Returns the number of charge cycles of the battery.

Examples

SYSTEM:BATTERY:CCYCLE? might return 10, indicating that the battery has been charged 10 times.

SYSTem:BATTeRy:DATE? (Query Only)

Queries the battery manufactured date.

Conditions

Requires an RSA500A series instrument with a battery installed.

Group

System commands

Syntax

SYSTem:BATTeRy:DATE?

Returns

Returns the date string as yyyy-mm-dd.

Examples

SYSTEM:BATTERY:DATE? might return "2015-10-05", indicating the battery manufactured date is October 5, 2015.

SYSTem:BATTeRy:RChArge? (Query Only)

Queries the relative charge remaining.

Conditions

Requires an RSA500A series or RSA600A series instrument with a battery installed.

Group

System commands

Syntax

SYSTem:BATTeRy:RChArge?

Returns

Returns the relative charge remaining in percent.

Examples

SYSTEM:BATTERY:RCHARGE? might return 50, indicating the relative charge remaining is 50%.

SYSTem:BATTery:SERial? (Query Only)

Queries the battery serial number.

Conditions

Requires an RSA500A series instrument with a battery installed.

Group

System commands

Syntax

```
SYSTem:BATTery:SERial?
```

Returns

Returns the battery serial number.

Examples

SYSTEM:BATTERY:SERIAL? might return 1234, indicating the serial number is 1234.

SYSTem:BATTery:STATus? (Query Only)

Queries the battery status.

Conditions

Requires an RSA500A series instrument with a battery installed.

Group

System commands

Syntax

```
SYSTem:BATTery:STATus?
```

Returns

ACFull means AC present and fully charged

ACCharging means AC present and charging

ACNBattery means AC present and no battery

FULL means battery fully charged

EMPTY means battery fully discharged DISCharging battery discharging ERRor battery error

Examples

SYSTEM:BATTERY:STATUS? might return ACNB, indicating no battery is installed.

SYSTem:BATTery:TEMPerature? (Query Only)

Queries the battery temperature.

Conditions

Requires an RSA500A series instrument with a battery installed.

Group

System commands

Syntax

SYSTem:BATTery:TEMPerature?

Returns

Returns the battery temperature in degrees Celsius.

Examples

SYSTEM:BATTERY:TEMPERATURE? might return 15, indicating that the battery temperature is 15 °C.

SYSTem:COMMunicate:GPIB[:SELF]:ADDRESS

Sets or queries the GPIB address of the instrument.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:COMMunicate:GPIB[:SELF]:ADDRESS <value>
SYSTem:COMMunicate:GPIB[:SELF]:ADDRESS?

Arguments

<value>::<NR1> specifies the GPIB address of the instrument.

*RST has no effect on the value.

Examples

SYSTEM:COMMUNICATE:GPIB:SELF:ADDRESS 18 sets the GPIB address to 18.

SYSTem:DATE

Sets or queries the date (year, month, and day). This command is equivalent to the date setting through the Windows Control Panel.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:DATE <year>,<month>,<day>
SYSTem:DATE?

Related Commands

[SYSTem:TIME](#) (on page 2583)

Arguments

<year>: :<NRf> specifies the year (4 digits). Range: 2000 to 2099.

<month>: :<NRf> specifies the month. Range: 1 (January) to 12 (December).

<day>: :<NRf> specifies the day. Range: 1 to 31. These values are rounded to the nearest integer.

*RST has no effect on the settings.

Examples

SYSTEM:DATE 2008,3,19 sets the internal calendar to March 19, 2008.

SYSTem:ERRor:ALL? (Query Only)

Queries the error/event queue for all the unread items and removes them from the queue. The response is a comma separated list of number, string pairs in FIFO order. For details of the error messages, refer to [Error messages and codes](#) (on page 2756).

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:ERRor:ALL?

Arguments

None

Returns

<ecode>,"<edesc>[;<einfo>]"{"<ecode>,"<edesc>[;<einfo>]"}

Where

<ecode>: :<NR1> is the error/event code (-32768 to 32767).

<edesc>: :<string> is the description on the error/event.

<einfo>: :<string> is the detail of the error/event.

If the queue is empty, the response is 0, "No error; Queue empty - No events to report".

Examples

SYSTEM:ERROR:ALL? might return -130, "Suffix error; Unrecognized suffix, INPutMLEVel -10dB", indicating that the unit of the reference level is improper.

SYSTem:ERRor:CODE:ALL? (Query Only)

Queries the error/event queue for all the unread items and removes them from the queue. The response returns a comma separated list of only the error/event code numbers in FIFO order. For details of the error messages, refer to [Error messages and codes](#) (on page 2756).

Conditions

Measurement views: All

Group

System commands

Syntax

`SYSTem:ERRor:CODE:ALL?`

Arguments

None

Returns

`<ecode>{,<ecode>}`

Where

`<ecode>: : <NR1>` is the error/event code, ranging from -32768 to 32767.

If the queue is empty, the response is 0.

Examples

`SYSTEM:ERROR:CODE:ALL?` might return -101, -108 of the error codes.

SYSTem:ERRor:CODE[:NEXT]? (Query Only)

Queries the error/event queue for the next item and removes it from the queue. The response returns only the error/event code number omitting the string. Except for the shortened response, the query operates identically to `SYSTem:ERRor[:NEXT]?`. For details of the error messages, refer to [Error messages and codes](#) (on page 2756).

Conditions

Measurement views: All

Group

System commands

Syntax

`SYSTem:ERRor:CODE[:NEXT]?`

Arguments

None

Returns

`<ecode>: : <NR1>` is the error/event code, ranging from -32768 to 32767.

Examples

`SYSTEM:ERROR:CODE:NEXT?` might return -101 of the error code.

SYSTem:ERRor:COUNt? (Query Only)

Queries the error/event queue for the number of unread items. As errors and events may occur at any time, more items may be present in the queue at the time it is actually read.

Conditions

Measurement views: All

Group

System commands

Syntax

`SYSTem:ERRor:COUNT?`

Arguments

None

Returns

`<enum>::<NR1>` is the number of errors/events.

If the queue is empty, the response is 0.

Examples

`SYSTEM:ERROR:COUNT?` might return 2, indicating that the error/event queue contains two of unread errors/events.

SYSTem:ERRor[:NEXT]? (Query Only)

Queries the error/event queue for the next item and removes it from the queue. The response returns the full queue item consisting of an integer and a string. For details of the error messages, refer to the Measurement status conditions table in the PDF of the Programmer manual for your product.

Conditions

Measurement views: All

Group

System commands

Syntax

`SYSTem:ERRor[:NEXT]?`

Arguments

None

Returns

`<ecode>,"<edesc>[:<einfo>]"`

Where

`<ecode>::<NR1>` is the error/event code, ranging from -32768 to 32767.

`<edesc>::<string>` is the description on the error/event.

`<einfo>::<string>` is the additional information on the error/event.

Examples

`SYSTEM:ERROR:NEXT?` might return -130, "Suffix error; Unrecognized suffix, INPutMLeVel -10dB", indicating that the unit is improper.

SYSTem:GNSS:ALTitude (No Query Form)

Query the GNSS altitude.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

```
SYSTem:GNSS:ALTitude <altitude>
```

Returns

<altitude>::<NRF> in meters.

Examples

SYSTem:GNSS:ALTITUDE might return 60.1, the GNSS altitude.

SYSTem:GNSS:COURse? (Query Only)

Query the GNSS course in degrees.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

```
SYSTem:GNSS:COURse?
```

Examples

SYSTem:GNSS:COURSE? might return 162.78, indicating the GNSS course is 162.78 degrees.

SYSTem:GNSS:DATA? (Query Only)

Query the GNSS data.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

```
SYSTem:GNSS:DATA?
```

Returns

<status>, <longitude>, <latitude>, <altitude>, <timestamp>, <speed>, <course>, satellites> <HDOP>

Examples

SYSTEM:GNSS:DATA? might return

LOCK,-122.8197333333,45.4994000000,63.4000000000,"2012-06-01T13:51:26.00",22.96480

SYSTem:GNSS:HDOP? (Query Only)

Query the GNSS HDOP value.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

SYSTem:GNSS:HDOP?

Returns

<value>::<NR1> the horizontal DOP value.

Examples

SYSTEM:GNSS:HDOP? might return 900.000E-3, the GNSS HDOP value.

SYSTem:GNSS:LATitude? (Query Only)

Query the GNSS latitude.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

SYSTem:GNSS:LATitude?

Examples

SYSTEM:GNSS:LATITUDE? might return 45.497193, the GNSS latitude.

SYSTem:GNSS:LONGitude? (Query Only)

Query the GNSS longitude.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:GNSS:LONGitude?`

Examples

`SYSTEM:GNSS:LONGITUDE?` might return the `-122.82372`, the GNSS longitude.

SYSTem:GNSS:SATellites? (Query Only)

Query the number of GNSS satellites.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:GNSS:SATellites?`

Examples

`SYSTEM:GNSS:SATELLITES?` might return `10.000`, indicating the number of GNSS satellites is 10.

SYSTem:GNSS:SElected

Selects or queries the source for the GNSS signal.

The `INTernal` argument is not available with the RSA306.

Conditions

Measurement views: All

Group

System commands

Syntax

`SYSTem:GNSS:SElected { NONE | INTernal | EXTernal }`
`SYSTem:GNSS:SElected?`

Arguments

`NONE`: Selects no GNSS system.

`EXTernal`: This can be an external USB device or other external device on the table.

Returns

`NONE`: No GNSS system is selected.

EXternal: The external GNSS system.

Examples

SYSTEM:GNSS:SELECTED? might return EXT, indicating the source for the GNSS system is an external device.

SYSTEM:GNSS:SERial:BAUD

Sets or queries the GNSS serial baud rate.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

```
SYSTEM:GNSS:SERial:BAUD { 4800, 9600, 19200, 38400 }  
SYSTEM:GNSS:SERial:BAUD?
```

Examples

SYSTEM:GNSS:SERIAL:BAUD 19200 sets the baud rate to 19200.

SYSTEM:GNSS:SERial:PORT

Sets or queries the GNSS serial communications port.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

```
SYSTEM:GNSS:SERial:PORT <COM_Port>  
SYSTEM:GNSS:SERial:PORT?
```

Examples

SYSTEM:GNSS:SERIAL:PORT 1 sets PORT 1 as the GNSS serial communications port.

SYSTEM:GNSS:SPEed? (Query Only)

Query the GNSS speed in meter/hour.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:GNSS:SPEEd?`

Examples

`SYSTEM:GNSS:SPEED?` might return `31.33583`, indicating the GNSS speed is 31.33583 meters/hour.

SYSTem:GNSS:STATus? (Query Only)

Query the GNSS status.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:GNSS:STATus?`

Returns

`{ OFF | BAD | UNLock | LOCKed }`

Where:

`OFF` - the GNSS is turned off.

`BAD` - a communication error.

`UNL` - the GNSS is unlocked.

`LOCK` - the GNSS is locked.

Examples

`SYSTEM:GNSS:STATUS?` might return `BAD`, indicating a communication error has occurred. For example, the GNSS port or baud rate is wrong.

SYSTem:GNSS:TIMestamp? (Query Only)

Query the GNSS timestamp.

Conditions

Measurement views: All

Requires an RSA306B/500A/600A instrument.

Group

System commands

Syntax

`SYSTem:GNSS:TIMestamp?`

Examples

SYSTEM:GNSS:TIMESTAMP? might return 2012-06-01T13:47:21.00, the GNSS timestamp.

SYSTem:KLOCK

Enables or disables the local lockout operation.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:KLOCK { OFF | ON | 0 | 1 }  
SYSTem:KLOCK?
```

Arguments

OFF or 0 disables the local lockout operation.

ON or 1 enables the local lockout operation.

Examples

SYSTEM:KLOCK ON enables the local lockout operation.

SYSTem:LASTaligned:DATEtime? (Query Only)

Queries the last alignment date and time of the device.

Conditions

Should be connected RSA7100B or RSA7100A to query.

Group

System commands

Syntax

```
:SYSTem:LASTaligned:DATEtime?
```

Examples

:SYSTem:LASTaligned:DATEtime? returns last alignment date and time of the device.

SYSTem:LASTaligned:TEMPerature? (Query Only)

Queries the last aligned temperature of the device.

Conditions

Should be connected to RSA7100B or RSA7100A to query.

Group

System commands

Syntax

```
:SYSTem:LASTaligned:TEMPerature?
```

Examples

:SYSTem:LASTaligned:TEMPerature? returns last aligned temperature of the device.

SYSTem:LINK:SETTings

Sets or queries whether or not global settings linking enabled for the measurements displayed.

Conditions

Measurement views: General Signal viewing and GPDemod Measurements.

Group

System commands

Syntax

```
SYSTem:LINK:SETTings
```

Arguments

0 indicates global settings linking is disabled.

1 indicates global settings linking is enabled.

Examples

SYSTem:LINK:SETTings 1 enables the global settings linking for the displayed measurement views.

SYSTem:LINK:SETTings:SYNC

Sets the synchronize settings referring to source for the measurements displayed.

Conditions

Measurement views: General Signal viewing and GPDemod Measurements.

Group

System commands

Syntax

```
SYSTem:LINK:SETTings:SYNC { 'Source1' | 'Source2' | 'Source3' | 'Source4' }
```

Arguments

'Source1' or 'Source2'.

Examples

SYSTem:LINK:SETTings:SYNC 'Source2' synchronizes the settings referring to Source2 for the displayed measurement views.

SYSTem:OPTions? (Query Only)

Queries the options installed in the analyzer. This command is equivalent to the IEEE common command *OPT?.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:OPTions?

Arguments

None

Returns

<option>::<string> contains the comma-separated option numbers.

Examples

SYSTEM:OPTIONS? might return "01,02,20", indicating that Option 01, 02, and 20 are currently installed in the analyzer.

SYSTem:PRESet (No Query Form)

Restores the analyzer to the defaults. This command is equivalent to the Preset key on the front panel.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:PRESet

Arguments

None

Examples

SYSTEM:PRESET restores the analyzer to the defaults.

SYSTem:PRESet:APPLication:ACTion

Sets or queries the preset action for the application preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:PRESet:APPLication:ACTion { RECall | SHOW }
SYSTem:PRESet:APPLication:ACTion?

Arguments

RECall recalls the selected preset for the application preset type.

SHOW lists the available presets for the application preset type.

Examples

SYSTEM:PRESET:APPLICATION:ACTION SHOW lists the available presets for the application preset type.

SYSTem:PRESet:BLUEtooth:STANdard

Sets or queries the standard, setup, Retaining Current Reference level, and Retaining Center Frequency in the Bluetooth standard preset.

Conditions

Measurement views: Launch BT Application

Group

System commands

Syntax

SYSTem:PRESet:BLUEtooth:STANdard {BR | LE | EDR}, {BW20DB | MODD | INBE | NCOM}, {1 | 0}, {1 | 0}

Arguments

BR is the Basic Rate.

LR is the Low Energy Rate.

EDR is the Enhanced Data Rate.

<test_setup> :: = {BW20DB|MODD|INBE|NCOM} the name of the test setup.

<Retaining_Current_Reflevel> :: = [1 | 0] where 1 indicates this value is checked in the view; 0 indicates the value is unchecked.

<Retaining_Center_Frequency> :: = [1 | 0] where 1 indicates this value is checked in the view; 0 indicates the value is unchecked.

Examples

SYSTEM:PRESET:BLUETOOTH:STANDARD BR,MODD,0,1 will set Preset to Bluetooth, standard to basic rate, Test Setup to Modulation/Frequency Offset/Drift/Output Power, disable the retain current center frequency setting, Enable the Retain current ref level setting.

SYSTem:PRESet:DPX (No Query Form)

Restores the analyzer to the defaults for the DPX preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:PRESet:DPX { SWEpt | REALtime | ZERospan }

Arguments

SWEpt restores the setup of the Swept DPX measurement.

REALtime restores the setup of the Realtime DPX measurement (110 MHz span).

ZERospan restores the setup of the Zero Span DPX measurement.

Examples

SYSTEM:PRESET:DPX REALtime restores the DPX, Spectrum to realtime.

SYSTem:PRESet:DPX:ACTion

Sets or queries the preset action for the DPX preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:DPX:ACTion { RECall | SHOW }  
SYSTem:PRESet:DPX:ACTion?
```

Arguments

RECall recalls the selected preset for the DPX preset type.

SHOW lists the available presets for the DPX preset type.

Examples

SYSTEM:PRESET:DPX:ACTION SHOW lists the available presets for the DPX preset type.

SYSTem:PRESet:DPX:SElected

Sets or queries the presets for the DPX preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:DPX:SElected { OPEn | SWEpt | REALtime | ZERospan }  
SYSTem:PRESet:DPX:SElected?
```

Arguments

OPEn sets the DPX measurement to Open the DPX display.

SWEpt sets the DPX measurement to Swept mode.

REALtime sets the DPX measurement to Real-time mode (110 MHz span).

ZERospan sets the DPX measurement to Zero Span mode.

Examples

SYSTEM:PRESET:DPX:SELECTED REALtime sets the DPX, Spectrum to realtime

SYSTem:PRESet:LTE:STANdard

Sets or queries the following: Preset, Test Setup, frame structure channel bandwidth, Base Station category (for LTE ACLR and SEM test setups), Adjacent channel type (for LTE ACLR test setup), Retain current Center Frequency setting, and Retain current Reference Level.

Conditions

Measurement view: Standards Presets

Group

System commands

Syntax

```
SYSTem:PRESet:LTE:STANdard { MODUlation | ACLR | CS | SEM, FDD | TDD, BW1PT4M | BW3M | BW5M | BW10M
    | BW15M | BW20M, WACA | WACB1 | WACB2 | HACAB | LACAB | MACAB, UTRA | EUTRA, CR1PT28M | CR3PT84M
    | CR7PT68M, 0 | 1, 0 | 1 }
SYSTem:PRESet:LTE:STANdard?
```

Arguments

MODUlation | ACLR | CS | SEM, FDD | TDD, BW1PT4M | BW3M | BW5M | BW10M | BW15M | BW20M,
WACA | WACB1 | WACB2 | HACAB | LACAB | MACAB, UTRA | EUTRA, CR1PT28M | CR3PT84M |
CR7PT68M, 0 | 1, 0 | 1

Returns

See Arguments.

Examples

SYSTEM:PRESET:LTE:STANDARD? might return MOD, FDD, BW1PT4M, 0, 1, indicating that the test setup is Cell ID, Frame Structure, Channel BW, Retain Center Frequency, Retain Reference Level.

SYSTem:PRESet[:MAIN](No Query Form)

Restores the analyzer to the defaults. This command is equivalent to the SYSTem:PRESet command.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet[:MAIN] { MAIN| }
SYSTem:PRESet[:MAIN] ?
```

Arguments

CURRent restores the analyzer to the current version of the main preset.

V1 restores the analyzer to the original version of the main preset.

V2 restores the analyzer to the Full Spectrum version of the main preset.

Examples

`SYSTEM:PRESET[:MAIN] CURRENT` restores the analyzer to the defaults of the current version.

SYSTem:PRESet:MAIN:ACTion

Sets or queries the preset action for the main preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:MAIN:ACTion { RECall | SHOW }  
SYSTem:PRESet:MAIN:ACTion?
```

Arguments

`RECall` recalls the selected preset for the main preset type.

`SHOW` lists the available presets for the main preset type.

Examples

`SYSTEM:PRESET:MAIN:ACTION SHOW` lists the available presets for the main preset type.

SYSTem:PRESet:MAIN:SELeCted

Sets or queries the presets for the Main preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:MAIN:SELeCted { CURRent | V1 | V2 }  
SYSTem:PRESet:MAIN:SELeCted?
```

Arguments

`CURRent` selects the current version of the Main presets.

`V1` selects the previous version of the main preset.

`V2` selects Full Spectrum Sweep version of the current main preset.

Examples

`SYSTEM:PRESET:MAIN:SELECTED CURRent` selects the current version of the Main presets.

SYSTem:PRESet:P25:STANdard (No Query Form)

This command restores the analyzer defaults for the P25 Standards preset.

Conditions

Measurement view: Any P25 measurement

Group

System commands

Syntax

```
SYSTem:PRESet:P25:STANdard <{ PHASe1 | PHASe2 }>,<{ C4FM | HCPM | HDQPSK }>,<{ 1 | 0 }>
```

Arguments

PHASe1 and PHASe2 are the P25 standard types.

C4FM, HCPM, HDQPSK are the P25 modulation types.

1 = retain center frequency; 0 = do not retain center frequency.

Returns

<standard> is the P25 standard type: Phase1, Phase2.

<modulation type> is the P25 modulation type: C4FM, HCPM (Inbound), HDQPSK (Outbound).

<{ 1 | 0 }> controls whether or not the center frequency is retained: 0 = not retained; 1 = retained.

Examples

SYSTem:PRESet:P25:STANDARD? might return PHASE1,C4FM,0, indicating that the P25 preset is set to standard type Phase 1, modulation type C4FM, and that the center frequency is set to not be retained.

SYSTem:PRESet:STANdards (No Query Form)

Restores the analyzer to the defaults for the WLAN Standards preset type. To restore the analyzer to a preset file, use the command [SYSTem:PRESet:USER](#) (on page 2572).

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:STANdards <WLAN>
```

Arguments

<WLAN> specifies to restore the analyzer to the WLAN standards preset type.

Examples

SYSTem:PRESet:STANDARDS "WLAN" restores the analyzer to the defaults for the WLAN Standards preset type.

SYSTem:PRESet:STANdards:ACTion

Sets or queries the preset action for the Standards preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:STANdards:ACTion { RECall | SHOW }  
SYSTem:PRESet:STANdards:ACTion?
```

Arguments

RECall recalls the selected preset for the Standards preset type.

SHOW lists the available presets for the Standards preset type.

Examples

SYSTEM:PRESET:STANDARDS:ACTION SHOW lists the available presets for the Standards preset type.

SYSTem:PRESet:USER (No Query Form)

Restores the analyzer to the defaults for the user preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:USER <file_name>
```

Arguments

<file_name>::<string> specifies the user presets file to restore. The file extension is .Setup. You can omit the extension.

Examples

SYSTEM:PRESET:USER "Spectrum" restores the defaults of the file "Spectrum.Setup" from the C:\RSA5100B Files\User Presets directory.

SYSTem:PRESet:USER:ACTion

Sets or queries the preset action for the user preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:USER:ACTion { RECall | SHOW }  
SYSTem:PRESet:USER:ACTion?
```

Arguments

RECall recalls the selected preset for the user preset type.

SHOW lists the available presets for the user preset type.

Examples

SYSTEM:PRESET:USER:ACTION SHOW lists the available presets for the User preset type.

SYSTem:PRESet:USER:SElected

Sets or queries the presets for the User preset type.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:PRESet:USER:SElected <file_name>

SYSTem:PRESet:USER:SElected?

Arguments

<file_name>::<string> specifies the User presets file to set. The file extension is .Setup. You can omit the extension.

Examples

SYSTEM:PRESET:USER:SELECTED "Spectrum" sets the User preset to "Spectrum.Setup" saved in C:\RSA5100B Files\User Presets directory.

SYSTem:PRESet:WLAN:AD:STANdard

Sets or queries the 802.11ad preset standard.

Conditions

Measurement views: All 802.11ad measurement views

Group

System commands

Syntax

SYSTem:PRESet:WLAN:AD:STANdard {SC| CPHY,SEM| EVM,0| 1,0| 1,CH1| CH2}

SYSTem:PRESet:WLAN:AD:STANdard?

Arguments

SC|CPHY = Sets standard as either Single carrier or Control PHY

SEM|EVM = Sets Test setup as either SEM or EVM

0|1 = Checks or unchecks the check box for Retain current Center Frequency settings

0|1 = Checks or unchecks the check box for Retain Current Ref Level setting

CH1|CH2 = Selects between channel 1 and channel 2

Returns

See Arguments

Examples

`SYSTEM:PRESET:WLAN:AD:STANDARD?` might return `"SC,EVM,0,1,CH2"`, indicating the standard selected is single carrier, test setup selected is EVM, Retain current Center Frequency box is disabled (unchecked), Retain Current Ref Level is enabled (checked), and Channel 2 is selected.

SYSTem:PRESet:WLAN:AY:STANdard

Set or query the WLAN 802.11ay standard, Retain Current Center Frequency setting, and Retain Current Reference Level setting in the WLAN 802.11ay standard preset.

Conditions

Measurement views: All WLAN 802.11ay

Group

System commands

Syntax

`SYSTem:PRESet:WLAN:AY:STANdard <AYSC>,{ EVM | SEM },{ 0 | 1},{ 0 | 1 },{ CH1 | CH2 },{ BW1X | BW2X }`

`SYSTem:PRESet:WLAN:AY:STANdard?`

Arguments

Argument	Description
AYSC	Sets the standard to Single Carrier.
EVM SEM	Sets the test setup as EVM or SEM.
0 1	Retains the Center Frequency.
0 1	Retains the Reference Level.
CH1 CH2	Sets the Radio Frequency Source to Channel 1 or Channel 2.
BW1X BW2X	Sets the Channel Bandwidth as 2.16 GHz or 4.32 GHz.

Returns

See Arguments.

Examples

`SYST:PRESet:WLAN:AY:STAN AYSC,EVM,0,1,CH2,BW1X` sets preset to 802.11ay, standard to Single Carrier, disables the Retain Current Center Frequency setting, enables the Retain Current Reference Level setting, and sets the channel to CH2.

`SYST:PRESet:WLAN:AY:STAN?` may return `AYSC, SEM, 1, 0, CH1, BW2X`, which means that the standard is Single Carrier, the display type is SEM, the Center Frequency is retained, the Reference Level is not retained, Reference Frequency Source is set to channel 1, and the Channel Bandwidth is 4.32 GHz.

SYSTem:PRESet:WLAN:STANdard

Sets or queries the standard and bandwidth presets for the WLAN standards preset type. The first enumeration is the 802.11 standard; the second enumeration is the bandwidth.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:PRESet:WLAN:STANdard { B | AC, [BW20|BW40|BW80|BW160] | [A,G],BW20 | P, [BW5|BW10|BW20] | J,
[BW10|BW20] | N, [BW20|BW40] }
SYSTem:PRESet:WLAN:STANdard?
```

Arguments

B selects the 802.11b WLAN standard preset options.

AC, [BW20|BW40|BW80|BW160] selects the 802.11b WLAN standard preset options.

[A,G], BW20 selects the 802.11a or g WLAN standard preset options.

P, [BW5|BW10|BW20] selects the 802.11p WLAN standard preset options.

J, [BW10|BW20] selects the 802.11j WLAN preset options.

N, [BW20|BW40] selects the 802.11n WLAN standard preset options.

Examples

SYSTEM:PRESET:WLAN:STANDARD P, BW5 selects 802.11p as the WLAN standard to use and 5 MHz as the bandwidth preset.

SYSTem:SVPC:DISconnect (No Query Form)

Disconnects an RSA306B/500A/600A/7100A. If playback is active, exits playback.

Group

System commands

Syntax

```
SYSTem:SVPC:DISconnect
```

Arguments

None.

SYSTem:SVPC:CONNect (No Query Form)

Connects an RSA306B/500A/600A/7100A.

Group

System commands

Syntax

```
SYSTem:SVPC:CONNect
```

Arguments

None.

SYSTem:SVPC:CONNect:RSA300 (No Query Form)

Connects an RSA306 instrument.

Group

System commands

Syntax

```
SYSTem:SVPC:CONNect:RSA300
```

Arguments

None.

SYSTem:SVPC:HSInterface:ENABLE

Sets or queries the status of the HSI interface as enabled or disabled.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:SVPC:HSInterface:ENABLE {0|1}  
SYSTem:SVPC:HSInterface:ENABLE?
```

Arguments

0 to disable

1 to enable

Example

:SYSTem:SVPC:HSInterface:ENABLE 1 enables the HIS interface.

SYSTem:SVPC:HSInterface:IP:ADDRess

Sets or queries the IP address of the instrument connected via HSI interface.

Conditions

Measurement views: All

Group

System commands

Syntax

```
SYSTem:SVPC:HSInterface:IP:ADDRess <value>  
SYSTem:SVPC:HSInterface:IP:ADDRess?
```


Arguments

<value>: : <NR1> specifies the IP address of the instrument.

Examples

:SYSTem:SVPC:HSInterface:IP:ADDReSS "134.64.244.152" sets the IP address to given value.

SYSTem:SVPC:HSInterface:PORT:NUMBer

Sets or queries the port number of the instrument connected via HSI interface.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:SVPC:HSInterface:PORT:NUMBer <value>
SYSTem:SVPC:HSInterface:PORT:NUMBer?

Arguments

<value>: : <NR1> specifies the port number of the instrument.

Examples

:SYSTem:SVPC:HSInterface:PORT:NUMBer 5000 sets the port number to given value.

SYSTem:SVPC:HSInterface:USE:LOCALhost

Sets or queries whether the HSI interface is connected via the local host.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:SVPC:HSInterface:USE:LOCALhost <value>
SYSTem:SVPC:HSInterface:USE:LOCALhost?

Arguments

0 to disable

1 to enable

Examples

:SYSTem:SVPC:HSInterface:USE:LOCALhost 1 indicates that HIS interface is using local host.

SYSTem:SVPC:INSTrument:SERial? (Query Only)

Available when an RSA is connected to SignalVu-PC.

Queries the serial number and model of the connected instrument.

Group

System commands

Syntax

`SYSTem:SVPC:INSTRument:SERIal?`

Arguments

None.

Returns

Serial number and model of connected instrument.

This commands will not return the correct instrument serial number if an RSA is disconnected and then another connected without using the Search for Instruments tool in the SignalVu-PC application to find and connect to the new instrument.

SYSTem:SVPC:INSTRument:VERSion? (Query Only)

Available when an RSA is connected to SignalVu-PC. Queries the firmware version of the connected instrument.

Group

System commands

Syntax

`SYSTem:SVPC:INSTRument:VERSion?`

Arguments

None.

Returns

Firmware version of connected instrument.

This commands will not return the correct instrument firmware version if an RSA is disconnected and then another connected without using the Search for Instruments tool in the SignalVu-PC application to find and connect to the new instrument.

SYSTem:SVPC:INSTRument:MODEL? (Query Only)

Available when an RSA is connected to SignalVu-PC. Queries the model of the connected instrument.

Group

System commands

Syntax

`SYSTem:SVPC:INSTRument:MODEL?`

Arguments

None.

Returns

Model of connected instrument.

This commands will not return the correct model if an RSA is disconnected and then another connected without using the Search for Instruments tool in the SignalVu-PC application to find and connect to the new instrument.

SYSTem:SVPC:INSTrument:OPTions? (Query Only)

Available when an RSA is connected to SignalVu-PC. Queries the options for the connected instrument.

Group

System commands

Syntax

SYSTem:SVPC:INSTrument:OPTions?

Arguments

None.

Returns

Model of connected instrument.

This commands will not return the correct options if an RSA is disconnected and then another connected without using the Search for Instruments tool in the SignalVu-PC application to find and connect to the new instrument.

SYSTem:SVPC:SOURce<x>:ADD

Adds Measurement Source.

Conditions

It should be connected to MSO/LPD/DPO7/SX to set.

Group

System commands

Syntax

SYSTem:SVPC:SOURce<x>:ADD

Related Commands

[SYSTem:SVPC:SOURce<x>:REMOVe](#) (on page 2580)

[SYSTem:SVPC:SOURce<x>:RENAme](#) (on page 2581)

[SYSTem:SVPC:SOURce<x>:REMOVe:ALL](#) (on page 2580)

Arguments

<x> specifies the measurement source index, 1 for Source1.

Returns

None

Examples

SYSTem:SVPC:SOURce1:ADD adds measurement source under source configuration.

SYSTem:SVPC:SOURce<x>:REMOve

Removes latest user defined measurement Source from source configuration.

Conditions

It should be connected to MSO/LPD/DPO7/SX to set.

Group

System commands

Syntax

```
SYSTem:SVPC:SOURce<x>:REMOve
```

Related Commands

[SYSTem:SVPC:SOURce<x>:ADD](#) (on page 2579)

[SYSTem:SVPC:SOURce<x>:RENAme](#) (on page 2581)

[SYSTem:SVPC:SOURce<x>:REMOve:ALL](#) (on page 2580)

Arguments

<x> specifies the measurement source index, 1 for Source1.

Returns

None

Examples

SYSTem:SVPC:SOURce1:REMOve removes the measurement source from source configuration.

SYSTem:SVPC:SOURce<x>:REMOve:ALL

Removes all user defined measurement sources from source configuration.

Conditions

It should be connected to MSO/LPD/DPO7/SX to set.

Group

System commands

Syntax

```
SYSTem:SVPC:SOURce?:REMOve:ALL
```

Related Commands

SYSTem:SVPC:SOURce<x>:ADD

SYSTem:SVPC:SOURce<x>:REMOve

SYSTem:SVPC:SOURce<x>:RENAme

Arguments

None

Returns

None

Examples

`SYSTem:SVPC:SOURce:REMOve:ALL`, removes all user defined measurement sources from source configuration.

SYSTem:SVPC:SOURce<x>:RENAme

Sets or queries measurement source name under source configuration.

Conditions

It should be connected to MSO/LPD/DPO7/SX to set or query.

Group

System commands

Syntax

`SYSTem:SVPC:SOURce<x>:RENAme <source_name>`
`SYSTem:SVPC:SOURce<x>:RENAme?`

Related Commands

[SYSTem:SVPC:SOURce<x>:ADD](#) (on page 2579)

[SYSTem:SVPC:SOURce<x>:REMOve](#) (on page 2580)

[SYSTem:SVPC:SOURce<x>:REMOve:ALL](#) (on page 2580)

Arguments

`<x>` specifies measurement source index, 1 for Source1.

`<source_name>` specifies custom source name.

Returns

Measurement Source name

Examples

`SYSTem:SVPC:SOURce1:RENAme "Wifi"` renames the measurement source "Source 1" to "Wifi".

`SYSTem:SVPC:SOURce1:RENAme?` returns the measurement Source "Source 1" name.

SYSTem:SVPC:VINStr:CONNect

Connects to the Virtual Instrument MSO5/6, DPO7 oscilloscopes.

Group

System commands

Syntax

`SYSTem:SVPC:VINStr:CONNect <instrument>, <channels>, <RT BW>`

Arguments

`<virtual_instrument_type>::<instrument>` specifies the type of Virtual instrument to connect with.

`<number_of_channels>::<channels>` specifies the number of channels of the virtual instrument.

`<max_rt_bandwidth>::<RT BW>` specifies the maximum real time bandwidth of the virtual instrument in GHz.

<virtual_instrument_type>	<number_of_channels>	<max_rt_bandwidth> (GHz)
MSO5/6	2, 4, 8	1, 2.5, 4, 6, 8, 10
DPO7	2, 4	8, 10, 13, 16, 20, 25

Related commands

[SYSTem:SVPC:INSTrument:MODEL?](#) (on page 2578)

To check if the connection was successful. Returns "VI MSO5/6" or "VI DPO7" based on the virtual instrument connected.

Examples

SYSTem:SVPC:VINStr:CONNect "DPO7", "4", "20" connects to Virtual instrument of type DPO7 with 4 channels and maximum real time bandwidth of 20 GHz.

SYSTem:SVPC:VINStr:CONNect "MSO5/6", "8", "10" connects to Virtual instrument of type MSO5/6 with 8 channels and maximum real time bandwidth of 10 GHz.

SYSTem:SVPC:VINStr:CHANnel2:CONFig

Sets or queries the channel configurations of the Virtual Instrument.

Group

System commands

Syntax

```
SYSTem:SVPC:VINStr:CHANnel<x>:CONFig <signalType_param1_param2>
SYSTem:SVPC:VINStr:CHANnel<x>:CONFig?
```

Arguments

<signalType_param1_param2>::<string> specifies the signal type, parameter1 and parameter2 for the Channel<x>. Allowed signal types are QAM, PULSE, MULTI TONE.

<x> = values representing range of channels available in the connected virtual instrument.

Examples

SYSTem:SVPC:VINStr:CHANnel2:CONFig "MULTI TONE_10e6_-10" sets the Channel2 Signal type to MULTI TONE, Signal Step to 10 MHz and Amplitude to -10 dBm.

SYSTem:SVPC:VINStr:CHANnel2:CONFig? returns the current configuration of Channel2 in string format. In this case "CH2_MULTI TONE_10e6_-10".

SYSTem:TEMPerature? (Query only)

Queries the current device temperature.

Conditions

Should be connected to RSA7100B or RSA7100A to query.

Group

System commands

Syntax

:SYSTem:TEMPerature?

Examples

SYSTem:TEMPerature? returns current device temperature of the device.

SYSTem:TIME

Sets or queries the time (hours, minutes, and seconds). This command is equivalent to the time setting through the Windows Control Panel.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:TIME <hour>,<minute>,<second>

SYSTem:TIME?

Related Commands

[SYSTem:DATE](#) (on page 2555)

Arguments

<hour>::<NRf> specifies the hours. Range: 0 to 23.

<minute>::<NRf> specifies the minutes. Range: 0 to 59.

<second>::<NRf> specifies the seconds. Range: 0 to 59. These values are rounded to the nearest integer.

*RST has no effect on the settings.

Examples

SYSTEM:TIME 10,15,30 sets the time to 10:15:30.

SYSTem:VERSion? (Query Only)

Returns the SCPI version number for which the analyzer complies.

Conditions

Measurement views: All

Group

System commands

Syntax

SYSTem:VERSion?

Arguments

None

Returns

<NR2> has the form YYYY.V where the Ys represent the year-version (for example, 1999) and the V represents an approved revision number for that year.

Examples

SYSTEM:VERSION? might return 1999.0 for the SCPI version.

Trace Commands

TRACe:{AM|FM|PM}:DETection

Sets or queries the display detector, the method to be used for decimating traces to fit the available horizontal space on screen. The number of horizontal pixels on screen is generally smaller than that of waveform data points. When actually displayed, the waveform data is therefore thinned out, according to the number of pixels, for being compressed.

Conditions

Measurement views: AM, FM, PM

Group

Trace commands

Syntax

```
TRACe:{AM|FM|PM}:DETection { AVERage | POSitive | NEGative }  
TRACe:{AM|FM|PM}:DETection?
```

Arguments

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

Examples

TRACE:AM:DETECTION AVERage specifies that the trace displays the average data value for each pixel.

TRACe:{AM|FM|PM}:FREeze

Determines whether or not to freeze the trace display in the AM/FM/PM view.

Conditions

Measurement views: AM, FM, PM

Group

Trace commands

Syntax

```
TRACe:{AM|FM|PM}:FREeze { OFF | ON | 0 | 1 }  
TRACe:{AM|FM|PM}:FREeze?
```

Arguments

OFF or 0 updates the trace display normally.

ON or 1 stops updating the trace display.

Examples

TRACE:AM:FREEZE ON freezes the trace display.

TRACE:{AM|FM|PM}:FUNCTION

Sets or queries the trace function in the AM/FM/PM view.

Conditions

Measurement views: AM, FM, PM

Group

Trace commands

Syntax

```
TRACE:{AM|FM|PM}:FUNCTION { NORMa1 }
TRACE:{AM|FM|PM}:FUNCTION?
```

Arguments

NORMa1 selects the normal display.

Examples

TRACE:AM:FUNCTION NORMa1 selects the normal display in the AM view.

TRACE:DIQVtime[:MEASview<y>]:ENABLE:I

Enables or disables the I trace in the Demod I&Q versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Trace commands

Syntax

```
TRACE:DIQVtime[:MEASview<y>]:ENABLE:I { OFF | ON | 0 | 1 }
TRACE:DIQVtime[:MEASview<y>]:ENABLE:I?
```

Arguments

OFF or 0 hides the I trace.

ON or 1 shows the I trace.

Examples

TRACE:DIQVtime:MEASview1:ENABLE:I ON shows the I trace in the Demod I&Q versus Time measurement view 1.

TRACe:DIQVtime[:MEASview<y>]:ENABle:Q

Enables or disables the Q trace in the Demod I&Q versus Time measurement.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Trace commands

Syntax

```
TRACe:DIQVtime[:MEASview<y>]:ENABle:Q { OFF | ON | 0 | 1 }
TRACe:DIQVtime[:MEASview<y>]:ENABle:Q?
```

Arguments

OFF or 0 hides the Q trace.

ON or 1 shows the Q trace.

Examples

TRACe:DIQVtime:MEASview1:ENABle:Q ON shows the Q trace in the Demod I&Q versus Time Measurement view 1.

TRACe:DIQVtime[:MEASview<y>]:MODE

Sets or queries whether to display the Demod I&Q versus Time trace as vectors or symbols (points).

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement view: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Trace commands

Syntax

```
TRACe:DIQVtime[:MEASview<y>]:MODE { VECTors | SYMBols }
```

Arguments

VECTors displays the trace in a format that uses lines to connecting points in the trace display.

SYMBols displays the trace in a format that does not use lines to connect points in the trace display.

Examples

TRACe:DIQVtime:MEASview1:MODE SYMBols sets the display to show symbols without lines connecting points Measurement view 1.

TRACe:DIQVtime[:MEASview<y>]:SElect:I

Selects the I trace in the Demod I&Q versus Time. The query version of this command returns whether the I trace is selected or not.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Trace commands

Syntax

```
TRACe:DIQVtime[:MEASview<y>]:SElect:I  
TRACe:DIQVtime[:MEASview<y>]:SElect:I?
```

Arguments

None

Returns

0 indicates that the I trace is deselected.

1 indicates that the I trace is selected.

Examples

TRACe:DIQVtime:MEASview1:SElect:I selects the I trace in the Demod I&Q versus Time Measurement view 1.

TRACe:DIQVtime[:MEASview<y>]:SElect:Q

Selects the Q trace in the Demod I&Q versus Time. The query version of this command returns whether the Q trace is selected or not.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Demod I&Q versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod I&Q versus Time).

Group

Trace commands

Syntax

```
TRACe:DIQVtime[:MEASview<y>]:SElect:Q  
TRACe:DIQVtime[:MEASview<y>]:SElect:Q?
```

Arguments

None

Returns

0 indicates that the Q trace is deselected.

1 indicates that the Q trace is selected.

Examples

`TRACe:DIQVtime[:MEASview1]:SElect:Q` selects the Q trace in the Demod I&Q versus Time Measurement view 1.

TRACe:EDiagram[:MEASview<y>]:ENABLE:I

Determines whether to show or hide the I trace in the Eye diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Trace commands

Syntax

```
TRACe:EDiagram[:MEASview<y>]:ENABLE:I { OFF | ON | 0 | 1 }
TRACe:EDiagram[:MEASview<y>]:ENABLE:I?
```

Arguments

OFF or 0 hides the I trace.

ON or 1 shows the I trace.

Examples

`TRACe:EDiagram:MEASview2:ENABLE:I ON` shows the I trace in the eye diagram Measview 2.

TRACe:EDiagram[:MEASview<y>]:ENABLE:Q

Determines whether to show or hide the Q trace in the Eye diagram.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Trace commands

Syntax

```
TRACe:EDiagram[:MEASview<y>]:ENABLE:Q { OFF | ON | 0 | 1 }
TRACe:EDiagram[:MEASview<y>]:ENABLE:Q?
```

Arguments

OFF or 0 hides the Q trace.

ON or 1 shows the Q trace.

Examples

TRACe:EDiagram:MEASview2:ENABle:Q ON shows the Q trace in the eye diagram Measview 2.

TRACe:EDiagram[:MEASview<y>]:SElect:I

Selects the I trace in the Eye diagram. When used as query, it returns whether the I trace is selected or not.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Trace commands

Syntax

```
TRACe:EDiagram[:MEASview<y>]:SElect:I
TRACe:EDiagram[:MEASview<y>]:SElect:I?
```

Arguments

None

Returns

0 indicates that the I trace is deselected.

1 indicates that the I trace is selected.

Examples

TRACe:EDiagram:MEASview2:SElect:I selects the I trace in the eye diagram for measview2.

TRACe:EDiagram[:MEASview<y>]:SElect:Q

Selects the Q trace in the eye diagram. The query version of this command returns whether the Q trace is selected or not.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Eye diagram

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: Eye diagram).

Group

Trace commands

Syntax

```
TRACe:EDIagram[:MEASview<y>]:SElect:Q  
TRACe:EDIagram[:MEASview<y>]:SElect:Q?
```

Arguments

None

Returns

0 indicates that the Q trace is deselected.

1 indicates that the Q trace is selected.

Examples

TRACe:EDIagram:MEASview2:SElect:Q selects the Q trace in the eye diagram Measview 2.

TRACe:EMC:AMBIent:COUNT

Sets or queries the count value of specified ambient trace in EMC view.

<value> = <NR1> count value

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:AMBIent:COUNT <value>  
TRACe:EMC:AMBIent:COUNT?
```

Arguments

<value> = <NR1>

Returns

<NR1>

Examples

TRACe:EMC:AMBIent:COUNT might return 20, indicating that the count value of ambient trace 2 is 20.

TRACe:EMC:AMBIent:COUNT:ENABLE

Sets or queries to enable or disable the count check box for specified ambient trace in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:AMBIent:COUNT:ENABle {0 | OFF | 1 | ON}
```

TRACe:EMC:AMBIent:COUNT:ENABle?

Arguments

0 or OFF disables the count check box 1 or ON enables the count check box

Returns

<Boolean> 0, 1

Examples

TRACe:EMC:AMBIENT:COUNT:ENABLE might return 1, indicating that count check box is enabled.

TRACe:EMC:AMBIent:COUNT:RESet (No Query Form)

Resets the count value of live ambient trace in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe:EMC:AMBIent:COUNT:RESet

Arguments

None

Returns

None

Examples

TRACe:EMC:AMBIENT:COUNT:RESET resets the count value of live ambient trace

TRACe:EMC:AMBIent:ENABLE

Sets or queries to show or hide the ambient trace on plot by enabling or disabling the show check box in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe:EMC:AMBIent:ENABle {0 | OFF | 1 | ON}
TRACe:EMC:AMBIent:ENABle?

Arguments

0 or OFF disables the show check box and hides the ambient trace 1 or ON enables the show check box and displays the ambient trace

Returns

<Boolean> 0, 1

Examples

TRACE:EMC:AMBIENT:ENABLE? might return 0, indicating that the selected ambient trace is hidden.

TRACe:EMC:AMBIent:FREeze

Sets or queries to freeze the ambient trace on plot by enabling or disabling the freeze check box in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:AMBIent:FREeze {0 | OFF | 1 | ON}  
TRACe:EMC:AMBIent:FREeze?
```

Arguments

0 or OFF disables the freeze check box 1 or ON enables the freeze check box

Returns

<Boolean> 0, 1

Examples

TRACE:EMC:AMBIENT:FREEZE? might return 1, indicating that the selected ambient trace is frozen.

TRACe:EMC:AMBIent:FUNCTion

Sets or queries the scan function for the selected ambient trace in EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:AMBIent:FUNCTion {NONE | MAXH | AVER | AVGL}  
TRACe:EMC:AMBIent:FUNCTion?
```

Arguments

NONE = Normal is the function selected

MAXH = Max Hold is the function selected

AVER = Avg(VRMS) is the function selected

AVGL = Avg (of logs) is the function selected

Returns

<String> See Arguments

Examples

TRACE:EMC:AMBIENT:FUNCTION might return AVER, indicating the scan function selected for ambient trace is Avg(VRMS).

TRACe:EMC:AMBIent:SElect

Sets or queries the selection of ambient trace in live trace of EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe:EMC:AMBIent:SElect
TRACe:EMC:AMBIent:SElect?

Arguments

None

Returns

<Boolean> 0, 1

Examples

TRACE:EMC:AMBIENT:SELECT might return 1, indicating that ambient trace 1 is selected in live trace.

TRACe:EMC:MATH:ENABLE

Sets or queries to show or hide the math trace on plot by enabling or disabling the show check box in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe:EMC:MATH:ENABLE {0 | OFF | 1 | ON}
TRACe:EMC:MATH:ENABLE?

Arguments

0 or OFF disables the show check box and hides the math trace 1 or ON enables the show check box and displays the math trace

Returns

<Boolean> 0, 1

Examples

TRACE:EMC:MATH:ENABLE? might return 1, indicating that the math trace is enabled (displayed).

TRACe:EMC:MATH:FREEze

Sets or queries to freeze the math trace on plot by enabling or disabling the freeze check box in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:MATH:FREEze {0 | OFF | 1 | ON}  
TRACe:EMC:MATH:FREEze?
```

Arguments

0 or OFF disables the freeze check box 1 or ON enables the freeze check box

Returns

<Boolean> 0, 1

Examples

TRACE:EMC:MATH:FREEZE? might return 1, indicating that selected math trace is frozen.

TRACe:EMC:MATH:LEFToperand

Sets or queries the trace for left operand to obtain a math trace in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:MATH:LEFToperand <arg>  
TRACe:EMC:MATH:LEFToperand?
```

Arguments

<arg> = {scan1 | scan2 | ambient | recall1 | recall2 | recall3 | recall4 | recall5}

Returns

<String>

Examples

TRACE:EMC:MATH:LEFTOPERAND selects ambient trace as left operand.

TRACe:EMC:MATH:RIGHToperand

Sets or queries the trace for right operand to obtain a math trace in EMC view.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:MATH:RIGHToperand <arg>  
TRACe:EMC:MATH:RIGHToperand?
```

Arguments

<arg> = {scan1 | scan2 | ambient | recall1 | recall2 | recall3 | recall4 | recall5}

Returns

<String>

Examples

TRACe:EMC:MATH:RIGHTOPERAND? might return `scan1`, indicating that the right operand selected is scan1 trace.

TRACe:EMC:MATH:SElect

Sets or queries the selection of math trace in live trace of EMC View.

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe:EMC:MATH:SElect  
TRACe:EMC:MATH:SElect?
```

Arguments

None

Returns

<Boolean> 0, 1

Examples

TRACe:EMC:MATH:SELECT might return 1, indicating that math trace is selected.

TRACe:EVM[:MEASview<y>]:MODE

Sets or queries whether to display the EVM versus Time trace as vectors or symbols (points).

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement view: EVM versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: EVM versus Time).

Group

Trace commands

Syntax

```
TRACe:EVM[:MEASview<y>]:MODE { VECTors | SYMBols }
TRACe:EVM[:MEASVIEW<y>]:MODE?
```

Arguments

VECTors displays the trace in a format that uses lines to connecting points in the trace display.

SYMBols displays the trace in a format that does not use lines to connect points in the trace display.

Examples

TRACe:EVM:MEASVIEW2:MODE VECTors sets the display to connect points in the display for measview 2 of EVM versus Time.

TRACe:FDVTime[:MEASview<y>]:MODE

Sets or queries whether to display the Frequency Deviation versus Time trace as vectors or symbols (points).

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement view: Frequency deviation versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Frequency deviation versus Time).

Group

Trace commands

Syntax

```
TRACe:FDVTime[:MEASview<y>]:MODE { VECTors | SYMBols }
TRACe:FDVTime[:MEASView<y>]:MODE?
```

Arguments

VECTors display the trace in a format that uses lines to connect points in the trace display.

SYMBols display the trace in a format that does not use lines to connect points in the trace display.

Examples

TRACe:FDVTime:MEASview2:MODE VECTORS sets the display to connect points in the display for measview 2 of Frequency deviation versus Time.

TRACe:{FSETtling|PSETtling}:AVERAge:COUNT

Sets or queries the number of traces to combine. This command is effective when you select AVERAge with the **s** command.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe:{FSETtling|PSETtling}:AVERAge:COUNT <number>  
TRACe:{FSETtling|PSETtling}:AVERAge:COUNT?
```

Related Commands

[TRACe:{FSETtling|PSETtling}:AVERAge:ENABLE](#) (on page 2597)

Arguments

<number>::<NR1> specifies the number of traces to combine for averaging.

Range: 1 to 10000.

Examples

TRACE1:PSETTLING:AVERAGE:COUNT 64 sets the average count to 64 for Trace 1.

TRACe:{FSETtling|PSETtling}:AVERAge:COUNT:CURRent? (Query Only)

Queries the current running average count value. The returned value is valid (non-zero) only while the instrument is acquiring and averaging a signal. Use the `TRACe:{FSETtling|PSETtling}:AVERAge:COUNT` command to determine the setting for Average.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe:{FSETtling|PSETtling}:AVERAge:COUNT:CURRent?
```

Related Commands

[TRACe:{FSETtling|PSETtling}:AVERAge:COUNT](#) (on page 2597)

Examples

TRACE1:PSETTLING:AVERAGE:COUNT? might return the value 64.

TRACe:{FSETtling|PSETtling}:AVERAge:ENABLE

Determines whether to enable or disable averaging the trace(s).

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe:{FSETtling|PSETtling}:AVERage:ENABle { OFF | ON | 0 | 1 }  
TRACe:{FSETtling|PSETtling}:AVERage:ENABle?
```

Arguments

OFF or 0 disables averaging.

ON or 1 enables averaging.

Examples

TRACE:PSETTLING:AVERAGE:ENABLE ON enables the Phase Settling Time averaging.

TRACe:{FSETtling|PSETtling}:RESet (No Query Form)

If trace averaging is enabled, this command resets the current averaged trace to 0.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe:{FSETtling|PSETtling}:RESet
```

Examples

TRACE1:PSETTLING:RESET resets the current averaged trace to 0.

TRACe:{FSETtling|PSETtling}:SMOothing:COUNT

Sets or queries the number of data points to take the moving average for smoothing the traces. This command applies to both Trace 1 and Trace 2.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe:{FSETtling|PSETtling}:SMOothing:COUNT <number>  
TRACe:{FSETtling|PSETtling}:SMOothing:COUNT?
```

Arguments

<number>::<NR1> specifies the number of data points to take the moving average for smoothing. Range: 2 to 1000.

Examples

`TRACE:FSETTLING:SMOOTHING:COUNT 16` sets the Frequency Settling Time smoothing count to 16.

TRACe:{FSETtling|PSETtling}:SMOothing:ENABLE

Determines whether to enable or disable smoothing the trace(s).

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe:{FSETtling|PSETtling}:SMOothing:ENABLE { OFF | ON | 0 | 1 }
TRACe:{FSETtling|PSETtling}:SMOothing:ENABLE?
```

Arguments

OFF or 0 disables smoothing.

ON or 1 enables smoothing.

Examples

`TRACE:PSETTLING:SMOOTHING:ENABLE ON` enables the Phase Settling Time smoothing.

TRACe<x>:FVTime[:MEASview<y>]

Determines whether or not to show the trace in the Frequency versus Time view.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>] { OFF | ON | 0 | 1 }
TRACe<x>:FVTime[:MEASview<y>]?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 hides the trace in the Frequency versus Time view.

ON or 1 shows the trace in the Frequency versus Time view.

Examples

`TRACE1:FVTIME:MEASview1 ON` shows the trace in the Frequency versus Time view.

TRACe<x>:FVTime[:MEASview<y>]:AVERage:COUNT

Sets or queries the number of traces to combine. This command is effective when you select AVERage with the TRACe:FVTime[:MEASview<y>]:FUNCTION command.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:AVERage:COUNT <number>
TRACe<x>:FVTime[:MEASview<y>]:AVERage:COUNT?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<number>::<NR1> specifies the number of traces to combine for averaging.

Range: 1 to 10000.

Examples

TRACE1:FVTIME:MEASview1:AVERAGE:COUNT 64 sets the average count to 64.

TRACe<x>:FVTime[:MEASview<y>]:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for the Max or Min Hold trace in the Frequency versus Time measurement. This command is effective when TRACe<x>:FVTime[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold and INITiate:CONTinuous is set to OFF.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:COUNT <number>
TRACe<x>:FVTime[:MEASview<y>]:COUNT?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<number>::<NR1> specifies the count for Max/Min Hold.

Range: 1 to 10000.

Examples

TRACe1:FVTime:MEASview1:COUNT 32 sets the count to 32 for the Max/Min Hold trace.

TRACe<x>:FVTime[:MEASview<y>]:COUNT:ENABLE

Determines whether to enable or disable the count for the Max or Min Hold trace in the Frequency versus Time view. This command is effective when TRACe<x>:FVTime[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:COUNT:ENABLE { OFF | ON | 0 | 1 }
TRACe<x>:FVTime[:MEASview<y>]:COUNT:ENABLE?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 disables the count for the Max/Min Hold trace.

ON or 1 enables the count for the Max/Min Hold trace.

Examples

TRACe1:FVTime:MEASview1:COUNT:ENABLE ON enables the Max/Min Hold count.

TRACe<x>:FVTime[:MEASview<y>]:COUNT:RESet (No Query Form)

Clears the Max or Min Hold data and counter, and restarts the process in the Frequency versus Time view. This command is effective when TRACe<x>:FVTime[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:COUNT:RESet
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

TRACe1:FVTime:MEASview1:COUNT:RESet clears the Max/Min Hold data and counter, and restarts the process.

TRACe<x>:FVTime[:MEASview<y>]:FREeze

Determines whether or not to freeze the display of the trace in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:FVTime[:MEASview<y>]:FREeze?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 updates the display of the trace normally.

ON or 1 stops updating the display of the trace.

Examples

TRACE1:FVTIME:MEASview1:FREEZE ON stops updating the display of the trace.

TRACe<x>:FVTime[:MEASview<y>]:DETection

Enables or queries the type of detection for the specified trace. The parameter <x> represents traces 1 to 4.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | POSNegative | SAMPl e }
TRACe<x>:FVTime[:MEASview<y>]:DETection?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPl e displays the first sample value received for each pixel.

Examples

`TRACe2:FVTime[:MEASview<y>]:DETEction POSitive` enables positive detection on Trace2.

TRACe<x>:FVTime[:MEASview<y>]:FUNCTION

Sets or queries the trace function in the Frequency versus Time measurement.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:FUNCTION { NORMal | AVERage | MAXHold | MINHold}
TRACe<x>:FVTime[:MEASview<y>]:FUNCTION?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

NORMal selects the normal waveform display.

AVERage selects the Average display that indicates the average frequency drift at each time point.

MAXHold selects the Max Hold display that indicates the maximum frequency drift at each time point.

MINHold selects the Min Hold display that indicates the minimum frequency drift at each time point.

Examples

`TRACE1:FVTIME:MEASview1:FUNCTIONMAX Hold` displays the Max Hold trace in the Frequency versus Time measurement.

TRACe<x>:IQVTime[:MEASview<y>]:AVERage:COUNT

Sets or queries the number of traces to combine. This command works for both I and Q traces when you select AVERage in the `TRACe<x>:IQVTime[:MEASview<y>]:FUNCTION` command.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

```
TRACe<x>:IQVTime[:MEASview<y>]:AVERage:COUNT <number>
TRACe<x>:IQVTime[:MEASview<y>]:AVERage:COUNT?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

`<number>::<NR1>` specifies the number of traces to combine for averaging.

Range: 1 to 10000.

Examples

`TRACE1:IQVTIME:MEASview1:AVERAGE:COUNT 64` sets the average count to 64.

TRACe<x>:IQVTime[:MEASview<y>]:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for the Max or Min Hold trace in the RF I & Q versus Time measurement. This command is effective when `TRACe<x>:IQVTime[:MEASview<y>]:FUNCTION` is set to `MAXHold` or `MINHold` and `INITiate:CONTinuous` is set to `OFF`.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

`TRACe<x>:IQVTime[:MEASview<y>]:COUNT <number>`
`TRACe<x>:IQVTime[:MEASview<y>]:COUNT?`

Arguments

`<x>` = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

`<y>` = 1 to 8; represents measurement index based on number of sources of connected instrument, where `MEASview` keyword is optional. Default value 1.

`<number>::<NR1>` specifies the count for Max/Min Hold.

Range: 1 to 10000.

Examples

`TRACE1:IQVTIME:MEASview1:COUNT 32` sets the count to 32 for the Max/Min Hold trace.

TRACe<x>:IQVTime[:MEASview<y>]:COUNT:ENABLE

Determines whether to enable or disable the count for the Max or Min Hold trace in the RF I & Q versus Time view. This command is effective when `TRACe<x>:IQVTime[:MEASview<y>]:FUNCTION` is set to `MAXHold` or `MINHold`.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

`TRACe<x>:IQVTime[:MEASview<y>]:COUNT:ENABLE { OFF | ON | 0 | 1 }`
`TRACe<x>:IQVTime[:MEASview<y>]:COUNT:ENABLE?`

Arguments

`<x>` = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 disables the count for the Max/Min Hold trace.

ON or 1 enables the count for the Max/Min Hold trace.

Examples

TRACE1:IQVTIME:MEASview1:COUNT:ENABLE ON enables the Max/Min Hold count.

TRACe<x>:IQVTime[:MEASview<y>]:COUNT:RESet (No Query Form)

Clears the Max or Min Hold data and counter, and restarts the process in the RF I & Q versus Time view. This command is effective when TRACe<x>:IQVTime[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

TRACe<x>:IQVTime[:MEASview<y>]:COUNT:RESet

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

TRACE1:IQVTIME:MEASview1:COUNT:RESET clears the Max/Min Hold data and counter, and restarts the process.

TRACe<x>:IQVTime[:MEASview<y>]:DETection

Sets or queries the detection method for the RF I & Q versus Time view.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

TRACe<x>:IQVTime[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | POSNegative | SAMPlE }
TRACe<x>:IQVTime[:MEASview<y>]:DETection?

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPLE displays the first sample value received for each pixel.

Examples

TRACE1:IQVTIME:MEASview1:DETECTION AVERAGE enables display of the average value for each pixel.

TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:I

Determines whether to show or hide the I trace in the RF I & Q versus Time measurement.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

```
TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:I { OFF | ON | 0 | 1 }
TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:I?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 hides the I trace.

ON or 1 shows the I trace.

Examples

TRACE1:IQVTIME:MEASview1:ENABLE:I ON shows the I trace in the RF I & Q versus Time measurement.

TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:Q

Determines whether to show or hide the Q trace in the RF I & Q versus Time measurement.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

```
TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:Q { OFF | ON | 0 | 1 }
TRACe<x>:IQVTime[:MEASview<y>]:ENABLE:Q?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 hides the Q trace.

ON or 1 shows the Q trace.

Examples

TRACE1:IQVTIME:MEASview1:ENABLE:Q ON shows the Q trace in the IQ level versus Time measurement.

TRACe<x>:IQVTime[:MEASview<y>]:FREeze

Determines whether to freeze the IQ traces in the RF I & Q versus Time measurement.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

```
TRACe<x>:IQVTime[:MEASview<y>]:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:IQVTime[:MEASview<y>]:FREeze?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 updates IQ trace display normally.

ON or 1 stops updating IQ trace display.

Examples

TRACE1:IQVTIME:MEASview1:FREEZE ON freezes the IQ traces.

TRACe<x>:IQVTime[:MEASview<y>]:FUNction

Sets or queries the trace function in the RF I & Q versus Time measurement.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

```
TRACe<x>:IQVTime[:MEASview<y>]:FUNction { NORMal | AVERage | MAXHold | MINHold }
TRACe<x>:IQVTime[:MEASview<y>]:FUNction?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

NORMal selects the normal waveform display.

AVERage selects the Average display that indicates the average signal level at each time point.

MAXHold selects the Max Hold display that indicates the maximum signal level at each time point.

MINHold selects the Min Hold display that indicates the minimum signal level at each time point.

Examples

TRACE1:IQVTIME:MEASview1:FUNCTION MAXHold displays the Max Hold trace in the IQ level versus Time measurement.

TRACe<x>:IQVTime[:MEASview<y>]:SElect:I

Determines whether or not to select the I trace to obtain the maximum and minimum measurement results.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

```
TRACe<x>:IQVTime[:MEASview<y>]:SElect:I { OFF | ON | 0 | 1 }
TRACe<x>:IQVTime[:MEASview<y>]:SElect:I?
```

Related Commands

[TRACe<x>:IQVTime\[:MEASview<y>\]:SElect:Q](#) (on page 2608)

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or **0** deselects the I trace.

ON or **1** selects the I trace.

Executing **TRACe<x>:IQVTime[:MEASview<y>]:SElect:I ON** sets

TRACe<x>:IQVTime[:MEASview<y>]:SElect:Q OFF.

Examples

TRACE1:IQVTIME:MEASview1:SELECT:I ON selects the I trace in the RF I & Q versus Time measurement.

TRACe<x>:IQVTime[:MEASview<y>]:SElect:Q

Determines whether or not to select the Q trace to obtain the maximum and minimum measurement results.

Conditions

Measurement views: RF I & Q versus Time

Group

Trace commands

Syntax

```
TRACe<x>:IQVTime[:MEASview<y>]:SElect:Q { OFF | ON | 0 | 1 }
TRACe<x>:IQVTime[:MEASview<y>]:SElect:Q?
```

Related Commands

[TRACe<x>:IQVTime\[:MEASview<y>\]:SElect:I](#) (on page 2608)

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 deselects the Q trace.

ON or 1 selects the Q trace.

Executing TRACe<X>:IQVTime[:MEASview<y>]:SElect:Q ON sets

TRACe<x>:IQVTime[:MEASview<y>]:SElect:I OFF.

Examples

TRACE1:IQVTIME:MEASview1:SELECT:Q ON selects the Q trace in the RF I&Q versus Time measurement.

TRACe:MERRor[:MEASview<y>]:MODE

Sets or queries whether to display the Magnitude error trace as vectors or symbols (points).

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement view: Magnitude error

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Magnitude error versus Time).

Group

Trace commands

Syntax

```
TRACe:MERRor[:MEASview<y>]:MODE { VECTors | SYMBols }
TRACe:MERRor[:MEASview<y>]:MODE?
```

Arguments

VECTors displays the trace in a format that uses lines to connecting points in the trace display.

SYMBols displays the trace in a format that does not use lines to connect points in the trace display.

Examples

TRACE:MERRor:MEASview2:MODE VECTORS sets the display to connect points in the display for measview 2 of MERRor versus Time.

TRACe:OBW:MAXHold

Determines whether or not to perform a Max Hold on the spectrum data for the Occupied Bandwidth trace.

Conditions

Measurement views: Occupied Bandwidth

Group

Trace commands

Syntax

```
TRACe:OBW:MAXHold { OFF | ON | 0 | 1 }  
TRACe:OBW:MAXHold?
```

Arguments

OFF or 0 does not perform a Max Hold on the spectrum data.

ON or 1 performs a Max Hold on the spectrum data.

Examples

TRACE:OBW:MAXHOLD ON performs a Max Hold on the spectrum data for the Occupied Bandwidth trace.

TRACe:OFDM:CONSte

Determines whether or not to show the trace in the OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe:OFDM:CONSte { OFF | ON | 0 | 1 }  
TRACe:OFDM:CONSte?
```

Arguments

OFF or 0 hides the trace in the view.

ON or 1 shows the trace in the view.

Examples

TRACE:OFDM:CONSTE ON shows the trace in the OFDM Constellation view

TRACe:OFDM:CONSte:FREeze

Determines whether or not to freeze the display of the trace in the OFDM Constellation view.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe:OFDM:CONStE:FReeze { OFF | ON | 0 | 1 }  
TRACe:OFDM:CONStE:FReeze?
```

Arguments

OFF or 0 updates the display of the trace normally.

ON or 1 stops updating the display of the trace.

Examples

TRACe:OFDM:CONStE:FReeze ON freezes the trace in the OFDM Constellation view.

TRACe:OFDM:FLATness:FReeze

Sets or queries whether to freeze the average trace on the OFDM Spectral Flatness display. When the freeze state is turned on, the trace stops updating.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Trace commands

Syntax

```
TRACe:OFDM:FLATness:FReeze { 0 | 1 | OFF | ON }  
TRACe:OFDM:FLATness:FReeze?
```

Arguments

ON or 1 turns on the freeze state, causing the trace to stop updating.

OFF or 0 turns off the freeze state.

Returns

Outputs the frozen status of the selected trace as an integral value. 1 indicates a frozen trace and 0 a non-frozen trace.

Examples

TRAC:OFDM:FLAT:FRE 1 freezes the trace, causing it to stop updating.

TRACe:OFDM:FLATness:SHOW

Displays or hides the trace on the OFDM Spectral Flatness display.

Conditions

Measurement view: OFDM

This command requires Option 22, "OFDM Measurements".

Group

Trace commands

Syntax

TRACE:OFDM:FLATness:SHOW {0|1|OFF|ON}

Arguments

ON or 1 displays the trace.

OFF or 0 hides the trace.

Examples

TRACE:OFDM:FLAT:SHOW 1 turns on the display of the trace.

TRACe:PERRor[:MEASview<y>]:MODE

Sets or queries whether to display the Frequency deviation versus Time trace as vectors or symbols (points).

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement view: Phase error versus Time

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Phase error versus Time).

Group

Trace commands

Syntax

TRACe:PERRor[:MEASview<y>]:MODE { VECTors | SYMBols }
TRACe:PERRor[:MEASview<y>]:MODE?

Arguments

VECTors displays the trace in a format that uses lines to connecting points in the trace display.

SYMBols displays the trace in a format that does not use lines to connect points in the trace display.

Examples

TRACe:PERRor:MEASview2:MODE VECTors sets the display to connect points in the display display for measview 2 of Phase error versus Time .

TRACe<x>:PHVTime[:MEASview<y>]

Determines whether or not to show the trace in the Phase versus Time view.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

TRACe<x>:PHVTime[:MEASview<y>] { OFF | ON | 0 | 1 }
TRACe<x>:PHVTime[:MEASview<y>]?

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 hides the trace in the Phase versus Time view.

ON or 1 shows the trace in the Phase versus Time view.

Examples

TRACE1:PHVTIME:MEASview1 ON shows the trace in the Phase versus Time view.

TRACe<x>:PHVTime[:MEASview<y>]:AVERage:COUNT

Sets or queries the number of traces to combine. This command is effective when you select AVERage with the TRACe<x>:PHVTime[:MEASview<y>]:FUNCTION command.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

TRACe<x>:PHVTime[:MEASview<y>]:AVERage:COUNT <number>

TRACe<x>:PHVTime[:MEASview<y>]:AVERage:COUNT?

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<number>::<NR1> specifies the number of traces to combine for averaging.

Range: 1 to 10000.

Examples

TRACE1:PHVTIME:MEASview1:AVERAGE:COUNT 64 sets the average count to 64.

TRACe<x>:PHVTime[:MEASview<y>]:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for the Max or Min Hold trace in the Phase versus Time measurement. This command is effective when TRACe<x>:PHVTime[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold and INITiate:CONTinuous is set to OFF.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

```
TRACe<x>:PHVTime[:MEASview<y>]:COUNT <number>
TRACe<x>:PHVTime[:MEASview<y>]:COUNT?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

<number>::<NR1> specifies the count for Max/Min Hold.

Range: 1 to 10000.

Examples

TRACE1:PHVTIME:MEASview1:COUNT 32 sets the count to 32 for the Max/Min Hold trace.

TRACe<x>:PHVTime[:MEASview<y>]:COUNT:ENABLE

Determines whether to enable or disable the count for the Max or Min Hold trace in the Phase versus Time view. This command is effective when TRACe<x>:PHVTime:MEASview<y>:FUNCTION is set to MAXHold or MINHold.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

```
TRACe<x>:PHVTime[:MEASview<y>]:COUNT:ENABLE { OFF | ON | 0 | 1 }
TRACe<x>:PHVTime[:MEASview<y>]:COUNT:ENABLE?
```

Related Commands

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 disables the count for the Max/Min Hold trace.

ON or 1 enables the count for the Max/Min Hold trace.

Examples

TRACE1:PHVTIME:MEASview1:COUNT:ENABLE ON enables the Max/Min Hold count.

TRACe<x>:PHVTime[:MEASview<y>]:COUNT:RESet (No Query Form)

Clears the Max or Min Hold data and counter, and restarts the process in the Phase versus Time view. This command is effective when TRACe<x>:PHVTime:MEASview<y>:FUNCTION is set to MAXHold or MINHold.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

```
TRACe<x>:PHVTime[:MEASview<y>]:COUNT:RESet
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

Examples

TRACE1:PHVTIME:MEASview1:COUNT:RESET clears the Max/Min Hold data and counter, and restarts the process.

TRACe<x>:PHVTime[:MEASview<y>]:FREEze

Determines whether to freeze the trace display in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

```
TRACe<x>:PHVTime[:MEASview<y>]:FREEze { OFF | ON | 0 | 1 }
TRACe<x>:PHVTime[:MEASview<y>]:FREEze?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

OFF or 0 updates the trace display normally.

ON or 1 stops updating trace display.

Examples

TRACE1:PHVTIME:MEASview1:FREEZE ON stops updating trace display.

TRACe<x>:PHVTime[:MEASview<y>]:DETection

Sets or queries the display detector (method to be used for decimating traces to fit the available horizontal space on screen). The number of horizontal pixels on screen is generally smaller than that of waveform data points. When actually displayed, the waveform data is therefore thinned out, according to the number of pixels, for being compressed.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

```
TRACe<x>:PHVTime[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | POSNegative | SAMPlE }
TRACe<x>:PHVTime[:MEASview<y>]:DETection?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPlE displays the first sample value received for each pixel.

Examples

TRACe1:PHVTime[:MEASview<y>]:DETection POSitive displays the maximum data value for each pixel.

TRACe<x>:PHVTime[:MEASview<y>]:FUNction

Sets or queries the trace function in the Phase versus Time measurement.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

```
TRACe<x>:PHVTime[:MEASview<y>]:FUNction { NORMal | AVERage | MAXHold | MINHold }
TRACe<x>:PHVTime[:MEASview<y>]:FUNction?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

NORMal selects the normal waveform display.

AVERage selects the Average display that indicates the average phase drift at each time point.

MAXHold selects the Max Hold display that indicates the maximum phase drift at each time point.

MINHold selects the Min Hold display that indicates the minimum phase drift at each time point.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPlE displays the first sample value received for each pixel.

Examples

TRACe1:PHVTIME:MEASview1:FUNCTION MAXHold displays the Max Hold trace in the Phase versus Time measurement.

TRACe:SEM:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for multi-trace functions (Max Hold and Average) in the Spectral Emissions Mask measurement. This command is effective when TRACe:SEM:FUNCTION is set to MAXHold or AVERage and INITiate:CONTinuous is set to OFF.

Conditions

Measurement views: Spectral Emissions Mask

Group

Trace commands

Syntax

```
TRACe:SEM:COUNT <number>  
TRACe:SEM:COUNT?
```

Arguments

<number>::<NR1> specifies the count for multi-trace functions.

Range: 1 to 10000.

Examples

TRACe:SEM:COUNT 32 sets the count to 32 for multi-trace functions.

TRACe:SEM:COUNT:RESet (No Query Form)

Clears the multi-function (Max Hold or Average) data and counter and restarts the process in the Spectral Emissions Mask view. This command is effective when TRACe:SEM:FUNCTION is set to MAXHold or AVERage.

Conditions

Measurement views: Spectral Emissions Mask

Group

Trace commands

Syntax

```
TRACe:SEM:COUNT:RESet
```

Arguments

None

Examples

TRACe:SEM:COUNT:RESET clears the multi-function data and counter, and restarts the process.

TRACe:SEM:FUNCTION

Sets or queries the trace function in the Spectral Emissions Mask view.

Conditions

Measurement views: Spectral Emissions Mask

Group

Programmer Manual

Trace commands

Syntax

```
TRACE:SEM:FUNCTION { NONE | MAXHold | AVERage }
TRACE:SEM:FUNCTION?
```

Arguments

NONE selects normal display.

MAXHold selects the Max Hold display that indicates the maximum amplitude drift at each frequency point.

AVERage selects the Average display that indicates the average amplitude drift at each frequency point.

Examples

`TRACE:SEM:FUNCTION MAXHold` displays the Max Hold trace in the Spectral Emissions Mask measurement.

TRACE:SGRam[:MEASview<y>]:DETection

Sets or queries the display detector (method to be used for decimating traces to fit the available horizontal space on screen). The number of horizontal pixels on screen is generally smaller than that of waveform data points. When actually displayed, the waveform data is therefore thinned out, according to the number of pixels, for being compressed.

Conditions

Measurement views: Spectrogram

Group

Trace commands

Syntax

```
TRACE:SGRam[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | CAVerage | CPEak | QUASipeak
| AVGLog }
TRACE:SGRam[:MEASview<y>]:DETection?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where **MEASview** keyword is optional by default y is 1.

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

CAVerage displays the CISPR average value for each pixel.

CPEak displays the CISPR peak value for each pixel.

QUASipeak displays the quasi-peak value for each pixel.

AVGLog displays the average data value of logs for each pixel.

Returns

{AVERage | POSitive | NEGative | CAVerage | CPEak | QUASipeak | AVGLog}

Examples

`TRACE:SGRam:MEASview1:DETection POSitive` displays the maximum data value for each pixel.

TRACe:SGRam[:MEASview<y>]:FREeze

Determines whether or not to freeze the spectrogram display.

Conditions

Measurement views: Spectrogram

Group

Trace commands

Syntax

```
TRACe:SGRam[:MEASview<y>]:FREeze { OFF | ON | 0 | 1 }
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 updates the display of the spectrogram normally.

ON or 1 stops updating the display of the spectrogram.

Examples

TRACe:SGRam:MEASview1:FREeze ON freezes the spectrogram display.

TRACe:SGRam[:MEASview<y>]:FUNCTION

NOTE: This function is no longer available in software versions 2.3.0159 and later. Sending this command selects the correct. SENSE:SGRam[:MEASview<y>]:TIME[:SCALE]:MODE and TRACe:SGRam[:MEASview<y>]:DETection to achieve the same result as with previous software versions. The query will return the equivalent trace function based on the MODE and DETection settings.

Sets or queries the trace function for the specified trace in the spectrogram.

Conditions

Measurement views: Spectrogram

Group

Trace commands

Syntax

```
TRACe:SGRam[:MEASview<y>]:FUNCTION { NONE | AVERage | MAXHold | MINHold | AVGLog }
TRACe:SGRam[:MEASview<y>]:FUNCTION?
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

NONE selects the normal spectrogram display.

AVERage selects the Average display that indicates the average signal level at each frequency point.

MAXHold selects the Max Hold display that indicates the maximum signal level at each frequency point.

MINHold selects the Min Hold display that indicates the minimum signal level at each frequency point.

AVGLog selects the Average of logs display that indicates the average signal level of logs at each frequency point.

Returns

{NONE | AVERage | MAXHold | MINHold| AVGLog}

Examples

TRACe:SGRam:MEASview1:FUNctIon MAXHold selects the Max Hold display for the spectrogram.

TRACe:SGRam[:MEASview<y>]:FUNctIon:TIME

NOTE: This command has a new function in software versions 2.3.159 and above. Sets the Spectrum Monitor mode values for Time per update. Sending this command sets

SENSe:SGRam[:MEASview<y>]:TIME:SCALE:PER:UPDate:MINutes and

SENSe:SGRam[:MEASview<y>]:WATerfall:DIRection based on the value sent in. The query form returns the number of minutes based on the new settings values.

Conditions

Measurement views: Spectrogram

Group

Trace commands

Syntax

TRACe:SGRam[:MEASview<y>]:FUNctIon:TIME <value>

TRACe:SGRam[:MEASview<y>]:FUNctIon:TIME?

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<value>: : <NR1> specifies the time length in Spectrum Monitor mode.

Range: 1 to 600 minutes and 60 seconds.

Returns

<NRf> specifies the time length in Spectrum Monitor mode.

Examples

TRACe:SGRam:MEASview1:FUNctIon:TIME 6E2 sets the Time/update value to 600 minutes.

TRACe:SGRam[:MEASview<y>]:RESet

Determines whether or not to reset the spectrogram display.

Conditions

Measurement view: Spectrogram

Group

Trace commands

Syntax

```
TRACe:SGRam[:MEASview<y>]:RESet {OFF | ON | 0 | 1}
```

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

OFF or 0 does not reset the display of the spectrogram.

ON or 1 resets the display of the spectrogram.

Examples

TRACe:SGRam:MEASview1:RESet ON resets the spectrogram measurement view 1 display.

TRACe:SGRam[:MEASview<y>]:SElect:LINE

Sets or queries the line number to send to the spectrum display.

Conditions

Measurement views: Spectrogram

Group

Trace commands

Syntax

```
TRACe:SGRam[:MEASview<y>]:SElect:LINE <number>
```

```
TRACe:SGRam[:MEASview<y>]:SElect:LINE?
```

Related Commands

[TRACe<x>:SPECTrum](#) (on page 2691)

Arguments

<y> = 1 to 8 represents measurement index based on number of sources of connected instrument. where MEASview keyword is optional by default y is 1.

<number> ::= <NR1> specifies the line number to send to the spectrum display.

Range: 0 to the maximum line number of the spectrogram displayed on screen.

Returns

<NRf> specifies the line number to send to the spectrum display.

Examples

TRACe:SGRam:MEASview1:SElect:LINE 75 selects Line #75 in the spectrogram to send to the spectrum display.

TRACe:SPURious:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for multi-trace functions (Max Hold and Average) in the Spurious measurement. This command is effective when TRACe:SPURious:FUNCTION is set to MAXHold or AVERAGE and INITiate:CONTinuous is set to OFF.

Conditions

Measurement views: Spurious

Group

Trace commands

Syntax

```
TRACe:SPURious:COUNT <number>  
TRACe:SPURious:COUNT?
```

Arguments

<number>: : <NR1> specifies the count for multi-trace functions.

Range: 1 to 10000.

Examples

TRACe:SPURIOUS:COUNT 32 sets the count to 32 for multi-trace functions.

TRACe:SPURious:COUNT:ENABLE

Determines whether to enable or disable the count for multi-trace functions (Max Hold and Average) in the Spurious view. This command is effective when TRACe:SPURious:FUNCTION is set to MAXHold or AVERage.

Conditions

Measurement views: Spurious

Group

Trace commands

Syntax

```
TRACe:SPURious:COUNT:ENABLE { OFF | ON | 0 | 1 }  
TRACe:SPURious:COUNT:ENABLE?
```

Arguments

OFF or 0 disables the count for multi-trace functions.

ON or 1 enables the count for multi-trace functions.

Examples

TRACe:SPURIOUS:COUNT:ENABLE ON enables the count for multi-trace functions.

TRACe:SPURious:COUNT:RESet (No Query Form)

Clears the multi-function (Max Hold or Average) data and counter, and restarts the process in the Spurious view. This command is effective when TRACe:SPURious:FUNCTION is set to MAXHold or AVERage.

Conditions

Measurement views: Spurious

Group

Trace commands

Syntax

```
TRACe:SPURious:COUNT:RESet
```

Arguments

None

Examples

`TRACE:SPURIOUS:COUNT:RESET` clears the multi-function data and counter, and restarts the process.

TRACe:SPURious:FREEze

Determines whether or not to freeze the display of the trace in the Spurious view.

Conditions

Measurement views: Spurious

Group

Trace commands

Syntax

```
TRACe:SPURious:FREEze { OFF | ON | 0 | 1 }  
TRACe:SPURious:FREEze?
```

Arguments

`OFF` or `0` updates the display of the trace normally.

`ON` or `1` stops updating the display of the trace.

Examples

`TRACE:SPURIOUS:FREEZE ON` stops updating the display of the trace.

TRACe:SPURious:FUNction

Sets or queries the trace function in the Spurious view.

Conditions

Measurement views: Spurious

Group

Trace commands

Syntax

```
TRACe:SPURious:FUNction { NONE | MAXHold | AVERage | AVGLog}  
TRACe:SPURious:FUNction?
```

Arguments

`NONE` selects normal display.

`MAXHold` selects the Max Hold display that indicates the maximum amplitude drift at each frequency point.

`AVERage` selects the Average display that indicates the average amplitude drift at each frequency point.

`AVGLog` selects the Average of logs display that indicates the average amplitude drift of logs at each frequency point.

Examples

`TRACE:SPURIOUS:FUNCTIONMAXHold` displays the Max Hold trace in the Spurious measurement.

TRACe:WLAN:AD:CONStE:TYPE

Sets or queries the trace type in the 802.11ad Constellation display.

Conditions

Measurement view: 802.11ad Constellation

Group

Trace commands

Syntax

```
TRACe:WLAN:AD:CONStE:TYPE { ROTA | REGU }  
TRACe:WLAN:AD:CONStE:TYPE?
```

Arguments

ROTA is pi/2 Rotated trace type

REGU is the Regular trace type

Returns

ROTA means the trace type is set to pi/2 rotated

REGU means the trace type is set to regular

Examples

TRACe:WLAN:AD:CONStE:TYPE ROTA sets the trace type to PI/2 Rotated.

TRACe:WLAN:AY:CONStE:TYPE

Set or query the Trace Type (Regular or PI/2 Rotated).

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Trace commands

Syntax

```
TRACe:WLAN:AY:CONStE:TYPE { REGU | ROTA }  
TRACe:WLAN:AY:CONStE:TYPE?
```

Arguments

REGU sets the Trace Type as Regular.

ROTA sets the Trace Type as PI/2 Rotated.

Returns

REGU means that the Trace Type is Regular.

ROTA means that the Trace Type is PI/2 Rotated

Examples

TRAC:WLAN:AY:CONS:TYPE REGU sets the Trace Type to Regular.

TRAC:WLAN:AY:CONS:TYPE? may return ROTA, which means the Trace Type is PI/2 Rotated.

TRACe:WLAN:FLATness:FREeze

Sets or queries whether to freeze the average trace on the WLAN Spectral Flatness display. When the freeze state is turned on, the selected trace stops updating.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe:WLAN:FLATness:FREeze {0|1|OFF|ON}  
TRACe:WLAN:FLATness:FREeze?
```

Arguments

ON or 1 turns on the freeze state, causing the selected trace to stop updating.

OFF or 0 turns off the freeze state.

Returns

Outputs the frozen status of the selected trace as an integral value.

1 indicates a frozen trace and 0 a non-frozen trace.

Examples

TRAC:WLAN:FLAT:FRE 1 freezes the trace, causing it to stop updating.

TRACe:WLAN:FLATness:SHOW

Displays or hides the trace on the WLAN Spectral Flatness display.

NOTE: WLAN Spectral Flatness is only available for OFDM (non-802.11b) signals.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe:WLAN:FLATness:SHOW {0|1|OFF|ON}  
TRACe:WLAN:FLATness:SHOW?
```

Arguments

ON or 1 displays the trace.

OFF or 0 hides the trace.

Examples

TRACE:WLAN:FLAT:SHOW 1 turns on the display of the trace.

TRACe1:TOVerview[:MEASview<y>]

Enables display of or queries the display status of the specified trace. Only Trace1 is valid.

Conditions

Measurement views: General Waveform display

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>] { OFF | ON | 0 | 1 }  
TRACe1:TOVerview[:MEASview<y>]?
```

Arguments

OFF or 0 disables the trace overview.

ON or 1 enables the trace overview.

Examples

TRACe1:TOVerview:MEASVIEW1 ON shows the trace1 in the Time overview Measurement View 1.

TRACe1:TOVerview[:MEASview<y>]:AVERage:COUNT

Sets or queries the number of traces averaged to generate the specified trace. Only Trace1 is valid.

Conditions

Measurement views: Trace Function set to Average

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>]:AVERage:COUNT <value>  
TRACe1:TOVerview[:MEASview<y>]:AVERage:COUNT?
```

Arguments

<value>::<NR1> an integer number of traces to average to create the waveform display.

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

TRACe1:TOVerview:MEASview1:AVERAge:COUNT 200 sets the Average count for Trace 1 to 200.

TRACe1:TOVerview[:MEASview<y>]:COUNT

Enables or queries the count set for the specified trace. Only Trace1 is valid.

Conditions

Measurement views: Trace Function set to Average

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>]:COUNT <value>  
TRACe1:TOVerview[:MEASview<y>]:COUNT?
```

Arguments

<value>::<NRf>

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Returns

<NRf>

Examples

TRACe1:TOVerview:MEASview1:COUNT 200 sets the Trace1 Average count to 200.

TRACe1:TOVerview[:MEASview<y>]:COUNT:ENABLE

Enables or queries the Average count for the specified trace. Only Trace1 is valid.

Conditions

Measurement views: Trace Function set to Average

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>]:COUNT:ENABLE { OFF | ON | 0 | 1 }  
TRACe1:TOVerview[:MEASview<y>]:COUNT:ENABLE?
```

Arguments

OFF or 0 disables the trace count.

ON or 1 enables the trace count.

Examples

TRACe1:TOVerview:MEASview1:COUNT:ENABLE ON enables the Trace1 Average count.

TRACe1:TOVerview[:MEASview<y>]:COUNT:RESet (No Query Form)

Resets the waveform count for the specified trace. Only Trace1 is valid.

Conditions

Measurement views: Trace Function set to Average

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>]:COUNT:RESet
```

Arguments

The parameter <y> = 1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value is 1.

Examples

TRACe1:TOVerview:MEASview1:COUNT:RESet sets the trace count to 1.

TRACe1:TOVerview[:MEASview<y>]:DETection

Enables or queries the type of detection for the specified trace. Only Trace1 is valid.

Conditions

Measurement views: all

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | POSNegative | SAMPl e }  
TRACe1:TOVerview[:MEASview<y>]:DETection?
```

Arguments

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPl e displays the first sample value received for each pixel.

Examples

TRACe1:TOVerview:MEASview1:DETection POSitive enables positive detection on Trace1.

TRACe1:TOVerview[:MEASview<y>]:FREeze

Enables or queries a halt to acquisition updates for the specified trace. Only Trace1 is valid.

Conditions

Measurement views: all

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>]:FREeze { OFF | ON | 0 | 1 }
TRACe1:TOVerview[:MEASview<y>]:FREeze?
```

Arguments

OFF or 0 disables the trace freeze function.

ON or 1 enables the trace freeze function.

Examples

TRACe1:TOVerview:MEASview1:FREeze ON Halts acquisition updates to Trace1.

TRACe1:TOVerview[:MEASview<y>]:FUNCTION

Enables or queries the selected Function for the specified trace. Only Trace1 is valid.

Conditions

Measurement views: all

Group

Trace commands

Syntax

```
TRACe1:TOVerview[:MEASview<y>]:FUNCTION { NORMal | AVERage | MAXHold | MINHold }
TRACe1:TOVerview[:MEASview<y>]:FUNCTION?
```

Arguments

NORMal Each new trace is displayed and then replaced by the next trace.

AVERage Multiple traces are averaged together to generate the displayed trace.

MAXHold Displays the maximum value in the trace record for each display point.

MINHold Displays the minimum value in the trace record for each display point.

Examples

TRACe1:TOVerview:MEASview1:FUNCTION AVERage enables the averaging of multiple traces on Trace1.

TRACe<x>:{AM|FM|PM}

Determines whether or not to show the trace in the AM/FM/PM view.

Conditions

Measurement views: AM, FM, PM

Group

Trace commands

Syntax

```
TRACe<x>:{AM|FM|PM} { OFF | ON | 0 | 1 }
TRACe<x>:{AM|FM|PM}?
```

Arguments

OFF or 0 hides the trace in the AM, FM, or PM view.

ON or 1 shows the trace in the AM, FM, or PM view.

Examples

TRACE:AM ON shows the trace in the AM view.

TRACe<x>:AVTime[:MEASview<y>]

Determines whether or not to show the specified trace in the Amplitude versus Time view.

The parameter <x> = 1 to 4; All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>] { OFF | ON | 0 | 1 }
TRACe<x>:AVTime[:MEASview<y>]?
```

Arguments

OFF or 0 hides the specified trace in the Amplitude versus Time view.

ON or 1 shows the specified trace in the Amplitude versus Time view.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:AVTIME:MEASVIEW1 ON shows Trace 1 in the Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:AVERage:COUNT

Sets or queries the number of traces to combine. This command is effective when you select AVERage with the

TRACe<x>:AVTime[:MEASview<y>]:FUNCTION command.

The parameter <x> = 1 to 3; Trace 4 (math trace) is invalid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:AVERage:COUNT <number>
TRACe<x>:AVTime[:MEASview<y>]:AVERage:COUNT?
```

Arguments

<number>: : <NR1> specifies the number of traces to combine for averaging.

Range: 1 to 10000.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`TRACE1:AVTIME:MEASVIEW1:AVERAGE:COUNT 64` sets the average count to 64 for Trace 1 for Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:AVERage:RESet (No Query Form)

Restarts acquisition and display of waveforms for the specified trace. For an Average, Max Hold, or Min Hold trace, it restarts the sequence, discarding accumulated data and resetting the counter.

The parameter <x> = 1 to 3; Trace 4 (math trace) is invalid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:AVERage:RESet
```

Related Commands

[TRACe<x>:AVTime\[:MEASview<y>\]:FUNction](#) (on page 2634)

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`TRACE1:AVTIME:MEASVIEW1:AVERAGE:RESET` restarts acquisition and display of waveforms for Trace 1 on Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for the Max or Min Hold trace in the Amplitude versus Time measurement. This command is effective when `TRACe<x>:AVTime[:MEASview<y>]:FUNction` is set to `MAXHold` or `MINHold` and `INITiate:CONTinuous` is set to `OFF`.

The parameter <x> = 1 to 3; Trace 4 (math trace) is invalid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:COUNT <number>
TRACe<x>:AVTime[:MEASview<y>]:COUNT?
```

Arguments

<number>::<NR1> specifies the count for Max/Min Hold.

Range: 1 to 10000.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:AVTIME:MEASVIEW1:COUNT 32 sets the count to 32 for Trace 1 on Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:COUNT:ENABLE

Determines whether to enable or disable the count for the Max or Min Hold trace in the Amplitude versus Time view. This command is effective when TRACe<x>:AVTime[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold.

The parameter <x> = 1 to 3; Trace 4 (math trace) is invalid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:COUNT:ENABLE { OFF | ON | 0 | 1 }
TRACe<x>:AVTime[:MEASview<y>]:COUNT:ENABLE?
```

Arguments

OFF or 0 disables the count for the Max/Min Hold trace.

ON or 1 enables the count for the Max/Min Hold trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:AVTIME:MEASVIEW1:COUNT:ENABLE ON enables the Max/Min Hold count for Trace 1 on Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:COUNT:RESet (No Query Form)

Clears the Max or Min Hold data and counter, and restarts the process for the specified trace in the Amplitude versus Time view. This command is effective when TRACe<x>:AVTime[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold.

The parameter <x> = 1 to 3; Trace 4 (math trace) is invalid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:COUNT:RESet
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:AVTIME:MEASVIEW1:COUNT:RESET clears the Max/Min Hold data and counter, and restarts the process for Trace 1 on Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:DETection

Sets or queries the display detector (method to be used for decimating traces to fit the available horizontal space on screen). The number of horizontal pixels on screen is generally smaller than that of waveform data points. When actually displayed, the waveform data is therefore thinned out, according to the number of pixels, for being compressed.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | POSNegative | SAMPlE }
TRACe<x>:AVTime[:MEASview<y>]:DETection?
```

Arguments

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPlE displays the first sample value received for each pixel.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE:AVTIME:MEASVIEW1:DETECTION AVERage specifies that the trace displays the average data value for each pixel on Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:FREeze

Determines whether or not to freeze the display of the specified trace in the Amplitude versus Time view.

The parameter <x> = 1 to 4; All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:AVTime[:MEASview<y>]:FREeze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:AVTIME:MEASVIEW1:FREEZE ON freezes the display for Trace 1 in the Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:FUNction

Sets or queries the function for the specified trace in the Amplitude versus Time view.

The parameter <x> = 1 to 3; Trace 4 (math trace) is invalid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:FUNction { NORMal | AVERage | MAXHold | MINHold }
TRACe<x>:AVTime[:MEASview<y>]:FUNction?
```

Arguments

NORMal selects the normal display.

AVERage selects the Average display that indicates the average amplitude at each time point.

MAXHold selects the Max Hold display that indicates the maximum amplitude at each time point.

MINHold selects the Min Hold display that indicates the minimum amplitude at each time point.

The parameter <x> = 0 to 4. The specified marker must be activated using the **CALCulate:MARKer:ADD** command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:AVTIME:MEASVIEW1:FUNCTION MAXHold selects Max Hold for Trace 1 in the Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:LEFToperand

Sets or queries the left operand for the math trace (Trace 4) in the Amplitude versus Time view.

The parameter <x> = 4; Only Trace 4 (math trace) is valid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

TRACe<x>:AVTime[:MEASview<y>]:LEFToperand { TRACE1 | TRACE2 | TRACE3 }
TRACe<x>:AVTime[:MEASview<y>]:LEFToperand?

Related Commands

[TRACe<x>:AVTime\[:MEASview<y>\]:RIGHToperand](#) (on page 2635)

Arguments

TRACE1 selects Trace 1 as the left operand for the math trace. **TRACE2** selects Trace 2 as the left operand for the math trace. **TRACE3** selects Trace 3 as the left operand for the math trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the **CALCulate:MARKer:ADD** command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE2:AVTIME:MEASVIEW1:LEFTOPERAND selects Trace 2 as the left operand for the math trace for Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:RIGHToperand

Sets or queries the right operand for the math trace (Trace 4) in the Amplitude versus Time view.

The parameter <x> = 4; Only Trace 4 (math trace) is valid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:RIGHToperand { TRACE1 | TRACE2 | TRACE3 }
TRACe<x>:AVTime[:MEASview<y>]:RIGHToperand?
```

Related Commands

[TRACe<x>:AVTime\[:MEASview<y>\]:LEFToperand](#) (on page 2635)

Arguments

TRACE1 selects Trace 1 as the right operand for the math trace. TRACE2 selects Trace 2 as the right operand for the math trace. TRACE3 selects Trace 3 as the right operand for the math trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

`TRACE1:AVTIME:MEASVIEW1:RIGHTOPERAND` selects Trace 1 as the right operand for the math trace on Amplitude versus Time Measurement View 1.

TRACe<x>:AVTime[:MEASview<y>]:SElect

Sets or queries the trace whose measurement results are being displayed in the readout on the top and bottom of the view.

The parameter <x> = 1 to 4; All traces are valid.

Conditions

Measurement views: Amplitude versus Time

Group

Trace commands

Syntax

```
TRACe<x>:AVTime[:MEASview<y>]:SElect
TRACe<x>:AVTime[:MEASview<y>]:SElect?
```

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the `CALCulate:MARKer:ADD` command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Returns

```
{ 0 | 1 }
```

- 0 indicates that the results are not being displayed in the readout for the trace.
- 1 indicates that the results are being displayed in the readout for the trace.

Examples

`TRACE1:AVTIME:MEASVIEW1:SELECT` selects Trace 1 to display the measurement results in the readout for Amplitude versus Time Measurement View 1.

`TRACE1:AVTIME:MEASVIEW1:SELECT?` might return 1, indicating that the results are being displayed in the readout for Trace 1 on Amplitude versus Time Measurement View 1.

TRACe<x>:BLUetooth:CONSte

Sets or queries the specified trace to display or hide in the Bluetooth Constellation display.

The parameter <x> is trace 1 or 2.

Conditions

Measurement views: Bluetooth Constellation

Group

Trace commands

Syntax

```
TRACe<x>:BLUetooth:CONSte { OFF | ON | 0 | 1 }  
TRACe<x>:BLUetooth:CONSte?
```

Arguments

OFF or 0 hides the selected trace.

ON or 1 displays the selected trace.

Returns

0 indicates the specified trace is not shown in the Bluetooth Constellation display.

1 indicates the specified trace is shown in the Bluetooth Constellation display.

Examples

`TRACe1:BLUetooth:CONSte ON` specifies that trace 1 appears in the Bluetooth Constellation display.

TRACe<x>:BLUetooth:CONSte:FREeze

Sets or queries the specified trace to freeze or not to freeze in the Bluetooth Constellation display.

The parameter <x> is trace 1 or 2.

Conditions

Measurement views: Bluetooth Constellation

Group

Trace commands

Syntax

```
TRACe<x>:BLUetooth:CONSte:FREeze { OFF | ON | 0 | 1 }  
TRACe<x>:BLUetooth:CONSte:FREeze?
```

Arguments

OFF or 0 updates the display of the selected trace normally.

ON or 1 stops updating the display of the selected trace.

Returns

0 indicates the specified trace is being updated in the Bluetooth Constellation display.

1 indicates the specified trace is not being updated in the Bluetooth Constellation display.

Examples

TRACel:BLUEtooth:CONStE:FReeze ON freezes the display for trace 1 in the Bluetooth Constellation display.

TRACe<x>:BLUEtooth:CONStE:MODE

Sets or queries the Bluetooth Constellation trace display mode. The parameter <x> is trace 1 or 2.

Conditions

Measurement views: Bluetooth Constellation

Group

Trace commands

Syntax

```
TRACe<x>:BLUEtooth:CONStE:MODE { VECT | SYMB | LIN }
TRACe<x>:BLUEtooth:CONStE:MODE?
```

Arguments

VECT connects adjacent symbol points with the signal locus.

SYMB displays individual symbol points. LIN displays linear symbol points.

Examples

TRACel:BLUEtooth:XONStE:MODE VECT shows the Bluetooth Constellation display is connecting adjacent symbol points with the signal locus.

TRACe<x>:BLUEtooth:CONStE:SELEct

Sets or queries the active trace in the Bluetooth Constellation diagram. The parameter <x> is trace 1 or 2.

Conditions

Measurement views: Bluetooth Constellation

Group

Trace commands

Syntax

```
TRACe<x>:BLUEtooth:CONStE:SELEct <active>
TRACe<x>:BLUEtooth:CONStE:SELEct?
```

Arguments

<active> ::= {0 | 1}

Where:

0, the specified trace is not the selected trace.

1, the specified trace is the selected trace.

Examples

TRACe1:BLUetooth:CONSt:SElect specifies trace 1 as the selected trace.

TRACe<x>:BLUetooth:EDIagram:ENABle:I

Determines whether to show or hide the I trace in the Bluetooth eye diagram.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Trace commands

Syntax

```
TRACe<x>:BLUetooth:EDIagram:ENABle:I { OFF | ON | 0 | 1 }  
TRACe<x>:BLUetooth:EDIagram:ENABle:I?
```

Arguments

OFF or 0 hides the I trace.

ON or 1 shows the I trace.

Examples

TRACEx:BLUETOOTH:EDIAGRAM:ENABle:I ON shows the I trace in the eye diagram.

TRACe<x>:BLUetooth:EDIagram:ENABle:Q

Determines whether to show or hide the Q trace in the Bluetooth Eye diagram.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Trace commands

Syntax

```
TRACe<x>:BLUetooth:EDIagram:ENABle:Q { OFF | ON | 0 | 1 }  
TRACe<x>:BLUetooth:EDIagram:ENABle:Q?
```

Arguments

OFF or 0 hides the Q trace.

ON or 1 shows the Q trace.

Examples

TRACEx:BLUETOOTH:EDIAGRAM:ENABle:Q ON shows the Q trace in the eye diagram.

TRACe<x>:BLUetooth:EDIagram:SElect:I

Selects the I trace in the Bluetooth eye diagram. The query version of this command returns whether the I trace is selected or not.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Trace commands

Syntax

```
TRACe<x>:BLUetooth:EDIagram:SElect:I { 0 | 1 }  
TRACe<x>:BLUetooth:EDIagram:SElect:I?
```

Arguments

None

Returns

0 indicates that the I trace is deselected.

1 indicates that the I trace is selected.

Examples

TRACEX:BLUETOOTH:EDIAGRAM:SELECT:I selects the I trace in the eye diagram.

TRACe<x>:BLUetooth:EDIagram:SElect:Q

Selects the Q trace in the Bluetooth eye diagram. The query version of this command returns whether the I trace is selected or not.

Conditions

Measurement views: Bluetooth Eye diagram

Group

Trace commands

Syntax

```
TRACe<x>:BLUetooth:EDIagram:SElect:Q { 0 | 1 }  
TRACe<x>:BLUetooth:EDIagram:SElect:Q?
```

Arguments

None

Returns

0 indicates that the Q trace is deselected.

1 indicates that the Q trace is selected.

Examples

TRACEX:BLUETOOTH:EDIAGRAM:SELECT:Q selects the Q trace in the eye diagram.

TRACe<x>:BLUetooth:FDVTime:MODE

Sets or queries whether to display the Frequency Deviation vs. Time trace as vectors or symbols (points).

Conditions

Measurement views: Frequency Deviation vs. Time

Group

Trace commands

Syntax

```
TRACe<x>:BLUEtooth:FDVTime:MODE { VECTors | SYMBols }
TRACe<x>:BLUEtooth:FDVTime:MODE?
```

Arguments

VECTors connects adjacent symbol points with lines.

SYMBols displays individual symbol points.

Examples

TRACe:BLUEtooth:FDVTime:MODE VECT sets the display to connect points in the display with lines.

TRACe<x>:CCDF:FREeze

Determines whether or not to freeze the display of the specified trace (Trace 1 or 2) in the CCDF view.

The parameter <x> = 1 or 2; Trace 3 (Gaussian curve) is invalid.

Conditions

Measurement views: CCDF

Group

Trace commands

Syntax

```
TRACe<x>:CCDF:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:CCDF:FREeze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

Examples

TRACE1:CCDF:FREEZE ON freezes the display for Trace 1.

TRACe<x>:CCDF:SElect

Sets or queries the trace whose measurement results are being displayed in the readout on the top of the view. The selected trace is indicated by the measurement pointer (pink triangle) on the waveform.

The parameter <x> = 1 to 3; All traces are valid.

Conditions

Measurement views: CCDF

Group

Trace commands

Syntax

TRACe<x>:CCDF:SElect
TRACe<x>:CCDF:SElect?

Arguments

None

Returns

{ 0 | 1 }

0 indicates that the results are not being displayed in the readout for the trace.

1 indicates that the results are being displayed in the readout for the trace.

Examples

TRACE1:CCDF:SELECT selects Trace 1 to display the measurement results in the readout.

TRACE1:CCDF:SELECT? might return 1, indicating that the results are being displayed in the readout for Trace 1.

TRACe<x>:CCDF:SHOW

Determines whether to show or hide the specified trace in the CCDF view. The parameter <x> = 1 to 3; All traces are valid.

Conditions

Measurement views: CCDF

Group

Trace commands

Syntax

TRACe<x>:CCDF:SHOW { OFF | ON | 0 | 1 }
TRACe<x>:CCDF:SHOW?

Arguments

OFF or 0 hides the specified trace.

ON or 1 shows the specified trace.

Examples

TRACE1:CCDF:SHOW ON shows Trace 1 in the CCDF view.

TRACe<x>:CCDF:X

Sets or queries the horizontal position of the measurement pointer (pink triangle) to measure the CCDF. Use the TRACe<x>:CCDF:Y? query to read the value.

The parameter <x> = 1 to 3.

NOTE: Use the TRACe<x>:CCDF:SHOW command to show the specified trace and the TRACe<x>:CCDF:SElect command to select the trace before running the TRACe<x>:CCDF:X command.

Conditions

Measurement views: CCDF

Group

Trace commands

Syntax

TRACe<x>:CCDF:X <value>

TRACe<x>:CCDF:X?

Arguments

<value>: : <NRf> specifies the horizontal position of the measurement pointer.

Range: 0 to 20 dB.

Examples

TRACE1:CCDF:X 5 puts the measurement pointer at 5 dB on Trace 1.

TRACe<x>:CCDF:Y? (Query Only)

Queries the vertical position (CCDF value) of the measurement pointer (displayed as a pink triangle). Use the TRACe<x>:CCDF:X command to set the horizontal position of the pointer.

The parameter <x> = 1 to 3.

NOTE: Use the TRACe<x>:CCDF:SHOW command to show the specified trace and the TRACe<x>:CCDF:SElect command to select the trace before running the TRACe<x>:CCDF:Y? query.

Conditions

Measurement views: CCDF

Group

Trace commands

Syntax

TRACe<x>:CCDF:Y?

Arguments

None

Returns

<value>: : <NRf> is the vertical position (CCDF) of the measurement pointer.

Range: 0 to 100%.

The value of 99.0999953003E+36 is returned if the trace is not available.

Examples

TRACE1:CCDF:Y? might return 14.72, indicating the CCDF is 14.72% at the measurement pointer on Trace 1.

TRACe<x>:CONSte[:MEASview<y>]

Specifies whether or not to show the specified trace (Trace 1 or 2) in the Constellation display.

The parameter <x> = 1 or 2.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Trace commands

Syntax

```
TRACe<x>:CONSte[:MEASview<y>] {OFF | ON | 0 | 1 }
TRACe<x>:CONSte[:MEASview<y>]?
```

Arguments

OFF or 0 hides the selected trace.

ON or 1 displays the selected trace.

Returns

{ 0 } indicates the specified trace is not shown in the Constellation display.

{ 1 } indicates the specified trace is shown in the Constellation display.

Examples

TRACe1:CONSte:MEASview2 2 specifies that Trace 2 be shown in the Constellation display for measview 2 of constellation.

TRACe<x>:CONSte[:MEASview<y>]:FREeze

Specifies whether or not to freeze (halt updates) to the display of the specified trace (Trace 1 or 2) in the Constellation display.

The parameter <x> = 1 or 2.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation) .

Group

Trace commands

Syntax

```
TRACe<x>:CONSte[:MEASview<y>]:FREeze {OFF | ON | 0 | 1 }
TRACe<x>:CONSte[:MEASview<y>]:FREeze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

Returns

{ 0 } indicates the specified trace is being updated.

{ 1 } indicates the specified trace is not being updated.

Examples

TRACe1:CONSte:MEASview2:FReeze ON freezes the display for Trace 1 for measview 2 of constellation.

TRACe<x>:CONSte[:MEASview<y>]:MODE

Sets or queries how to display the constellation trace.

The parameter <x> = 1 or 2.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Trace commands

Syntax

```
TRACe<x>:CONSte[:MEASview<y>]:MODE { VECTors | SYMBols }
TRACe<x>:CONSte[:MEASview<y>]:MODE?
```

Arguments

VECTors connects adjacent symbol points with the signal locus.

SYMBols displays individual symbol points.

Examples

TRACe<X>:CONSte:MEASview2:MODE VECTors shows the constellation connecting adjacent symbol points with the signal locus for measview 2 of constellation.

TRACe<x>:CONSte[:MEASview<y>]:Q:OFFSet

Sets the Q offset in the Constellation display to Use shared Pref, Remove Q offset, or Include Q offset.

The parameter <x> = 1 or 2.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Trace commands

Syntax

```
TRACe<x>:CONSte[:MEASview<y>]:Q:OFFSet { SHARed | RQOFset | IQOFset }
TRACe<x>:CONSte[:MEASview<y>]:Q:OFFSet?
```

Arguments

SHARed means that the Q offset applied to the selected trace will be the same as the Remove Q offset setting located on the Prefs tab (which applies to all GP Digital Modulation displays).

Remove Q offset removes the Q offset, possibly overriding the Remove Q offset setting on the Prefs tab. Changing the Constellation display Q Offset value with this command does not affect the Q offset setting on other displays.

Include Q offset includes the Q offset, possibly overriding the Remove Q offset setting on the Prefs tab. Changing the Constellation display Q Offset value with this command does not affect the Q offset setting on other displays.

Returns

{ SHAR } indicates that Q Offset is set to Use Shared Pref.

{ RQOF } indicates that Q Offset is set to Remove Q Offset.

{ IQOF } indicates that Q Offset is set to Include Q Offset.

Examples

TRACe1:CONSte:MEASview2:Q:OFFSet SHAR sets the Constellation display Q Offset to Use Shared Pref for measview 2 of constellation.

TRACe<x>:CONSte[:MEASview<y>]:SElect (No query form)

Sets or queries the trace to which the Show, Freeze, Content, and Q Offset settings apply.

The parameter <x> = 1 or 2.

The parameter <y> = 1 to number of instances of a measurement created or number of channels available in an instrument (Example: 1 to 8 channels for MSO58).

Conditions

Measurement views: Constellation

MEASview keyword is optional and applicable only for measurements that supports multi-instance creation of measurement (Example: GPDemod Constellation).

Group

Trace commands

Syntax

```
TRACe<x>:CONSte[:MEASview<y>]:SElect
TRACe<x>:CONSte[:MEASview<y>]:SElect?
```

Arguments

None

Returns

{ 0 } indicates the specified trace is not the selected trace.

{ 1 } indicates the specified trace is the selected trace.

Examples

TRACe1:CONSt:MEASview2:SElect specifies Trace 1 as the selected trace for measview 2 of constellation.

TRACe<x>:DPX

Determines whether or not to show the specified trace in the DPX, Spectrum view.

The parameter <x> = 1 to 7; All traces are valid. Trace 6 is for the DPXogram trace and Trace 7 is for the Ogram line.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX { OFF | ON | 0 | 1 }
TRACe<x>:DPX?
```

Arguments

OFF or 0 hides the specified trace in the DPX, Spectrum view.

ON or 1 shows the specified trace in the DPX, Spectrum view.

Examples

TRACE1:DPX ON shows Trace 1 (the maximum trace) in the DPX, Spectrum view.

TRACe<x>:DPX:AVERAge:COUNT

Sets or queries the number of traces to combine for averaging in the DPX, Spectrum view.

The parameter <x> = 3; Only Trace 3 (average trace) is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:AVERAge:COUNT <number>
TRACe<x>:DPX:AVERAge:COUNT?
```

Arguments

<number>::<NR1> specifies the number of traces to combine for averaging.

Range: 1 to 10000.

Examples

TRACE3:DPX:AVERAGE:COUNT 32 sets the average count to 32.

TRACe<x>:DPX:COLor:CURVe

Sets or queries how colors are mapped to the signal density in the DPX, Spectrum bitmap display. The mapping can be linear (Curve = 1), or it can be set to concentrate the resolution on the lower level of the range (Curve > 1) or the mapping can be set to show the best resolution on the upper range of density or hit count (Curve = 0.1 – 0.99). This command is only valid for the Bitmap display.

The parameter <x> = 5; only Trace5 is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:COLor:CURVe <value>  
TRACe<x>:DPX:COLor:CURVe?
```

Arguments

<value>::<NRf> specifies how colors are mapped to the signal density. Range:

Examples

TRACe<x>:DPX:COLor:CURVe 1.5 concentrates the resolution on the lower level of the range on the Bitmap display.

TRACe<x>:DPX:COLor:INTensity

Sets or queries the color intensity in the DPX, Spectrum view. The value is common to all traces.

The parameter <x> = 1 to 5; All traces are valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:COLor:INTensity <value>  
TRACe<x>:DPX:COLor:INTensity?
```

Arguments

<value>::<NRf> specifies color intensity. Range: 1 to 100%.

Examples

TRACE1:DPX:COLOR:INTENSITY 30 sets the color intensity to 30%.

TRACe<x>:DPX:COLor:SCALE:AUTO (No Query Form)

Automatically adjusts the Max and Min color settings to display the broadest range of colors in the DPX, Spectrum bitmap display. This command is only valid for the Bitmap display.

The parameter <x> = 5; only Trace5 is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:COLor:SCALE:AUTO
```

Arguments

<x>: :=5 specifies the auto-color setting for the Bitmap trace.

Examples

TRACe5:DPX:COLor:SCALE:AUTO autosets the Bitmap display color scheme.

TRACe<x>:DPX:DETection

Sets or queries the detection type (POSitive, NEGative, AVERage) for traces 1, 2 and 3 in the DPX, Spectrum view.

Trace 4 (math trace) and Trace 5 (bitmap trace) are invalid choices. Trace 6 is only valid for DPXogram.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:DETection { AVERage | NEGative | POSitive }
TRACe<x>:DPX:DETection?
```

Arguments

The following table shows the trace function and display. For the average trace, use the TRACe<x>:DPX:AVERage:COUNT command to set the average count.

Examples

TRACE1:DPX:DETection AVERage enables analysis to look for AVERage on Trace 1.

TRACe<x>:DPX:DGRAM:SELection:LINE

Sets or queries a line from the DPXogram display to send to the DPX, Spectrum display.

Trace 6 is the DPXogram trace. No other traces are allowed.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:DGRAM:SELection:LINE <number>
```

TRACe<x>:DPX:DGRAM:SElect:LINE?

Arguments

<number> ::= <NR1> specifies the line number in the DPXogram display.

Examples

TRACE6:DPX:DGRAM:SELECT:LINE 75 selects line #75 in the DPXogram display to send to the DPX, Spectrum display.

TRACe<x>:DPX:DOT:PERSistent

Determines whether to enable or disable the dot persistence for the bitmap trace (Trace 5) in the DPX, Spectrum view.

The parameter <x> = 5; Only Trace 5 (bitmap trace) is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:DOT:PERSistent { OFF | ON | 0 | 1 }
TRACe<x>:DPX:DOT:PERSistent?
```

Arguments

OFF or 0 disables the dot persistence.

ON or 1 enables the dot persistence.

Examples

TRACE5:DPX:DOT:PERSISTENT ON enables the dot persistence in the DPX, Spectrum view.

TRACe<x>:DPX:DOT:PERSistent:TYPE

Sets or queries the persistence type for the bitmap trace (Trace 5) in the DPX, Spectrum view.

The parameter <x> = 5; Only Trace 5 (bitmap trace) is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:DOT:PERSistent:TYPE { VARIable | INFinite }
TRACe<x>:DPX:DOT:PERSistent:TYPE?
```

Arguments

VARIable selects the variable persistence display which leaves acquired data points on the display for a period of time specified by the TRACe<x>:DPX:DOT:PERSistent:VARIable command.

INFinite selects the infinite persistence display which accumulates data points on the display indefinitely.

Examples

TRACE5:DPX:DOT:PERSISTENT:TYPE VARIABLE selects the variable persistence display.

TRACe<x>:DPX:DOT:PERSistent:VARiable

Sets or queries how long data points are displayed. This command is effective when TRACe<x>:DPX:DOT:PERSistent:TYPE is set to VARiable. This affects the display only.

The parameter <x> = 5; Only Trace 5 (bitmap trace) is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:DOT:PERSistent:VARiable <number>
TRACe<x>:DPX:DOT:PERSistent:VARiable?
```

Arguments

<number>::<NR1> specifies the how long waveform points are displayed on the screen. Range: 100 ms to 60 s (the default value is 1.0 s).

Examples

TRACE5:DPX:DOT:PERSISTENT:VARIABLE 20 specifies that the waveform points are displayed on the screen for a period of 20 before they disappear.

TRACe<x>:DPX:FREEze

Determines whether or not to freeze the display of the specified trace in the DPX, Spectrum view.

The parameter <x> = 1 to 6; All traces are valid. Trace 6 is for the DPXogram trace and Trace 7 is for the Ogram line.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:FREEze { OFF | ON | 0 | 1 }
TRACe<x>:DPX:FREEze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

Examples

TRACE1:DPX:FREEZE ON freezes the display for the +peak trace.

TRACe<x>:DPX:FUNCTION

Sets or queries the trace function for the +Peak, -Peak, or Average trace (Trace 1, 2, or 3, respectively) in the DPX, Spectrum view.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (bitmap trace) are invalid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:FUNCTION { NORMAl | HOLD | AVERAge }
TRACe<x>:DPX:FUNCTION?
```

Arguments

The following table shows the trace function and display. For the average trace, use the TRACe<x>:DPX:AVERAge:COUNT command to set the average count.

Function	Trace1 (+Peak trace)	Trace2 (-Peak trace)	Trace3 (Average trace)
NORMAl	Normal spectrum (Detection: +Peak)	Normal spectrum (Detection: -Peak)	Normal spectrum (Detection: Average)
HOLD	Max-hold spectrum	Min-hold spectrum	NA
AVERAge	NA	NA	Average spectrum

Examples

TRACE1:DPX:FUNCTION HOLD selects the max hold waveform for Trace 1.

TRACe<x>:DPX:LEFToperand

Sets or queries the left operand for the math trace (Trace 4) in the DPX, Spectrum view.

The parameter <x> = 4; Only Trace 4 (math trace) is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:LEFToperand { TRACe1 | TRACe2 | TRACe3 }
TRACe<x>:DPX:LEFToperand?
```

Related Commands

[TRACe<x>:DPX:RIGHToperand](#) (on page 2653)

Arguments

TRACE1 selects Trace 1 as the left operand for the math trace.

TRACE2 selects Trace 2 as the left operand for the math trace.

TRACE3 selects Trace 3 as the left operand for the math trace.

Examples

TRACE4:DPX:LEFTOPERAND TRACE2 selects Trace 2 as the left operand for the math trace.

TRACe<x>:DPX:RIGHToperand

Sets or queries the right operand for the math trace (Trace 4) in the DPX, Spectrum view.

The parameter <x> = 4; Only Trace 4 (math trace) is valid.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:RIGHToperand { TRACE1 | TRACE2 | TRACE3 }
TRACe<x>:DPX:RIGHToperand?
```

Related Commands

[TRACe<x>:DPX:LEFToperand](#) (on page 2652)

Arguments

TRACE1 selects Trace 1 as the right operand for the math trace.

TRACE2 selects Trace 2 as the right operand for the math trace.

TRACE3 selects Trace 3 as the right operand for the math trace.

Examples

TRACE4:DPX:RIGHTOPERAND TRACE1 selects Trace 1 as the right operand for the math trace.

TRACe<x>:DPX:SElect

Sets or queries the trace to display the readout at the upper left of the DPX, Spectrum view.

The parameter <x> = 1 to 7; All traces are valid. Trace 6 is for the DPXogram trace and Trace 7 is for the Ogram line.

Conditions

Measurement views: DPX, Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:DPX:SElect
TRACe<x>:DPX:SElect?
```

Arguments

None

Returns

{ 0 | 1 }

- 0 indicates that the readout is not being displayed for the specified trace.
- 1 indicates that the readout is being displayed for the specified trace.

Examples

TRACE1:DPX:SELECT selects Trace 1 (+Peak trace) to display the readout.

TRACE1:DPX:SELECT? might return 1, indicating that the readout is being displayed for Trace 1.

TRACe<x>:EMC:RECAll:ENABle

Sets or queries that selected recalled trace is enabled (displayed) or disabled in EMC View.

<x> = <NR1> either 1,2,3,4,5 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe<x>:EMC:RECAll:ENABle {0 | OFF | 1 | ON}
TRACe<x>:EMC:RECAll:ENABle?

Arguments

0 or OFF indicates recalled trace is disabled 1 or ON indicates recalled trace is enabled

Returns

<Boolean> 0,1

Examples

TRACe4:EMC:RECAll:ENABle might return 1, indicating that the recalled trace 4 is enabled (displayed).

TRACe<x>:EMC:RECAll:SELEct

Sets or queries the selection of specified recalled trace in live trace of EMC View.

<x> = <NR1> either 1,2,3,4,5 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe<x>:EMC:RECAll:SELEct
TRACe<x>:EMC:RECAll:SELEct?

Arguments

None

Returns

<Boolean> 0,1

Examples

TRACe3:EMC:RECA11:SElect might return 1, indicating that recalled trace 3 is selected.

TRACe<x>:EMC:SCAN:COUNT

Sets or queries the count value of specified scan trace in EMC View.

<x> = <NR1> 1 or 2 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe<x>:EMC:SCAN:COUNT <value>

TRACe<x>:EMC:SCAN:COUNT?

Arguments

<value> = <NR1>

Returns

<NR1>

Examples

TRACe1:EMC:SCAN:COUNT might return 12, indicating the count value for trace 1 is 12.

TRACe<x>:EMC:SCAN:COUNT:RESet (No Query Form)

Resets the count value of the specified live scan trace in EMC view.

<x> = <NR1> 1 or 2 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Mass Memory commands

Syntax

TRACe<x>:EMC:SCAN:COUNT:RESet

Arguments

None

Returns

None

Examples

`TRACe2:EMC:SCAN:COUNT:RESet` resets the count value of live scan trace 2.

TRACe<x>:EMC:SCAN:ENABLE

Sets or queries that selected scan trace is enabled (displayed) or disabled in EMC View.

<x> = <NR1> 1 or 2 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe<x>:EMC:SCAN:ENABLE { 0 | OFF | 1 | ON }
TRACe<x>:EMC:SCAN:ENABLE?
```

Arguments

0 or OFF indicates the scan trace is disabled. 1 or ON indicates the scan trace is enabled.

Returns

<Boolean> 0,1

Examples

`TRACe1:EMC:SCAN:ENABLE?` might return 1, indicating that the scan trace 1 is enabled (displayed).

TRACe<x>:EMC:SCAN:FUNCTION

Sets or queries the scan function for the selected scan trace in EMC View.

<x> = <NR1>1 or 2 Trace number

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe<x>:EMC:SCAN:FUNCTION {NONE | MAXH | AVER | AVGL}
TRACe<x>:EMC:SCAN:FUNCTION?
```

Arguments

NONE = Normal is the function selected MAXH = Max Hold is the function selected AVER = Avg(VRMS) is the function selected

AVGL = Avg (of logs) is the function selected

Returns

<String> See Arguments

Examples

TRACe1:EMC:SCAN:ENABle? might returns MAXH, indicating that the scan function selected for trace 1 is Max Hold.

TRACe<x>:EMC:SCAN:SElect

Sets or queries the selection of scan trace in live trace of EMC View.

<x> = <NR1>1 or 2 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe<x>:EMC:SCAN:SElect
TRACe<x>:EMC:SCAN:SElect?

Arguments

None

Returns

<Boolean> 0,1

Examples

TRACe1:EMC:SCAN:SElect might return 1, indicating that scan trace 1 is selected.

TRACe<x>:EMC:SPOT:ENABle

Sets or queries that selected spot trace is enabled (displayed) or disabled in EMC View.

<x> = <NR1> either 1 , 2 or 3 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

TRACe<x>:EMC:SPOT:ENABle {0 | OFF | 1 | ON}
TRACe<x>:EMC:SPOT:ENABle?

Arguments

0 or OFF indicates spot trace is disabled 1 or ON indicates spot trace is enabled

Returns

<Boolean> 0,1

Examples

TRACe2:EMC:SPOT:ENABLe might return 1, indicating that the spot trace 2 is enabled (displayed).

TRACe<x>:EMC:SPOT:SElect

Sets or queries the selection of spot trace in live trace of EMC View.

<x> = <NR1> either 1 , 2 or 3 (trace number)

Conditions

Measurement view: EMC - EMI Display

Group

Trace commands

Syntax

```
TRACe<x>:EMC:SPOT:SElect
TRACe<x>:EMC:SPOT:SElect?
```

Arguments

None

Returns

<Boolean> 0,1

Examples

TRACe1:EMC:SPOT:SElect might return 1, indicating that spot trace 1 is selected.

TRACe<x>:{FSETtling|PSETtling}:FREeze

Determines whether to freeze the specified trace in the Settling Time measurement display.

The parameter <x> = 1 or 2.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe<x>:{FSETtling|PSETtling}:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:{FSETtling|PSETtling}:FREeze?
```

Arguments

OFF or 0 updates the trace display normally.

ON or 1 stops updating trace display.

Examples

TRACE1:FSETTLING:FREEZE ON stops updating the Trace 1 display.

TRACe<x>:{FSETtling|PSETtling}:SElect

Selects the trace in the settling time measurement. The query returns the currently selected trace.

The parameter <x> = 1 or 2.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe<x>:{FSETtling|PSETtling}:SElect
TRACe<x>:{FSETtling|PSETtling}:SElect?
```

Arguments

None

Returns

0 (not selected) or 1 (selected).

Examples

TRACE2:FSETTLING:SELECT selects Trace 2.

TRACe<x>:{FSETtling|PSETtling}:SHOW

Determines whether to show or hide the specified trace in the settling time view. The parameter <x> = 1 or 2.

Conditions

Measurement views: Frequency and Phase Settling Time

Group

Trace commands

Syntax

```
TRACe<x>:{FSETtling|PSETtling}:SHOW { OFF | ON | 0 | 1 }
TRACe<x>:{FSETtling|PSETtling}:SHOW?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 shows the specified trace.

Examples

TRACE1:PSETTLING:SHOW ON shows Trace 1 in the Phase Settling Time view.

TRACe<x>:FVTime[:MEASview<y>]:DETection

Enables or queries the type of detection for the specified trace. The parameter <x> represents traces 1 to 4.

Conditions

Measurement views: Frequency versus Time

Group

Trace commands

Syntax

```
TRACe<x>:FVTime[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | POSNegative | SAMPlE }
TRACe<x>:FVTime[:MEASview<y>]:DETection?
```

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPlE displays the first sample value received for each pixel.

Examples

TRACe2:FVTime[:MEASview<y>]:DETection POSitive enables positive detection on Trace2.

TRACe<x>:LTE:ACLR:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for multitrace functions (Max Hold and Average) in the LTE ACLR measurement. This command is effective when TRACe<x>:LTE:ACLR:FUNCTION is set to MAXHold or AVERage and INITiate:CONTinuous is set to OFF.

Conditions

Measurement view: LTE ACLR

Group

Trace commands

Syntax

```
TRACe<x>:LTE:ACLR:COUNT <number>
```

Related Commands

[TRACe<x>:LTE:ACLR:FUNCTION](#) (on page 2661)

Arguments

<number>::<NR1> specifies the count for multi-trace functions. Range: 1 to 10000.

Returns

<NR1>

Examples

`TRACE1:LTE:ACLR:COUNT 32` sets the count to 32 for multitrace functions.

TRACe<x>:LTE:ACLR:COUNT:RESet (No Query Form)

Clears the multifunction (Max Hold or Average) data and counter and restarts the process in the LTE ACLR display. This command is effective when `TRACe<x>:LTE:ACLR:FUNCTION` is set to `MAXHold` or `AVERage`.

Conditions

Measurement view: LTE ACLR

Group

Trace commands

Syntax

`TRACe<x>:LTE:ACLR:COUNT:RESet`

Related Commands

[TRACe<x>:LTE:ACLR:FUNCTION](#) (on page 2661)

Arguments

None

Examples

`TRACE1:LTE:ACLR:COUNT:RESET` clears the multifunction data and counter, and restarts the process.

TRACe<x>:LTE:ACLR:FUNCTION

Sets or queries the trace function in the LTE ACLR display.

Conditions

Measurement view: LTE ACLR

Group

Trace commands

Syntax

`TRACe<x>:LTE:ACLR:FUNCTION { NONE | MAXH | AVER }`
`TRACe<x>:LTE:ACLR:FUNCTION?`

Arguments

`NONE` sets Normal display of Trace 1.

`MAXHold` sets Max Hold display of Trace 1, which indicates the maximum amplitude drift at each frequency point.

`AVERage` sets Average display of Trace 1, which indicates the average amplitude drift at each frequency point.

Returns

`NONE` means that Trace 1 is set to Normal display. `MAXHold` means Trace 1 is set to Max Hold display. `AVERage` means Trace 1 is set to Average display.

Examples

TRACE1:LTE:ACLR:FUNCTION MAXH displays the Max Hold trace in the LTE ACLR display.

TRACe<x>:LTE:CONSte:SYNChronization:SEQUence:STATe? (Query Only)

Returns whether or not a measurement signal (Primary Synchronization Signal/Secondary Synchronization Signal) is selected for the specified trace in the Trace tab of the settings control panel of the LTE Constellation display.

Conditions

Measurement view: LTE Constellation

Group

Trace commands

Syntax

TRACe<x>:LTE:CONSte:SYNChronization:SEQUence:STATe?

Returns

0 means no measurement signal is selected.

1 means a measurement signal is selected.

Examples

TRACE1:LTE:CONSte:SYNCHRONIZATION:SEQUENCE:STATE? might return 1, indicating that SSS or PSS is selected in the Trace tab of the LTE Constellation display.

TRACe<x>:NOISe:FIGure:AVERage:COUNT

Sets or queries the average counts for the specified trace in the Noise Figure display.

Conditions

Measurement view: Noise Figure

The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

TRACe<x>:NOISe:FIGure:AVERage:COUNT <NR1>
TRACe<x>:NOISe:FIGure:AVERage:COUNT?

Arguments

<NR1> = integer

Range: 2 to 10000

Returns

<NR3> floating point value with an exponent, which is the average count value.

Examples

TRAC1:NOIS:FIG:AVER:COUN? might return 10.0000000000E+3, indicating that the average count value is set to 10000.

TRACe<x>:NOISe:FIGure:COUNT:ENABLE

Sets or queries whether or not the count feature for the specified trace in the Noise Figure display is enabled or disabled.

Conditions

Measurement view: Noise Figure display The parameter <x>= 1 to 3.

Only available when trace Function is set to Avg (VRMS), Max Hold, or Min Hold.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:FIGure:COUNT:ENABLE { OFF | ON | 0 | 1 }
TRACe<x>:NOISe:FIGure:COUNT:ENABLE?
```

Arguments

OFF or 0 disables the count feature for the specified trace.

ON or 1 enables the count feature for the specified trace.

Returns

0 indicates the count feature for the specified trace if disabled.

1 indicates the count feature for the specified trace if enabled.

Examples

TRAC1:NOIS:FIG:COUN:ENAB ON enables the count feature for Trace 1.

TRAC1:NOIS:FIG:COUN:ENAB? might return 0, indicating that the count feature for Trace 1 is disabled.

TRACe<x>:NOISe:FIGure:DETection

Sets or queries the trace detection method in the Noise Figure display.

Conditions

Measurement view: Noise Figure display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:FIGure:DETection { AVERage }
TRACe<x>:NOISe:FIGure:DETection?
```

Arguments

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

Returns

AVER means that the trace function is set to Average (VRMS).

Examples

TRACE1:NOIS:FIG:DET AVER sets the detection method for Trace 1 to Average (VRMS).

TRACE2:NOIS:FIG:DET? might return AVER, indicating that the function for Trace 1 is set to Average (VRMS).

TRACe<x>:NOISe:FIGure:FReeze

Specifies whether or not to freeze (halt updates of) the specified trace in the Noise Figure display.

Conditions

Measurement view: Noise Figure display

The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:FIGure:FReeze { OFF | ON | 0 | 1 }  
TRACe<x>:NOISe:FIGure:FReeze?
```

Arguments

OFF or 0 normally updates the display of the specified trace.

ON or 1 stops updating the display of the specified trace.

Returns

0 indicates the specified trace is being updated normally in the Noise Figure display.

1 indicates the specified trace is not being updated in the Noise Figure display.

Examples

TRAC1:NOIS:FIG:FRE ON freezes the display of Trace 1.

TRAC1:NOIS:FIG:FRE? might return 0, indicating that the display of Trace 1 is set to Freeze.

TRACe<x>:NOISe:FIGure:FUNCTion

Sets or queries the trace processing method (function) in the Noise Figure display.

Conditions

Measurement view: Noise Figure display

The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:FIGure:FUNCTion { NORMal | AVERage | MAXHold| MINHold}  
TRACe<x>:NOISe:FIGure:FUNCTion?
```


Arguments

NORMa1: Displays the trace record for each display point without additional processing.

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

MAXHold: Displays the maximum value in the trace record for each display point.

MINHold: Displays the minimum value in the trace record for each display point.

Returns

NORM means that the trace function is set to Normal.

AVER means that the trace function is set to Average (VRMS).

MAXH means that the trace function is set to Max Hold.

MINH means that the trace function is set to Min Hold.

Examples

TRAC1:NOIS:FIG:FUNC NORM sets the function for Trace 1 to Normal.

TRAC2:NOIS:FIG:FUNC? might return **MAXH**, indicating that the function for Trace 1 is set to Max Hold.

TRACe<x>:NOISe:FIGure:SElect

Sets the trace to be shown in the Noise Figure display. The query form of this command returns whether or not the specified trace is set to show (ON) or not (OFF).

Conditions

Measurement view: Noise Figure display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

TRACe<x>:NOISe:FIGure:SElect

TRACe<x>:NOISe:FIGure:SElect?

Arguments

None

Returns

0 means that the specified trace is not shown (set to Off).

1 means that the specified trace is set to show (set to normal).

Examples

TRAC1:NOIS:FIG:SEL will set the display to show Trace 1.

TRAC2:NOIS:FIG:SEL? might return 1, indicating that Trace 2 is set to show.

TRACe<x>:NOISe:FIGure:SHOW

Sets or queries the state (shown or not shown) of the specified trace in the Noise Figure display.

Conditions

Measurement view: Noise Figure display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:FIGure:SHOW { OFF | ON | 0 | 1 }  
TRACe<x>:NOISe:FIGure:SHOW?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 displays the specified trace.

Returns

0 indicates the specified trace is not shown in the Noise Figure display.

1 indicates the specified trace is shown in the Noise Figure display.

Examples

TRAC1:NOIS:FIG:SHOW sets Trace to show in the Noise Figure display.

TRAC2:NOIS:FIG:SHOW? might return 0, indicating that Trace 2 is not showing in the Noise Figure display.

TRACe<x>:NOISe:GAIN:AVERage:COUNT

Sets or queries the average counts for the specified trace in the Gain display.

Conditions

Measurement view: Gain

The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:GAIN:AVERage:COUNT <NR1>  
TRACe<x>:NOISe:GAIN:AVERage:COUNT?
```

Arguments

<NR1> = integer

Range: 2 to 10000

Returns

<NR3> floating point value with an exponent, which is the average count value.

Examples

TRAC1:NOIS:GAIN:AVER:COUN? might return 10.0000000000E+3, indicating that the average count value is set to 10000.

TRACe<x>:NOISe:GAIN:COUNT:ENABLE

Sets or queries whether or not the count feature for the specified trace in the Gain display is enabled or disabled.

Conditions

Measurement view: Gain display

The parameter <x>= 1 to 3.

Only available when trace Function is set to Avg (VRMS), Max Hold, or Min Hold.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:GAIN:COUNT:ENABLE { OFF | ON | 0 | 1 }
TRACe<x>:NOISe:GAIN:COUNT:ENABLE?
```

Arguments

OFF or 0 disables the count feature for the specified trace.

ON or 1 enables the count feature for the specified trace.

Returns

0 indicates the count feature for the specified trace if disabled.

1 indicates the count feature for the specified trace if enabled.

Examples

TRAC1:NOIS:GAIN:COUN:ENAB ON enables the count feature for Trace 1.

TRAC1:NOIS:GAIN:COUN:ENAB? might return 0, indicating that the count feature for Trace 1 is disabled.

TRACe<x>:NOISe:GAIN:DETectiOn

Sets or queries the trace detection method in the Gain display.

Conditions

Measurement view: Gain display

The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:GAIN:DETectiOn { AVERage }
TRACe<x>:NOISe:GAIN:DETectiOn?
```

Arguments

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

Returns

AVER means that the trace function is set to Average (VRMS).

Examples

TRACE1:NOIS:YFAC:DET AVER sets the detection method for Trace 1 to Average (VRMS).

TRACE2:NOIS:YFAC:DET? might return AVER, indicating that the function for Trace 1 is set to Average (VRMS).

TRACe<x>:NOISe:GAIN:FREEze

Specifies whether or not to freeze (halt updates of) the specified trace in the Gain display.

Conditions

Measurement view: Gain display

The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:GAIN:FREEze { OFF | ON | 0 | 1 }  
TRACe<x>:NOISe:GAIN:FREEze?
```

Arguments

OFF or 0 normally updates the display of the specified trace.

ON or 1 stops updating the display of the specified trace.

Returns

0 indicates the specified trace is being updated normally in the Gain display.

1 indicates the specified trace is not being updated in the Gain display.

Examples

TRAC1:NOIS:GAIN:FRE ON freezes the display of Trace 1.

TRAC1:NOIS:GAIN:FRE? might return 0, indicating that the display of Trace 1 is set to Freeze.

TRACe<x>:NOISe:GAIN:FUNction

Sets or queries the trace processing method (function) in the Gain display.

Conditions

Measurement view: Gain display

The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:GAIN:FUNCTION { NORMal | AVERage | MAXHold| MINHold}
TRACe<x>:NOISe:GAIN:FUNCTION?
```

Arguments

NORMal: Displays the trace record for each display point without additional processing.

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

MAXHold: Displays the maximum value in the trace record for each display point.

MINHold: Displays the minimum value in the trace record for each display point.

Returns

NORM means that the trace function is set to Normal.

AVER means that the trace function is set to Average (VRMS).

MAXH means that the trace function is set to Max Hold.

MINH means that the trace function is set to Min Hold.

Examples

TRAC1:NOIS:GAIN:FUNC NORM sets the function for Trace 1 to Normal.

TRAC2:NOIS:GAIN:FUNC? might return **MAXH**, indicating that the function for Trace 1 is set to Max Hold.

TRACe<x>:NOISe:GAIN:SElect

Sets the trace to be shown in the Gain display. The query form of this command returns whether or not the specified trace is set to show (ON) or not (OFF).

Conditions

Measurement view: Gain display

The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:GAIN:SElect
TRACe<x>:NOISe:GAIN:SElect?
```

Arguments

None

Returns

0 means that the specified trace is not shown (set to Off).

1 means that the specified trace is set to show (set to normal).

Examples

TRAC1:NOIS:GAIN:SEL will set the display to show Trace 1.

TRAC2:NOIS:GAIN:SEL? might return 1, indicating that Trace 2 is set to show.

TRACe<x>:NOISe:GAIN:SHOW

Sets or queries the state (shown or not shown) of the specified trace in the Gain display.

Conditions

Measurement view: Gain display

The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:GAIN:SHOW { OFF | ON | 0 | 1 }  
TRACe<x>:NOISe:GAIN:SHOW?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 displays the specified trace.

Returns

0 indicates the specified trace is not shown in the Gain display.

1 indicates the specified trace is shown in the Gain display.

Examples

TRAC1:NOIS:GAIN:SHOW sets Trace to show in the Gain display.

TRAC2:NOIS:GAIN:SHOW? might return 0, indicating that Trace 2 is not showing in the Gain display.

TRACe<x>:NOISe:TEMPerature:AVERage:COUNT

Sets or queries the average counts for the specified trace in the Noise Temperature display.

Conditions

Measurement view: Noise Temperature The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:TEMPerature:AVERage:COUNT <NR1>  
TRACe<x>:NOISe:TEMPerature:AVERage:COUNT?
```

Arguments

<NR1> = integer

Range: 2 to 10000

Returns

<NR3> floating point value with an exponent, which is the average count value.

Examples

TRAC1:NOIS:TEMP:AVER:COUN? might return 10.0000000000E+3, indicating that the average count value is set to 10000.

TRACe<x>:NOISe:TEMPerature:COUNT:ENABLE

Sets or queries whether or not the count feature for the specified trace in the Noise Temperature display is enabled or disabled.

Conditions

Measurement view: Noise Temperature display The parameter <x>= 1 to 3.

Only available when trace Function is set to Avg (VRMS), Max Hold, or Min Hold.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:TEMPerature:COUNT:ENABle { OFF | ON | 0 | 1 }
TRACe<x>:NOISe:TEMPerature:COUNT:ENABle?
```

Arguments

OFF or 0 disables the count feature for the specified trace.

ON or 1 enables the count feature for the specified trace.

Returns

0 indicates the count feature for the specified trace if disabled.

1 indicates the count feature for the specified trace if enabled.

Examples

TRAC1:NOIS:TEMP:COUN:ENAB ON enables the count feature for Trace 1.

TRAC1:NOIS:TEMP:COUN:ENAB? might return 0, indicating that the count feature for Trace 1 is disabled.

TRACe<x>:NOISe:TEMPerature:DETection

Sets or queries the trace detection method in the Noise Temperature display.

Conditions

Measurement view: Noise Temperature display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:TEMPerature:DETection { AVERage }
TRACe<x>:NOISe:TEMPerature:DETection?
```

Arguments

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

Returns

AVER means that the trace function is set to Average (VRMS).

Examples

TRAC1:NOIS:TEMP:DET AVER sets the detection method for Trace 1 to Average (VRMS).

TRAC2:NOIS:TEMP:DET? might return AVER, indicating that the function for Trace 1 is set to Average (VRMS).

TRACe<x>:NOISE:TEMPerature:FREEze

Specifies whether or not to freeze (halt updates of) the specified trace in the Noise Temperature display.

Conditions

Measurement view: Noise Temperature display The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISE:TEMPerature:FREEze { OFF | ON | 0 | 1 }
TRACe<x>:NOISE:TEMPerature:FREEze?
```

Arguments

OFF or 0 normally updates the display of the specified trace.

ON or 1 stops updating the display of the specified trace.

Returns

0 indicates the specified trace is being updated normally in the Noise Temperature display.

1 indicates the specified trace is not being updated in the Noise Temperature display.

Examples

TRAC1:NOIS:TEMP:FRE ON freezes the display of Trace 1.

TRAC1:NOIS:TEMP:FRE? might return 0, indicating that the display of Trace 1 is set to Freeze.

TRACe<x>:NOISe:TEMPerature:FUNction

Sets or queries the trace processing method (function) in the Noise Temperature display.

Conditions

Measurement view: Noise Temperature display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:TEMPerature:FUNCTion { NORMal | AVERage | MAXHold | MINHold}
TRACe<x>:NOISe:TEMPerature:FUNCTion?
```

Arguments

NORMal: Displays the trace record for each display point without additional processing.

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

MAXHold: Displays the maximum value in the trace record for each display point.

MINHold: Displays the minimum value in the trace record for each display point.

Returns

NORM means that the trace function is set to Normal.

AVER means that the trace function is set to Average (VRMS).

MAXH means that the trace function is set to Max Hold.

MINH means that the trace function is set to Min Hold.

Examples

TRAC1:NOIS:TEMP:FUNC NORM sets the function for Trace 1 to Normal.

TRAC2:NOIS:TEMP:FUNC? might return **MAXH**, indicating that the function for Trace 1 is set to Max Hold.

TRACe<x>:NOISe:TEMPerature:SElect

Sets the trace to be shown in the Noise Temperature display. The query form of this command returns whether or not the specified trace is set to show (On) or not (Off).

Conditions

Measurement view: Noise Temperature display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:TEMPerature:SElect
TRACe<x>:NOISe:TEMPerature:SElect?
```

Arguments

None

Returns

0 means that the specified trace is not shown (set to Off).

1 means that the specified trace is set to show (set to normal).

Examples

TRAC1:NOIS:TEMP:SEL will set the display to show Trace 1.

TRAC2:NOIS:TEMP:SEL? might return 1, indicating that Trace 2 is set to show.

TRACe<x>:NOISe:TEMPerature:SHOW

Sets or queries the state (shown or not shown) of the specified trace in the Noise Temperature display.

Conditions

Measurement view: Noise Temperature display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:TEMPerature:SHOW { OFF | ON | 0 | 1 }  
TRACe<x>:NOISe:TEMPerature:SHOW?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 displays the specified trace.

Returns

0 indicates the specified trace is not shown in the Noise Temperature display.

1 indicates the specified trace is shown in the Noise Temperature display.

Examples

TRAC1:NOIS:TEMP:SHOW sets Trace 1 to show in the Noise Temperature display.

TRAC2:NOIS:TEMP:SHOW? might return 0, indicating that Trace 2 is not showing in the Noise Temperature display.

TRACe<x>:NOISe:YFACTOR:AVERage:COUNT

Sets or queries the average counts for the specified trace in the Y Factor display.

Conditions

Measurement view: Y Factor

The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:YFACTOR:AVERage:COUNT <NR1>  
TRACe<x>:NOISe:YFACTOR:AVERage:COUNT?
```

Arguments

<NR1> = integer

Range: 2 to 10000

Returns

<NR3> floating point value with an exponent, which is the average count value.

Examples

TRAC1:NOIS:TEMP:AVER:COUN? might return 10.0000000000E+3, indicating that the average count value is set to 10000.

TRACe<x>:NOISe:YFACTOR:COUNT:ENABLE

Sets or queries whether or not the count feature for the specified trace in the Y Factor display is enabled or disabled.

Conditions

Measurement view: Y Factor display The parameter <x>= 1 to 3.

Only available when trace Function is set to Avg (VRMS), Max Hold, or Min Hold.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:YFACTOR:COUNT:ENABLE { OFF | ON | 0 | 1 }
TRACe<x>:NOISe:YFACTOR:COUNT:ENABLE?
```

Arguments

OFF or 0 disables the count feature for the specified trace.

ON or 1 enables the count feature for the specified trace.

Returns

0 indicates the count feature for the specified trace if disabled.

1 indicates the count feature for the specified trace if enabled.

Examples

TRAC1:NOIS:YFAC:COUN:ENAB ON enables the count feature for Trace 1.

TRAC1:NOIS:YFAC:COUN:ENAB? might return 0, indicating that the count feature for Trace 1 is disabled.

TRACe<x>:NOISe:YFACTOR:DETECTION

Sets or queries the trace detection method in the Y Factor display.

Conditions

Measurement view: Y Factor display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:YFACTOR:DETECTION { AVERage }
TRACe<x>:NOISe:YFACTOR:DETECTION?
```

Arguments

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

Returns

AVER means that the trace function is set to Average (VRMS).

Examples

TRACE1:NOIS:YFAC:DET AVER sets the detection method for Trace 1 to Average (VRMS).

TRACE2:NOIS:YFAC:DET? might return AVER, indicating that the function for Trace 1 is set to Average (VRMS).

TRACe<x>:NOISE:YFACtor:FREEze

Specifies whether or not to freeze (halt updates of) the specified trace in the Y Factor display.

Conditions

Measurement view: Y Factor display The parameter <x>= 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISE:YFACtor:FREEze { OFF | ON | 0 | 1 }
TRACe<x>:NOISE:YFACtor:FREEze?
```

Arguments

OFF or 0 normally updates the display of the specified trace.

ON or 1 stops updating the display of the specified trace.

Returns

0 indicates the specified trace is being updated normally in the Y Factor display.

1 indicates the specified trace is not being updated in the Y Factor display.

Examples

TRAC1:NOIS:YFAC:FRE ON freezes the display of Trace 1.

TRAC1:NOIS:YFAC:FRE? might return 0, indicating that the display of Trace 1 is set to Freeze.

TRACe<x>:NOISe:YFACtor:FUNCTion

Sets or queries the trace processing method (function) in the Y Factor display.

Conditions

Measurement view: Y Factor display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:YFACtor:FUNCTion { NORMAl | AVERAge | MAXHold| MINHold}
TRACe<x>:NOISe:YFACtor:FUNCTion?
```

Arguments

NORMa1: Displays the trace record for each display point without additional processing.

AVERage: Each point on the trace is the result of determining the RMS Voltage value for all of the IQ samples available to the trace point. When displayed in either linear (Volts, Watts) or Log (dB, dBm), the correct RMS value results.

When the averaging function is applied to a trace, the averaging is performed on the linear (Voltage) values, resulting in the correct average for RMS values.

MAXHold: Displays the maximum value in the trace record for each display point.

MINHold: Displays the minimum value in the trace record for each display point.

Returns

NORM means that the trace function is set to Normal.

AVER means that the trace function is set to Average (VRMS).

MAXH means that the trace function is set to Max Hold.

MINH means that the trace function is set to Min Hold.

Examples

TRAC1:NOIS:YFAC:FUNC NORM sets the function for Trace 1 to Normal.

TRAC2:NOIS:YFAC:FUNC? might return **MAXH**, indicating that the function for Trace 1 is set to Max Hold.

TRACe<x>:NOISe:YFACTOR:SElect

Sets the trace to be shown in the Y Factor display. The query form of this command returns whether or not the specified trace is set to show (ON) or not (OFF).

Conditions

Measurement view: Y Factor display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

TRACe<x>:NOISe:YFACTOR:SElect
TRACe<x>:NOISe:YFACTOR:SElect?

Arguments

None

Returns

0 means that the specified trace is not shown (set to Off).

1 means that the specified trace is set to show (set to normal).

Examples

TRAC1:NOIS:YFAC:SEL will set the display to show Trace 1.

TRAC2:NOIS:YFAC:SEL? might return 1, indicating that Trace 2 is set to show.

TRACe<x>:NOISe:YFACTOR:SHOW

Sets or queries the state (shown or not shown) of the specified trace in the Y Factor display.

Conditions

Measurement view: Y Factor display The parameter <x> = 1 to 3.

Group

Trace commands

Syntax

```
TRACe<x>:NOISe:YFACTOR:SHOW { OFF | ON | 0 | 1 }  
TRACe<x>:NOISe:YFACTOR:SHOW?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 displays the specified trace.

Returns

0 indicates the specified trace is not shown in the Y Factor display.

1 indicates the specified trace is shown in the Y Factor display.

Examples

TRACE1:NOISE:YFACTOR:SHOW sets Trace 1 to show in the Y Factor display.

TRACE2:NOISE:YFACTOR:SHOW? might return 0, indicating that Trace 2 is not showing in the Y Factor display.

TRACe<x>:OFDM:EVM

Determines whether or not to show the specified trace in the OFDM EVM view.

The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:EVM { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:EVM?
```

Arguments

OFF or 0 hides the specified trace in the view.

ON or 1 shows the specified trace in the view.

Examples

TRACe1:OFDM:EVM ON shows Trace 1 in the OFDM EVM view.

TRACe<x>:OFDM:EVM:FREEze

Determines whether or not to freeze the display of the specified trace in the OFDM EVM view.

The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:EVM:FREEze { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:EVM:FREEze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

Examples

TRACE1:OFDM:EVM:FREEZE ON freezes the display for Trace 1.

TRACe<x>:OFDM:EVM:SELEct

Sets or queries the specified trace to display in the OFDM EVM view. The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:EVM:SELEct  
TRACe<x>:OFDM:EVM:SELEct?
```

Arguments

None

Returns

```
{ OFF | ON | 0 | 1 }
```

OFF or 0 indicates that the readout is not being displayed for the specified trace.

ON or 1 indicates that the readout is being displayed for the specified trace.

Examples

TRACE1:OFDM:EVM:SELECT selects Trace 1 (Average trace) to display the readout.

TRACE1:OFDM:EVM:SELECT? might return 1, indicating that the readout is being displayed for Trace 1.

TRACe<x>:OFDM:MERRor

Determines whether or not to show the specified trace in the OFDM Magnitude error view.

The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:MERRor { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:MERRor?
```

Arguments

OFF or 0 hides the specified trace in the view.

ON or 1 shows the specified trace in the view.

Examples

TRACe1:OFDM:MERRor ON shows Trace 1 in the OFDM Magnitude error view.

TRACe<x>:OFDM:MERRor:FREEze

Determines whether or not to freeze the display of the specified trace in the OFDM Magnitude error view.

The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:MERRor:FREEze { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:MERRor:FREEze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

Examples

TRACE1:OFDM:MERRor:FREEZE ON freezes the display for Trace 1.

TRACe<x>:OFDM:MERRor:SElect

Sets or queries the specified trace to display in the OFDM Magnitude error view. The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:MERRor:SElect { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:MERRor:SElect?
```

Arguments

None

Returns

```
{ OFF | ON | 0 | 1 }
```

OFF or 0 indicates that the readout is not being displayed for the specified trace.

ON or 1 indicates that the readout is being displayed for the specified trace.

Examples

TRACE1:OFDM:MERRor:SELECT selects Trace 1 (Average trace) to display the readout.

TRACE1:OFDM:MERRor:SELECT? might return 1, indicating that the readout is being displayed for Trace 1.

TRACe<x>:OFDM:PERRor

Determines whether or not to show the specified trace in the OFDM Phase error view.

The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:PERRor { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:PERRor?
```

Arguments

OFF or 0 hides the specified trace in the view.

ON or 1 shows the specified trace in the view.

Examples

TRACE1:OFDM:PERRor ON shows Trace 1 in the OFDM Phase error view.

TRACe<x>:OFDM:PERRor:FREeze

Determines whether or not to freeze the display of the specified trace in the OFDM Phase error view.

The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:PERRor:FREEze { OFF | ON | 0 | 1 }
TRACe<x>:OFDM:PERRor:FREEze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

Examples

TRACE1:OFDM:PERRor:FREEZE ON freezes the display for Trace 1.

TRACe<x>:OFDM:PERRor:SELEct

Sets or queries the specified trace to display in the OFDM Phase error view. The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:PERRor:SELEct { OFF | ON | 0 | 1 }
TRACe<x>:OFDM:PERRor:SELEct?
```

Arguments

None

Returns

```
{ OFF | ON | 0 | 1 }
```

OFF or 0 indicates that the readout is not being displayed for the specified trace.

ON or 1 indicates that the readout is being displayed for the specified trace.

Examples

TRACE1:OFDM:PERRor:SELECT selects Trace 1 (Average trace) to display the readout.

TRACE1:OFDM:PERRor:SELECT? might return 1, indicating that the readout is being displayed for Trace 1.

TRACe<x>:OFDM:POWEr

Determines whether or not to show the specified trace in the OFDM Power view. The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:POWer { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:POWer?
```

Arguments

OFF or 0 hides the specified trace in the view.

ON or 1 shows the specified trace in the view.

Examples

TRACe1:OFDM:POWer ON shows Trace 1 in the OFDM Power view.

TRACe<x>:OFDM:POWer:FREeze

Determines whether or not to freeze the display of the specified trace in the OFDM Power view.

The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:POWer:FREeze { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:POWer:FREeze?
```

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating the display of the specified trace.

Examples

TRACe1:OFDM:POWer:FREeze ON freezes the display for Trace 1.

TRACe<x>:OFDM:POWer:SElect

Sets or queries the specified trace to display in the OFDM Power view. The parameter <x> = 1 or 2, where 1 is Average and 2 is Value.

Conditions

Measurement views: OFDM

Group

Trace commands

Syntax

```
TRACe<x>:OFDM:POWer:SElect { OFF | ON | 0 | 1 }  
TRACe<x>:OFDM:POWer:SElect?
```

Arguments

None

Returns

```
{ OFF | ON | 0 | 1 }
```

OFF or 0 indicates that the readout is not being displayed for the specified trace.

ON or 1 indicates that the readout is being displayed for the specified trace.

Examples

TRACE1:OFDM:POWer:SELECT selects Trace 1 (Average trace) to display the readout.

TRACE1:OFDM:POWer:SELECT? might return 1, indicating that the readout is being displayed for Trace 1.

TRACe<x>:P25:CONStellation

Specifies whether or not to show the specified trace (Trace 1 or 2) in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation display The parameter <x>= 1 or 2.

Group

Trace commands

Syntax

```
TRACe<x>:P25:CONStellation { OFF | ON | 0 | 1 }  
TRACe<x>:P25:CONStellation?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 displays the specified trace.

Returns

0 indicates the specified trace is not shown in the P25 Constellation display.

1 indicates the specified trace is shown in the P25 Constellation display.

Examples

TRAC1:P25:CONS ON specifies that Trace 1 be shown in the P25 Constellation display.

TRACe<x>:P25:CONStellation:FREeze

Specifies whether or not to freeze (halt updates of) the specified trace (Trace 1 or 2) in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation display The parameter <x>= 1 or 2.

Group

Trace commands

Syntax

```
TRACe<x>:P25:CONStellation:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:P25:CONStellation:FREeze?
```

Arguments

OFF or 0 normally updates the display of the specified trace.

ON or 1 stops updating the display of the specified trace.

Returns

0 indicates the specified trace is being updated normally in the P25 Constellation display.

1 indicates the specified trace is not being updated in the P25 Constellation display.

Examples

TRAC1:P25:CONS:FRE ON freezes the display of Trace 1.

TRAC1:P25:CONS:FRE? might return 0, indicating that the display of Trace 1 is set to Freeze.

TRACe<x>:P25:CONStellation:MODE

Sets or queries how to display the trace content in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation display The parameter <x>= 1 or 2.

Group

Trace commands

Syntax

```
TRACe<x>:P25:CONStellation:MODE { VECT | SYMB | LIN }
```

Arguments

VECT (vectors) connects adjacent symbol points with the signal locus.

SYMB (symbols) displays individual symbol points.

LIN (line) displays all symbol points as a line.

Returns

VECT adjacent symbol points are connected with the signal locus.

SYMB individual symbol points are displayed.

LIN all symbol points are displayed as a line.

Examples

TRAC1:P25:CONS:MODE SYMB sets the display to show the constellation of Trace 1 connecting adjacent symbol points with the signal locus.

TRACe<x>:P25:CONStellation:SElect

Selects the specified trace (Trace 1 or 2) in the P25 Constellation display.

Conditions

Measurement view: P25 Constellation display The parameter <x>= 1 or 2.

Group

Trace commands

Syntax

```
TRACe<x>:P25:CONStellation:SElect { OFF | ON | 0 | 1 }  
TRACe<x>:P25:CONStellation:SElect?
```

Arguments

None

Returns

0 indicates the specified trace is not the active trace in the P25 Constellation display.

1 indicates the specified trace is the active trace in the P25 Constellation display.

Examples

TRAC1:P25:CONS:SEL? might return 1, indicating that Trace 1 is the selected trace in the P25 Constellation display.

TRACe<x>:P25:EDiagram:ENABle:I

Determines whether to show or hide the I trace in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Trace commands

Syntax

```
TRACe<x>:P25:EDIagram:ENABle:I  
TRACe<x>:P25:EDIagram:ENABle:I?
```

Related Commands

[TRACe<x>:P25:EDIagram:ENABle:Q](#) (on page 2687)

Arguments

OFF or 0 hides the I trace.

ON or 1 shows the I trace.

Returns

0 indicates the trace is off.

1 indicates the trace is on.

Examples

TRACEX:P25:EDIAGRAM:ENABle:I ON shows the I trace in the P25 Eye Diagram display.

TRACe<x>:P25:EDiagram:ENABle:Q

Determines whether to show or hide the Q trace in the P25 Eye Diagram display.

Conditions

Measurement view: P25 Eye Diagram

Group

Trace commands

Syntax

TRACe<x>:P25:EDiagram:ENABle:Q

TRACe<x>:P25:EDiagram:ENABle:Q?

Related Commands

[TRACe<x>:P25:EDiagram:ENABle:I](#) (on page 2686)

Arguments

OFF or 0 hides the Q trace.

ON or 1 shows the Q trace.

Returns

0 indicates the trace is off.

1 indicates the trace is on.

Examples

TRACEX:P25:EDIAGRAM:ENABLE:Q ON shows the Q trace in the P25 Eye Diagram display.

TRACe<x>:P25:EDiagram:SElect:I

This command selects the I trace in the P25 Eye Diagram display. The query version of this command returns whether the I trace is selected or not.

Conditions

Measurement view: P25 Eye Diagram

Group

Trace commands

Syntax

TRACe<x>:P25:EDiagram:SElect:I

TRACe<x>:P25:EDiagram:SElect:I?

Related Commands

[TRACe<x>:P25:EDiagram:SElect:Q](#) (on page 2688)

Arguments

None.

Returns

0 indicates that the I trace is not the selected trace.

1 indicates that the I trace is the selected trace.

Examples

TRACEX:P25:EDIAGRAM:SELECT:I selects the I trace in the P25 Eye Diagram display.

TRACe<x>:P25:EDiagram:SElect:Q

This command selects the Q trace in the P25 Eye Diagram display. The query version of this command returns whether the Q trace is selected or not.

Conditions

Measurement view: P25 Eye Diagram

Group

Trace commands

Syntax

TRACe<x>:P25:EDIagram:SElect:Q

TRACe<x>:P25:EDIagram:SElect:Q?

Related Commands

[TRACe<x>:P25:EDIagram:SElect:I](#) (on page 2687)

Arguments

None.

Returns

0 indicates that the Q trace is not the selected trace.

1 indicates that the Q trace is the selected trace.

Examples

TRACEX:P25:EDIAGRAM:SELECT:Q selects the Q trace in the P25 Eye Diagram display.

TRACe<x>:PHVTime[:MEASview<y>]:DETection

Sets or queries the display detector (method to be used for decimating traces to fit the available horizontal space on screen). The number of horizontal pixels on screen is generally smaller than that of waveform data points. When actually displayed, the waveform data is therefore thinned out, according to the number of pixels, for being compressed.

Conditions

Measurement views: Phase versus Time

Group

Trace commands

Syntax

TRACe<x>:PHVTime[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | POSNegative | SAMPl e }

TRACe<x>:PHVTime[:MEASview<y>]:DETection?

Arguments

<x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

<y> = 1 to 8; represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional. Default value 1.

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

POSNegative displays the maximum and minimum data values for each pixel.

SAMPLE displays the first sample value received for each pixel.

Examples

TRACe1:PHVTime[:MEASview<y>]:DETection POSitive displays the maximum data value for each pixel.

TRACe<x>:PNOise:SElect

Selects the trace in the phase noise measurement. The query returns the currently selected trace.

The parameter <x> = 1 and 2.

Conditions

Measurement views: Phase noise

Group

Trace commands

Syntax

```
TRACe<x>:PNOise:SElect
TRACe<x>:PNOise:SElect?
```

Arguments

None

Returns

0 (not selected) or 1 (selected).

Examples

TRACE2:PNOISE:SELECT selects Trace 2.

TRACe<x>:PNOise:SHOW

Shows or hides the specified trace in the phase noise view. The parameter <x> = 1 and 2.

Conditions

Measurement views: Phase noise

Group

Trace commands

Syntax

```
TRACe<x>:PNOise:SHOW { OFF | ON | 0 | 1 }  
TRACe<x>:PNOise:SHOW?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 shows the specified trace.

Examples

TRACE1:PNOISE:SHOW ON shows Trace 1 in the phase noise view.

TRACe<x>:PNOise:SMOothing:COUNT

Sets or queries the number of data points to take the moving average for smoothing the trace. This command is effective when TRACe<x>:PNOise:SMOothing:ENABLE is set to ON.

The parameter <x> = 1 and 2.

Conditions

Measurement views: Phase noise

Group

Trace commands

Syntax

```
TRACe<x>:PNOise:SMOothing:COUNT <number>  
TRACe<x>:PNOise:SMOothing:COUNT?
```

Arguments

<number>::<NR1> specifies the number of data points to take the moving average for smoothing. Range: 3 to 50.

Examples

TRACE1:PNOISE:SMOOTHING:COUNT 16 sets the smoothing count to 16 for Trace 1.

TRACe<x>:PNOise:SMOothing:ENABLE

Determines whether to enable or disable smoothing the specified trace in the phase noise view.

The parameter <x> = 1 and 2.

Conditions

Measurement views: Phase noise

Group

Trace commands

Syntax

```
TRACe<x>:PNOise:SMOothing:ENABLE { OFF | ON | 0 | 1 }  
TRACe<x>:PNOise:SMOothing:ENABLE?
```

Arguments

OFF or 0 disables smoothing.

ON or 1 enables smoothing.

Examples

TRACE1:PNOISE:SMOOTHING:ENABLE ON enables smoothing Trace 1 in the phase noise view.

TRACe<x>:PNOise:SMOothing:RESet (No Query Form)

Restarts the smoothing process, discarding accumulated data and resetting the counter. This command is effective when TRACe<x>:PNOise:SMOothing: ENABLE is set to ON.

The parameter <x> = 1 and 2.

Conditions

Measurement views: Phase noise

Group

Trace commands

Syntax

TRACe<x>:PNOise:SMOothing:RESet

Arguments

None

Examples

TRACE1:PNOISE:SMOOTHING:RESET restarts the smoothing process for Trace 1.

TRACe<x>:SPECTrum[:MEASview<y>]

Sets or queries the Reference level of measurement source for Q data type.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

TRACe<x>:SPECTrum[:MEASview<y>] { OFF | ON | 0 | 1 }
TRACe<x>:SPECTrum[:MEASview<y>] ?

Arguments

OFF or 0 hides the specified trace.

ON or 1 shows the specified trace.

For Trace 5 (spectrogram), use the TRACe:SGRam:SElect:LINE command to select the line to send to the spectrum display.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASview2 ON shows Trace 1 in the Spectrum Analyzer view.

TRACe<x>:SPECTrum[:MEASview<y>]:AVERage:COUNT

Sets or queries the number of traces to combine. This command is effective when

TRACe<x>:SPECTrum[:MEASview<y>]:FUNction is AVERage, MAXHold or MINHold.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

TRACe<x>:SPECTrum[:MEASview<y>]:AVERage:COUNT <number>

TRACe<x>:SPECTrum[:MEASview<y>]:AVERage:COUNT?

Arguments

<number>::<NR1> specifies the number of traces to combine for averaging.

Range: 1 to 10000.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:AVERAGE:COUNT 64 sets the average count to 64 for Trace 1.

TRACe<x>:SPECTrum[:MEASview<y>]:AVERage:RESet (No Query Form)

Clears average data and counter, and restarts the average process for the specified trace in the Spectrum view. This command is effective when TRACe<x>:SPECTrum[:MEASview<y>]:FUNction is set to AVERage, MAXHold or MINHold.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

TRACe<x>:SPECTrum[:MEASview<y>]:AVERage:RESet

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:AVERAGE:RESET clears average data and counter, and restarts the average process for Trace 1.

TRACe<x>:SPECtrum[:MEASview<y>]:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for the Max or Min Hold trace in the Spectrum measurement. This command is effective when TRACe<x>:SPECtrum[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold and INITiate:CONTinuous is set to OFF.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECtrum[:MEASview<y>]:COUNT <number>
TRACe<x>:SPECtrum[:MEASview<y>]:COUNT?
```

Arguments

<number>::<NR1> specifies the count for Max/Min Hold.

Range: 1 to 10000.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:COUNt 32 sets the count to 32 for Trace 1.

TRACe<x>:SPECtrum[:MEASview<y>]:COUNT:ENABLE

Determines whether to enable or disable the count for the Max or Min Hold trace in the Spectrum view. This command is effective when TRACe<x>:SPECtrum[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECtrum[:MEASview<y>]:COUNT:ENABLE { OFF | ON | 0 | 1 }
TRACe<x>:SPECtrum[:MEASview<y>]:COUNT:ENABLE?
```

Arguments

OFF or 0 disables the count for the Max/Min Hold trace.

ON or 1 enables the count for the Max/Min Hold trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:COUNT:ENABLE ON enables the Max/Min Hold count for Trace 1.

TRACe<x>:SPECTrum[:MEASview<y>]:COUNT:RESet (No Query Form)

Clears the Max or Min Hold data and counter, and restarts the process for the specified trace in the Spectrum view. This command is effective when TRACe<x>:SPECTrum[:MEASview<y>]:FUNCTION is set to MAXHold or MINHold.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

TRACe<x>:SPECTrum[:MEASview<y>]:COUNT:RESet

Arguments

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:COUNT:RESET clears the Max/Min Hold data and counter, and restarts the process for Trace 1.

TRACe<x>:SPECTrum[:MEASview<y>]:DETection

Sets or queries the display detector (method to be used for decimating traces to fit the available horizontal space on screen). The number of horizontal pixels on screen is generally smaller than that of waveform data points. When actually displayed, the waveform data is therefore thinned out, according to the number of pixels, for being compressed.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECTrum[:MEASview<y>]:DETection { AVERage | POSitive | NEGative | CAVerage | CPEak |
    QUASipeak | SAMPlE | AVGLog }
TRACe<x>:SPECTrum[:MEASview<y>]:DETection?
```

Arguments

AVERage displays the average data value for each pixel.

POSitive displays the maximum data value for each pixel.

NEGative displays the minimum data value for each pixel.

CAVerage displays the CISPR average value for each pixel.

CPEak displays the CISPR peak value for each pixel.

QUASipeak displays the quasi-peak value for each pixel.

SAMPlE displays the most recent sample value for each pixel.

AVGLog displays the average data value of logs for each pixel.

The parameter <x> = 0 to 4. The specified marker must be activated using the **CALCulate:MARKer:ADD** command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:DETECTION POSitive displays the maximum data value for each pixel on Trace 1

TRACe<x>:SPECTrum[:MEASview<y>]:FREeze

Determines whether or not to freeze the display of the specified trace in the Spectrum view.

The parameter <x> = 1 to 5; All traces are valid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECTrum[:MEASview<y>]:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:SPECTrum[:MEASview<y>]:FREeze?
```

Arguments

OFF or **0** updates the display of the specified trace normally.

ON or **1** stops updating the display of the specified trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the **CALCulate:MARKer:ADD** command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:FREEZE ON freezes Trace 1 in the Spectrum Analysis display.

TRACe<x>:SPECTrum[:MEASview<y>]:FUNction

Sets or queries the function for the specified trace in the Spectrum view.

The parameter <x> = 1 to 3; Trace 4 (math trace) and Trace 5 (spectrogram) are invalid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECTrum[:MEASview<y>]:FUNction { NONE | AVERage | MAXHold | MINHold | AVGLog}
TRACe<x>:SPECTrum[:MEASview<y>]:FUNction?
```

Arguments

NONE selects the normal spectrum display.

AVERage selects the Average display that indicates the average signal level at each frequency point.

MAXHold selects the Max Hold display that indicates the maximum signal level at each frequency point.

MINHold selects the Min Hold display that indicates the minimum signal level at each frequency point.

AVGLog selects the Average of logs display that indicates the average signal level of logs at each frequency point.

The parameter <x> = 0 to 4. The specified marker must be activated using the **CALCulate:MARKer:ADD** command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE1:SPECTRUM:MEASVIEW2:FUNCTION MAXHold selects Max Hold for Trace 1 in the Spectrum view.

TRACe<x>:SPECTrum[:MEASview<y>]:LEFToperand

Sets or queries the left operand for the math trace (Trace 4) in the Spectrum view. The parameter <x> = 4; Only Trace 4 (math trace) is valid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECTrum[:MEASview<y>]:LEFToperand { TRACE1 | TRACE2 | TRACE3 }
TRACe<x>:SPECTrum[:MEASview<y>]:LEFToperand?
```

Related Commands

[TRACe<x>:SPECTrum\[:MEASview<y>\]:RIGHToperand](#) (on page 2697)

Arguments

TRACE1 selects Trace 1 as the left operand for the math trace.

TRACE2 selects Trace 2 as the left operand for the math trace.

TRACE3 selects Trace 3 as the left operand for the math trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE4:SPECTRUM:MEASVIEW2:LEFTOPERAND TRACE1 selects Trace 1 as the left operand for the math trace.

TRACe<x>:SPECtrum[:MEASview<y>]:RIGHtooperand

Sets or queries the right operand for the math trace (Trace 4) in the Spectrum view. The parameter <x> = 4; Only Trace 4 (math trace) is valid.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECtrum[:MEASview<y>]:RIGHtooperand { TRACE1 | TRACE2 | TRACE3 }
TRACe<x>:SPECtrum[:MEASview<y>]:RIGHtooperand?
```

Related Commands

[TRACe<x>:SPECtrum\[:MEASview<y>\]:LEFToperand](#) (on page 2696)

Arguments

TRACE1 selects Trace 1 as the right operand for the math trace.

TRACE2 selects Trace 2 as the right operand for the math trace.

TRACE3 selects Trace 3 as the right operand for the math trace.

The parameter <x> = 0 to 4. The specified marker must be activated using the CALCulate:MARKer:ADD command

The parameter <y>=1 to 8 represents measurement index based on number of sources of connected instrument, where MEASview keyword is optional by default y is 1

Examples

TRACE4:SPECTRUM:MEASVIEW2:RIGHTOPERAND TRACE1 selects Trace 1 as the right operand for the math trace

TRACe<x>:SPECtrum[:MEASview<y>]:SElect

Sets or queries the trace to display the readout at the upper left of the Spectrum view.

The parameter <x> = 1 to 5; All traces are valid.

NOTE: TRACe5 (spectrogram) is valid when the spectrum and spectrogram measurements are running.

Conditions

Measurement views: Spectrum

Group

Trace commands

Syntax

```
TRACe<x>:SPECTrum[:MEASview<y>]:SElect
TRACe<x>:SPECTrum[:MEASview<y>]:SElect?
```

Arguments

None

Returns

{ 0 | 1 }

- 0 indicates that the readout is not being displayed for the specified trace.
- 1 indicates that the readout is being displayed for the specified trace.

Examples

TRACE1:SPECTRUM:MEASview1:SELECT selects Trace 1 to display the readout.

TRACE1:SPECTRUM:MEASview1:SELECT? might return 1, indicating that the readout is being displayed for Trace 1.

TRACe<x>:TXGain

Sets or queries the display to show or hide the specified trace.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Group

Trace commands

Syntax

```
TRACe<x>:TXGain { OFF | ON | 0 | 1 }
TRACe<x>:TXGain?
```

Arguments

OFF or 0 hides the specified trace.

ON or 1 shows the specified trace.

Returns

OFF or 0 means that the specified trace is hidden.

ON or 1 means that the specified trace is showing.

Examples

TRACE1:TXGAIN 1 shows Trace 1.

TRACe<x>:TXGain:AVERage:COUNt

Sets or queries the number of traces averaged to generate the displayed trace. (Present only when Function is set to anything but Normal.)

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Group

Trace commands

Syntax

TRACe<x>:TXGain:AVERage:COUNT <number>

Arguments

<number>::=<NR1> specifies the number of traces to combine for averaging.

Range: 1 to 10000

Returns

<NR1> is an integer that is the number of traces to combine for averaging.

Examples

TRACE1:TXGAIN:AVERAGE:COUNT 64 sets the average count to 64 for Trace 1.

TRACe<x>:TXGain:AVERage:RESet (No Query Form)

Clears/resets the average data and counter and restarts the averaging process.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Function must be is set to anything but Normal.

Group

Trace commands

Syntax

TRACe<x>:TXGain:AVERage:RESet

Arguments

None.

Examples

TRACE1:TXGAIN:AVERAGE:RESET clears average data and counter, and restarts the average process for Trace 1.

TRACe<x>:TXGain:COUNT

Sets or queries how many acquisitions run in the single acquisition mode for the Average or Max or Min Hold trace in the measurement.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Function must be is set to anything but Normal.

Group

Trace commands

Syntax

```
TRACe<x>:TXGain:COUNt <number>  
TRACe<x>:TXGain:COUNt?
```

Arguments

<number> ::= <NR1> specifies the count for Averaged, Max or Min Hold.

Range: 1 to 10000.

Returns

<NR1> is an integer that is the count for Averaged, Max or Min Hold.

Examples

TRACE1:TXGAIN:COUNt 32 sets the count to 32 for Trace 1.

TRACe<x>:TXGain:COUNt:ENABLE

The command enables or disables whether to use the number of traces Averaged or Max Hold or Min Hold to generate the displayed trace. The query returns whether or not it is enabled.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Group

Trace commands

Syntax

```
TRACe<x>:TXGain:COUNt:ENABle { OFF | ON | 0 | 1 }  
TRACe<x>:TXGain:COUNt:ENABle?
```

Arguments

OFF or 0 disables the count for the specified trace.

ON or 1 enables the count for the specified trace.

Returns

OFF or 0 means that the count for the specified trace is disabled.

ON or 1 means that the count for the specified trace is enabled.

Examples

TRACE1:TXGAIN:COUNt:ENABLE ON enables the count for Trace 1.

TRACe<x>:TXGain:COUNt:RESet (No Query Form)

Restarts the trace count when the function is Average, Max Hold, or Min Hold.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Group

Programmer Manual

Trace commands

Syntax

TRACe<x>:TXGain:COUNT:RESet

Arguments

None.

Examples

TRACE1:TXGAIN:COUNT:RESET clears the trace data and counter, and restarts the process for Trace 1.

TRACe<x>:TXGain:FREeze

Sets the trace as frozen or live. The query returns whether the trace is frozen or live.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Group

Trace commands

Syntax

TRACe<x>:TXGain:FREeze { OFF | ON | 0 | 1 }
TRACe<x>:TXGain:FREeze?

Arguments

OFF or 0 updates the display of the specified trace normally.

ON or 1 stops updating (freezes) the display of the specified trace.

Returns

OFF or 0 means that the specified trace is updating normally on the display.

ON or 1 means that the specified trace is not updating on the display.

Examples

TRACE1:TXGAIN:COUNT:FREEZE ON freezes Trace 1 in the display.

TRACe<x>:TXGain:FUNCTion

Sets or queries the trace processing method.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Group

Trace commands

Syntax

TRACe<x>:TXGain:FUNCTion { NORMal | MAXHold | MINHold | AVERage | AVGLog }

Arguments

NORMal selects the normal display.

AVERage selects the Average display that indicates the average signal level at each frequency point.

MAXHold selects the Max Hold display that indicates the maximum signal level at each frequency point.

MINHold selects the Min Hold display that indicates the minimum signal level at each frequency point.

AVGLog selects the Average of logs display that indicates the average signal level of logs at each frequency point.

Returns

See Arguments.

Examples

`TRACE1:TXGAIN:COUNT:FUNCTION MAXHold` selects Max Hold for Trace 1.

TRACe<x>:TXGain:SElect

Selects or queries the specified trace.

Conditions

Measurement view: Transmission Gain Where <x> is the trace and is 1, 2, or 3.

Group

Trace commands

Syntax

`TRACe<x>:TXGain:SElect`
`TRACe<x>:TXGain:SElect?`

Arguments

None.

Returns

The currently selected trace number.

Examples

`TRACE1:TXGAIN:SELECT` selects Trace 2.

`TRACE1:TXGAIN:SELECT?` might return 1, indicating that Trace 1 is selected.

TRACe<x>:WLAN:AD:CONSt:RESUlt:CONTEnt:STATe

Sets or queries the state of the specified Result Contents (Preamble, Header, Data, Guard) of the specified trace.

Conditions

Measurement view: 802.11ad Constellation

Where the <x> trace variable is 1, 2, 3, or 4

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:AD:CONStE:RESUlt:CONTEnt:STATe <boolean>,<arg>
TRACe<x>:WLAN:AD:CONStE:RESUlt:CONTEnt:STATe?
```

Arguments

<boolean> arguments

0 or OFF disables the specified trace.

1 or ON enables the specified trace.

<arg> result contents arguments.

The Result Contents arguments are:

- 1 is the Preamble
- 2 is the Header
- 3 is the Data
- 4 is the Guard (only applies to Single Carrier standard)

Returns

See Arguments

Examples

TRACe1:WLAN:AD:CONStE:RESUlt:CONTEnt:STATe 1, 1 enables the Preamble result contents for trace 1.

TRACe2:WLAN:AD:CONStE:RESUlt:CONTEnt:STATe? might return 0, 3, indicating the Data result contents for trace 2 are disabled.

TRACe<x>:WLAN:AY:CONStE:RESUlt:CONTEnt:STATe

Set or query the result contents to Preamble, Header, Data, and Guard for the 11ay Single Carrier standard.

Conditions

Measurement view: 802.11ay Analysis Constellation

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:AY:CONStE:RESUlt:CONTEnt:STATe { 0 | 1 }
TRACe<x>:WLAN:AY:CONStE:RESUlt:CONTEnt:STATe?
```

Arguments

<x> is 1,2,3,4

OFF or 0 disables the Preamble, Header, Data, and Guard result contents are disabled for the 11ay Single Carrier standard (for 4.32 GHz BW Header is not applicable) based on Trace <x> selection, where <x> is 1,2,3,4.

ON or 1 enables the Preamble, Header, Data, and Guard result contents are enabled for the 11ay Single Carrier standard (for 4.32 GHz BW Header is not applicable) based on Trace <x> selection, where <x> is 1,2,3,4.

Returns

OFF or 0 means that the Preamble, Header, Data, and Guard result contents are disabled for the 11ay Single Carrier standard (for 4.32 GHz BW Header is not applicable) based on Trace <x> selection, where <x> is 1,2,3,4.

ON or 1 means that the Preamble, Header, Data, and Guard result contents are enabled for the 11ay Single Carrier (for 4.32 GHz BW Header is not applicable) based on Trace <x> selection, where <x> is 1,2,3,4.

Examples

TRAC1:WLAN:AY:CONS:RESU:CONT:STAT ON enables the Preamble, Header, Data, and Guard result contents for the 11ay Single Carrier standard under the Trace 1 tab.

TRAC2:WLAN:AY:CONS:RESU:CONT:STAT? may return OFF, which means that the Preamble, Header, Data, and Guard result contents are disabled for the 11ay Single Carrier standard under the Trace 2 tab.

TRACe<x>:WLAN:CONSte

Turns the selected trace on or off in the constellation plot display, or queries the enabled status. < x> is accepted by the command but ignored as there is only a single WLAN constellation trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:CONSte { 0 | 1 | OFF | ON }
TRACe<x>:WLAN:CONSte?
```

Arguments

OFF or 0 turns off the constellation trace.

ON or 1 turns on the constellation trace

Returns

Returns the status of the selected trace as an integral value.

0 implies a disabled trace.

1 implies a enabled trace.

Examples

TRAC:WLAN:CONS 1 turns the constellation trace on in the plot display.

TRACe<x>:WLAN:CONSte:FREeze

When the freeze state is turned on, the selected trace stops updating in the constellation plot. <x> is accepted by the command but ignored as there is only a single WLAN constellation trace.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:CONStE:FReeze { 0 | 1 | OFF | ON }
TRACe<x>:WLAN:CONStE:FReeze?
```

Arguments

ON or 1 turns on the freeze state, causing the constellation trace to stop updating.

OFF or 0 turns off the freeze state.

Returns

Outputs the frozen status of the selected trace as an integral value. 1 indicates a frozen trace (stopped updating) and 0 a non-frozen trace.

Examples

TRAC:WLAN:CONS:FRE 1 freezes the constellation trace, causing it to stop updating.

TRACe<x>:WLAN:CRESPonse:SElect

Sets or queries which WLAN Channel Response trace is the active trace. TRACe1 is Magnitude, TRACe2 is Phase.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:CRESPonse:SElect
TRACe<x>:WLAN:CRESPonse:SElect?
```

Arguments

None

Returns

Returns 1, which implies that the selected trace is the active trace.

Returns 0, which implies that the selected trace is not the active trace.

Examples

TRACE1:WLAN:CRES:SELECT specifies to select the magnitude trace.

TRACE1:WLAN:CRES:SELECT? might return 1, indicating that the magnitude trace is the active trace.

TRACe<x>:WLAN:EVM:FReeze

When the freeze state is turned on, the selected trace stops updating. TRACe1 is Averages. TRACe2 is Points.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:EVM:FREEze {0|1|OFF|ON}
TRACe<x>:WLAN:EVM:FREEze?
```

Arguments

ON or 1 turns on the freeze state, causing the selected trace to stop updating.

OFF or 0 turns off the freeze state.

Returns

Outputs the frozen status of the selected trace as an integral value. 1 indicates a frozen trace and 0 a non-frozen trace.

Examples

TRACE2:WLAN:EVM:FREEZE 1 causes Trace 2 to stop updating.

TRACE2:WLAN:EVM:FREEZE 1? might return 0, indicating that Trace 2 is not in a freeze state and is updating.

TRACe<x>:WLAN:EVM[:SHOW]

Displays or hides the selected trace. TRACe1 is Averages. TRACe2 is Points.

NOTE: Use this command only with multicarrier standards and not singlecarrier (802.11b).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:EVM[:SHOW] { 0 | 1 | OFF | ON }
TRACe<x>:WLAN:EVM[:SHOW] ?
```

Arguments

ON or 1 displays the trace.

OFF or 0 hides the trace.

Examples

TRAC2:WLAN:EVM:SHOW 1 displays the WLAN EVM points trace.

TRACe<x>:WLAN:MERRor:FREEze

When the freeze state is turned on, the selected trace stops updating. TRACe1 is Averages. TRACe2 is Points.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:MERRor:FREEze { 0 | 1 | OFF | ON }
TRACe<x>:WLAN:MERRor:FREEze?
```

Arguments

ON or 1 turns on the freeze state, causing the selected trace to stop updating.

OFF or 0 turns off the freeze state.

Returns

Outputs the frozen status of the selected trace as an integral value. 1 indicates a frozen trace and 0 a non-frozen trace.

Examples

TRACE2:WLAN:MERR:FREEZE 1 causes Trace 2 to stop updating.

TRACE2:WLAN:MERR:FREEZE 1? might return 0, indicating that Trace 2 is not in a freeze state and is updating.

TRACe<x>:WLAN:MERRor[:SHOW]

Displays or hides the selected trace. TRACe1 is Averages. TRACe2 is Points.

NOTE: Use this command only with multicarrier standards and not singlecarrier (802.11b).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:MERRor[:SHOW] { 0 | 1 | OFF | ON }
TRACe<x>:WLAN:MERRor[:SHOW]?
```

Arguments

ON or 1 displays the trace.

OFF or 0 hides the trace.

Examples

TRAC2:WLAN:MERR:SHOW 1 displays the WLAN Magnitude Error points trace.

TRACe<x>:WLAN:PERRor:FREEze

When the freeze state is turned on, the selected trace stops updating. TRACe1 is Averages. TRACe2 is Points.

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:PERRor:FREEze { 0 | 1 | OFF | ON }
TRACe<x>:WLAN:PERRor:FREEze?
```

Arguments

ON or 1 turns on the freeze state, causing the selected trace to stop updating.

OFF or 0 turns off the freeze state.

Returns

Outputs the frozen status of the selected trace as an integral value. 1 indicates a frozen trace and 0 indicates a non-frozen trace.

Examples

TRACE2:WLAN:PERR:FREEZE 1 causes Trace 2 to stop updating.

TRACE2:WLAN:PERR:FREEZE 1? might return 0, indicating that Trace 2 is not in a freeze state and is updating.

TRACe<x>:WLAN:PERRor[:SHOW]

Displays or hides the selected trace. TRACe1 is Averages. TRACe2 is Points.

NOTE: Use this command only with multicarrier standards and not singlecarrier (802.11b).

Conditions

Measurement view: WLAN

This command requires WLAN Measurements

Group

Trace commands

Syntax

```
TRACe<x>:WLAN:PERRor[:SHOW] { 0 | 1 | OFF | ON }
TRACe<x>:WLAN:PERRor[:SHOW]?
```

Arguments

ON or 1 displays the trace.

OFF or 0 hides the trace.

Examples

TRAC2:WLAN:PERR:SHOW 1 displays the WLAN Phase Error points trace.

Trigger commands

*TRG (No Query Form)

Generates a trigger. It produces the same effect as the Force Trigger button on the Trigger control panel. This command is valid when the trigger mode is Triggered.

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*TRG

Arguments

None

Examples

*TRG generates a trigger.

TRIGger:ADVanced:SWEep:MODE

Sets or enables the analyzer to wait for a trigger for each acquisition in a swept spectrum or other measurement requiring multiple acquisitions worth of span.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

TRIGger:ADVanced:SWEep:MODE {OFF|ON|0|1}

Arguments

ON or 1 enables the wait for a trigger for each acquisition.

OFF or 0 disables the wait for a trigger for each acquisition.

Returns

Examples

TRIGGER:ADVANCED:SWEPT:MODE 1 causes the analyzer to wait for a trigger for each acquisition.

TRIGger:DPX:SHOW:FRAMES

Determines when to show frames in the swept acquisition mode. Show frames continuously when ON or show only triggered frames when OFF.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger:DPX:SHOW:FRAMES { OFF | ON | 0 | 1 }  
TRIGger:DPX:SHOW:FRAMES?
```

Arguments

OFF or 0 shows only triggered frames.

ON or 1 shows frames continuously.

Examples

TRIGger:DPX:SHOW:FRAMES ON shows frames continuously.

TRIGger:DPX:TDM:SHOW:ALL

Sets or queries the selections of the DPX Prefs control panel tab page.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger:DPX:TDM:SHOW:ALL { OFF | ON | 0 | 1 }  
TRIGger:DPX:TDM:SHOW:ALL?
```

Arguments

OFF or 0 selects the Synch with acquisition triggers option.

ON or 1 selects the Trigger as fast as possible option.

Examples

TRIGGER:DPX:TDM:SHOW:ALL ON selects the Trigger as fast as possible option in the DPX Prefs control panel tab.

TRIGger:EVENT:EXternal:SLOPe

Sets or queries the signal slope of the External input to determine a trigger event.

Conditions

Requires an RSA 306, 306B, 500A series, or 600A series be connected.

Group

Trigger commands

Syntax

```
TRIGger:EVENT:EXternal:SLOPe { RISE | FALL }
```

Arguments

RISE Trigger event occurs on the rising edge.

FALL Trigger event occurs on the falling edge.

Examples

TRIGGER:EVENT:EXTERNAL:SLOPE RISE sets the trigger event to occur on the rising edge of the External signal input.

TRIGger:EVENT:INPut:LEVel

Sets or queries the power level that the signal must pass through to cause a trigger event when the trigger type is set to Power.

Conditions

Requires an RSA 306, 306B, 500A series, or 600A series be connected.

Group

Trigger commands

Syntax

TRIGger:EVENT:INPut:LEVel <numeric>

Arguments

<numeric>::=<NR3>

Range: -170 dBm to 50 dBm

Examples

TRIGGER:EVENT:INPUT:LEVEL 10 sets the trigger threshold level to 10 dBm.

TRIGger:EVENT:INPut:SLOPe

Sets or queries the signal slope of the RF Input to determine a trigger event.

Conditions

Requires an RSA 306, 306B, 500A series, or 600A series be connected.

Group

Trigger commands

Syntax

TRIGger:EVENT:INPut:SLOPe { RISE | FALL }

Arguments

RISE Trigger event occurs on the rising edge.

FALL Trigger event occurs on the falling edge.

Examples

TRIGGER:EVENT:INPUT:SLOPE RISE sets the trigger event to occur on the rising edge of the RF Input signal.

TRIGger:EVENT:INPut:TYPE

Sets or queries the type of trigger. (Power is the only available setting.)

Conditions

Requires an RSA 306, 306B, 500A series, or 600A series be connected.

Group

Trigger commands

Syntax

```
TRIGger:EVENT:INPut:TYPE {POWer}
```

Arguments

POWer Sets trigger type to Power.

Examples

`TRIGGER:EVENT:INPUT:TYPE POWER` sets the trigger type to Power.

TRIGger:EVENT:SOURce

Sets or queries the source of the signal to be monitored for a trigger event.

Conditions

Requires an RSA 306, 306B, 500A series, or 600A series be connected.

Group

Trigger commands

Syntax

```
TRIGger:EVENT:SOURce { INPut | EXTernal }  
TRIGger:EVENT:SOURce?
```

Arguments

INPut Sets the trigger source to the RF Input.

EXTernal Sets the trigger source to use the External input.

Examples

`TRIGGER:EVENT:SOURCE INPUT` sets the trigger source to the RF Input.

TRIGger:MASK:NEW (No Query Form)

Loads a new frequency mask.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

TRIGger:MASK:NEW <freq(1)>,<ampl(1)>,<freq(2)>,<ampl(2)>,...,<freq(n)>,<ampl(n)>(n = 500 maximum)

Arguments


<freq(n)>,<ampl(n)> are numbers that represent a frequency (Hz) and amplitude (dBm) pair that define a point of the mask. Up to 500 pairs can be specified with zero frequency being the center screen. The mask is visible in the spectrum view with the following trigger conditions

NOTE: Do not include a unit suffix (such as Hz, dBm, or dB) with the arguments for this command.

- Trigger mode: Triggered (TRIGger[:SEquence]:TIME:QUALified:TIME<x> is set to ON or 1.)
- Trigger type: Frequency Mask (TRIGger[:SEquence]:EVENT:INPut:TYPE is set to FMASK.)

Examples

TRIGGER:MASK:NEW-8E6,-80,0,-10,8E6,-80 loads the mask with the points A (-8 MHz, -80 dBm), B (0 Hz, -10 dBm), and C (8 MHz, -80 dBm), as shown in the following figure.

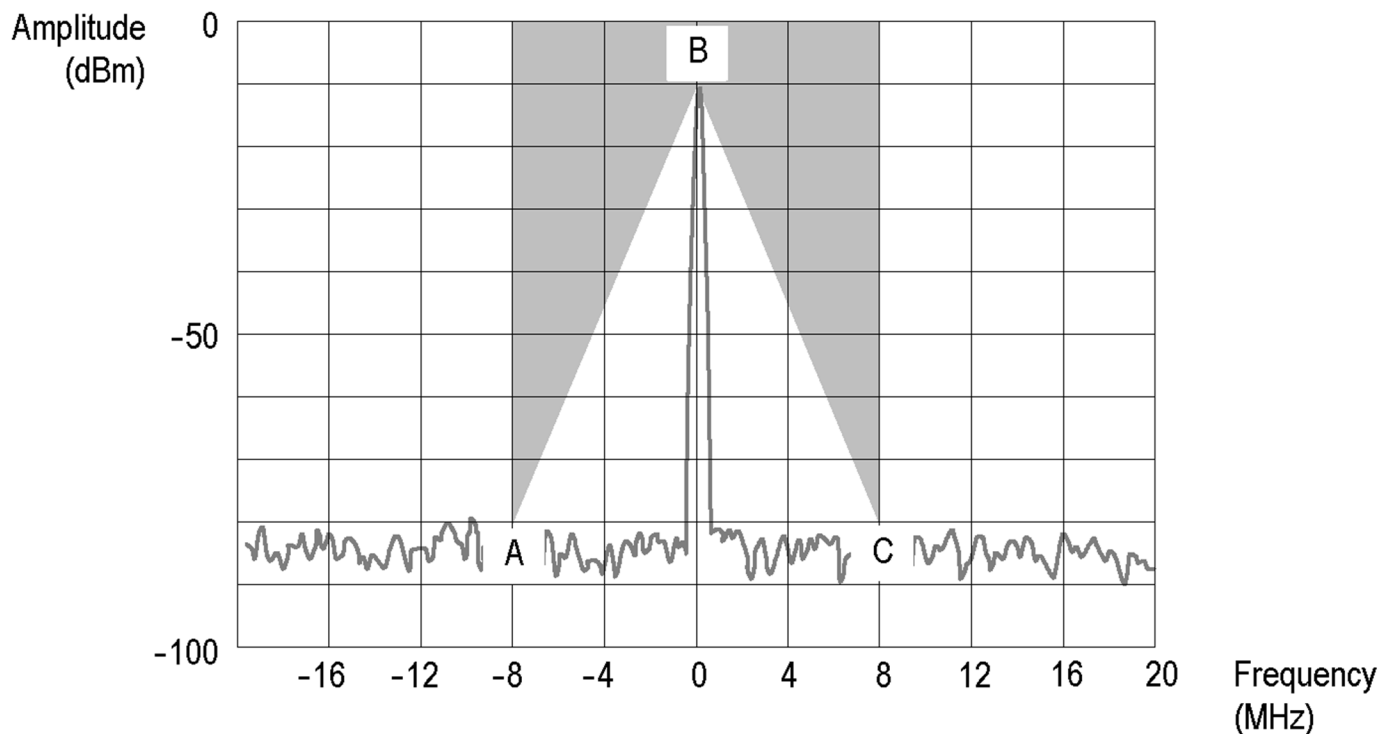

Trigger mask setting example

TRIGger:MASK:NEW:AUTO (No Query Form)

Draws a new frequency mask automatically based on a reference trace.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

TRIGger:MASK:NEW:AUTO <meas_ID>,<trace_ID>,<x_margin>,<y_margin>

Arguments

<meas_ID>::<string> specifies the measurement view.

<trace_ID> specifies the reference trace.

The values of <meas_ID> and <trace_ID> are listed in the following table for each possible measurement view.

<x_margin>::<Nrf> specifies the X margin (horizontal offset from the reference trace) in Hz.

<y_margin>::<Nrf> specifies the Y margin (vertical offset from the reference trace) in dB.

Measurement view	<meas_ID>	<trace_ID>
Spectrum	"specan"	TRACE1 (Trace 1), TRACE2 (Trace 2), TRACE3 (Trace 3), TRACE4 (Math trace), TRACE5 (Spectrogram trace)
DPX, Spectrum	"dpx"	TRACE1 (+Peak trace), TRACE2 (-Peak trace), TRACE3 (Avg trace), TRACE4 (Math trace)q
GFFFGChannel power and ACPR	"acpr"	TRACE1 (Trace 1)
MCPR	"mcpr"	TRACE1 (Trace 1)
OBW	Q"obw"	TRACE1 (Trace 1)

Examples

TRIGGER:MASK:NEW:AUTO "specan",TRACE 1,2E+6,15 draws a new frequency mask automatically in the Spectrum view based on Trace 1 with the horizontal margin of 2 MHz and the vertical margin of 15 dB.

TRIGger:MASK:OPEN (No Query Form)

Opens a trigger mask with a specified file. To save a trigger mask, use the TRIGger:MASK:SAVE command.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

TRIGger:MASK:OPEN <file_name>

Arguments

<file_name>::<string> specifies the trigger mask file to open.

The file extension is .msk. You can omit the extension.

For the directory of file, refer to [Specifying the File](#) (on page 239).

Examples

TRIGGER:MASK:OPEN "C:\My Documents\Mask1" opens the trigger mask with the *Mask1* file in the *My Documents* directory.

TRIGger:MASK:SAVE (No Query Form)

Saves the current trigger mask to a specified file. To open the trigger mask, use the TRIGger:MASK:OPEN command.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

TRIGger:MASK:SAVE <file_name>

Arguments

<file_name>::<string> specifies the file to save the trigger mask.

The file extension is .msk. You can omit the extension.

For the directory of file, refer to [Specifying the File](#) (on page 239).

Examples

TRIGGER:MASK:SAVE"C:\My Documents\Mask1" saves the trigger mask to the *Mask1* file in the *My Documents* directory.

TRIGger:SAVE:COUNT:MAXimum

Sets or queries the number of times a Save on Trigger action stores a file. After this limit is reached, no more files are saved. The instrument will continue to run, but no additional files are saved when a trigger event occurs.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

TRIGger:SAVE:COUNT:MAXimum <numeric>

Arguments

<numeric>::=<NR1>

Range: 1 to 10000

Examples

TRIGGER:SAVE:COUNT:MAXIMUM 100 sets the number of files saved to 100.

TRIGger:SAVE:COUNT[:STATe]

Sets or queries the Maximum total number of files feature. When enabled and the set limit is reached, no more files are saved. The instrument will continue to run, but no additional files are saved when a trigger event occurs.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

```
TRIGger:SAVE:COUNT[:STATe] { OFF | ON | 0 | 1 }
```

Arguments

ON or 1 enables the maximum number of saved files feature.

OFF or 0 disables the maximum number of saved files feature.

Examples

TRIGGER:SAVE:COUNT[:STATE] 1 enables the maximum number of saved files feature.

TRIGger:SAVE:DATA:FORMat

Sets or queries the file format used when saving the acquisition data on a trigger event.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

```
TRIGger:SAVE:DATA:FORMat { TIQ | CSV | MAT }
```

Arguments

TIQ: Native format data file which may include multiple frames.

CSV: Comma-separated values format.

MAT: MATLAB format.

Examples

TRIGGER:SAVE:DATA:FORMAT TIQ saves the data file in native format.

TRIGger:SAVE:DATA[:STATe]

Sets or queries to save data when a trigger event occurs.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

```
TRIGger:SAVE:DATA[:STATe] { OFF | ON | 0 | 1 }
```

Arguments

ON or 1 enables the save on trigger function.

OFF or 0 disables the save on trigger function

Examples

TRIGGER:SAVE:DATA[:STATE] 1 enables the save on trigger function.

TRIGger:SAVE:PICTure:FORMat

Sets or queries the file format used when saving a picture of the display when a trigger event occurs.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

TRIGger:SAVE:PICTure:FORMat { PNG | JPG | BMP }

Arguments

PNG, JPG, BMP: picture formats available.

Examples

TRIGGER:SAVE:PICTURE:FORMAT PNG sets the picture format extension to .PNG.

TRIGger:SAVE:PICTure[:STATe]

Sets or queries the save picture on trigger setting. This enables saving a picture of the display when a trigger event occurs.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

TRIGger:SAVE:PICTure[:STATe] { OFF | ON | 0 | 1 }

Arguments

OFF or 0 enables saving a picture.

ON or 1 disables saving a picture.

Examples

TRIGGER:SAVE:PICTURE[:STATE] 1 enables saving a picture of the display when a trigger event occurs.

TRIGger[:SEquence]:ADVanced:HOLDoff

Sets or queries the trigger holdoff time which prevents triggers until there have been no trigger events for at least the specified holdoff period.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:ADVanced:HOLDoff <value>  
TRIGger[:SEquence]:ADVanced:HOLDoff?
```

Arguments

<value>::<NRf> specifies the trigger holdoff time. Range: 20 ns to 10 s.

Examples

TRIGger[:SEquence]:ADVanced:HOLDoff 1.5us sets the trigger holdoff time to 1.5 μ s.

TRIGger[:SEquence]:ADVanced:HOLDoff:ENABLE

Enables or queries the status of the Advanced Trigger Holdoff function.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:ADVanced:HOLDoff:ENABLE { OFF | ON | 0 | 1 }  
TRIGger[:SEquence]:ADVanced:HOLDoff:ENABLE?
```

Arguments

OFF or 0 does not trigger based on the advanced trigger holdoff settings.

ON or 1 enables triggering based on the advanced trigger holdoff settings.

Examples

TRIGger:ADVanced:HOLDoff:ENABLE ON enables triggering based on the advanced trigger holdoff settings.

TRIGger[:SEquence]:ADVanced:SWEep:MODE

Determines whether or not to trigger each segment in the swept acquisition mode.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:ADVanced:SWEep:MODE { OFF | ON | 0 | 1 }
TRIGger[:SEquence]:ADVanced:SWEep:MODE?
```

Arguments

OFF or 0 does not trigger each segment in the swept acquisition mode.

ON or 1 triggers each segment in the swept acquisition mode.

Examples

TRIGGER:SEQUENCE:ADVANCED:SWEPT:MODE ON triggers each segment in the swept acquisition mode.

TRIGger[:SEquence]:ADVanced:SWEPT:SEGMENT:ENABLE

Determines whether or not to set the spectrum analyzer to wait for a trigger for each acquisition in a swept spectrum or other measurement requiring multiple acquisitions worth of span.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:ADVanced:SWEPT:SEGMENT:ENABLE { OFF | ON | 0 | 1 }
TRIGger[:SEquence]:ADVanced:SWEPT:SEGMENT:ENABLE?
```

Arguments

OFF or 0 does not trigger each segment in the swept acquisition mode.

ON or 1 triggers each segment in the swept acquisition mode.

Examples

TRIGger[:SEquence]:ADVanced:SWEPT:SEGMENT:ENABLE ON waits for a trigger for each acquisition in a swept spectrum or other measurement requiring multiple acquisitions worth of span.

TRIGger[:SEquence]:EVENT:A:EDGE:COUPLing

Sets or queries the choice of trigger coupling type.

Conditions

Measurement views: All

Arguments

For MSO/LPD, available arguments are {DC | HFREject | LFREject | NOISereject}.

For SX, available arguments are {DC | AC | HFREject | LFREject | NOISereject | RF}.

Group

Trigger commands

Syntax

```
:TRIGger[:SEquence]:EVENT:A:EDGE:COUPling {DC| AC | HFREject | LFREject | NOISereject| RF}
TRIGger[:SEquence]:EVENT:A:EDGE:COUPling?
```

Examples

TRIGger:SEquence:EVENT:A:EDGE:COUPling DC sets the Trigger coupling type to DC.

TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:MODE

Sets or queries the trigger hold off mode.

Conditions

Measurement views: All

This command is applicable only for SX/MSO.

Group

Trigger commands

Syntax

```
:TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:MODE {TIME | RANDom | AUTO}
:TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:MODE?
```

Examples

:TRIGger:SEquence:EVENT:A:EDGE:HOLDoff:MODE RANDom sets Holdoff mode to Random.

TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:TIME

Sets or queries the time after triggering on an event, that the instrument waits before detecting the same trigger event to start the next acquisition.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:TIME <value>
TRIGger[:SEquence]:EVENT:A:EDGE:HOLDoff:TIME?
```

Range

{0 to 10} in seconds

Examples

TRIGger:SEquence:EVENT:A:EDGE:HOLDoff:TIME 5 sets the hold off time to 5 seconds.

TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL

Sets or queries where the trigger point occurs for trigger source type.

Conditions

Measurement views: All

This cmd is applicable only for SX.

Group

Trigger commands

Syntax

```
:TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL <value>  
:TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL
```

Examples

:TRIGger:SEquence:EVENT:A:EDGE:LEVEL -0.316 sets the trigger point to -0.316.

TRIGger[:SEquence]:EVENT:EXTFront:IMPedance

Sets or queries the impedance of the external trigger input on the front panel.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:EXTFront:IMPedance { OHM50 | OHM5K}  
TRIGger[:SEquence]:EVENT:EXTFront:IMPedance?
```

Arguments

OHM50 selects 50 Ω impedance.

OHM5K selects 5 k Ω impedance.

Examples

TRIGGER:SEQUENCE:EVENT:EXTFRONT:IMPEDANCE OHM 50 selects 50 Ω impedance for the external trigger input on the front panel.

TRIGger[:SEquence]:EVENT:EXTFront:LEVEL

Sets or queries the trigger level at the external trigger input on the front panel.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:EXTFront:LEVEL <value>  
TRIGger[:SEquence]:EVENT:EXTFront:LEVEL?
```

Arguments

<value>::<NRf> specifies the trigger level. Range: -2.5 to +2.5 V.

Examples

`TRIGGER:SEQUENCE:EVENT:EXTFRONT:LEVEL 1.5` sets the trigger level to 1.5 V at the external trigger input on the front panel.

TRIGger[:SEQuence]:EVENT:EXTFront:SLOPe

Sets or queries the trigger slope of the external trigger input on the front panel.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEQuence]:EVENT:EXTFront:SLOPe { RISE | FALL }  
TRIGger[:SEQuence]:EVENT:EXTFront:SLOPe?
```

Arguments

`RISe` causes the trigger event on the rising edge.

`FALL` causes the trigger event on the falling edge.

Examples

`TRIGGER:SEQUENCE:EVENT:EXTFRONT:SLOPE RISE` causes the trigger event on the rising edge of the external input signal.

TRIGger[:SEQuence]:EVENT:EXTRear:SLOPe

Sets or queries the trigger slope of the external trigger input on the rear panel. The trigger level is fixed to the TTL threshold.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEQuence]:EVENT:EXTRear:SLOPe { RISE | FALL }  
TRIGger[:SEQuence]:EVENT:EXTRear:SLOPe?
```

Arguments

`RISe` causes the trigger event on the rising edge.

`FALL` causes the trigger event on the falling edge.

Examples

`TRIGGER:SEQUENCE:EVENT:EXTREAR:SLOPE RISE` causes the trigger event on the rising edge of the external input signal.

TRIGger[:SEquence]:EVENT:GATed

Sets or queries the positive or negative logic for the gated trigger input on the rear panel.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:GATed { HIGH | LOW }  
TRIGger[:SEquence]:EVENT:GATed?
```

Arguments

HIGH specifies that the gated trigger input is high active.

LOW specifies that the gated trigger input is low active.

Examples

TRIGGER:SEQUENCE:EVENT:GATED HIGH specifies that the gated trigger input is high active.

TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude

Sets or queries the center vertical level for the density trigger region of the RF input DPX bitmap display.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude <value>  
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude?
```

Related Commands

[TRIGger\[:SEquence\]:EVENT:INPut:DDENsity:AMPLitude:TOLerance](#) (on page 2724)

Arguments

<value>::<NRf> specifies the vertical center of the trigger region in dBm.

Range: 0 to 200 dBm.

Examples

TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude 100dBm sets the center level to 100 dBm for the density trigger region.

TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude:TOLerance

Sets or queries the positive and negative extensions of the density trigger region from the center vertical level. The density trigger region is defined for the DPX bitmap display.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude:TOLerance <value>  
TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude:TOLerance?
```

Related Commands

[TRIGger\[:SEquence\]:EVENT:INPut:DDENsity:FREQuency:TOLerance](#) (on page 2725)

Arguments

<value>::<NRf> specifies an absolute amplitude value for the positive and negative limits of the density trigger region in dBm. Range: within the defined measurement box.

Examples

TRIGger[:SEquence]:EVENT:INPut:DDENsity:AMPLitude:TOLerance 50 sets the positive limit 50 dBm above the amplitude level and the negative limit 50 dBm below the amplitude level.

TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency

Sets or queries the center horizontal level for the density trigger region of the RF input DPX bitmap display.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency <value>  
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency?
```

Arguments

<value>::<NRf> specifies the horizontal center of the trigger region. Range: within the defined measurement box.

Examples

TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency 1.82GHz sets the center horizontal level to 1.82 GHz for the density trigger region.

TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency:TOLerance

Sets or queries the left and right extensions of the density trigger region from the center horizontal level. The density trigger region is defined for the DPX bitmap display.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency:TOLerance <value>  
TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency:TOLerance?
```

Arguments

<value>::<NRf> specifies an absolute frequency value for the left and right limits from the center frequency of the density trigger region. Range: within the defined measurement box.

Examples

TRIGger[:SEquence]:EVENT:INPut:DDENsity:FREQuency:TOLerance 0.2GHz for a center frequency of 1.82 GHz, sets the left horizontal limit to 1.62 GHz and the right horizontal limit to 2.02 GHz for the density trigger region.

TRIGger[:SEquence]:EVENT:INPut:DDENsity:THReshold

Sets or queries the DPX Density threshold that defines a trigger event for the density trigger region of the DPX bitmap display. The DPX Density must be higher or lower (specified by the Density selection) than this value to define a trigger event.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:DDENsity:THReshold <value>  
TRIGger[:SEquence]:EVENT:INPut:DDENsity:THReshold?
```

Related Commands

Arguments

<value>::<NRf> specifies the DPX Density threshold as a percentage (%).

Range: within the defined measurement box.

Examples

TRIGger[:SEquence]:EVENT:INPut:DDENsity:THReshold 2 sets the DPX Density threshold to 2 % for the density trigger.

TRIGger[:SEquence]:EVENT:INPut:DDENsity:VIOlation

Sets or queries whether a density value higher or lower than the THReshold value defines a trigger event for the density trigger region of the DPX bitmap display.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:DDENsity:VIOlation { HIGHer| LOWer }  
TRIGger[:SEquence]:EVENT:INPut:DDENsity:VIOlation?
```

Related Commands

[TRIGger\[:SEquence\]:EVENT:INPut:DDENsity:THReshold](#) (on page 2725)

Arguments

HIGHer a DPX density value above the THReshold value defines the trigger event.

LOWer a DPX Density value below the THReshold value defines the trigger event.

Examples

`TRIGger:EVENT:INPut:DDENsity:VIOlation LOWER` sets the DPX Density violation to trigger when the probability of occurrence is lower than the threshold percentage.

TRIGger[:SEquence]:EVENT:INPut:FEDGE:LEVel

Sets or queries the trigger level at the frequency edge input.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FEDGE:LEVel <value>  
TRIGger[:SEquence]:EVENT:INPut:FEDGE:LEVel?
```

Arguments

<value>::<NRf> specifies the trigger level.

Range: $\pm$ (Max AcqBW/2) Hz

Examples

`TRIGGER:SEQUENCE:EVENT:INPUT:FEDGE:LEVEL 1.5` sets the trigger level to 1.5 V at the frequency edge input.

TRIGger[:SEquence]:EVENT:INPut:FEDGE:LEVel:ACTual? (Query Only)

Queries the actual length of the frequency edge input for the DPX measurement.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FEDGE:LEVel:ACTual?
```

Arguments

None

Returns

<NRf> The actual length in Hz.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:FEDGE:LEVEL:ACTUAL? might return 10 Hz, indicating that the actual length is 10 Hz.

TRIGger[:SEquence]:EVENT:INPut:FEDGE:SLOPe

Sets or queries the trigger slope of the frequency edge input.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FEDGE:SLOPe { RISE | FALL }  
TRIGger[:SEquence]:EVENT:INPut:FEDGE:SLOPe?
```

Arguments

RISe causes the trigger event on the rising edge.

FALL causes the trigger event on the falling edge.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:FEDGE:SLOPE RISE causes the trigger event on the rising edge of the frequency edge input.

TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:LEVel

Set or queries the threshold level in the DPX measurement.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:LEVel <value>
TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:LEVel?
```

Arguments

<value>::<NRf> specifies the threshold level.

Range: 50 dBm to –170 dBm

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:FEDGE:THRESHOLD:LEVEL -25 sets the threshold level to –25 dBm.

TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:STATe

Set or queries the threshold state in the DPX measurement.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:STATe { OFF | ON | 0 | 1 }
TRIGger[:SEquence]:EVENT:INPut:FEDGE:THReshold:STATe?
```

Arguments

OFF or 0 disables the threshold.

ON or 1 enables the threshold.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:TDBWIDTH:STATE OFF enables the threshold.

TRIGger[:SEquence]:EVENT:INPut:FMASK:{BANDwidth|BWIDth}[:RESolution]

Sets or queries the Resolution Bandwidth value to be used in the spectrum view for the frequency mask trigger.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FMASK:{BANDwidth|BWIDth[:RESolution]} <value>
TRIGger[:SEquence]:EVENT:INPut:FMASK:{BANDwidth|BWIDth[:RESolution]}?
```

Arguments

<value>: : <NRf> specifies the resolution bandwidth for Frequency Mask triggering.

Examples

TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth 300kHz sets the resolution bandwidth to 300 kHz.

TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth|BWIDth[:RESolution]:ACTual? (Query Only)

Queries current setting for the Resolution Bandwidth value used in the spectrum view for the frequency mask trigger.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth|BWIDth[:RESolution]:ACTual?
```

Arguments

None.

Examples

TRIGger:EVENT:INPut:FMASK:BWIDth:ACTUAL? returns the resolution bandwidth value.

TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth|BWIDth[:RESolution]:AUTO

Sets or queries whether to automatically set the Resolution Bandwidth value used in the spectrum view for the frequency mask trigger.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth|BWIDth[:RESolution]:AUTO { OFF | ON | 0 | 1 }
TRIGger[:SEquence]:EVENT:INPut:FMASK:BANDwidth|BWIDth[:RESolution]:AUTO?
```

Arguments

OFF or 0 sets the resolution bandwidth manually with the command `TRIGger[:SEquence]:EVENT:INPut:FMASk:{BANDwidth|BWIDth}[:RESolution]`.

ON or 1 sets the resolution bandwidth automatically.

Examples

`TRIGger:EVENT:INPut:FMASk:BWIDth:AUTO ON` sets the resolution bandwidth automatically.

TRIGger[:SEquence]:EVENT:INPut:FMASk:VIOlation

Sets or queries when the analyzer triggers in the frequency mask trigger.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

`TRIGger[:SEquence]:EVENT:INPut:FMASk:VIOlation { T | F | TF | FT | TFT | FTF }`
`TRIGger[:SEquence]:EVENT:INPut:FMASk:VIOlation?`

Arguments

The following table lists the arguments which represent the trigger violations.

Trigger violations

Violation	Description
T	Only one state is required to initiate a trigger event. The signal has at least one data point inside the mask. The trigger event occurs at the first point that appears inside the mask. A trigger event could occur on the first acquisition.
F	Only one state change is required to initiate a trigger event. The signal has at least one data point outside the mask. The trigger event occurs at the first point that appears outside the mask. A trigger event could occur on the first acquisition.
TF	Two states are required to initiate a trigger event. The signal must be inside the mask and then passes out of the mask. The trigger event occurs at the first transition where the signal passes out of the mask.
FT	Two states are required to initiate a trigger event. The signal must be outside the mask and then passes into the mask. The trigger event occurs at the first transition where the signal passes into the mask.
TFT	Three states are required to initiate a trigger event. The signal starts inside the mask and then passes out of the mask. Next, the signal must pass into the mask. The trigger event occurs at the second transition where the signal passes back into the mask.
FTF	Three states are required to initiate a trigger event. The signal starts outside the mask and then passes into the mask. Next, the signal must pass back outside the mask. The trigger event occurs at the second transition where the signal passes back out of the mask.

Examples

`TRIGGER:SEQUENCE:EVENT:INPUT:FMASK:VIOLATION` TF specifies that the analyzer will trigger when the signal has crossed into the mask and then outside of the mask.

TRIGger[:SEQuence]:EVENT:INPut:LEVel

Sets or queries the trigger level for the RF input level trigger.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEQuence]:EVENT:INPut:LEVel <value>  
TRIGger[:SEQuence]:EVENT:INPut:LEVel?
```

Arguments

<value>::<NRf> specifies the trigger level. Range: -170 to +50 dBm.

Examples

`TRIGGER:SEQUENCE:EVENT:INPUT:LEVEL -10` sets the trigger level to -10 dBm for the RF input level trigger.

TRIGger[:SEQuence]:EVENT:INPut:RUNT:PULSe

Sets or queries the Runt trigger for a positive or negative going pulse.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEQuence]:EVENT:INPut:RUNT:PULSe { POSitive | NEGative }  
TRIGger[:SEQuence]:EVENT:INPut:RUNT:PULSe?
```

Arguments

POSitive causes the trigger event on a positive runt pulse.

NEGative causes the trigger event on a negative runt pulse.

Examples

`TRIGger:EVENT:INPut:RUNT:PULSE POSitive` causes the trigger event on a positive pulse.

TRIGger[:SEQuence]:EVENT:INPut:RUNT:PULSe:HIGH:LEVel

Sets or queries the upper level (first threshold) to qualify a Runt trigger.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe:HIGh:LEVel <value>
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe:HIGh:LEVel?
```

Arguments

<value>: : <NRf> sets the upper vertical level for a runt pulse in dBm.

Examples

TRIGger:EVENT:INPut:RUNT:PULSe 300 causes the trigger event when the leading edge of a pulse crosses the 300 dBm level.

TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe:LOW:LEVel

Sets or queries the lower level (second threshold) to qualify a Runt trigger.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe:LOW:LEVel <value>
TRIGger[:SEquence]:EVENT:INPut:RUNT:PULSe:LOW:LEVel?
```

Arguments

<value>: : <NRf> sets the lower vertical level for a runt pulse in dBm.

Examples

TRIGger:EVENT:INPut:RUNT:PULSe 3 causes the trigger event when the following edge of a pulse crosses the 3 dBm level.

TRIGger[:SEquence]:EVENT:INPut:SLOPe

Sets or queries the trigger slope for the RF input level trigger.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:SLOPe { RISE | FALL }
TRIGger[:SEquence]:EVENT:INPut:SLOPe?
```

Arguments

RISe causes the trigger event on the rising edge.

FALL causes the trigger event on the falling edge.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:SLOPE RISE causes the trigger event on the rising edge of the RF input signal.

TRIGger[:SEquence]:EVENT:INPut:TDBWidth

Sets or queries the time-domain bandwidth for the RF input power trigger. This command is effective when TRIGger[:SEquence]:EVENT:INPut:TDBWidth:STATe is ON.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:TDBWidth <value>  
TRIGger[:SEquence]:EVENT:INPut:TDBWidth?
```

Arguments

<value>::<NRf> specifies the time-domain bandwidth.

Range: 1 Hz to 60 MHz.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:TDBWIDTH 5MHz sets the time-domain bandwidth to 5 MHz for the RF input power trigger.

TRIGger[:SEquence]:EVENT:INPut:TDBWidth:ACTual? (Query Only)

Queries the actual time-domain bandwidth for the RF input power trigger.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:TDBWidth:ACTual?
```

Related Commands

[TRIGger\[:SEquence\]:EVENT:INPut:TDBWidth](#) (on page 2733)

Arguments

None

Returns

<NRf> Actual time-domain bandwidth.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:TDBWIDTH:ACTUAL? might return 1.000E+6, indicating that the actual time-domain bandwidth is 1 MHz.

TRIGger[:SEquence]:EVENT:INPut:TDBWidth:STATe

Determines whether to set the time-domain bandwidth automatically or manually for the RF input power trigger.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:TDBWidth:STATe { OFF | ON | 0 | 1 }  
TRIGger[:SEquence]:EVENT:INPut:TDBWidth:STATe?
```

Arguments

OFF or 0 sets the time-domain bandwidth automatically.

ON or 1 sets the time-domain bandwidth manually using the TRIGger[:SEquence]: EVENT:INPut:TDBWidth command.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:TDBWIDTH:STATE OFF sets the time-domain bandwidth automatically.

TRIGger[:SEquence]:EVENT:INPut:TYPE

Sets or queries the trigger type for the source of RF input.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:INPut:TYPE { Power | FMASK | DDENsity | RUNT | FEDGe }  
TRIGger[:SEquence]:EVENT:INPut:TYPE?
```

Arguments

POWer uses the power level for triggering.

FMASK uses the frequency mask for triggering.

DDENsity uses the density mask for triggering.

RUNT uses the runt mask for triggering.

Examples

TRIGGER:SEQUENCE:EVENT:INPUT:TYPE FMASK uses the frequency mask for triggering.

:TRIGger[:SEQuence]:EVENT:PPS:SYStrigger

Queries the last triggered local system time when 1-PPS trigger is selected.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
:TRIGger[:SEQuence]:EVENT:PPS:SYStrigger?
```

Examples

```
:TRIGger[:SEQuence]:EVENT:PPS:SYStrigger? might return 15:02:12.000001.
```

:TRIGger[:SEQuence]:EVENT:PPS:UTCtrigger

Queries the last triggered global UTC time when 1-PPS trigger is selected.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
:TRIGger[:SEQuence]:EVENT:PPS:UTCtrigger?
```

Examples

```
:TRIGger[:SEQuence]:EVENT:PPS:UTCtrigger? might return 09:32:12.000001.
```

TRIGger[:SEQuence]:EVENT:SOURce

Sets or queries the trigger event source.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEQuence]:EVENT:SOURce { INPut | EXTFront | EXTRear | EXTGated | LiNe }
TRIGger[:SEQuence]:EVENT:SOURce?
```

Arguments

The following table lists the arguments.

Trigger event source

Argument	Source
INPut	RF input
EXTFront	Trigger in (front)
EXTRear	Trigger in (rear)
EXTGated	Gate in
LINe	AC line
PPST	PPS Event

Examples

`TRIGGER:SEQUENCE:EVENT:SOURCE INPut` specifies the trigger event source as the RF input.

TRIGger[:SEQuence]:FORCed

Determines whether or not to cause a manual trigger if the acquisition is armed, ready and waiting for a trigger. This command is valid when `TRIGger[:SEQuence]:TIME:QUALified:TIME<x>` is set to On (the trigger mode is Triggered).

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEQuence]:FORCed { OFF | ON | 0 | 1 }
TRIGger[:SEQuence]:FORCed?
```

Arguments

OFF or 0 does not cause a manual trigger.

ON or 1 causes a manual trigger.

Examples

`TRIGGER:SEQUENCE:FORCED ON` causes a manual trigger if the acquisition is armed, ready and waiting for a trigger.

TRIGger:SEQuence:FORCed (No Query Form)

Causes a trigger event to occur when the trigger mode is set to Triggered, regardless of the set trigger conditions.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

TRIGger:SEQuence:FORCed

Arguments

None

Examples

TRIGGER:SEQUENCE:FORCED forces a trigger event.

TRIGger[:SEQuence]:IMMediate (No Query Form)

Causes a trigger immediately, skipping the event detection and delay. This command is valid when TRIGger[:SEQuence]:TIME:QUALified:TIME<x> is set to On (the trigger mode is Triggered).

Conditions

Measurement views: All

Group

Trigger commands

Syntax

TRIGger[:SEQuence]:IMMediate

Arguments

None

Examples

TRIGGER:SEQUENCE:IMMEDIATE causes a trigger immediately, skipping the event detection and delay.

TRIGger[:SEQuence]:STATus

Sets or queries the trigger mode (Free Run or Triggered).

Conditions

Measurement views: All

Group

Trigger commands

Syntax

TRIGger[:SEQuence]:STATus { OFF | ON | 0 | 1 }
TRIGger[:SEQuence]:STATus?

Arguments

OFF or 0 selects the free-run mode.

ON or 1 selects the triggered mode.

Examples

TRIGGER:SEQUENCE:STATUS ON selects the triggered mode.

TRIGger[:SEquence][:STATus]

Sets or queries the trigger mode setting.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence][:STATus] { 0 | 1 }  
TRIGger[:SEquence][:STATus] ?
```

Arguments

0 sets the trigger mode to Free Run.

1 sets the trigger mode to Triggered.

Examples

TRIGGER:SEQUENCE:STATUS 0 sets the trigger mode to Free Run.

TRIGger[:SEquence]:TIME:DElay

Sets or queries the trigger delay time which occurs after recognizing an event but before actually declaring the trigger.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:TIME:DElay <value>  
TRIGger[:SEquence]:TIME:DElay ?
```

Arguments

<value>::<NRf> specifies the trigger delay time. Range: 0 to 60 s.

Examples

TRIGGER:SEQUENCE:TIME:DELAY 1.5 sets the trigger delay time to 1.5 s.

TRIGger[:SEquence]:TIME:POSition

Sets or queries the position of the trigger event within the acquisition record.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:TIME:POSition <value>  
TRIGger[:SEquence]:TIME:POSition?
```

Arguments

<value>: : <NRf> specifies the trigger position. Range: 1% to 99%.

Examples

TRIGGER:SEQUENCE:TIME:POSITION 20 sets the trigger position to 20% of the acquisition record.

TRIGger[:Sequence]:TIME:POSition:AUTO

Sets or queries the position of the trigger event (automatic or manual) within the acquisition record.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:Sequence]:TIME:POSition:AUTO { OFF | ON | 0 | 1 }  
TRIGger[:Sequence]:TIME:POSition:AUTO?
```

Arguments

OFF or 0 sets the position of the trigger event manually.

ON or 1 sets the position of the trigger event automatically.

Examples

TRIGGER:SEQUENCE:TIME:POSITION:AUTO ON sets the position of the trigger event automatically.

TRIGger[:SEquence]:TIME:QUALified

Sets or queries the timing qualification setting for triggers. Trigger events that do not meet the timing qualifications are ignored.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:TIME:QUALified { SHORTer | LONGer | INSide | OUTSide | NONE }  
TRIGger[:SEquence]:TIME:QUALified?
```

Arguments

SHORTer the length of the trigger event is shorter than the time specified by the TRIGger:TIME:QUALified:TIME1 setting.

LONGer the length of the trigger event is longer than the time specified by the `TRIGger:TIME:QUALified:TIME1` setting.

INSide the length of the trigger event is longer than the time `TRIGger:TIME:QUALified:TIME1` setting and shorter than the `TRIGger:TIME:QUALified:TIME2` setting.

OUTSide the length of the trigger event is shorter than the time `TRIGger:TIME:QUALified:TIME1` setting or longer than the `TRIGger:QUALified:TIME2` setting.

Examples

`TRIGger:SEquence:TIME:QUALified SHORTer` the length of the trigger event is shorter than the time specified by the `TRIGger:TIME:DELAY` setting.

TRIGger[:SEquence]:TIME:QUALified:TIME<x>

Sets or queries the Time1 and Time2 parameters for time qualified triggering. Time1 is the shorter or first time, and Time2 is the second or later time for the qualifying period. Each `TIME<x>` must be set with a separate command.

Conditions

Measurement views: All

For SignalVu-PC users, the RSA instrument must be connected.

Group

Trigger commands

Syntax

`TRIGger[:SEquence]:TIME:QUALified:TIME<x> <value>`

Related Commands

[TRIGger\[:SEquence\]:TIME:QUALified](#) (on page 2739)

Arguments

`<value>::<NRf>` the length of the trigger time for TIME1 or TIME2. (Range for RSA7100A with SignalVu-PC: 0 ns to 1 s.)

(Range for RSA5100B: 0 ns to 28 s.)

Examples

`TRIGger:TIME:QUALified:TIME1 55µs` sets the TIME1 trigger point at 55 µs after the trigger event.

TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:ANALog

Sets or queries where the trigger point occurs for Analog Trigger Source Type.

Conditions

Measurement views : All

This cmd is applicable only for MSO/LPD

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:ANALog <value>  
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:ANALog?
```

Range

{-0.316 to 0.316} in volts

Examples

TRIGger:SEquence:EVENT:A:EDGE:LEVEL:ANALog -0.316 sets the trigger point to -0.316.

TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:FREQuency

Sets or queries where the trigger point occurs for FreqVsTime Trigger Source Type.

Conditions

Measurement views: All

This cmd is applicable only for MSO/LPD.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:FREQuency <value>  
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:FREQuency?
```

Range

{-32.5E+6 to 32.5E+6} in Hz

Examples

TRIGger:SEquence:EVENT:A:EDGE:LEVEL:FREQuency? queries the trigger point of Frequency vs Time Source type.

TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:MAGNitude

Sets or queries where the trigger point occurs for MagVsTime Trigger Source Type.

Conditions

Measurement views: All

This cmd is applicable only for MSO/LPD.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:MAGNitude <value>  
TRIGger[:SEquence]:EVENT:A:EDGE:LEVEL:MAGNitude?
```

Range

{0 to 0.32} in Vrms/dBm

Examples

`TRIGger:SEquence:EVENT:A:EDGE:LEVEL:MAGNitude 0.32` sets the trigger point of MagVsTime source type to 0.32.

TRIGger[:SEquence]:EVENT:A:EDGE:SETTings

Sets or queries the setting of trigger source type.

Conditions

Measurement views: All

This cmd is applicable only for SX.

Group

Trigger commands

Syntax

```
:TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:TYPE {SHARed|INDEpendent}
:TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:TYPE?
```

Arguments

`SHARed` specifies that all trigger settings will be shared among all trigger sources.

`INDEpendent` specifies that all trigger settings will be independent of trigger source.

Examples

`:TRIGger:SEquence:EVENT:A:EDGE:SOURce SHARed` sets the source type settings to shared.

TRIGger[:SEquence]:EVENT:A:EDGE:SLOPe

Sets or queries whether instrument finds the trigger point on rising or falling edge or either edge of a signal.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:A:EDGE:SLOPe { RISE | FALL | EITHer}
TRIGger[:SEquence]:EVENT:A:EDGE:SLOPe?
```

Examples

`TRIGger:SEquence:EVENT:A:EDGE:SLOPe RISE` sets the trigger point on Rise.

TRIGger[:SEquence]:EVENT:A:EDGE:SOURce

Sets or queries the channel on which signal is to be monitored for a trigger event.

Conditions

Measurement views: All

For MSO/LPD trigger source can be selected from the list of available channels (CH1 to CH8).

For SX trigger source can be selected from list of channels as well as AUX and LINE inputs if available.

Group

Trigger commands

Syntax

```
:TRIGger[:SEquence]:EVENT:A:EDGE:SOURce {CH1 | CH2 | CH3 | CH4 | CH5 | CH6 | CH7 | CH8 | MCH1 |  
MCH2 | MCH3 | MCH4 | AUX | LINE}  
:TRIGger[:SEquence]:EVENT:A:EDGE:SOURce?
```

Examples

TRIGger:SEquence:EVENT:A:EDGE:SOURce CH1 sets CH1 on which trigger event to be monitored.

TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:FORMat

Sets or queries the vertical scale mode to Amplitude (Vrms) or Power (log).

Conditions

Measurement views: All

This cmd is applicable only for MSO/LPD.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:FORMat { AMPLINear | POWLINear | POWLOG}  
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:FORMat?
```

Examples

TRIGger:SEquence:EVENT:A:EDGE:SOURce:FORMat AMPLINear sets vertical scale mode to Amplitude.

TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:TYPE

Sets or queries the choice of Trigger source type.

Conditions

Measurement views: All

This cmd is applicable only for MSO/LPD.

Group

Trigger commands

Syntax

```
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:TYPE { ANALog | MAGVstime | FREQvstime }  
TRIGger[:SEquence]:EVENT:A:EDGE:SOURce:TYPE?
```

Examples

TRIGger:SEquence:EVENT:A:EDGE:SOURce ANALog sets the source type to Analog.

TRIGger[:SEquence]:EVENT:A:TYPE

Sets or queries the trigger type { supporting only Edge trigger}.

Conditions

Measurement views: All

Group

Trigger commands

Syntax

```
TRIGger[:SEquence:]EVENT:A:TYPE { EDGE }  
TRIGger[:SEquence:]EVENT:A:TYPE?
```

Examples

TRIGger:SEquence:EVENT:A:TYPE EDGE sets trigger type to edge.

TRIGger[:SEquence]:MODE

Sets or queries the trigger mode setting.

Conditions

This cmd is applicable only for SX.

Group

Trigger commands

Syntax

```
:TRIGger[:SEquence]:MODE {0 | 1}  
:TRIGger[:SEquence]:MODE?
```

Examples

:TRIGger:SEquence:MODE 0 sets the trigger mode to Free Run.

TRIGger:TIME:POSition

Sets or queries the point (in percent) along the acquisition record the trigger event should occur. Manually setting the trigger position disables the Auto setting.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

```
TRIGger:TIME:POSition <numeric>
```

Arguments

<numeric>::=<NR1>

Range: 1 to 100

Examples

TRIGGER:TIME:POSITION 50 sets the acquisition point to 50%.

TRIGger:TIME:POSition:AUTO

Sets or queries the instrument to automatically set the position of the trigger event.

Conditions

Requires an RSA be connected with SignalVu-PC.

Group

Trigger commands

Syntax

```
TRIGger:TIME:POSition:AUTO { OFF | ON | 0 | 1 }
```

Arguments

ON or 1 enables auto trigger position.

OFF or 0 disables auto trigger position.

Examples

TRIGGER:TIME:POSITION:AUTO 1 enables the auto trigger position setting.

UNIT:POWer

Sets or queries the fundamental unit of power. This command is equivalent to [SENSe]:POWer:UNITs.

Conditions

Measurement views: All

Group

Unit commands

Syntax

```
UNIT:POWer { DBM | DBV | VOLTs | WATTs | DBUW | DBW | DBUV | DBMV | DBUA | DBUV_M | DBUA_M |  
            AMPS }UNIT:POWer?
```

Arguments

The following table lists the arguments.

Power units

Argument	Power unit
DBM	dBm
DBV	dBV
VOLTs	Volts
WATTs	Watts
DBUW	dBμW

Argument	Power unit
DBW	dBW
DBUV	dB μ V
DBMV	dBmV
DBUA	dB μ A
DBUV_M	dB μ V/m
DBUA_M	dB μ A/m
AMPS	Amps

NOTE: Select dB μ V/m or dB μ A/m unit when using an antenna table.

Examples

UNIT: POWERDBM specifies the fundamental unit of power as dBm.

*WAI (No Query Form)

Prevents the analyzer from executing further commands or queries until all pending operations finish. This command allows you to synchronize the operation of the analyzer with your application program. For the details, refer to [Synchronizing execution](#) (on page 2755).

Conditions

Measurement views: All

Group

IEEE common commands

Syntax

*WAI

Related Commands

[*OPC](#) (on page 1580)

Arguments

None

Status and Events

The SCPI interface in the analyzer includes a status and event reporting system that enables the user to monitor crucial events that occur in the instrument. The analyzer is equipped with four registers and one queue that conform to IEEE Std 488.2-1987. This section will discuss these registers and queues along with status and event processing.

Status and event reporting system

The following figure outlines the status and event reporting mechanism offered in the RSA Series analyzers. It contains three major blocks

- Standard Event Status
- Operation Status
- Questionable Status (fan-out structure)


The processes performed in these blocks are summarized in the Status Byte. The three blocks contain four types of registers as shown in the following table.

Register type


Register	Description
Condition register	Records event occurrence in the instrument. Read only.
Transition register (positive/negative)	A positive transition filter allows an event to be reported when a condition changes from false to true. A negative filter allows an event to be reported when a condition changes from true to false. Setting both positive and negative filters true allows an event to be reported anytime the condition changes. Clearing both filters disables event reporting.
Event register	Records events filtered by the transition register. Read only.
Enable register	Masks the event register to report in the summary bit. User-definable.

* The use of Bit 15 is not allowed in SCPI.
The value of this bit is always zero.

CR: Condition Register
TR: Transition Register
EVR: Event Register
ENR: Enable Register

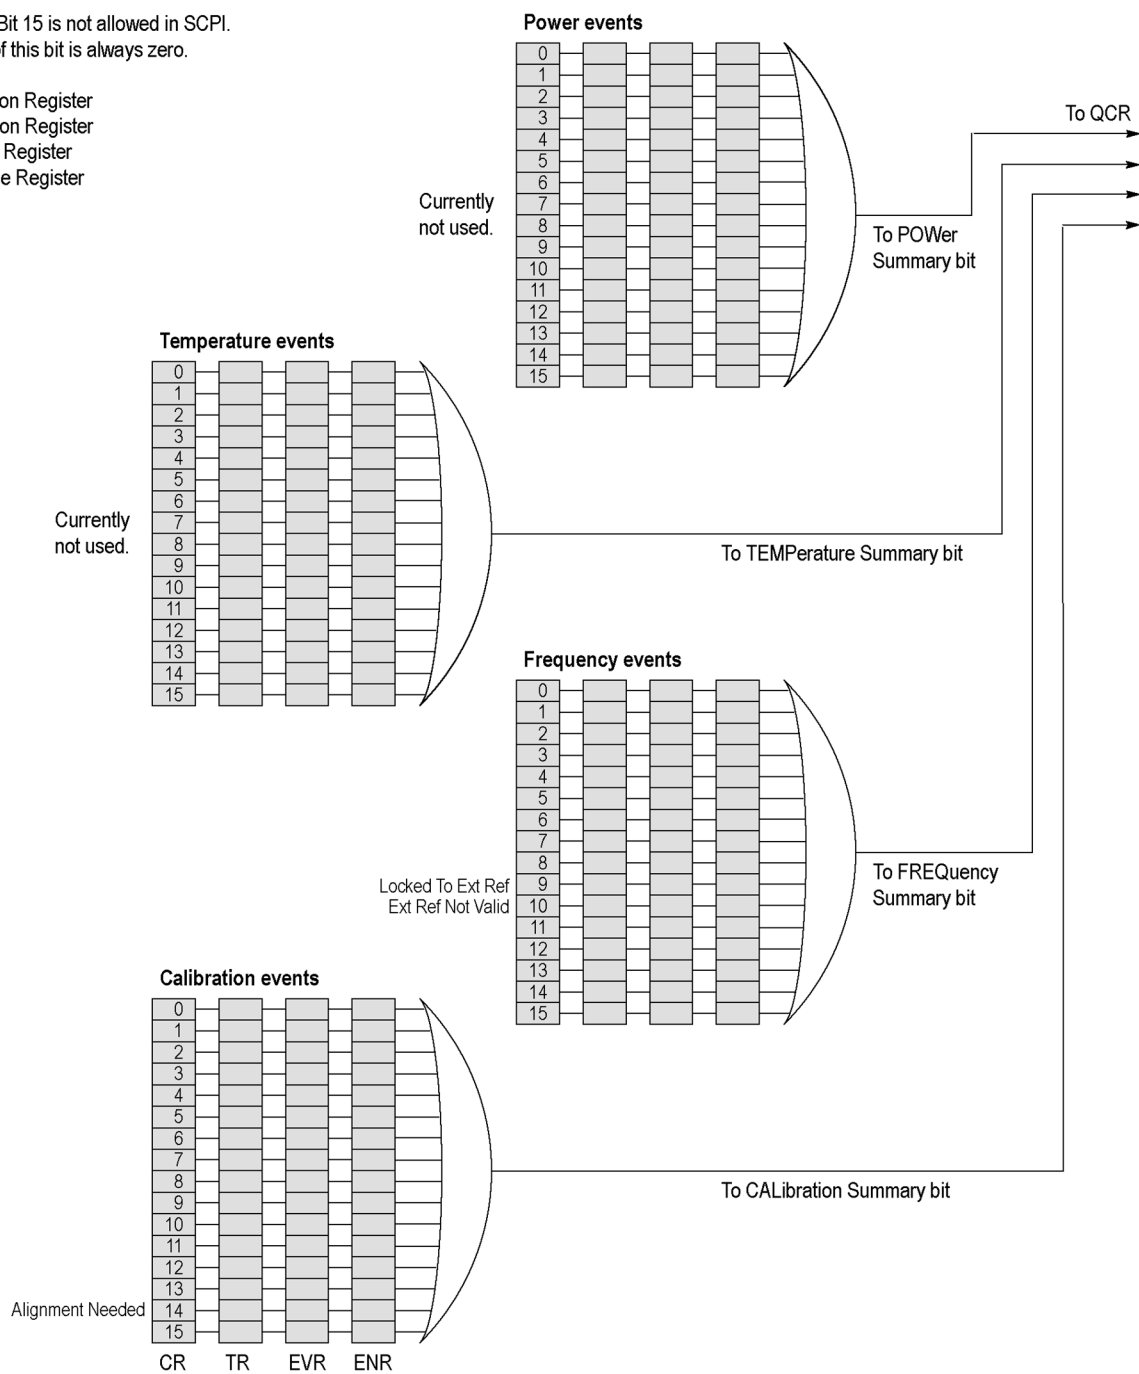

Status/Event reporting mechanism

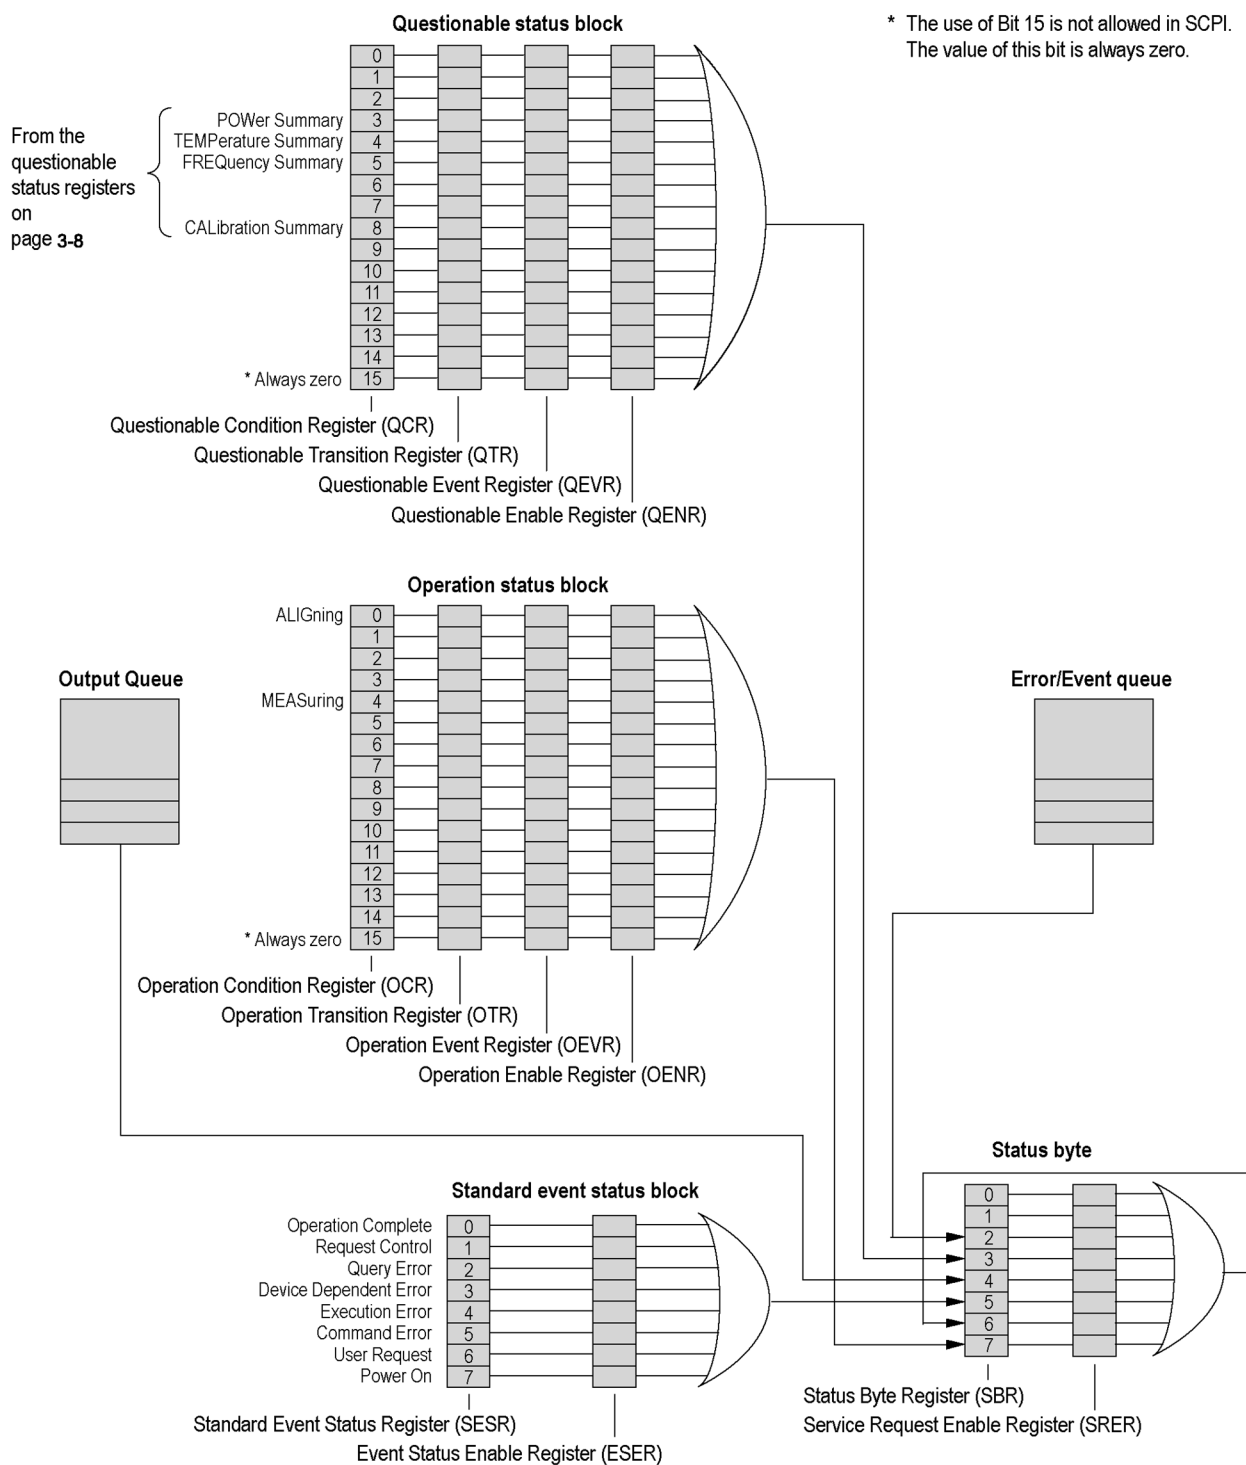

Status/Event reporting mechanism (continued)


Status Byte

The Status Byte contains the following two registers

- Status Byte Register (SBR)
- Service Request Enable Register (SRER)

Status Byte Register (SBR)

The SBR is made up of 8 bits. Bits 4, 5 and 6 are defined in accordance with IEEE Std 488.2-1987. These bits are used to monitor the output queue, SESR and service requests, respectively. The contents of this register are returned when the *STB? query is used.

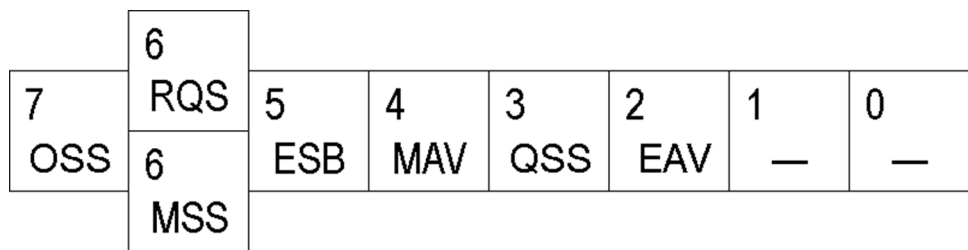

Status Byte Register (SBR)

SBR bit functions

Bit	Description
7	Operation Summary Status (OSS). Summary of the operation status register.
6	Request Service (RQS)/Master Status Summary (MSS). When the instrument is accessed using the GPIB serial poll command, this bit is called the Request Service (RQS) bit and indicates to the controller that a service request has occurred (in other words, that the GPIB bus SRQ line is LOW). The RQS bit is cleared when serial poll ends. When the instrument is accessed using the *STB? query, this bit is called the Master Status Summary (MSS) bit and indicates that the instrument has issued a service request for one or more reasons. The MSS bit is never cleared to 0 by the *STB? query.
5	Event Status Bit (ESB). This bit indicates whether or not a new event has occurred after the previous Standard Event Status Register (SESR) has been cleared or after an event readout has been performed.
4	Message Available Bit (MAV). This bit indicates that a message has been placed in the output queue and can be retrieved.
3	Questionable Summary Status (QSS). Summary of the Questionable Status Byte register.
2	Event Quantity Available (EAV). Summary of the Error Event Queue.
1-0	Not used


Service Request Enable Register (SRER)

The SRER is made up of bits defined exactly the same as bits 0 through 7 in the SBR as shown in the following figure. This register is used by the user to determine what events will generate service requests.

The SRER bit 6 cannot be set. Also, the RQS is not maskable.

The generation of a service request with the GPIB interface involves changing the SRQ line to LOW and making a service request to the controller. The result is that a status byte for which an RQS has been set is returned in response to serial polling by the controller.

Use the *SRE command to set the bits of the SRER. Use the *SRE? query to read the contents of the SRER. Bit 6 must normally be set to 0.

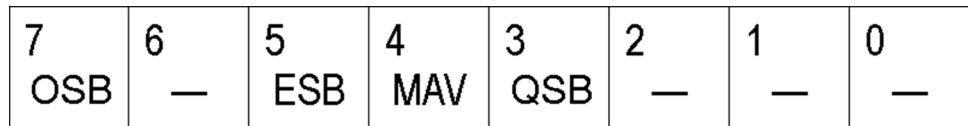

Service Request Enable Register (SRER)

Standard event status block

Reports the power on/off state, command errors, and the running state. It consists of the following registers of the following registers

- Standard Event Status Register (SESR)
- Event Status Enable Register (ESER)

These registers are made up of the same bits defined in the following figure and table. Use the *ESR? query to read the contents of the SESR. Use the *ESE() command to access the ESER.

7	6	5	4	3	2	1	0
PON	—	CME	EXE	DDE	QYE	—	OPC

Standard event status register

Standard event status register bit definition

Bit	Description
7	Power On (PON). Indicates that the power to the instrument is on.
6	Not used.
5	Command Error (CME). Indicates that a command error has occurred while parsing by the command parser was in progress.
4	Execution Error (EXE). Indicates that an error occurred during the execution of a command. Execution errors occur for one of the following reasons ▪ When a value designated in the argument is outside the allowable range of the instrument, or is in conflict with the capabilities of the instrument. ▪ When the command could not be executed properly because the conditions for execution differed from those essentially required.
3	Device-Dependent Error (DDE). An instrument error has been detected.
2	Query Error (QYE). Indicates that a query error has been detected by the output queue controller. Query errors occur for one of the following reasons ▪ An attempt was made to retrieve messages from the output queue, despite the fact that the output queue is empty or in pending status. ▪ The output queue messages have been cleared despite the fact that they have not been retrieved.
1	Not used.
0	Operation Complete (OPC). This bit is set with the results of the execution of the *OPC command. It indicates that all pending operations have been completed.

When an event occurs, the SESR bit corresponding to the event is set, resulting in the event being stacked in the Error/Event Queue. The SBR OAV bit is also set. If the bit corresponding to the event has also been set in the ESER, the SBR ESB bit is also set. When a message is sent to the Output Queue, the SBR MAV bit is set.

Operation status block

The operation status block contains conditions that are part of the instrument's normal operation. It consists of the following registers

- Operation Condition Register (OCR)
- Operation Positive/ Negative Transition Register (OPTR/ONTR)
- Operation Event Register (OEVR)
- Operation Enable Register (OENR)

These registers are made up of the same bits defined in the following table and figure. Use the STATUS:OPERation commands to access the operation status register set.

15	14	13	12	11	10	9	8	7	6	5	4 MEAS	3	2	1	0 ALIG

Operation status register

Operation status register bit definition

Bit	Description
15	Always zero (0).
14 - 5	Not used.
4	Measuring (MEAS). Indicates that the instrument is actively measuring. When the measurement ends after this bit is set in measurement, it is reset. "In measurement" means that one of the following commands is in execution: ▪ INITiate commands ▪ READ commands
3 - 1	Not used.
0	Aligning (ALIG). Indicates that the instrument is currently performing an alignment. When the alignment ends after this bit is set in alignment, it is reset.

When the specified state changes in the OCR, its bit is set or reset. This change is filtered with a transition register, and the corresponding bit of the OEVR is set. If the bit corresponding to the event has also been set in the OENR, the SBR OSS bit is also set.

Questionable Status Block

The questionable status register set contains bits which give an indication of the quality of various aspects of the signal together with the fanned out registers as described in the next subsections. It consists of the following registers

- Questionable Condition Register (QCR)
- Questionable Positive/Negative Transition Register (QPTR/QNTR)
- Questionable Event Register (QEVR)
- Questionable Enable Register (QENR)

These registers are made up of the same bits defined in the following table and figure. Use the STATUS:QUESTionable commands to access the questionable status register set.

15	14 CW	13	12	11	10	9	8 CAL	7	6	5 FREQ	4 TEMP	3 POW	2	1	0

Questionable status register

Questionable status register bit definition

Bit	Description
15	Always zero (0).
14	Command Warning (CW). Indicates a non-fatal warning that relates to the instrument's interpretation of a command, query, or one or more parameters of a specific command or query.
13 - 9	Not used.
8	CALibration Summary (CAL). Summary of the Questionable Calibration register.
7, 6	Not used.
5	FREQuency Summary (FREQ). Summary of the Questionable Frequency register.
4	TEMPerature Summary (TEMP). Summary of the Questionable Temperature register.
3	POWer Summary (POW). Summary of the Questionable Power register.
2 -0	Not used.

When the specified state changes in the QCR, its bit is set or reset. This change is filtered with a transition register, and the corresponding bit of the QEVr is set. If the bit corresponding to the event has also been set in the QENR, the SBR QSS bit is also set.

Questionable Power Register Set

Refines the power error for the POWER bit in the QCR.

Currently not used

Questionable Temperature Register Set

Refines the temperature error for the TEMPerature bit in the QCR.

Currently not used.

Questionable Frequency Register Set

The questionable frequency register set is made up of bits defined in the following table and figure. It refines the frequency error for the FREQuency bit in the QCR.

Use the STATus:QUESTionable:FREQuency commands to access the questionable frequency register set.

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
					ERNV	LTER									

Questionable frequency status register

Questionable frequency status register bit definition

Bit	Description
15	Always zero (0).

Bit	Description
14 - 11	Not used.
10	External Ref Not Valid (ERNV). Indicates that the external reference signal is not valid so the instrument is no longer locked to it.
9	Locked To External Ref (LTEF). Indicates that the instrument is locked to the external reference signal.
8 - 0	Not used.

Questionable Calibration Register Set

The questionable calibration register set is made up of bits defined in the following table and figure. It refines the calibration error for the CALibration bit in the QCR. Use the STATUS:QUESTionable:CALibration commands to access the questionable calibration register set.

15	14 ALN	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Questionable calibration status register

Questionable calibration status register bit definition

Bit	Description
15	Always zero.
14	Alignment Needed (ALN). Indicates the instrument needs the alignment.
13 - 0	Not used.

Queues

There are two types of queues in the status reporting system used in the analyzer: output queues and event queues.

Output Queue

The output queue is a FIFO (first in, first out) queue and holds response messages to queries, where they await retrieval. When there are messages in the queue, the SBR MAV bit is set.


The output queue will be emptied each time a command or query is received, so the controller must read the output queue before the next command or query is issued. If this is not done, an error will occur and the output queue will be emptied; however, the operation will proceed even if an error occurs.

Event Queue

The event queue is a FIFO queue and stores events as they occur in the analyzer. If more than 32 events occur, event 32 will be replaced with event code -350 ("Queue Overflow"). The error code and text are retrieved using the SYSTem:ERROR queries.

Status and event processing sequence

The following figure shows an outline of the sequence for status and event processing.

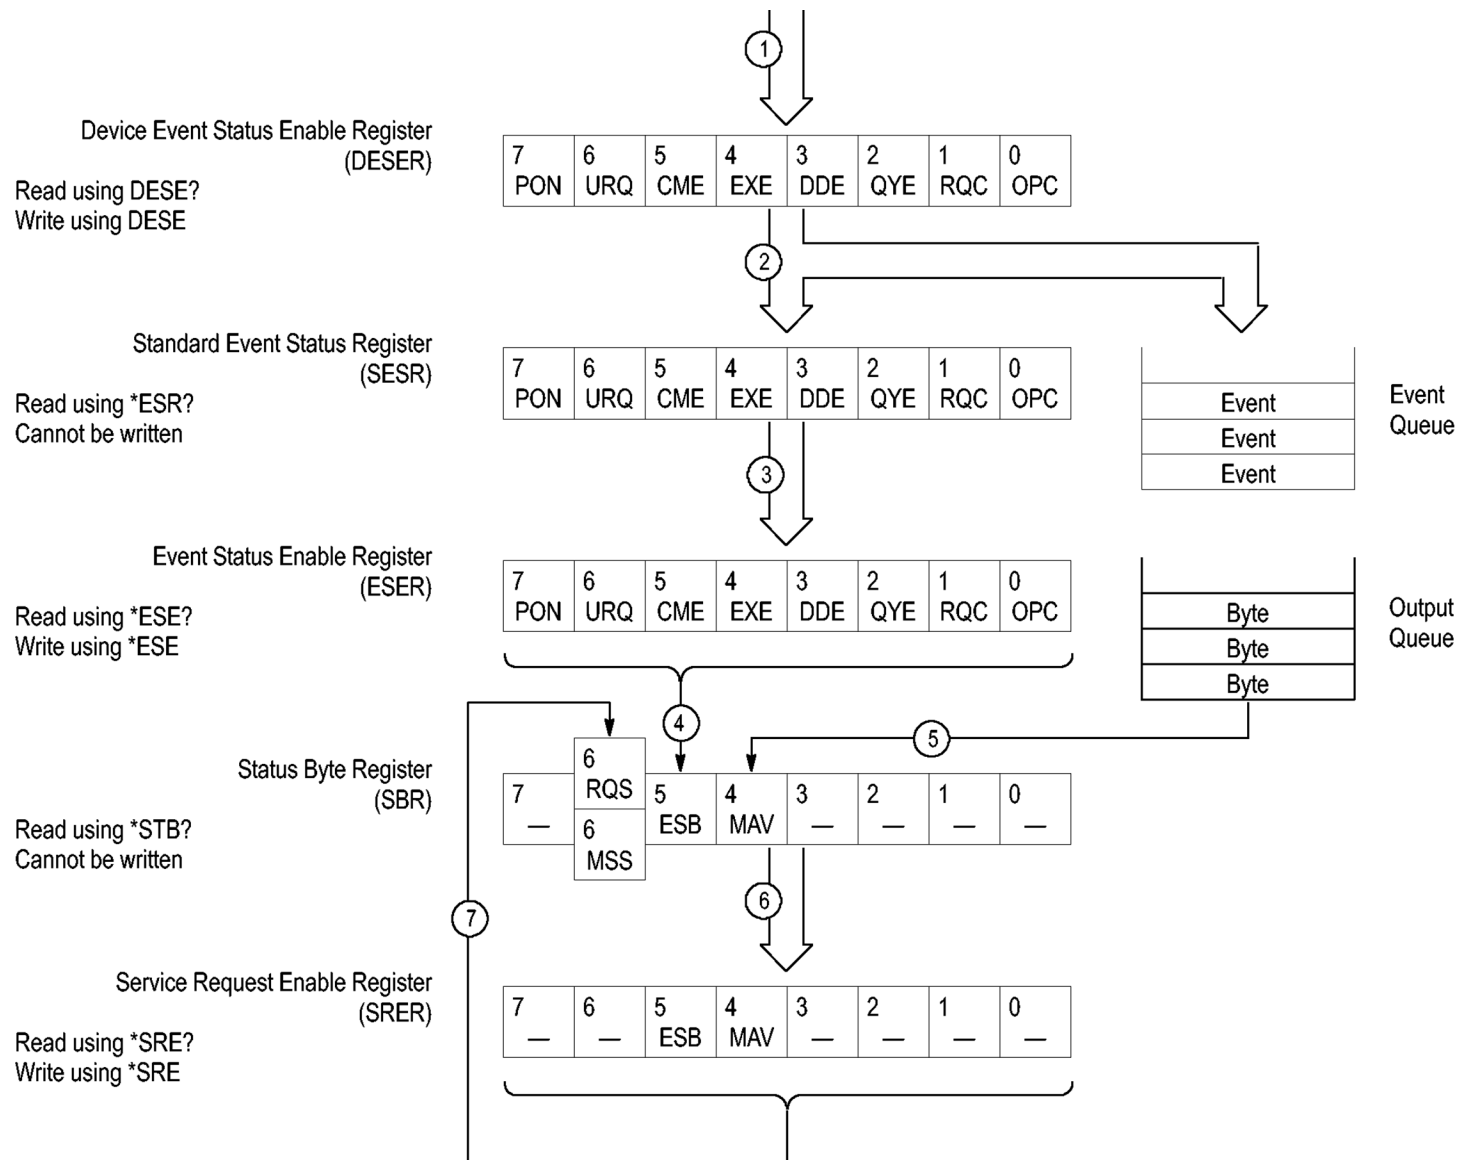

Status and event processing sequence

1. If an event has occurred, the SESR bit corresponding to that event is set and the event is placed in the event queue.
2. A bit corresponding to that event in the ESER has is set.
3. The SBR ESB bit is set to reflect the status of the ESER.
4. When a message is sent to the output queue, the SBR MAV bit is set.
5. Setting either the ESB or MAV bits in the SBR sets the respective bit in the SRER.
6. When the SRER bit is set, the SBR MSS bit is set and a service request is generated when using the GPIB interface.

Synchronizing execution

Almost all commands are executed in the order in which they are sent from the controller, and the execution of each command is completed in a short period of time. However, the following commands perform data analysis in another thread, and another command can thus be executed concurrently

- INITiate commands
- READ commands
- [SENSe]:REAnalyze

These commands are designed so that the next command to be sent is executed without waiting for the previous command to be completed. In some cases, a process executed by another command must first be completed before these commands can be executed; in other cases, these commands must be completed before the next command is executed.

You have two options to achieve command synchronization

- Using the status and event reporting function
- Using synchronizing commands

Using the Status and Event Reporting Function

In the following example, a READ command is used to obtain the measurement results while the Operation Condition Register (OCR) is being used to provide synchronization.

```
STATUS:OPERation:NTRansition 16
// Set the filter of the OCR MEASuring bit
STATUS:OPERation:ENABle 16
// Enable the filter of the OCR MEASuring bit
*SRE 128
// Set the SRER OSS bit
READ:SPECTrum:TRACe
// Obtain the measurement results
```

The command waits for generation of SRQ.

Using Synchronizing Commands

The IEEE-488.2 common commands include the following synchronizing commands

- *OPC
- *OPC?
- *WAI

Using the *OPC command. The *OPC command sets the SESR OPC bit when all the operations for which it is waiting are completed. If the GPIB interface is in use, you can synchronize the execution by using this command together with the serial polling or service request function.

The following is a command sequence example:

```
*ESE 1
// Enable the ESER OPC bit
*SRE 32
// Enable the SRER ESB bit
ABORt;INITiate:IMMediate;*OPC
// Wait for SRQ to provide synchronization
```

Using the *OPC? query. The query *OPC? writes ASCII code "1" into the Output Queue when all operations for which it is waiting are completed. You can provide synchronization using the command string as the following example:

```
ABORt;INITiate:IMMediate;*OPC
```

The command waits until "1" is written into the Output Queue. When the command goes to the Output Queue to read the data, a time-out may occur before the data is written into the queue.

Using the *WAI Command. After the process of the preceding command is completed, the *WAI command begins to execute the process of the next command as the following example:

```
ABORt;INITiate:IMMediate;*WAI
// Wait for the *WAI process to provide synchronization
```

Error messages and codes

Error codes with a negative value are SCPI standard error codes; errors with a positive value are unique to the RSA Series Signal Analyzers.

Event codes and messages can be obtained by using the queries `SYSTEM:ERROR?` and `SYSTEM:ERROR:ALL?` These are returned in the following format

```
<event_code>,"<event_message>"
```

Command errors

Command errors are returned when there is a syntax error in the command.

Command errors

Error code	Error message
-100	Command error
-101	Invalid character
-102	Syntax error
-103	Invalid separator
-104	Data type error
-105	GET not allowed
107	Can't replay - settings not compatible with data record
-109	Missing parameter
-111	Header separator error
-112	Program mnemonic too long
-113	Undefined header
-114	Header suffix out of range
-120	Numeric data error
-121	Character
-123	Exponent too large
-124	Too many digits
-128	Numeric data not allowed
-130	Suffix error
-131	Invalid suffix
-134	Suffix too long
-138	Suffix not allowed

Error code	Error message
-140	Character data error
-141	Invalid character data
-144	Character data too long
-148	Character data not allowed
-150	String data error
-151	Invalid string data
-158	String data not allowed
-160	Block data error
-161	Invalid block data
-168	Block data not allowed
-170	Command expression error
-171	Invalid expression
-178	Expression data not allowed
-180	Macro error
-181	Invalid outside macro definition
-183	Invalid inside macro definition
-184	Macro parameter error

Execution errors

These error codes are returned when an error is detected while a command is being executed.

Execution errors

Error code	Error message
-200	Execution error
-201	Invalid while in local
-202	Settings lost due to RTL
-210	Trigger error

Error code	Error message
-211	Trigger ignored
-212	Arm ignored
-213	Init ignored
-214	Trigger deadlock
-215	Arm deadlock
-220	Parameter error
-221	Settings conflict
-222	Data out of range
-223	Too much data
-224	Illegal parameter value
-225	Out of memory
-226	Lists not same length
-230	Data corrupt or stale
-231	Data questionable
-240	Hardware error
-241	Hardware missing
-250	Mass storage error
-251	Missing mass storage
-252	Missing media
-253	Corrupt media
-254	Media full
-255	Directory full
-256	Filename not found
-257	Filename error
-258	Media protected

Error code	Error message
-260	Execution expression error
-261	Math error in expression
-270	Execution macro error
-271	Macro syntax error
-272	Macro execution error
-273	Illegal macro label
-274	Execution macro parameter error
-275	Macro definition too long
-276	Macro recursion error
-277	Macro redefinition not allowed
-278	Macro header not found
-280	Program error
-281	Cannot create program
-282	Illegal program name
-283	Illegal variable name
-284	Program currently running
-285	Program syntax error
-286	Program runtime error

Device specific errors

These error codes are returned when an internal instrument error is detected. This type of error may indicate a hardware problem.

Device specific errors

Error code	Error message
-300	Device specific error
-310	System error
-311	Memory error

Error code	Error message
-312	PUD memory lost
-313	Calibration memory lost
-314	Save/Recall memory lost
-315	Configuration memory lost
-330	Self test failed
-350	Queue overflow

Query Errors

These error codes are returned in response to an unanswered query.

Query errors

Error code	Error message
-400	Query error
-410	Query interrupted
-420	Query unterminated
-430	Query deadlocked
-440	Query unterminated after indefinite period

Device errors

These error codes are unique to the RSA Series. They are classified into three groups: global, measurement, and source conditions, as shown in the following tables.

Device errors, global condition

Error code	Error message
100	Setup error
101	Disabled: data is from swept acquisition
102	Disabled: swept settings; Acquire data while display is selected
103	Acquisition bandwidth too small for current setup
104	Can't get acquisition data record
105	Can't open the requested display

Error code	Error message
106	Analysis failure
107	Analysis length was limited
108	Analysis length too small for current setup
109	No math trace: unmatched trace lengths
110	Analysis time was adjusted
111	Not enough samples for current setup
112	Can't replay. Data is from swept acquisition.
113	Can't replay. Live data needed for swept settings.
114	Recall error: setup not completely restored
115	Recall failure: problem with file or file contents
116	Save failure: file not saved
117	Unexpected software error. Please cycle power and try again.
118	Export failure: file not saved
119	Export failure: unable to open results file for export. File not saved.
120	Search condition for this result is already defined.
121	Search condition for this result was not found.
124	Load failed: <filename>
125	Store error: file not saved.
126	No Math trace: unmatched trace X range
127	Not enough memory for measurement
128	Incomplete analysis
129	Not enough samples for current setup
130	Mask creation error: <reason message>

Device errors, measurement condition

Error code	Error message
1000	TDBW actual (TDBW: Time Domain Bandwidth)
1002	RBW increased to
1003	RBW limited by acquisition bandwidth to
1004	RBW conflict. Increase span or analysis length
1011	Audio disabled: configuration problem
1012	Audio Demod disabled: swept acquisition
1013	Audio Demod disabled: trigger in use
1014	Audio disabled: IF band outside Acq BW
1015	Calibration error. See Windows Event Viewer for error detail.
OBW errors	
1016	Analysis failure: $\text{AcqBW} < \text{MeasBW} + (5 \times \text{RBW})$
1017	Analysis failure: AcqBW must be 10 kHz or more
1018	$x \text{ dB BW} > \text{Meas BW}$
Pulse errors	
1019	AcqBW too low for current Chirp BW setting
1020	Impulse Response only valid for Chirp modulation
1023	Not enough memory for measurement
Other measurements	
1024	BW actual (limited by Acq BW)
1025	CISPR not available in FastFrame. Uncheck FastFrame in the Acquire panel.
1026	Analysis length must be in auto.
1027	Carrier not found
1029	CISPR accuracy limited by acq memory. Adjust RBW or freq range.
1030	CISPR: Acq BW too small for RBW. Try increasing span or freq range.
1031	Insufficient data for CISPR. Acquire while display is selected.

Error code	Error message
1032	VBW increased - Analysis Length too short
1033	VBW does not use full Analysis Length.
1034	Analysis time was adjusted Reached sample limit of

Device errors, source condition

Error code	Error message
2008	Not calibrated
2009	FMT RBW limited by Acq BW to <XX>
2010	FMT RBW increased by Acq BW to <XX>
2011	Hardware failure - see Windows Event Viewer
2012	FMT disabled: Acq BW too small for current setup
2013	Hardware failure detected by diagnostics
2014	FMT disabled: RefLev too low for Volts/Watts units
2015	FMT disabled: settings conflict with selected measurement
2016	Preamp freq range exceeded
2024	RBW limited by Span to <XX>
2025	RBW increased by Span to <XX>
2028	External frequency reference signal not valid. Using internal reference.
2029	Unable to lock to external frequency reference. Using internal reference.
2033	Alignment error. Please run alignment again. If the problem persists, contact your Tektronix Service Center.
2034	Operational error: unable to complete operation. Please try again. If the problem persists, contact your Tektronix Service Center. See Windows Event Viewer for error detail.
2035	Hardware error: unable to configure hardware. Please try again. If the problem persists, contact your Tektronix Service Center. See Windows Event Viewer for error detail.
2036	Shutting down - internal temperature is too high. Check fans and airflow. If the problem persists, contact your Tektronix Service Center.
2037	Hardware error detected. To clear error, exit and restart the application. If the problem persists, contact your Tektronix Service Center.

Error code	Error message
2038	Disabled: RefLev too low\nfor Volts/Watts units
2042	Ext Corr > 20 dB pk-pk in acq segment
2044	Combined External Correction tables exceed the 60 dB peak-to-peak limit. External Correction tables were disabled. Please check table values and try again.
2045	Disabled: FastFrame doesn't support swept settings.
2046	Attenuator use currently exceeds the cautionary limit of 1200 changes per hour. Operation was stopped to protect against premature wear-out. The monitor function can be temporarily disabled in the Amplitude control panel or over the programmatic interface. Specified lifetime for an attenuator is 10,000,000 changes.
2047	Disabled: settings conflict with selected measurement
2048	Done saving — restart with Stop, then Run. The maximum number of files saved per run have been saved. To restart another FastSave acquisition, send INITIATE.

Status Conditions

Status conditions do not appear in the event queue, they are only returned by a :STATus:<measurement>EVENTs? query.

Global status

Global status conditions can be returned with any :STATus:<measurement>EVENTs? query.

Global status conditions

Status code	Status message
10107	Analysis Length was limited
10108	Analysis length too small for current setup
10110	Analysis time was adjusted
10122	Search result not enabled
10123	Search result no longer available

Measurement status

Measurement status conditions are unique to specific measurement groups.

Measurement status conditions

Status code	Status message
Pulse Measurements	

Status code	Status message
11001	Avg Tx only available in power units
11005	Pulse detection error
11006	Setup error: Define > Measurement Point is too late
11007	No pulses found
11008	No FFT (not all pulses have results)
11020	No FFT (not enough pulses)
11022	Analysis time was adjusted - reached time limit
11039	No sidelobe found
GP Digital Modulation	
11009	No burst detected
11034	Display not valid for selected modulation type
11035	Samples per symbol > 200. Decrease Measurement BW
11036	Too many samples per symbol. Decrease Measurement BW
Chan Power and ACPR	
11010	Measuring Noise
Other	
11028	CISPR: (progress message)
11037	Ext corrections enabled for traces
Settling Time	
11041	Signal not settled
11042	Settled duration too short
11043	First transition not found
11044	Meas Length limited by Analysis Length to xx.x xs
11045	Not enough samples: increase Meas BW or Meas Length
11046	Measurement Length exceeds limit of xxM points

Source status

Source status conditions can be returned with any :STATus:<measurement>EVENTs? query.

Source status conditions

Status code	Status message
12000	Data acquired during RF ADC overrange
12005	Aligning
12006	Not aligned
12007	Unaligned data
12009	Data from uncalibrated instrument
12010	Dither: manual control
12012	Data acquired during hardware failure
12014	Data acquired during RF dig gain overflow
12015	Locking to ext freq ref signal...
12018	RF Attenuator: manual control
12019	Saving acquisition
12020	Recalling acquisition data
12022	Disabled: data is from swept acquisition
12023	Disabled: Freq Mask Trigger in use
12026	Acq Sampling params: manual control
12027	Swept: RF Trig invalid for most signals
12030	Data acquired during RF ADC overrange
12031	Data acquired during RF dig gain overflow
12039	Decrease RefLev or increase\nAtten to prevent data errors
12040	Possible data errors - acquired with RefLev too much higher than RFAtten
12043	Ext Corr error - tables not applied
12056	Warming up
12057	Data acquired during warm-up


Status code	Status message
12063	Triggers disabled when DPX is swept
12064	Waiting for trigger. Open the DPX display.
12066	Data exceeds preamp range

Appendices

Appendix A: Character charts

B7 B6 B5 BITS B4 B3 B2 B1	0 0 0		0 0 1		0 1 0		0 1 1		1 0 0		1 0 1		1 1 0		1 1 1	
	CONTROL				NUMBERS SYMBOLS				UPPER CASE				LOWER CASE			
0 0 0 0	0 NUL 0	20 DLE 16	40 SP 32	60 0 48	100 @ 64	120 P 80	140 , 96	160 p 112								
0 0 0 1	1 SOH 1	21 DC1 17	41 ! 33	61 1 49	101 A 65	121 Q 81	141 a 97	161 q 113								
0 0 1 0	2 STX 2	22 DC2 18	42 " 34	62 2 50	102 B 66	122 R 82	142 b 98	162 r 114								
0 0 1 1	3 ETX 3	23 DC3 19	43 # 35	63 3 51	103 C 67	123 S 83	143 c 99	163 s 115								
0 1 0 0	4 SDC EOT 4	24 DCL DC4 20	44 \$ 36	64 4 52	104 D 68	124 T 84	144 d 100	164 t 116								
0 1 0 1	5 PPC ENQ 5	25 PPU NAK 21	45 % 37	65 5 53	105 E 69	125 U 85	145 e 101	165 u 117								
0 1 1 0	6 ACK 6	26 SYN 22	46 & 38	66 6 54	106 F 70	126 V 86	146 f 102	166 v 118								
0 1 1 1	7 BEL 7	27 ETB 23	47 ' 39	67 7 55	107 G 71	127 W 87	147 g 103	167 w 119								
1 0 0 0	10 GET BS 8	30 SPE CAN 24	50 (40	70 8 56	110 H 72	130 X 88	150 h 104	170 x 120								
1 0 0 1	11 TCT HT 9	31 SPD EM 25	51) 41	71 9 57	111 I 73	131 Y 89	151 i 105	171 y 121								
1 0 1 0	12 LF 10	32 SUB 26	52 * 42	72 : 58	112 J 74	132 Z 90	152 j 106	172 z 122								
1 0 1 1	13 VT 11	33 ESC 27	53 + 43	73 ; 59	113 K 75	133 [91	153 k 107	173 { 123								
1 1 0 0	14 FF 12	34 FS 28	54 , 44	74 < 60	114 L 76	134 \ 92	154 l 108	174 ; 124								
1 1 0 1	15 CR 13	35 GS 29	55 - 45	75 = 61	115 M 77	135] 93	155 m 109	175 } 125								
1 1 1 0	16 SO 14	36 RS 30	56 . 46	76 > 62	116 N 78	136 ^ 94	156 n 110	176 ~ 126								
1 1 1 1	17 SI 15	37 US 31	57 / 47	77 ? 63	117 O 79	137 _ 95	157 o 111	177 RUBOUT (DEL) 127								
	ADDRESSED COMMANDS		UNIVERSAL COMMANDS		LISTEN ADDRESSES		TALK ADDRESSES		SECONDARY ADDRESSES OR COMMANDS							

KEY



Tektronix

REF: ANSI STD X3.4-1977
 IEEE STD 488.1-1987
 ISO STD 646-2973

Appendix B: SCPI conformance information

All commands for the RSA Series analyzers are based on SCPI Version 1999.0. The following table lists the commands that are defined in the SCPI 1999.0 Standard. The other commands not listed in the table are not defined in the SCPI 1999.0 Standard.

SCPI 1999.0-defined commands

Command group	Command				
IEEE command	*CAL				
	*CLS				
	*ESE				
	*ESR				
	*IDN				
	*OPC				
	*OPT				
	*RST				
	*SRE				
	*STB				
	*TRG				
	*WAI				
ABORt	:ABORt				
INITiate	:INITiate	:CONTinuous			
		[:IMMEDIATE]			
STATus	:STATus	:OPERation	:CONDition?		
			:ENABLe		
			[:EVENT]?		
			:NTRansition		
			:PTRansition		
		:PRESet			

Command group	Command				
		:QUEStionable	:CONDition?		
			:ENABle		
			[[:EVENTt]]?		
			:NTRansition		
			:PTRansition		
SYSTem	:SYSTem	:COMMunicate	:GPIB	[[:SELF]]	:ADDRess
		:DATE			
		:ERRor	:ALL?		
			:CODE	:ALL??	
				[[:NEXT]]?	
			:COUNT?		
			[[:NEXT]]?		
		:PREset			
		:TIME			
		:VERSion?			
:UNIT	:UNIT	:POWER			

Appendix C: Creating a DPX Frame Access Plugin

A DPX Frame Access plugin gives access to DPX frames (bitmap and traces) from within the RSA process. The frame is accessed directly from its storage in memory, and so this method provides faster access to this data than from the **ASCII** (GPIB) interface.

A DPX Frame Access plugin consists of a managed assembly (dll) that contains a class that implements the IDPXFrameAccess interface. See below:

```

/// <summary>
/// If an external assembly is found that contains a type
/// that implements this interface, then it will be given
/// access to DPX frame data synchronous with data
/// coming from the hardware.
/// <summary>
public interface IDPXFrameAccess : IDisposable
{
    /// <summary>
    /// A frame is available. It will get called for
    /// every stitch.
    /// <summary>
    /// <param name="frame">valid only during the duration

```

```

/// of the function call </param>
void FrameAvailable(IDPXFrame frame);
}

```

The object that is passed into the FrameAvailable function is accessed via its IDPXFrame interface. See below:

```

/// <summary>
/// A DPX frame
///
/// <summary> public interface IDPXFrame
{
    /// <summary>
    /// Start frequency for traces and bitmap, Hz
    /// <summary> double StartFrequency { get; }
    /// <summary>
    /// Stop frequency for traces and bitmap, Hz
    /// </summary>
    double StopFrequency { get; }
    /// <summary>
    /// Top value of graph - current units
    /// </summary>
    double TopOfGraph { get; }
    /// <summary>
    /// Bottom value of graph - current units
    /// </summary>
    double BottomOfGraph { get; }
    /// <summary>
    /// What type of frame?
    /// </summary>
    DPXFrameType FrameType { get; }
    /// <summary>
    /// This is true if the frame is completed.
    /// It will be false if swept, and not all
    /// of the intermediate stitches have been
    /// completed. It will be true when all stitches
    /// have been completed, or if real-time.
    /// </summary>
    bool FrameComplete { get; }
    /// <summary>
    /// Get dimensions for bitmap
    /// </summary>
    /// <param name="rowCount"></param>
    /// <param name="columnCount"></param>
    void GetDimensions(out int rowCount, out int
columnCount);
    /// <summary>
    /// <param name="x"></param>
    void GetReferenceToBitmap(out ushort[] x);
    /// <summary>
    /// Get reference to array holding bitmap.
    /// Do not change the values in this array
    /// </summary>
    /// <param name="x"></param>
    void GetReferenceToBitmap(out float[] x);
    /// <summary>
    /// Get copy of Trace1. This will be the Max trace
    /// </summary>
    /// <param name="yValues">function will allocate
    /// the array, as necessary</param>
    void GetTrace1(ref float[] yValues);
    /// <summary>
    /// Get copy of Trace2. This will be the Min trace
    /// </summary>
    /// <param name="yValues">function will allocate
    /// the array, as necessary</param>
    void GetTrace2(ref float[] yValues);
    /// <summary>
    /// Get copy of Trace3. This will be the Avg trace
    /// </summary>
    /// <param name="yValues">function will allocate
    /// the array, as necessary</param>

```

```

void GetTrace3(ref float[] yValues);
}
public enum DPXFrameType
{
    /// <summary>
    Standard,
    /// </summary> Enhanced,
}

```

When the DPX measurement is running within the RSA application, the IDPXFrameAccess.FrameAvailable function is called once for every frame that becomes available from the DPX processing hardware. When the DPX measurement is operating in Real Time mode, FrameAvailable will be called for every Real Time frame. When the DPX measurement is operating in Swept mode, the total frequency span is covered by stitching together multiple real time spans at increasing center frequencies. In this case, FrameAvailable will be called for every stitch, with IDPXFrame.FrameComplete set to true on the last stitch.

The DPXFrameAccess assembly should not use the reference to the IDPXFrame object outside of the FrameAvailable function. It is only valid within the context of the FrameAvailable function call.

The creator of a DPXFrameAccess plugin should refer to the information in this programmer manual about the format of bitmap and trace data returned in the IDPXFrame object. Specifically, the FETCH:DPX:TRACE:xxx? queries are applicable. Traces that are not enabled are not computed and will not be available in the IDPXFrame.

Cautions about processing time within FrameAvailable function – in Real Time mode, DPX frames become available at a constant rate. As more time is taken in the FrameAvailable function, less CPU time is available for processing RF acquisitions (all the other measurements). If too much time is taken in the FrameAvailable function, frames may be missed and the update rate of other measurements may significantly slow down as they operate at lower priority than the DPX measurement.

To create a DPX Frame Access plugin, start with the example file attached to the PDF version of this manual. It has a class that implements IDPXFrameAccess and gives examples of accessing the various properties and methods of IDPXFrame.

NOTE: An example text file, DPXFrameAccessExample.cs, is attached to this PDF file. To access the attached file, open the PDF file and click the paperclip icon on the lower-left side of the document viewer.

Note that the build of this assembly will need to reference the MeasurementsShared.dll assembly in the C:\Program Files\Tektronix\XXXX\RSA\Client directory, where XXXX is either RSA5100B, or SignalVu, depending on the product..

Copy the DPX Frame Access assembly you have created to the C:\Program Files\Tektronix\XXXX\RSA\Plugins\DPX directory (you will need to create the directory). When the DPX measurement is started, it will discover the assembly and the FrameAvailable function will be called.



Glossary

Acronym	Description
ASCII	Acronym for the American Standard Code for Information Interchange. Controllers transmit commands to the instrument using ASCII character encoding.
ASK	Acronym for Amplitude Shift Keying. The process, or result of a process, in which the amplitude of the carrier is varied in accordance with the state of a digital input signal.
BNF (Backus-Naur Form)	A standard notation system for command syntax diagrams. The syntax diagrams in this manual use BNF notation.
Controller	A computer or other device that sends commands to and accepts responses from the analyzer.
EVM (Error Vector Magnitude)	The magnitude of an error of an actual signal relative to an ideal signal in a constellation display.
GPIB	Acronym for General Purpose Interface Bus, the common name for the communications interface system defined in IEEE Std 488.
IEEE	Acronym for the Institute for Electrical and Electronic Engineers.
IS95	Acronym for Interim Standard-95. The standards name for first-generation CDMA cellphone technology.
Modulation	The process of varying some characteristic of a signal with a second signal.
PSK	Acronym for Phase Shift Keying. The process, or result of a process, in which the carrier phase is varied discretely in accordance with a digital code.
QAM	Acronym for Quadrature Amplitude Modulation. The process, or result of a process, in which the amplitude and phase of the carrier are varied concurrently by synthesizing two orthogonal ASK waves (see ASK).