

Anritsu Advancing beyond

Rubidium™

RF/Microwave Signal Generator

MG36221A


9 kHz to 20 GHz

MG36241A

9 kHz to 43.5 GHz

MG36271A

9 kHz to 70 GHz

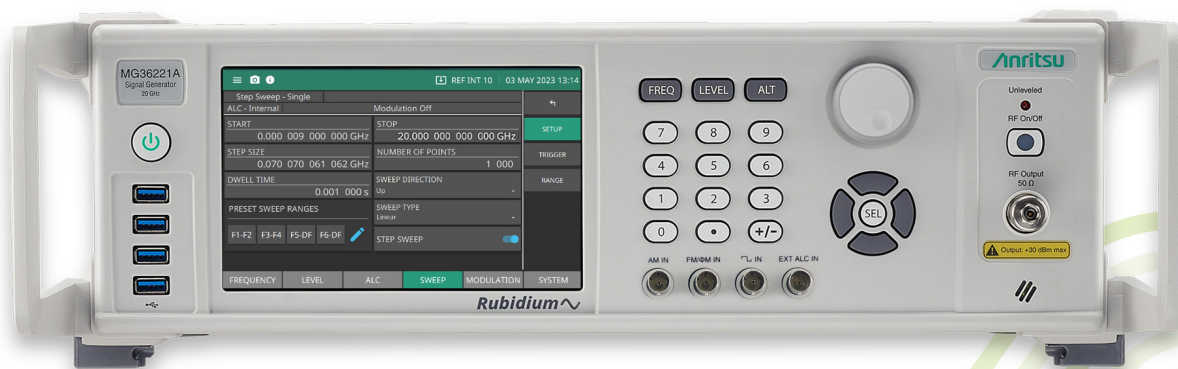

Introduction

The Rubidium™ MG362x1A is a microwave signal generator offering industry's lowest phase noise, best in class harmonics and spurious, excellent frequency stability, high output power, upgradability, reliability, and service. Our signal generators are configurable for a broad range of applications from R&D to manufacturing and depot repair. The Rubidium MG362x1A signal generator product line is built to deliver outstanding signal purity and frequency stability across a broad frequency range of 9 kHz to 70 GHz, even at high output power levels. The exceptional frequency stability coupled with low phase noise performance makes the Rubidium MG362x1A the ideal choice for many measurement applications. Anritsu provides a total solution including proven reliability and standard 1 year warranty plus pre-sale and post-sale support that is the best in the industry.

Instrument Highlights

- Frequency range: 9 kHz to 20/43.5/70 GHz
- Operable to 72 GHz
- Frequency resolution: 0.001 Hz
- SSB phase noise: -136 dBc/Hz (typical) and -140 dBc/Hz (measured) at 10 GHz output, 10 kHz offset
- Internal time base stability – Aging: $< \pm 2.0 \times 10^{-8}$ per year with Option 3
- Frequency range extendable to 1.1 THz
- Reference frequency input/output: 10 MHz, 100 MHz, 1600 MHz
- Up to +30 dBm leveled output power
- Output power:
 - 130 dBm to +20 dBm (20 GHz standard output)
 - 130 dBm to +16 dBm (43.5 GHz, standard output)
 - 100 dBm to +6 dBm (70 GHz, standard output)
- Harmonics: (20/43.5/70 GHz) -55 dBc
- Non-harmonics: (20/43.5/70 GHz) -63 dBc
- Modulation: AM, FM, PM, and Pulse
- Leveled pulse modulation
- Pulse modulation: Rise/Fall times 5 ns (typical)
- Pulse train generator option to simulate complex pulse radar signals.
- LF signal generator waveforms: Sine, square, pulse, triangle, ramp, GN/UN noise, User defined
- Frequency sweep modes: Analog, Step, List
- Frequency sweep width: 9 kHz to full frequency range (step, list), 100 MHz to full frequency range (Analog)
- Power sweep: Analog, Step and List
- Power sweep resolution: 0.01 dB/step
- On-site User Level Calibration

Capabilities and Functional Highlights

- The Low Phase Noise option delivers improved close-in phase noise from the standard Rubidium along with better frequency stability.
- The Ultra Low Phase Noise Option provides improved phase noise at higher offsets.
- For CW only applications between 2 GHz to 20 GHz, Rubidium provides even lower phase noise than the Ultra Low Phase Noise option, by another 3 dB on a separate RF output port at the back panel.
- The low noise RF/microwave signal generator Rubidium MG362x1A offers atomic clock frequency stability with an internal rubidium frequency reference option.
- Modulation capabilities include AM, FM, phase, and pulse to address simple to complex signal simulation requirements.
- Comprehensive pulse generation capabilities for testing pulse radar systems.
- On-site user level calibration capabilities helps maintain level accuracy over time, saves time and cost, and improves instrument availability.

MG362x1A Dimensions

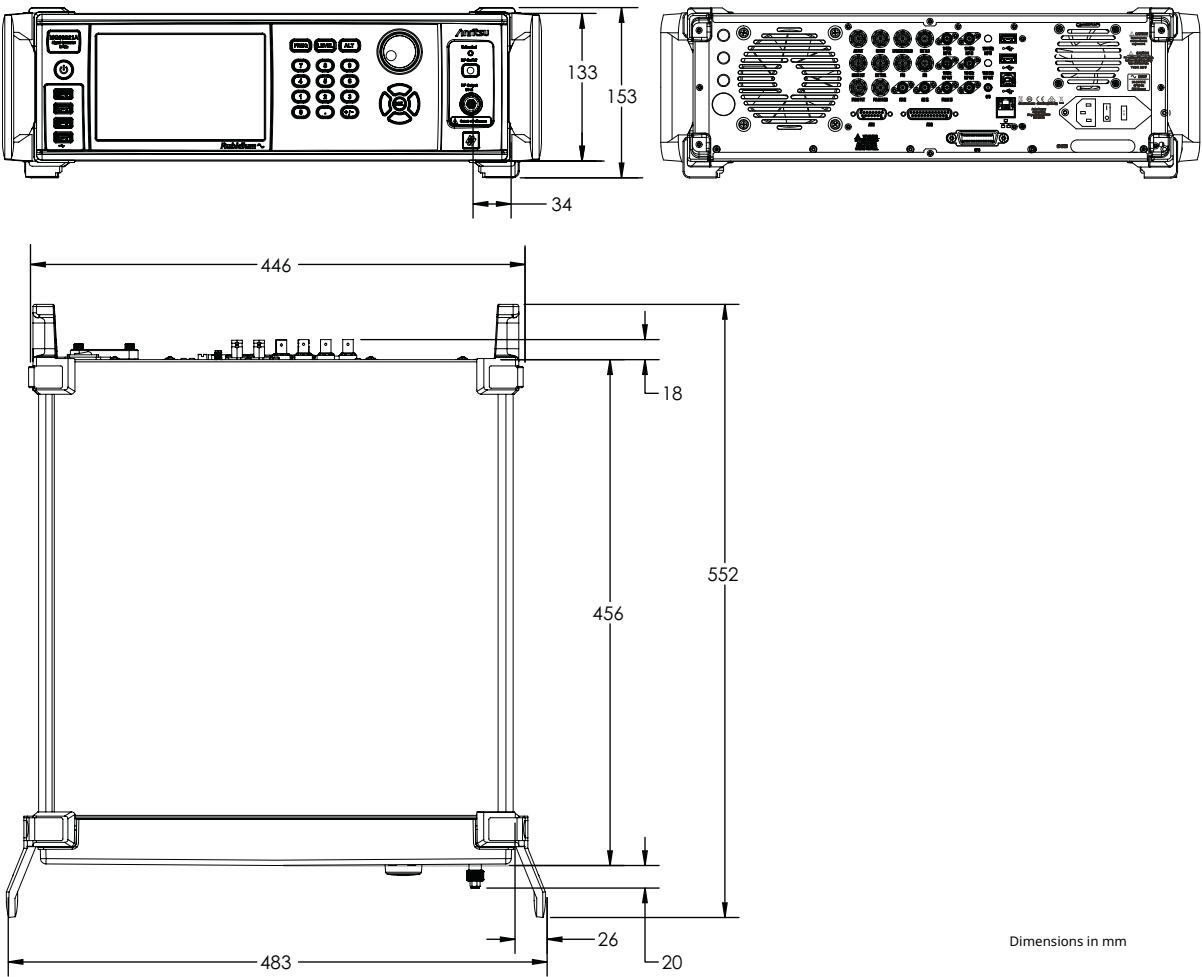


Table of Contents

Definitions.....	5
Frequency.....	6
Internal Time Base	6
Internal Reference Output.....	6
External Reference Input	6
Electronic Frequency Control.....	6
Signal Purity	7
Harmonic and Harmonic Related (dBc)	7
Non-harmonic (dBc)	7
Sub-harmonics (dBc).....	7
Power Line and Fan Rotation Spurious Emissions (dBc)	7
Residual FM	7
Single-Sideband Phase Noise	8
Premium Phase Noise, CW (Option 23)	12
Phase Noise, (Option 23) (dBc/Hz)	12
Harmonics, (Option 23) (typical)	12
Output Power Unleveled (Option 23)	12
Spurious (Option 23).....	12
Output Power.....	13
Maximum Leveled Output Power	13
Accuracy and Flatness.....	16
Step Sweep and CW Modes	16
Minimum Settable Output Power	16
Minimum Leveled Output Power	16
Unleveled Output Power Range	16
Power Level Switching Time.....	16
Step Attenuator (Option 2).....	16
General Output Power Specifications.....	16
On-site User Level Calibration (Option 18)	16
Power Modes	17
CW Power Sweep.....	17
Frequency Modes	18
Phase-Locked Step Sweep	18
Analog Sweep Mode (Option 6).....	18
Frequency Switching Time	18
Definitions.....	18
Switching Time.....	19
List Sweep	19
Frequency Markers (Option 6 required).....	19
Sweep Triggering.....	19
AM, FM, Φ M, and Pulse Modulation, Internal/External.....	20
Amplitude Modulation (Option 12).....	20
Frequency/Phase Modulation (Option 12).....	20
Frequency Modulation	21
Phase Modulation	22
External FM/Phase Mod Input	23
Pulse Modulation (Option 26)	23
Modulation Hardware (Option 27)	23
Pulse Train (Option 25)	24
User Defined Modulation (Option 10)	24
Millimeter-wave Frequency Coverage	25
Millimeter-wave Multiplier 2000-2087-R Through 2000-2098-R Series	25
General Specifications.....	26
Performance Specification	26
Output Attenuation.....	27
General	28
Remote Operation.....	28
Environmental (MIL-PRF-28800F, class 3)	28
Regulatory Compliance.....	28

Rear Panel	29
Rear Panel Connectors	29
Ordering Information	30
MG36221A Options	30
MG36241A Options	31
MG36271A Options	32
Standard Accessories	32
Upgrades	32
MG362x1A Option Configuration Matrix	32
USB Power Sensors	33
Transit Case	33
Accessories	33
Coaxial Adapters	34
Precision Adapters	36
Attenuators	36
Fixed Attenuators	37
Test Port Cables, Flexible, Ruggedized, Phase Stable	38

Definitions

Supplemental characteristics, denoted as (typical), measured, or nominal, provide additional (non-warranted) information, helpful in the application of the product.

Warranted Performance	All specifications and characteristics apply under the stated conditions below, unless otherwise stated: • After 30 minutes of warm-up time, where the instrument is left in the on state. • Over the 25 °C ± 5 °C temperature range.
Typical Performance	Typical specifications in parenthesis () describe performance that will be met by a minimum of 80% of all products. They do not include guard bands and are not warranted.
Measured Performance	Represents characteristic performance not warranted, but most likely to occur.
Nominal Performance	Represents representative performance not warranted or statistically derived from measurements, but by design.
Calibration Cycle	Recommended calibration cycle is 2 years from the date of shipment (Standard Warranty). All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com .

Frequency

	Model	Frequency Coverage	Output Connector
	MG36221A	9 kHz to 20.0 GHz	2.92 mm K(m)
	MG36241A	9 kHz to 43.5 GHz	2.92 mm K(m)
	MG36271A	9 kHz to 70 GHz	1.85 mm V(m)
	Frequency Resolution	0.001 Hz	
	Reference Frequency Accuracy (when instrument leaves the factory)	1×10^{-8}	
	Phase Offset	Adjustable in 0.1 degree steps	

Internal Time Base

	Standard	Option 3	Option 56
Time Base Type	OCXO	OCXO	Rubidium
Aging Rate per Year	$< \pm 5 \times 10^{-7}$	$< \pm 2 \times 10^{-8}$	$< \pm 1 \times 10^{-9}$
Temperature Effects from 0 to 55 °C	$< \pm 3 \times 10^{-7}$	$< \pm 2 \times 10^{-9}$	$< \pm 3 \times 10^{-10}$
Short-term Stability (Allan Deviation per 100 s after 2 hours warm up)	NA	NA	$< 8 \times 10^{-12}$

Internal Reference Output Provides a sine wave signal derived from the internal time base 50 Ω nominal impedance connectors, rear panel.

	Standard	Option 3 or 13	Option 3 or 13
Frequency (nominal)	10 MHz	100 MHz	1600 MHz
Output Level, ± 3 dB	10 dBm	12 dBm	5 dBm

External Reference Input

	Standard	Option 3
Input Frequency	10 MHz	1 Hz (PPS), 10 MHz, 100 MHz, 1600 MHz
10 MHz REF IN	Accepts an external 10 MHz ± 2 ppm (± 0.03 ppm for Option 3), 0 dBm to +10 dBm (+20 dBm damage level) reference signal (50 Ω nominal impedance, BNC type connector, rear panel).	
100 MHz REF IN (Option 3)	Accepts an external 100 MHz ± 2 ppm, +10 to +14 dBm (+20 dBm damage level) reference signal (50 Ω nominal impedance, BNC type connector, rear panel).	
1600 MHz REF IN (Option 3)	Accepts an external 1600 MHz ± 2 ppm, +3 to +7 dBm (+20 dBm damage level) reference signal (50 Ω nominal impedance, SMA, rear panel).	
PPS (Option 3)	Supports +3.3 V CMOS input/output selectable from reference menu. CMOS high-impedance input, BNC type connector, rear panel.	

Electronic Frequency Control Provides the capability to frequency modulate the internal crystal oscillator allowing phase locking of the synthesizer inside an external lock loop. High impedance (1 M Ω nominal), BNC type connector, rear panel. Accepts -4 to +4 VDC input voltage, 30 Hz bandwidth in wide reference PLL mode, 5 Hz/V minimum for standard reference, 0.75 Hz/V minimum for Option 3.

Signal Purity

In CW Mode. All specifications for < 40 GHz at the lesser of +10 dBm output or maximum specified leveled output power unless otherwise noted.

Harmonic and Harmonic Related (dBc)

Frequency Range	Standard + 10 dBm	Standard (Option 15) + 5dBm	(Option 15) +10 dBm	(Option 15) +15 dBm	(Option 15) +20 dBm
9 kHz to < 31.25 MHz	-35 ^a	-	-35	-30	-23
31.25 MHz to ≤ 1.3 GHz	-57 ^{a,b}	-	-57 ^c	-50	-47
> 1.3 GHz to < 2 GHz	-60 ^a	-	-60	-57	-52
≥ 2 GHz to ≤ 20 GHz	-60	-	-60	-60	-58
> 20 GHz to ≤ 24 GHz	-60	-	-20	-20	-15
> 24 GHz to ≤ 40 GHz	-60	-	-35	-35	-30
> 40 GHz to ≤ 43.5 GHz	-60	-55 ^d	-35	-35	-30
> 43.5 GHz to ≤ 70 GHz		-55 ^d			

a. Without Option 6. For harmonics with Option 6, see "Analog Sweep Mode (Option 6)" on page-18.

b. -55 for MG36241A and MG36271A models

c. -53 for MG36241A and MG36271A models

d. For MG36271A model

Non-harmonic (dBc)

Frequency Range	Standard
9 kHz to < 31.25 MHz	-65
31.25 MHz to ≤ 20 GHz	-70
> 20 GHz to ≤ 43.5 GHz	-63
> 43.5 GHz to ≤ 70 GHz	-63 ^a

a. Measured at +5 dBm for MG36271A model

Sub-harmonics (dBc) Sub-harmonics are defined as fout/N, where N is an integer.

Frequency Range	MG36221A	MG36241A	MG36271A
9 kHz to ≤ 20 GHz	-83	-83	-83
> 20 GHz to ≤ 32.5 GHz		-83	-75
> 32.5 GHz to ≤ 40 GHz		-83	-63
> 40 GHz to ≤ 43.5 GHz		-52	-63 ^a
> 43.5 GHz to ≤ 70 GHz			-63 ^a

a. Measured at +5dBm.

Power Line and Fan Rotation Spurious Emissions (dBc) (measured)

Frequency	Offset From Carrier	
	≤ 300 Hz	> 300 Hz to 1 kHz
9 kHz to ≤ 500 MHz	-90	-100
> 500 MHz to < 2 GHz MHz	-80	-100
> 2 GHz to ≤ 20 GHz	-60	-90
> 20 GHz to ≤ 43.5 GHz	-53	-83
> 43.5 GHz to ≤ 70 GHz	-50	-79

Residual FM (Hz RMS) In CW, Step Sweep modes, all specifications apply at the lesser of +10 dBm output or maximum specified leveled output power unless otherwise noted. (Residual FM spec does not apply to modulation modes)

Frequency	Residual FM (kHz RMS)		
	Standard (0.05 to 15 kHz BW)	Low Phase Noise (0.05 to 15 kHz BW)	Ultra Low Phase Noise (0.05 to 15 kHz BW)
100 MHz	0.07 Hz ^a	0.06 Hz ^a	0.06 Hz ^a
1 GHz	0.25 Hz ^a	0.18 Hz ^a	0.17 Hz ^a
10 GHz	0.93 Hz	0.70 Hz	0.55 Hz
20 GHz	1.9 Hz	1.8 Hz	1.2 Hz
43.5 GHz	5.5 Hz	5.5 Hz	4.2 Hz
70 GHz	6.5 Hz	6.0 Hz	5.0 Hz

a. 14 Hz with Option 6.

Single-Sideband Phase Noise


Phase noise is specified and guaranteed only with internal reference. In External Reference mode, the phase noise of the external supplied reference, and the selected external reference bandwidth, will dictate the instrument phase noise performance. Phase noise is not degraded when adding high power Option 15. Phase noise measured at +10 dBm for frequencies ≤ 43.5 GHz; otherwise, measured at +5 dBm or maximum power, whichever is lower.


Standard Phase Noise (typical), (dBc/Hz)		Offset from Carrier							
Frequency	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz	
100 MHz	-94 (-99)	-123 (-128)	-142 (-147)	-149 (-154)	-150 (-155)	-147 (-153)	-150 (-156)	-150 (-156)	
1 GHz	-74 (-79)	-103 (-108)	-132 (-138)	-140 (-146)	-144 (-150)	-145 (-151)	-153 (-159)	-153 (-159)	
10 GHz	-54 (-59)	-83 (-88)	-113 (-119)	-127 (-132)	-127 (-132)	-132 (-138)	-151 (-157)	-153 (-159)	
20 GHz	-48 (-53)	-77 (-82)	-107 (-113)	-120 (-125)	-118 (-123)	-127 (-133)	-150 (-156)	-153 (-159)	
43.5 GHz	-41 (-46)	-71 (-76)	-100 (-106)	-110 (-115)	-111 (-116)	-118 (-124)	-136 (-142)	-137 (-143)	
67 GHz	-37 (-42)	-66 (-71)	-96 (-102)	-110 (-115)	-110 (-115)	-115 (-121)	-134 (-140)	-136 (-142)	
70 GHz	-36 (-41)	-65 (-70)	-95 (-101)	-109 (-114)	-109 (-114)	-114 (-120)	-133 (-139)	-135 (-141)	


Low Phase Noise (Option 3) (typical), (dBc/Hz)		Offset from Carrier							
Frequency	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz	
100 MHz	-110 (-116)	-126 (-132)	-145 (-151)	-150 (-155)	-151 (-156)	-147 (-153)	-150 (-156)	-151 (-157)	
1 GHz	-90 (-96)	-106 (-112)	-133 (-139)	-140 (-146)	-145 (-151)	-145 (-151)	-153 (-159)	-153 (-159)	
10 GHz	-70 (-76)	-86 (-92)	-113 (-119)	-128 (-133)	-128 (-133)	-134 (-140)	-151 (-157)	-153 (-159)	
20 GHz	-64 (-70)	-80 (-86)	-107 (-113)	-120 (-125)	-120 (-125)	-127 (-133)	-150 (-156)	-153 (-159)	
43.5 GHz	-57 (-63)	-73 (-79)	-100 (-106)	-110 (-115)	-113 (-118)	-121 (-127)	-137 (-143)	-140 (-146)	
67 GHz	-53 (-59)	-69 (-75)	-96 (-102)	-111 (-116)	-111 (-116)	-117 (-123)	-134 (-140)	-136 (-142)	
70 GHz	-52 (-58)	-68 (-74)	-95 (-101)	-110 (-115)	-110 (-115)	-116 (-122)	-133 (-139)	-135 (-141)	

Ultra Low Phase Noise (Option 13) (typical), (dBc/Hz)		Offset from Carrier							
Frequency	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz	
100 MHz	-110 (-116)	-126 (-132)	-145 (-151)	-150 (-155)	-151 (-156)	-148 (-154)	-150 (-156)	-151 (-157)	
1 GHz	-90 (-96)	-106 (-112)	-133 (-139)	-141 (-147)	-146 (-152)	-146 (-152)	-153 (-159)	-153 (-159)	
10 GHz	-70 (-76)	-86 (-92)	-113 (-119)	-131 (-136)	-132 (-137)	-135 (-141)	-151 (-157)	-153 (-159)	
20 GHz	-64 (-70)	-80 (-86)	-107 (-113)	-124 (-129)	-124 (-129)	-129 (-135)	-150 (-156)	-153 (-159)	
43.5 GHz	-57 (-63)	-73 (-79)	-100 (-106)	-112 (-117)	-115 (-120)	-122 (-128)	-137 (-143)	-140 (-146)	
67 GHz	-53 (-59)	-69 (-75)	-96 (-102)	-114 (-119)	-115 (-120)	-118 (-124)	-134 (-140)	-136 (-142)	
70 GHz	-52 (-58)	-68 (-74)	-95 (-101)	-113 (-118)	-114 (-119)	-117 (-123)	-133 (-139)	-135 (-141)	

Export Phase Noise (Option 33)	Rubidium instrument providing high quality phase noise without needing Export license. Option 33 provides the best phase noise performance possible for export to other countries, thereby eliminating the logistics associated with obtaining an export license. Contact your sales representative for details.								
--------------------------------	---	--	--	--	--	--	--	--	--

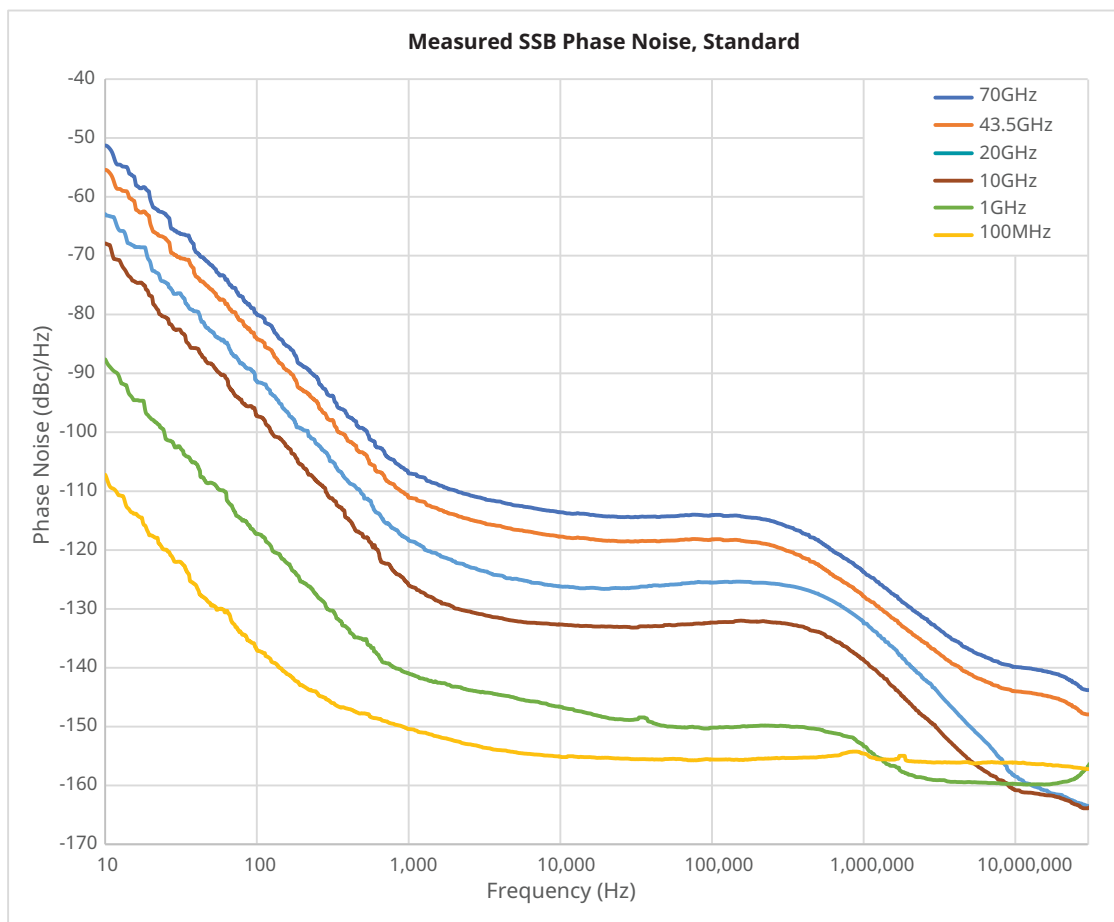

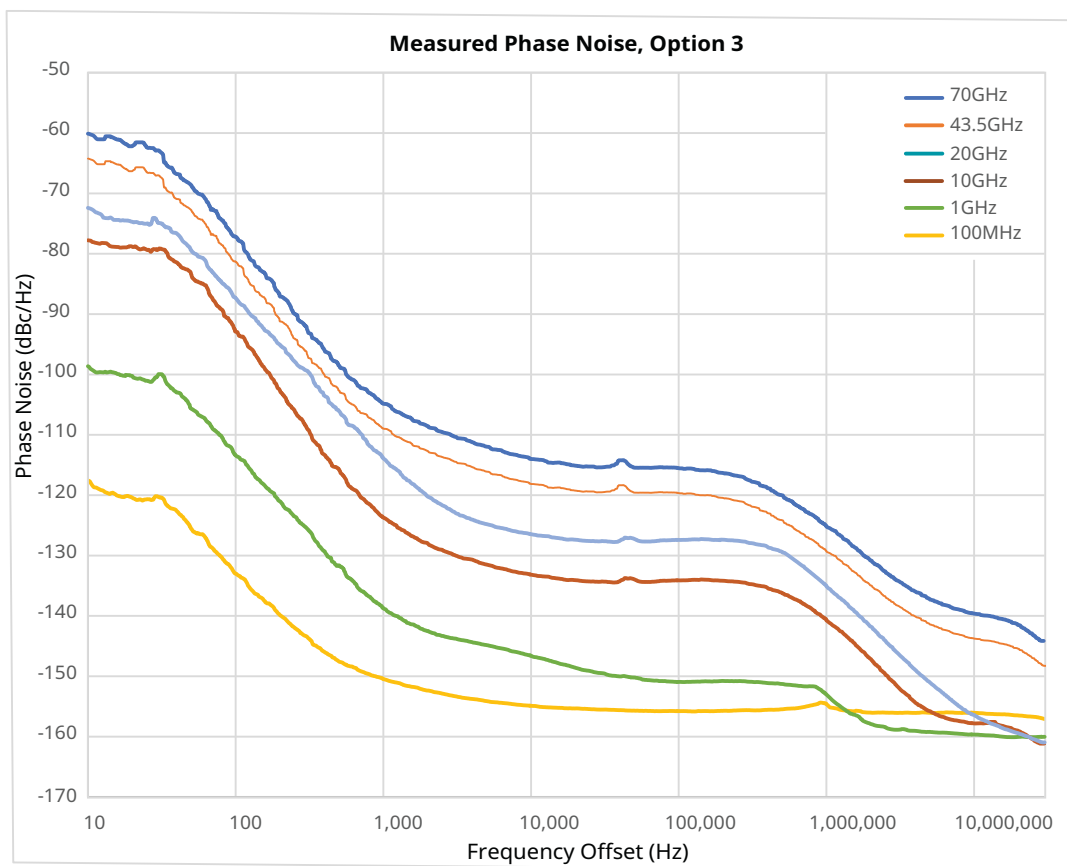

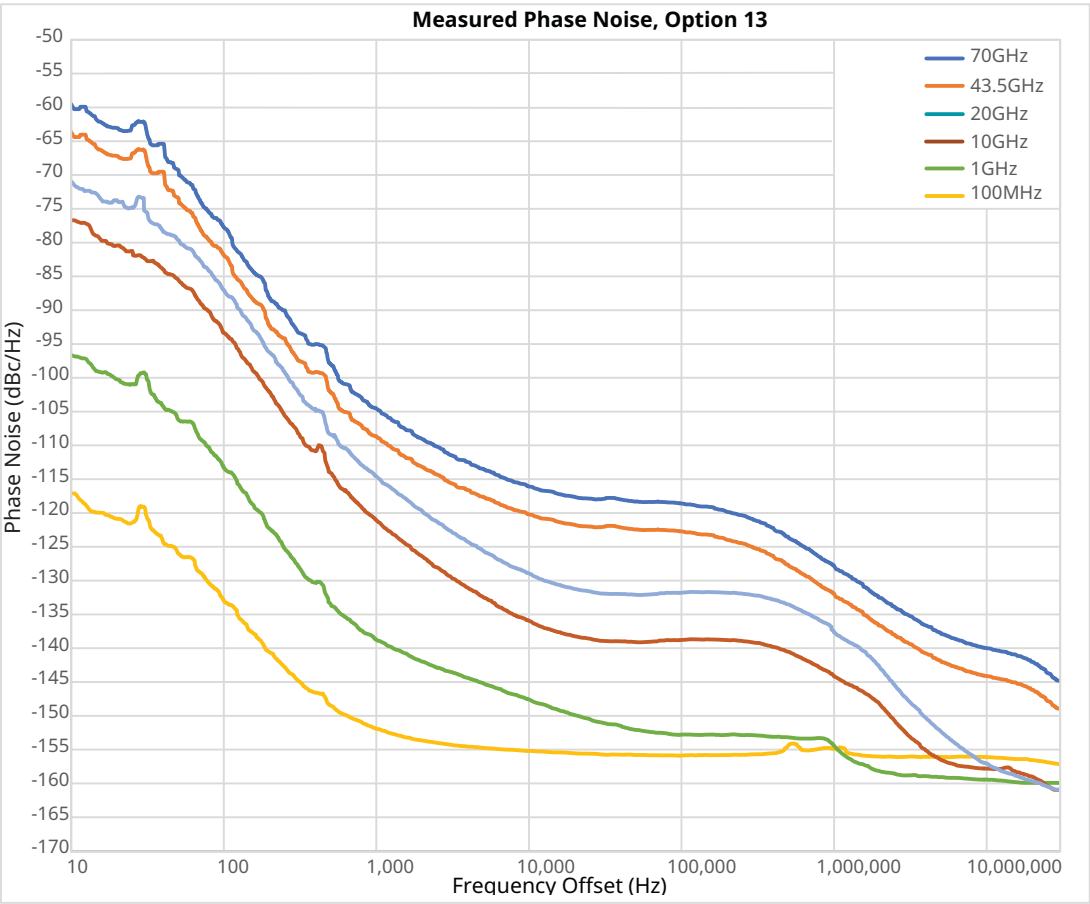

Premium Phase Noise, CW (Option 23)

A user-controlled switch routes signal directly from the synthesizer core to a Rear Panel RF output connector, eliminating the noise contribution of power amplifiers and leveling circuits. Output is 2 GHz to 20 GHz, unleveled, nominally +14 to +23 dBm. Phase noise at intermediate offsets is reduced by about 3 dB relative to front panel output. (Front panel RF output is disabled while the Rear Panel output is in use).

Phase Noise, (Option 23) (dBc/Hz) measured

Frequency	Offset from Carrier							
	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
2 GHz	-90	-106	-132	-150	-150	-148	-165	-169
10 GHz	-76	-92	-118	-140	-140	-145	-163	-166
20 GHz	-70	-86	-112	-134	-134	-139	-157	-160

Harmonics, (Option 23) (typical)


Frequency	dBc
2 GHz to ≤ 14 GHz	< -10
> 14 GHz to ≤ 20 GHz	< -25

Output Power Unleveled (Option 23)

Frequency	dBc
2 GHz to ≤ 18 GHz	> 15
> 18 GHz to ≤ 20 GHz	> 14



Spurious (Option 23)


< -70 dBc

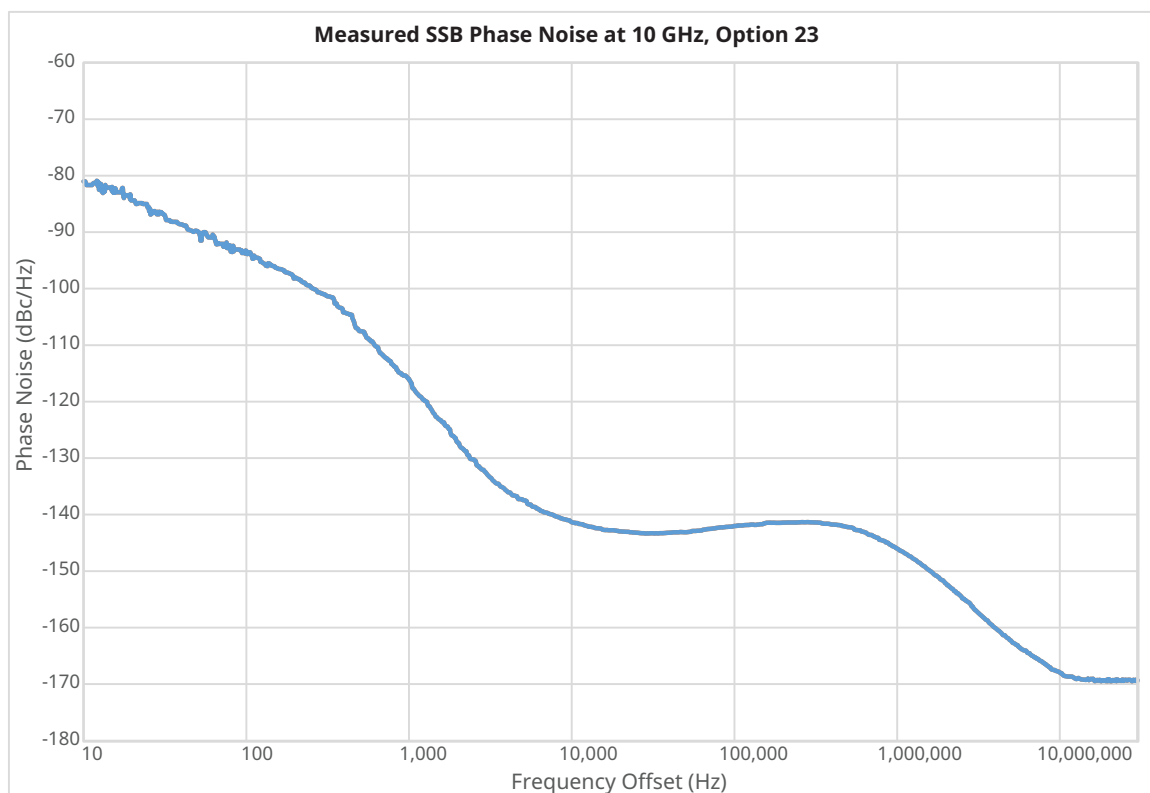

Output Power

Maximum Leveled Output Power			
Standard Power	Frequency Range	Output Power (dBm)	Output Power With Step Attenuator (dBm)
MG36221A	9 kHz to < 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+21	+20
	> 10 GHz to ≤ 20 GHz	+20	+19
MG36241A	9 kHz to ≤ 2 GHz	+19	+18
	> 2 GHz to ≤ 10 GHz	+19	+18
	> 10 GHz to ≤ 20 GHz	+16	+15
	> 20 GHz to ≤ 43.5 GHz	+16	+15
MG36271A	9 kHz to ≤ 13 GHz	+18	+18
	> 13 GHz to ≤ 37 GHz	+13.5	+11.5
	> 37 GHz to ≤ 65 GHz	+10.5	+9.5
	> 65 GHz to ≤ 67 GHz	+9	+5
	> 67 GHz to ≤ 70 GHz	+6 (typical)	+3 (typical)
High Power (Option 15)	Frequency Range	Output Power (dBm)	Output Power With Step Attenuator (dBm)
MG36221A	9 kHz to < 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+30	+30
	> 10 GHz to ≤ 18 GHz	+30	+28
	> 18 GHz to ≤ 20 GHz	+28	+27
MG36241A	9 kHz to < 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+29	+27
	> 10 GHz to ≤ 20 GHz	+23	+22
	> 20 GHz to ≤ 25 GHz	+20	+19
	> 25 GHz to ≤ 35 GHz	+23	+21
	> 35 GHz to ≤ 40 GHz	+20	+18
	> 40 GHz to ≤ 43.5 GHz	+20	+15
MG36271A	9 kHz to ≤ 2 GHz	+20	+19
	≥ 2 GHz to ≤ 10 GHz	+27	+21
	> 10 GHz to ≤ 20 GHz	+23	+21
	> 20 GHz to ≤ 37 GHz	+14.5	+11.5
	> 37 GHz to ≤ 42 GHz	+11	+8.5
	> 42 GHz to ≤ 60 GHz	+15	+11.5
	> 60 GHz to ≤ 65 GHz	+13	+9.5
	> 65 GHz to ≤ 67 GHz	+9	+5
	> 67 GHz to ≤ 70 GHz	+9 (typical)	+3 (typical)

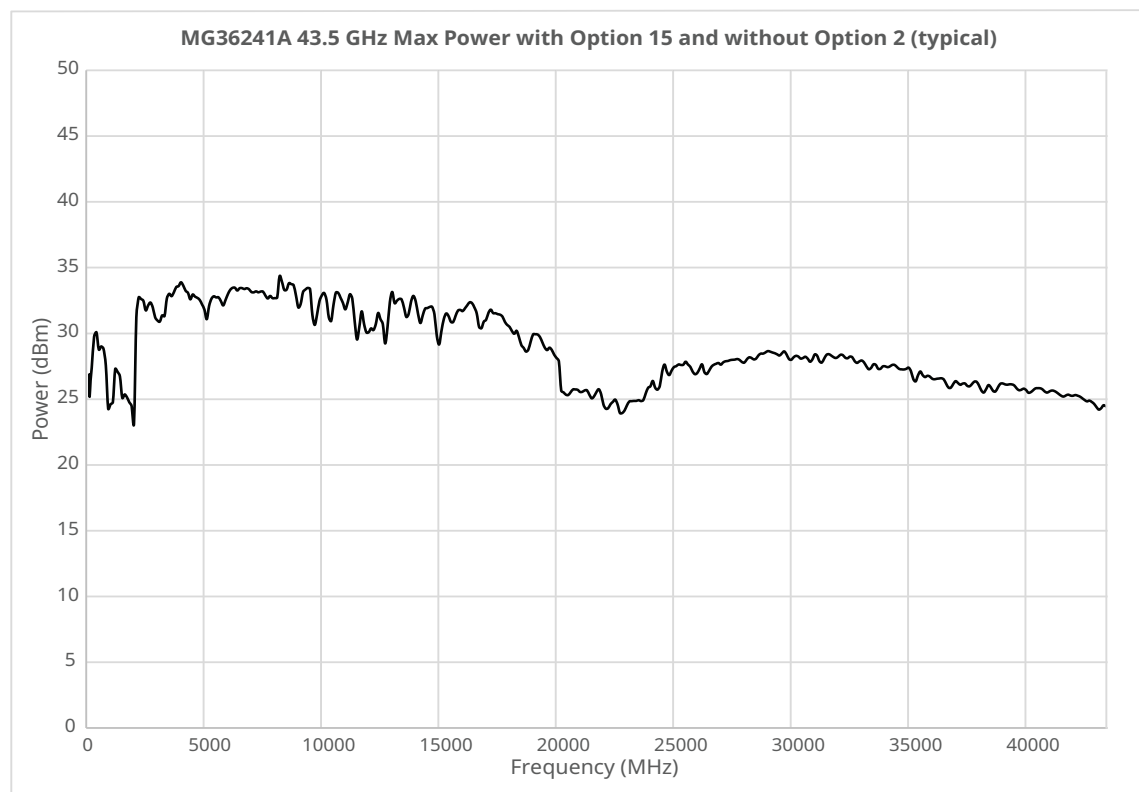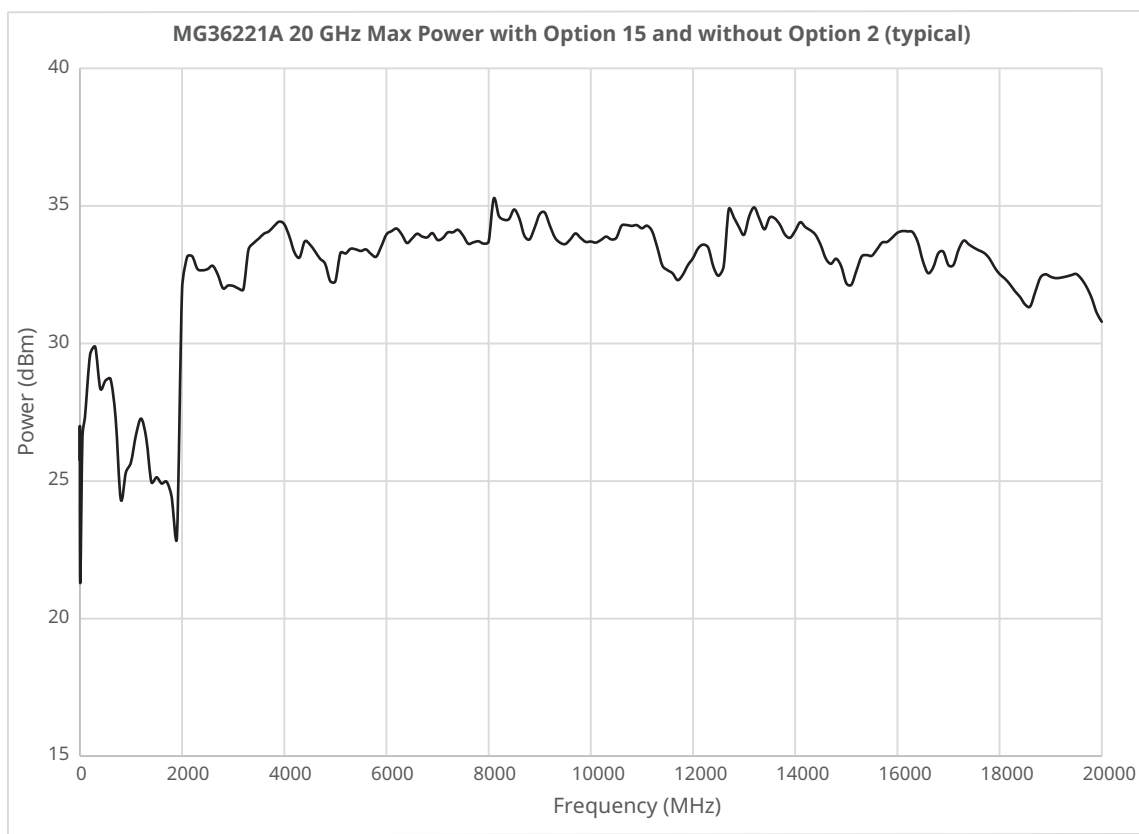

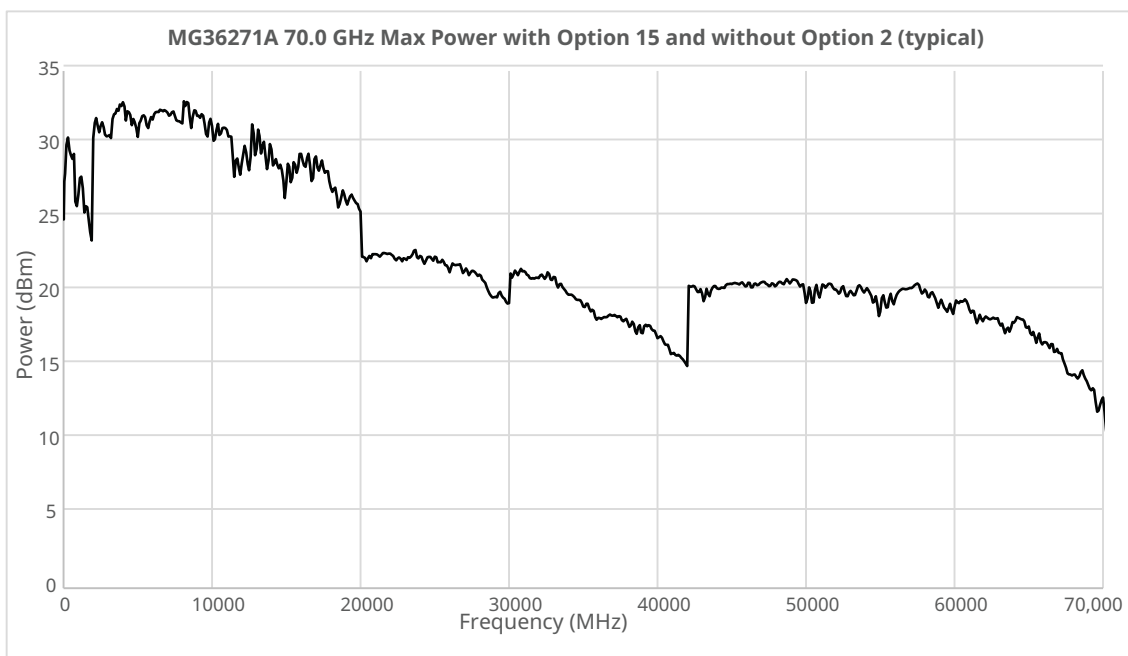

Accuracy and Flatness

Flatness is included within the accuracy specification.

Step Sweep and CW Modes				
Model	Power Range	Frequency	Accuracy	
MG36221A, MG36241A	To -90 dBm	9 kHz to ≤ 40 GHz	± 1 dB	
		> 40 GHz to 43.5 GHz	± 1.4 dB	
MG36271A	To -70 dBm	9 kHz to ≤ 40 GHz	± 1 dB	
		> 40 GHz to ≤ 67 GHz	± 1.5 dB	
		> 67 GHz to 70 GHz	± 1.5 dB (typical)	
	<-70 dBm to -90 dBm	9 kHz to ≤ 40 GHz	± 2 dB	
		> 40 GHz to ≤ 67 GHz	± 2.5 dB	
		> 67 GHz to 70 GHz	± 2.5 dB (typical)	
Minimum Settable Output Power				
Without an Attenuator	-20 dBm			
With an Attenuator	-130 dBm			
Minimum Leveled Output Power				
Without an Attenuator	-15 dBm (MG36221A and MG36241A)			
	-20 dBm (MG36271A)			
With an Attenuator	-120 dBm (MG36221A and MG36241A)			
	-100 dBm (MG36271A)			
Unleveled Output Power Range				
	(typical)			
Without an Attenuator	> 40 dB below max power			
With an Attenuator	> 130 dB below max power			
Power Level Switching Time				
	(to within specified accuracy)			
Without Change in Step Attenuator	< 3 ms (typical)			
With Change in Step Attenuator	< 20 ms (typical)			
Step Attenuator (Option 2)				
	Adds a 10 dB/step attenuator			
	110 dB range on models ≤ 43.5 GHz			
	90 dB range on models > 43.5 GHz to 70 GHz			
General Output Power Specifications				
Output Units	Selectable units are dBm, dBμV, and V. Selection of V assumes a 50 Ω load. All data entry and display are in the selected units			
Output Power Resolution	0.01 dB or 0.000 001 V			
Output Impedance	50 Ω nominal			
Output SWR (Internal Leveling)	< 2.0 (typical)			
Power Level Stability with Temperature	± 0.04 dB/°C			
Level Offset	Offsets the displayed power level to establish a new reference level			
RF On/Off	Toggles the RF output between an Off and On state			
RF On/Off Between Frequency Steps	System menu selection of RF On or RF Off during frequency switching in CW, Step Sweep, and List Sweep modes			
RF On/Off During Retrace	System menu selection of RF On or RF Off during retrace			
Internal Leveling	Power is leveled at the output connector in all modes			

On-site User Level Calibration (Option 18)

The on-site user level calibration option provides an internal level calibration interface with a level and flatness accuracy of ± 1 dB (typical). Connecting a MA24330A, MA24340A, or MA24350A USB power sensors to the RF output connector of the Rubidium signal generator and connecting the power sensor USB cable to the front or rear panel Type-C USB ports provides an internal level flatness calibration user interface controlled through the MG362x1A front panel.

Power Modes

CW Power Sweep

Range	Sweeps between any two power levels at a single CW frequency
Operating Modes	Step, List and Analog (Option 16)
Triggering Modes	Auto, Single
Analog Sweep Range	-20 dBm (typical) to maximum leveled power with the step attenuator set to 0 dBm
Triggering Source	Internal Free run, External (pos/neg) through BNC connector, Bus
Resolution	0.01 dB/step (Log) or 0.000 001 V (Linear)
Accuracy	Same as CW power accuracy
Log/Linear Sweep	Power sweep selectable as either log or linear. Log sweep is in dB; linear sweep is in V
Sweep Shape	Sawtooth
Step Size	User-controlled, 0.01 dB (Log) or 0.000 001 V (Linear) to the full power range of the instrument
Step Dwell Time	Variable from 10 μ s to 100 seconds. If the sweep crosses a step attenuator setting, there will be a sweep dwell of approximately 20 ms to allow setting of the step attenuator


Frequency Modes

Phase-Locked Step Sweep	
Sweep Width	Independently selected, 9 kHz to full range Every frequency step in sweep range is phase-locked
Accuracy	Same as internal or external time base
Linear/Log Sweep	User-selectable linear or log sweep In log sweep, step size logarithmically increases with frequency
Steps	User-selectable number of steps or the step size
Number of Steps	Variable from 2 to 65535
Step Size	0.001 Hz to the full frequency range of the instrument If the step size does not divide into the selected frequency range, the last step is truncated
Resolution (Minimum Step Size)	0.001 Hz
Sweep Mode	Auto, Manual
Triggering Mode	Auto, Single
Trigger Source	Auto, Single, External, Manual
Dwell Time Per Step	Variable from 10 μ S to 100 S
Analog Sweep Mode (Option 6) ¹	
Sweep Range	Available for MG36221A and MG36241A only. Start frequency during analog sweep is ≥ 100 MHz and Stop frequency is less than or equal to max. frequency. A range error will be displayed if any of these analog sweep start/stop limits are exceeded. Analog sweep is not available < 100 MHz.
Triggering	Auto, Single, External
Sweep Time Range	30 ms to 99 s
Sweep Speed	≤ 50 MHz/ms nominal
Harmonics Specification	
10 MHz to < 50 MHz	-36 dBc
50 MHz to < 2 GHz	-50 dBc


Frequency Switching Time

Definitions

Free Running Mode	Step or List Sweep t_{sw} = Switching Time, Unlocked
Lock Status Indicator	Rear Panel AUX I/O connector (pin 11) The lock status indicator goes high when the output is within 1 kHz of the final frequency t_{lk} = Locked Time = 1 ms + t_{dw} t_{dw} = Dwell Time, after locking. Selectable, 1 ms minimum $t_{lk}(\text{min}) = 2$ ms

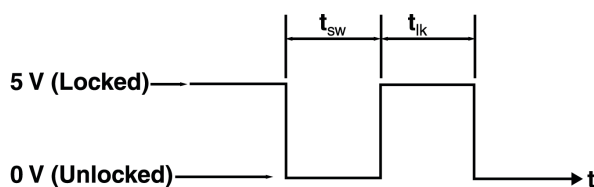

Single Frequency Trigger Mode	(List, non-sequential, and CFx modes) t_r = Trigger Response Time = 2 ms (Applies to GPIB, Ethernet and External TTL triggers)
-------------------------------	--

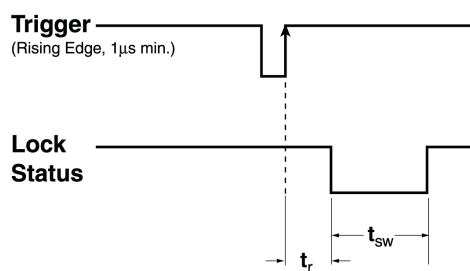

1. Adding Option 6 changes minimum CW frequency of MG362x1A from 9 kHz to 10 MHz.

Switching Time		Switching time is from Unlocked indication to frequency settled to within < 1 kHz of final. $T_{\text{msec}} = T1 + T2 + \text{abs} [(F1 + K1)*N1 - (F2 + K2)*N2]*1 \text{ msec/GHz, where:}$ $T1 = 7.5 \text{ ms}$ $T2 = 3 \text{ msec if } F2 \text{ is } < 2 \text{ GHz, otherwise } T2 = 0$ $F1 = \text{RF output frequency, GHz, at beginning of the frequency step}$ $F2 = \text{RF output frequency, GHz, at end of the frequency step}$ $Kx = \text{LO frequency, GHz, (internal to the DDC or HET downconverter) for given } Fx.$ $Nx = \text{YIG frequency division ratio, per the chart below, for given } Fx$	
	RF Output (GHz)	YIG Divider (N)	Downconverter LO, GHz (K)
	> 40 to 70	0.25	0
	> 20 to 40	0.5	0
	2 to 20	1	0
	> 1 to < 2	2	0
	> 0.5 to 1	4	0
	> 0.25 to 0.5	8	0
	> 0.125 to 0.25	16	0
	> 0.0625 to 0.125	32	0
	0.03125 to 0.0625	64	0
	0.000009 to < 0.03125	8	0.3
List Sweep		Manual, GPIB, or Ethernet control, up to 10 tables with 4000 non-sequential frequency/power sets can be stored and then addressed as a phase-locked step sweep. All tables are stored in non-volatile memory. Only one table is exposed on the GUI.	
	Triggering Mode	Auto, Single, External, Manual	
	Trigger Source	Internal free run, external through BNC connector, timer, Bus	
Rate (list mode switching)		See Frequency Switching Time	
	Sweep Range	9 kHz to full frequency range and amplitude range	
	Dwell Time	10 μs to 100 s	
	Minimum Step Size	0.001 Hz	
Frequency Markers (Option 6 required)			
	Description	Up to 20 independent, settable markers (F0 – F9 and M0 – M9)	
	Video Markers	+5 V or –5 V marker output, selectable from system menus AUX I/O connector, rear panel	
	Intensity Markers	Produces an intensity dot on analog display traces, obtained by a momentary dwell in RF sweep, in analog sweeps of < 1 second.	
	Marker Accuracy	Same as sweep frequency accuracy	
	Marker Resolution:	Analog Sweep: 1 MHz or Sweep Width/4096, which ever is greater Step Sweep: 0.01 Hz	
Sweep Triggering		Sweep triggering is provided for Step Frequency Sweep, List Frequency Sweep, and CW Power Sweep	
	Auto	Triggers sweep automatically	
	External	Triggers a sweep through BNC connector, Bus	
	Single Sweep	Triggers, aborts, and resets a single sweep Reset sweep may be selected to be at the top or bottom of the sweep	
	Single Step	Triggers each step of the sweep and waits for next trigger	

AM, FM, Φ M, and Pulse Modulation, Internal/External

Option 12 adds amplitude, frequency and phase modulation. Option 26 adds pulse modulation. Modulation can be driven internally or externally. Internal modulation requires Option 27. External modulation is driven via rear panel 50 Ω BNC connectors, one each for AM and FM/ Φ M. External modulation can also be driven from 50 Ω BNC connectors on the front panel with Option 29. AM, FM, Φ M, and Pulse modulation types may be simultaneously enabled except FM with Φ M.

Amplitude Modulation (Option 12)		All amplitude modulation specifications apply at 50 % depth, 1 kHz rate, sine wave, leveled ALC, with RF level set 6 dB below maximum specified leveled output power, unless otherwise noted
AM Depth		Linear: 0 % to 90 % (nominal) Log: 0 dB to 20 dB (nominal)
Accuracy		± 7 % relative to readout
AM Bandwidth (3 dB)		DC to > 50 kHz DC to 100 kHz (nominal)
Harmonic Distortion		< 5 % at 1 kHz: (nominal)
External AM Input		Log AM or Linear AM input Rear-panel BNC (50 Ω input impedance)
Sensitivity		Log AM: Continuously variable from 0 dB per volt to 25 dB per volt Linear AM: Continuously variable from 0 % per volt to 100 % per volt
External AM Input		± 1 Vpk maximum, Rear Panel BNC 50 Ω input impedance (Standard) 600 Ω input impedance (Option 30)
Damage Level		± 5 V

Frequency/Phase Modulation (Option 12) In the table below, Nmod and Nrf are multipliers that affect FM deviation at the measured frequency.

Option	Fout (MHz)	Nmod	Option	Fout (MHz)	Nrf
0006	> 10 to < 2000	1	0006	≥ 10 to < 2000	1
Standard	> 0.009 to ≤ 20	0.0625	Standard	≥ 0.009 to < 31.25	0.125
Standard	> 20 to < 31.25	0.125	Standard	≥ 31.25 to ≤ 62.5	0.015625
Standard	≥ 31.25 to ≤ 40	0.007813	Standard	> 62.5 to ≤ 125	0.03125
Standard	> 40 to ≤ 80	0.015625	Standard	> 125 to ≤ 250	0.0625
Standard	> 80 to ≤ 160	0.03125	Standard	> 250 to ≤ 500	0.125
Standard	> 160 to ≤ 320	0.0625	Standard	> 500 to $\leq 1,000$	0.25
Standard	> 320 to ≤ 640	0.125	Standard	> 1,000 to $\leq 2,000$	0.5
Standard	> 640 to $\leq 1,280$	0.25	All	$\geq 2,000$ to $\leq 20,000$	1
Standard	> 1,280 to < 2000	0.5	All	> 20,000 to $\leq 40,000$	2
All	≥ 2000 to $\leq 2,560$	0.5	All	> 40,000 to $\leq 43,500$	4
All	> 2,560 to $\leq 5,120$	1			
All	> 5120 to $\leq 10,240$	1			
All	> 10,240 to $\leq 20,000$	1			
All	> 20,000 to $\leq 40,000$	2			
All	> 40,000 to $\leq 43,500$	4			

Frequency Modulation

Parameter	Modes	Options	Specifications	Conditions, Int or Ext @ 1V pk AC, 0V DC, DC HPF, sinewave, except as noted
Max Deviation	Low Noise	Standard Option 6 Option 6	10 MHz *Nmod (see Nmod table) 10 MHz *Nmod (see Nmod table) 1 MHz	RF ≥ 2 MHz, Rate = DC ^a to lesser of (8 MHz or 0.03*RF) RF ≥ 50 MHz, Rate = DC ^a to 8 MHz RF < 50 MHz, Rate = DC ^a to 8 MHz
	Wide (unlocked)	Standard Option 6 Option 6	100 MHz *Nrf, typical 100 MHz *Nrf, typical 10 MHz, typical	RF > 31.25 MHz, Rate = DC ^a to 10 Hz RF ≥ 200 MHz, Rate = DC ^a to 10 Hz RF = 40 MHz to < 200 MHz, Rate = DC ^a to 10 Hz
Min Deviation	Low Noise	Standard, Opt. 6	640 Hz *Nmod, nominal, (less if Ext FM < ± 1 V)	Rate = 1 kHz
	Wide (unlocked)	Standard, Opt. 6	3.2 kHz *Nrf, nominal, (less if Ext FM < ± 1 V)	Rate = 10 kHz
Deviation Accuracy	Low Noise	Standard Option 6	Internal: ± 2 %, External: ± 3 % of indication Internal: ± 2 %, External: ± 3 % of indication	RF ≥ 2 MHz, Rate = 1 kHz, Deviation set 2 MHz*Nmod RF ≥ 50 MHz, Rate = 1 kHz, Deviation set 2 MHz*Nmod
External Sensitivity	Low Noise	Standard Option 6 Option 6	(1.28 kHz/V to 20 MHz/V) *Nmod (1.28 kHz/V to 20 MHz/V) *Nmod (1.28 kHz/V to 20 MHz/V)	RF ≥ 50 MHz RF < 50 MHz
	Wide (unlocked)	Standard Option 6 Option 6	(3.2 kHz/V to 105 MHz/V) *Nrf (3.2 kHz/V to 105 MHz/V) *Nrf 3.2 kHz/V to 105 MHz/V	RF ≥ 200 MHz RF 40 MHz to < 200 MHz
External Sensitivity Accuracy	Low Noise	Standard, Opt. 6	3 % nominal	Rate = 1 kHz
Flatness vs. Modulation Rate	Low Noise	Standard	± 1dB, (typical)	1 kHz - 1 MHz Rate vs. 1 kHz, Deviation set 2 MHz*Nmod, RF ≥ 2 MHz
		Option 6		1 kHz - 1 MHz Rate vs. 1 kHz, Deviation set 2 MHz*Nmod, RF ≥ 50 MHz
3 dB Bandwidth	Low Noise	Standard	DC ^a to 10 MHz	-3 dB vs. 1 kHz Rate, Deviation set 2 MHz*Nmod, RF > 80 MHz
		Option 6		-3 dB vs. 1 kHz Rate, Deviation setting = 2 MHz*Nmod, RF ≥ 50 MHz
	Wide (unlocked)	Standard	DC ^a to > 500 Hz, nominal	-3 dB vs. 10 Hz Rate, Deviation set 10 MHz*Nrf, RF > 31.25 MHz
		Option 6		-3 dB vs. 10 Hz Rate, Deviation set 10 MHz*Nrf, RF ≥ 40 MHz
Harmonic distortion (THD)	Highpass Filter	Standard, Opt. 6	DC ^a , 63 Hz, 1 kHz, nominal	
	Low Noise	Standard Option 6	1 %	Rate = 1 kHz and 50 kHz, Deviation = 300 kHz if RF > 80 MHz, 50 kHz if RF = 1MHz to ≤ 80 MHz Rate = 1 kHz and 50 kHz, Deviation = 300 kHz
Incidental AM	Low Noise	Standard, Opt. 6	≤ 0.3 % rms	50 Hz-15 kHz integration BW, Deviation = 50 kHz, Rate = 1 kHz, RF ≥ 2 MHz
Residual FM	Low Noise	Standard, Opt. 6	≤ 3 kHz rms	50 Hz-15 kHz integration BW, Deviation = 50 kHz, Rate = 1 kHz

a. Minimum settable modulation rate for Internal FM/PM is 100 mHz. External FM/PM inputs are DC-capable.

Phase Modulation

Parameter	Modes	Option	Specifications	Conditions, except as noted: Int or Ext@1VpkAC, 0VDC, DC HPF, sine wave
Max Deviation	Low Noise	Standard	$\pm[\text{lesser of } 5 \text{ rad or } 7 \text{ MHz/modrate}] * N_{\text{mod}}$	$RF \geq 1 \text{ MHz} + \text{Rate} * (1 + \text{Deviation, Rad})$, Rate = DC^a to lesser of (7 MHz or $0.03 * RF$)
		Option 6	$\pm[\text{lesser of } 5 \text{ rad or } 7 \text{ MHz/modrate}] * N_{\text{mod}}$	$RF \geq 10 \text{ MHz} + \text{Rate} * (1 + \text{Deviation, Rad})$, Rate = DC^a to 7 MHz
	Wide Deviation	Standard	$\pm[\text{lesser of } 640 \text{ rad or } 7 \text{ MHz/modrate}] * N_{\text{mod}}$	$RF \geq 1 \text{ MHz} + \text{Rate} * (1 + \text{Deviation, Rad})$, Rate = DC^a to lesser of (1 MHz or $0.001 * RF$)
		Option 6	$\pm[\text{lesser of } 640 \text{ rad or } 7 \text{ MHz/modrate}] * N_{\text{mod}}$	$RF \geq \text{greater of } (120 \text{ MHz, } 10 \text{ MHz} + \text{Rate} * (\text{Deviation, Rad}))$, Rate = DC^a to 1 MHz
Min Deviation	Low Noise	Standard, Opt. 6	1 m rad at $N_{\text{mod}} = 0.5$ to 2, (< 1m rad if Ext Φ M input < 1Vpk), nominal	Rate = 1 kHz
	Wide Deviation	Standard, Opt. 6	0.1 rad at $N_{\text{mod}} = 0.5$ to 2, (< 0.1 rad if Ext Φ M input < 1Vpk), nominal	By design, not tested, 100 Hz rate
Deviation Accuracy	Low Noise	Standard	Internal: $\pm 5 \%$, External: $\pm 5 \%$ of indication	$RF \geq 2 \text{ MHz}$, Rate = 1 kHz, Phase Dev setting = $5 \text{ rad} * N_{\text{mod}}$
		Option 6	Internal: $\pm 5 \%$, External: $\pm 5 \%$ of indication	$RF \geq 10 \text{ MHz}$, Rate = 1 kHz, Phase Dev set $5 \text{ rad} * N_{\text{mod}}$
	Wide Deviation	Standard	Internal: $\pm 5 \%$, External: $\pm 5 \%$ of Indication	$RF \geq 2 \text{ MHz}$, Rate = 100 Hz, Phase Dev set $640 \text{ rad} * N_{\text{mod}}$
		Option 6	Internal: $\pm 5 \%$, External: $\pm 5 \%$ of Indication	$RF \geq 10 \text{ MHz}$, Rate = 100 Hz, Phase Dev set $640 \text{ rad} * N_{\text{mod}}$
Ext Sensitivity	Low Noise	Standard, Opt. 6	$N_{\text{mod}} * 6.28 \text{ rad/V}$ to (1mrad/V for $N_{\text{mod}} = 0.5$ to 2)	
	Wide Deviation	Standard, Opt. 6	$N_{\text{mod}} * 804 \text{ rad/V}$ to (0.1 rad/V for $N_{\text{mod}} = 0.5$ to 2)	
External Sensitivity Accuracy	Low Noise	Standard	$\pm 5 \%$, nominal	$RF \geq 2 \text{ MHz}$, Rate = 1 kHz, Phase Dev set $5 \text{ rad} * N_{\text{mod}}$
	Wide Deviation	Option 6	$\pm 5 \%$, nominal	$RF \geq 2 \text{ MHz}$, Rate = 100 Hz, Phase Dev set $640 \text{ rad} * N_{\text{mod}}$
Flatness vs. Modulation Rate	Low Noise	Standard	$\pm 1 \text{ dB}$ (typical)	1 kHz-1 MHz Rate vs. 1 kHz, Phase Dev set $0.2 \text{ rad} * N_{\text{mod}}$, $RF \geq 2 \text{ MHz}$
		Option 6	$\pm 1 \text{ dB}$ (typical)	1 kHz-1 MHz Rate vs. 1 kHz, Phase Dev set $0.2 \text{ rad} * N_{\text{mod}}$
3 dB Bandwidth	Low Noise	Standard	DC^a to 10 MHz	-3 dB vs. 1 kHz Rate, Phase Dev set $0.2 \text{ rad} * N_{\text{mod}}$, $RF > 80 \text{ MHz}$
		Option 6	DC^a to 10 MHz	-3 dB vs. 1 kHz Rate, Phase Dev set $0.2 \text{ rad} * N_{\text{mod}}$, $RF \geq 25 \text{ MHz}$
	Wide Deviation	Standard	DC^a to 1 MHz, nominal	-3 dB vs. 100 Hz Rate, Phase Dev set $10 \text{ rad} * N_{\text{mod}}$, $RF \geq 2 \text{ MHz}$
		Option 6	DC^a to 1 MHz, nominal	-3 dB vs. 100 Hz Rate, Phase Dev set $10 \text{ rad} * N_{\text{mod}}$
	Highpass Filter	Standard, Opt. 6	DC^a , 63 Hz, 1 kHz, nominal	

a. Minimum settable modulation rate for Internal FM/PM is 100mHz. External FM/PM inputs are DC-capable.

External FM/Phase Mod Input

Connector type	BNC
Impedance	50 Ω , nominal
Full-scale Input	± 1 Vpk
Damage Level	± 5 V

Pulse Modulation (Option 26) Option 26 adds Pulse modulation, driven internally or externally. Requires Option 27. External modulation is driven from a rear panel BNC connector. It can also be driven from a BNC connector on the front panel with Option 29. Pulse modulation is not available for RF < 10 MHz.

On/Off Ratio	> 80 dB (70 dB for frequencies < 2 GHz)		
Minimum Levelled Pulse Width	100 ns, ≥ 2 GHz		
	1 μs, < 2 GHz		
Minimum Unlevelled Pulse Width	10 ns for 2 GHz to 20 GHz (external)		
	50 ns for > 20 GHz (external)		
Level Accuracy Relative to CW (100 Hz to 1 MHz PRF)	±0.5 dB, ≥ 2 GHz, Pulse widths ≥ 1 μs		
	±1 dB, ≥ 2 GHz, Pulse widths 100 ns to < 1 μs		
	±1 dB, < 2 GHz, Pulse widths ≥ 1 μs		
Pulse Delay	60 ns in External Mode (typical)		
PRF Range	DC to 10 MHz, unlevelled		
	100 Hz to 5 MHz, levelled		
External Input	Rear-panel BNC		
Drive Level	TTL compatible input		
Input Logic	Positive-true or negative-true, selectable from modulation menu		
Frequency Range	Rise and Fall Time (10% to 90%)	Overshoot	Video Feedthrough
≥ 10 MHz to < 31.25 MHz	400 ns	33 %	± 70 mV
≥ 31.25 MHz to < 125 MHz	90 ns	22 %	± 130 mV
≥ 125 MHz to < 500 MHz	33 ns	11 %	± 70 mV
≥ 500 MHz to < 2000 MHz	15 ns	10 %	± 50 mV
> 2 GHz	10 ns (5 ns, (typical)	10 %	± 30 mV

Modulation Hardware (Option 27)

Description	Modulation hardware that includes an internal pulse generator and two internal waveform generators, one providing a frequency or phase modulating signal and the other an amplitude modulating signal. This modulation hardware option can only be ordered in combination with either FM/ Φ M, AM, or Pulse modulation Options 12 and 26, respectively.		
Waveforms	Sinusoid, square, triangle, positive ramp, negative ramp, Gaussian noise, uniform noise		
Rate	0.1 Hz to 10 MHz sinusoidal		
	0.1 Hz to 1 MHz square-wave, triangle, ramps		
Resolution	0.1 Hz		
Waveform Outputs	Two BNC connectors on the rear panel, FM/ Φ M OUT and AM OUT		
Pulse Modes	Singlet, doublet, triplet, quadruplet		
Pulse Triggers	Freerun, triggered, gated, delayed, triggered with delay		
Pulse Inputs/Outputs	Video pulse and sync out, rear-panel BNC connectors		
Pulse Parameter			
Pulse Width	10 ns to 42 s		
Pulse Period	100 ns to 42 s (Period must be longer than 10 ns + sum of pulse widths and delays)		
Variable Delay: Singlet	20 ns to 42 s		
	Doublet		
	20 ns to 42 s		
Triplet	20 ns to 42 s		
	Quadruplet		
Resolution	20 ns to 42 s		
	10 ns		
Accuracy	10 ns (5 ns, typical))		

Pulse Train (Option 25)

Description	Pulse train adds ability to generate an arbitrary pulse pattern to simulate complex pulse radar signals. Up to 2048 pulse patterns or bursts can be generated with this option. Requires Option 26 and 27.
Number of pulse patterns/bursts	1 to 2047
No of pulses per burst	1 to 65535
Pulse ON/OFF period range	100 ns to (42 s)
PRF Range	0.024 Hz to 10 MHz
Resolution	10 ns
Accuracy	10 ns, (5 ns typ.)
Triggering mode	Auto, Single Step, Single Sweep, Breakpoint, Multiple Sweep
Triggering source	Single, external, external gate and time
No of Breakpoints	Up to 10

User Defined Modulation (Option 10)

User Defined Modulation option provides the ability to create arbitrary waveforms using Rubidium's remote GUI client. Waveform created in the remote GUI client can be downloaded into the internal look-up tables of 8191 points in LF generator's memory. The download files are in Anritsu proprietary wfm format containing integer numbers between 0 and 16383, where 0 corresponds to the minimum modulation level and 4095 the maximum. The arbitrary waveforms can be used for AM, FM/PM modulation. Alternatively, they can also be made available at the rear panel for external use.

In addition to the capability of creating and generating arbitrary waveforms, user defined modulation option enables Rubidium to synchronize between FM modulation and Pulse modulation. The synchronization between FM and Pulse modulation enables generation of linear and non linear chirp signals. Requires Option 12, 26 and 27.

Millimeter-wave Frequency Coverage

Millimeter-wave Multiplier 2000-2087-R Through 2000-2098-R Series


2000-2087-R through 2000-2098-R series of waveguide output multipliers are available for banded frequency coverage from 50 GHz (WR15) to 1.1 THz (WR1.0). These modules offer high test port power, voltage-controlled RF attenuation, and TTL controlled ON/OFF modulation rates to a few kHz as standard. The frequency multiplier modules are intended to be used in CW mode and do not preserve AM.



Frequency multiplier modules have two multipliers that can be configured to allow input signals in two frequency bands:



- Low frequency input for < 20 GHz and 10 dBm input level

In this configuration the RF output from Rubidium is input into the K(f) input port on the rear panel of the multiplier module. The port is designated as RF(L). The low frequency band input configuration uses both N_1 and N_2 multipliers, as shown below.

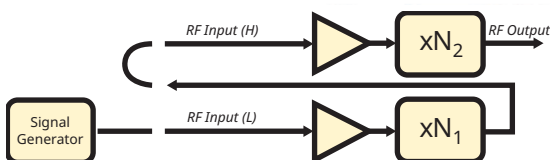

- High frequency input for < 50 GHz and 0 dBm input level

In this configuration the RF output from Rubidium is input into the 2.4 mm(f) input port on the rear panel of the multiplier module. The port is designated as RF(H). The high frequency band input configuration uses an N_2 multiplier, as shown below. This results in a lower multiplication factor and reduces unwanted subharmonic signals within the band.

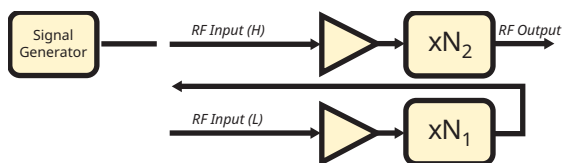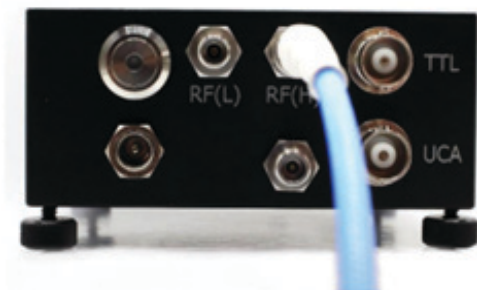

General Specifications

Parameter	Description	Specification	Connector
RF Input ^{a, b}	Low Frequency (typical / damage)	10 dBm $\pm$ 3dB / 16 dBm	2.92 mm(f)
	High Frequency (typical / damage)	0 dBm $\pm$ 3dB / 6 dBm	2.4 mm(f)
RF Output	VDI Precision Flange		UG-387/U-M
AC Inputs ^c	Single-Volt Power Supply (+9 V/4 A)	100 to 240 VAC, 3.5 A, 50 to 60 Hz	U.S. or E.U.
RF Power Control	User Controlled Attenuation (UCA)	0 V-off, 5 V-full power	BNC (f)
Voltage Bias Port	For Use with External Components	+9 V	LEMO 00
Operating Temperature	Typical / Recommended	25°C / 20-30°C	
Maximum Weight	–	2.0 lb (0.91 kg)	
Dimensions	Typical (Length x Width x Height)	5.00 x 3.50 x 1.50 inches	

a. For low frequency input operation a K(f) to K(m) RF cable is included as standard.

b. For high frequency band input operation, a 34VFKF50A V(f) to K(f) adapter and a V120mm RF cable are required and must be ordered separately. The 34VFKF50A adapter is used at Rubidium output to convert to a V(f). This is then connected to 2.4mm (f) input port of multiplier module with a V120MM RF cable.

c. It is recommended to turn the power ON only after all connections to the multiplier are made, such as RF input, AC inputs, and DC inputs. When turning power OFF, it is recommended to turn OFF the RF input from signal generator first, and then turn OFF/disconnect all other inputs and outputs of the multiplier.

Performance Specification

Parameter	Multiplier Model ^{a, b, c}					
	2000-2087-R	2000-2088-R	2000-2089-R	2000-2090-R	2000-2091-R	2000-2092-R
Frequency Band (GHz)	WR -15	WR-12	WR-10	WR-8.0	WR-6.5	WR-5.1
Output Frequency ^{d, e}	50 GHz to 75 GHz	60 GHz to 90 GHz	75 GHz to 110 GHz	90 GHz to 140 GHz	110 GHz to 170 GHz	140 GHz to 220 GHz
Output Power (dBm (typical)/ Minimum)	20 / 17	20 / 17	20 / 17	19 / 13	18 / 15	10 / 6
Multiplier Factors (Low/High Frequency)	6 / 3	6 / 3	6 / 3	12/6	12/6	12/6
RF input - Low Frequency	8.33 GHz to 12.5 GHz	10 GHz to 15 GHz	12.5 GHz to 18.33 GHz	7.5 GHz to 11.66 GHz	9.166 GHz to 14.166 GHz	11.66 GHz to 18.33 GHz
RF input - High Frequency	16.66 GHz to 25 GHz	20 GHz to 30 GHz	25 GHz to 36.66 GHz	15 GHz to 23.33 GHz	18.33 GHz to 28.33 GHz	23.33 GHz to 36.66 GHz

Parameter	Multiplier Model ^{a, b, c}					
	2000-2093-R	2000-2094-R	2000-2095-R	2000-2096-R	2000-2097-R	2000-2098-R
Frequency Band (GHz)	WR-4.3	WR-3.4	WR-2.8 (WM-710)	WR-2.2 (WM-570)	WR-1.5 (WM-380)	WR-1.0 (WM-250)
Output Frequency ^{d, e}	170 GHz to 260 GHz	220 GHz to 330 GHz	260 GHz to 400 GHz	330 GHz to 500 GHz	500 GHz to 750 GHz	750 GHz to 1100 GHz
Output Power (dBm (typical)/ Minimum)	8 / 3	6 / 3	5 / -1	0 / -6	-7 / -13	-16 / -26
Multiplier Factors (Low/High Frequency)	18 / 6	18 / 9	27 / 9	36 / 18	54 / 18	81 / 27
RF input - Low Frequency	9.44 GHz to 14.44 GHz	12.22 GHz to 18.33 GHz	9.62 GHz to 14.81 GHz	9.16 GHz to 13.88 GHz	9.25 GHz to 13.88 GHz	9.25 GHz to 13.58 GHz
RF input - High Frequency	28.33 GHz to 43.33 GHz	24.44 GHz to 36.66 GHz	28.88 GHz to 44.44 GHz	18.33 GHz to 27.77 GHz	27.77 GHz to 41.66 GHz	27.77 GHz to 40.74 GHz

a. These millimeter-wave modules are produced by VDI Inc. located in Charlottesville, VA. For detailed and up-to-date specifications, please call VDI, Inc. or visit their website at <http://www.vadiodes.com>.

b. Multipliers require power from an external power supply (+9 VDC, 4 A typical). The power supply adapter is a standard accessory and included with modules.


c. Warranty period for 2000-2087-R through 2000-2098-R multiplier modules is one year.

d. Unwanted harmonic content is better than -20 dBc (typical).

e. Frequency stability of input is degraded at the output by multiplier factor N (N1 x N2) and phase noise by 20log(N). For high frequency operation N1 = 1.

Output Attenuation

Frequency multiplier modules offer voltage-controlled RF output attenuation capability as standard. Users can input 0 to 5 V a DC voltage from an external source into the BNC connector on the rear panel designated as UCA. The output power can be varied from 90% to 10% through the UCA port. A sample curve of UCA control voltage vs. output power is shown below. The curve is subject to some variation due to measurement conditions, such as temperature and load impedance, and should be considered as representative only.

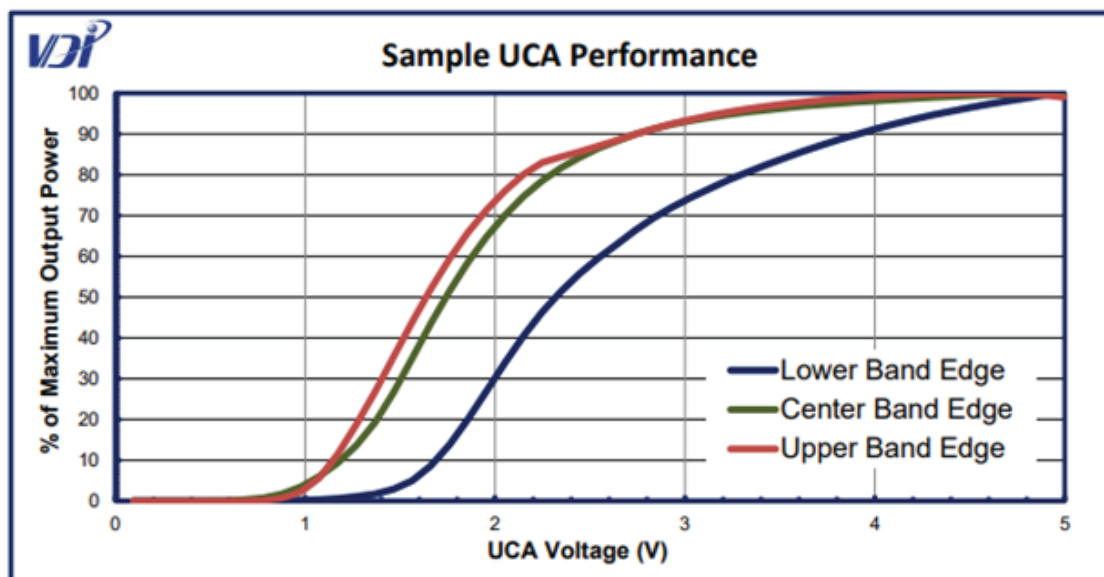

General

Calibration Cycle	Recommended calibration cycle is 2 years from the date of shipment (standard warranty). All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com
Stored Setups	Stores front panel settings in user file system with named set up files. The location of set up files can be internal memory or external pluggable memory. The number of set up files is only limited by memory size. Whenever the instrument is turned on, control settings come on at the same functions and values existing when the instrument was turned off.
Self Test	Instrument self-test is performed when Self-Test under diagnostics in the sandwich menu is selected. If an error is detected, an error message is displayed in a window on the touch screen identifying the probable cause.
Parameter Entry	Instrument-controlled parameters can be entered in multiple ways: touchscreen, keypad, rotary data knob, or the touch pads of the cursor-control key. Keypad entries are terminated by pressing the appropriate key or touchscreen. Edits are terminated by exiting the edit menu.
Reset	Returns all instrument parameters to predefined default states or values. Any pending GPIB or Ethernet I/O is aborted. Selectable from the system menu
Warm Up Time	Five user tables are available with up to 65535 points/table. From Standby: 30 minutes From Cold Start (0 °C): 120 hours to achieve specified frequency stability with aging. Instruments disconnected from AC line power for more than 72 hours require 30 days to return to specified frequency stability with aging.
Power	90 VAC to 264 VAC, 47 Hz to 63 Hz, 350 VA maximum
Standby	With AC line power connected, unit is placed in standby
Weight	20.5 kg
Dimensions (WxHxD)	483 mm x 133 mm x 552 mm
Warranty	1 year from shipment date

Remote Operation

Description	All instrument functions, settings, and operating modes (except for power on/standby) are controllable using commands sent from an external computer via sockets over Ethernet, or GPIB (IEEE-488 interface bus). Note: For users who wish to use a USB control interface, the following USB adapter, available from National Instruments is recommended: NI GPIB-USB-HS		
Ethernet Port	1000 Base-T (Gbit Ethernet)		
Ethernet Address	DHCP or static IP		
Commands	SCPI, Native (MG369xC compatible proprietary command set)		
GPIB Address	Selectable from a system menu		
IEEE -488 Interface Function Subset	Source Handshake: SH1	Service Request: SR1	Device Trigger: DT1
	Acceptor Handshake: AH1	Remote/Local: RL1	Controller Capability: C0, C1, C2, C3, C28
	Talker: T6	Parallel Poll: PP1	Tri-State Driver: E2
	Listener: L4	Device Clear: DC1	
Remote Lockout	While operating on the GPIB, all instrument front panel keys are locked.		
Backward Compatibility	The instrument responds to the published native (Anritsu proprietary) commands and responses of the Anritsu Models 6600, 6700, 6XX00, and MG3690 series signal sources.		
HiSLIP	Support available		

Environmental (MIL-PRF-28800F, class 3)

Storage Temperature Range	-40 °C to +75 °C
Operating Temperature Range	0 °C to +50 °C
Relative Humidity	5 % to 95 % at 40 °C (non-condensing)
Altitude	4,600 m, 43.9 cm-Hg
Vibration	Random, 5 Hz to 500 Hz, 0.015 to 0.0039 g ² /Hz PSD; Sinusoidal, 5 Hz to 55 Hz, 0.33 mm displacement

Regulatory Compliance


European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS directives 2011/65/EU and 2015/863
United Kingdom	EMC SI 2016/1091; BS EN 55011 & BS EN 61000-4-2/3/4/5/6/8/11 Consumer Protection (Safety) SI 2016/1101; BS EN 61010-1:2010 Environmental Protection SI 2012/3032; 2011/65/EU & 2015/863
Canada	ICES-1(A)/NMB-1(A)
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	R-R-A2J-1004

Rear Panel



Rear Panel Connectors (may be present but not active if option is not ordered)

Aux1 I/O Pin Descriptions

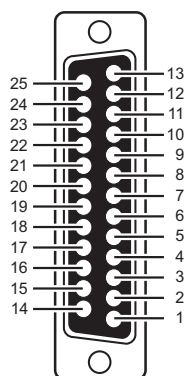

Pin	Description	Pin	Description
1	Horizontal Output	14	V/GHz Output
2	Chassis Ground	15	N/C
3	Sequential Sync Output	16	N/C
4	N/C	17	N/C
5	N/C	18	Sweep Dwell Input
6	Retrace Blanking Output	19	N/C
7	N/C	20	Bandswitch Blanking Output
8	Chassis Ground	21	N/C
9	N/C	22	N/C
10	Sweep Dwell Output	23	N/C
11	Lock Status Output	24	Chassis Ground
12	N/C	25	N/C
13	External Trigger Input		

Inputs and Outputs

	Description
AM OUT	Provides the amplitude modulation waveform from the internal LF generator. Enabled with Option 27. BNC type, rear panel.
HORIZ OUT	Requires Option 6 (available for MG36221A only). Horizontal Sweep Output provides a 0V at beginning and +10 V at end of sweep for all sweep modes, regardless of sweep width. In CW mode, the voltage is proportional to frequency between 0 V at low end and +10V at the high end of range. In CW mode, if CW Ramp is enabled, a repetitive 0V to +10V ramp is provided. The ramp speed is adjusted by the Sweep Time function. BNC type, rear panel.
PULSE OUT	Provides a video modulating signal from the internal pulse generator. Enabled with Option 27. BNC type, rear panel.
FM OUT	Provides the frequency or phase modulation waveform from the internal LF generator. Enabled with Option 27. BNC type, rear panel.
PULSE SYNC	Provides a TTL compatible signal, synchronized to the internal pulse modulation output. Enabled with Option 26. BNC type, rear panel.
LOCKED/LEVELLED	TTL high/low output signal when in internal ALC mode that is a logical AND of frequency locked condition and output leveled condition. When in Fixed Gain mode this signal indicates only frequency locked/unlocked condition. BNC type, rear panel.
PPS	1PPS input/output from either GNSS/GPS atomic clock receiver or internal rubidium reference option. 3.3V CMOS I/O. BNC type, rear panel.
FM IN	Accepts an external signal to frequency or phase modulate the RF output signal. Enabled with Option 12. 50 Ω impedance. BNC type, rear panel.
EXT ALC	Provides for leveling the RF output signal externally with either a detector or power meter. Signal requirements are shown in the RF Output specifications. BNC type, rear panel.
EFC	± 4 VDC 30 Hz bandwidth in wide reference PLL mode 1 MEG Ohm input impedance. Provides the capability to frequency modulate the internal crystal oscillator, allowing phase locking of the synthesizer inside an external lock loop. BNC type, rear panel.
AM IN	Accepts an external signal to amplitude modulate the RF output signal. Enabled with Option 12. 50 Ω impedance. BNC type, rear panel.
10 MHZ REF IN	Accepts an external 10 MHz ± 3 Hz, 0 dBm to +10 dBm (20 dBm no-damage level) time-base signal. Automatically disconnects the internal high-stability time-base option, if connected. 50 Ω impedance BNC type, rear panel.
10 MHZ REF OUT	Provides a 10 dBm, AC coupled, signal derived from the internal frequency standard. 50 Ω impedance BNC type, rear panel.
PULSE IN	Accepts an external TTL compatible signal to pulse modulate the RF output signal or to trigger or to gate the optional internal pulse generator. Enabled with Option 26. BNC type, rear panel.
100 MHZ REF IN	Accepts an external 100 MHz ± 200 Hz or 2 ppm 12 $\pm$ 1 dBm (20 dBm no-damage level) reference signal. Enabled with Option 3 or 13. Automatically disconnects the internal high-stability time-base option, if connected. 50 Ω impedance BNC type, rear panel.
100 MHZ REF OUT	Provides a 12 dBm, AC coupled, 100 MHz signal derived from the internal frequency standard. Enabled with Option 3 or 13. 50 Ω impedance BNC type, rear panel.

1600 MHZ REF IN	Accepts an external 1600 MHz $\pm$ 3.2 kHz or 2 ppm, 4 $\pm$ 1 dBm (20 dBm no-damage level) reference signal. Enabled with Option 3 or 13. Automatically disconnects the internal high-stability time-base option, if connected. 50 Ω impedance SMA type, rear panel.
1600 MHZ OUT	Provides a 5 dBm, AC coupled, 1600 MHz signal derived from the internal frequency standard. Enabled with Option 3 or 13. 50 Ω impedance SMA type, rear panel.
GPS	Accepts GNSS/GPS antenna input. Requires Option 66.
RF OUTPUT	Provides for RF output from 50 Ω source impedance. Option 9 moves the RF Output connector from the front to the rear panel. K Connector (male) fmax $\leq$ 43.5 GHz. V Connector (male) fmax 70 GHz.
ETHERNET (1000 Base-T)	Provides input/output connections for a Gigabit Ethernet interface. Accepts RJ45 type connectors, rear panel.
GPIO (IEEE-488)	Provides input/output connections for the General Purpose Interface Bus.
USB	Two USB 3.0 Type-A for peripherals such as memory device.
SD CARD	Accepts an external SDIO memory card.
AC POWER INPUT	AC Input connector, with On/Off switch, and fuses 350 VA maximum, 90 to 264 VAC, 47 Hz to 63 Hz.
AUX 1	Future capability
AUX 2	Future capability

Ordering Information

MG36221A Options

MG36221A-0001	Option 1, Rack Mount with Slides (Cannot be ordered with Option 11)
MG36221A-0002	Option 2, Mechanical Step Attenuator, 110 dB
MG36221A-0003	Option 3, Low Phase Noise and High Stability
MG36221A-0006	Option 6, Analog Sweep, Frequency
MG36221A-0009	Option 9, Rear Panel K(m)-Connector RF Output
MG36221A-0010	Option 10, User Defined Modulation (Always requires Option 27. Also requires Option 26 and Option 12 when ordering without Option 15. When ordering with Option 15, requires Option 45 and Option 12.)
MG36221A-0011	Option 11, Rack Mount without Slides (Shelf Mount)
MG36221A-0012	Option 12, Amplitude, Frequency, and Phase Modulation, Internal/External (Requires Option 27)
MG36221A-0013	Option 13, Ultra Low Phase Noise (Requires Option 3.)
MG36221A-0015	Option 15, High Power Output (Cannot be ordered with Option 26. Choose Option 45 when ordering with Option 26.)
MG36221A-0016	Option 16, Analog Power Sweep
MG36221A-0017	Option 17, Delete Front Panel (Requires Option 1 or 11. Cannot be ordered with Option 29.)
MG36221A-0018	Option 18, On-site User Level Calibration (Requires accessory kit 2000-2166-R, and MA24330A or MA24350A USB power sensor, each sold separately.)
MG36221A-0023	Option 23, Premium Phase Noise, CW (Requires Option 3 and 13.)
MG36221A-0025	Option 25, Pulse Train Modulation (Always requires Option 27. Also requires Option 26, or When ordered with Option 15, requires Option 45.)
MG36221A-0026	Option 26, Pulse Modulation, Internal/External (Always requires Option 27. When ordered with Option 15, choose Option 45 instead of 26.)
MG36221A-0027	Option 27, Modulation Hardware (Requires at least one of Option 12 and/or Option 26, or Option 45.)
MG36221A-0029	Option 29, Front Panel Modulation Input Output Access (Always requires Requires Option 27. Requires either Option 12 and/or Option 26. Cannot order with Option 17. When ordered with Option 15, requires Option 45 and/or Option 12.)
MG36221A-0030	Option 30, 600 Ω External AM/FM Input Impedance (Requires Option 12 and 27.)
MG36221A-0033	Option 33, Phase Noise, Export Option (Cannot be ordered with Options 3, 13, 23 and 56.)
MG36221A-0037	Option 37, Removable SDIO memory
MG36221A-0045	Option 45, High Power Pulse Modulation (Requires Option 27, cannot be ordered with option 15 or Option 17.)
MG36221A-0056	Option 56, Ultra Stability Time Base (Requires Option 3 or 13.)
MG36221A-0066	Option 66, GNSS Atomic Clock Receiver (Requires Option 3 or 13.)
MG36221A-0082	K(f) Connector
MG36221A-0097	Accredited Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data
MG36221A-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate
MG36221A-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data

MG36241A Options

MG36241A-0001	Option 1, Rack Mount with Slides (Cannot be ordered with Option 11)
MG36241A-0002	Option 2, Mechanical Step Attenuator, 110 dB
MG36241A-0003	Option 3, Low Phase Noise and High Stability
MG36241A-0006	Option 6, Analog Sweep, Frequency
MG36241A-0009	Option 9, Rear Panel K(m)-Connector RF Output
MG36241A-0010	Option 10, User Defined Modulation (Always requires Option 27. Also requires Option 26 and Option 12 when ordering without Option 15. When ordering with Option 15, requires Option 45 and Option 12.)
MG36241A-0011	Option 11, Rack Mount without Slides (Shelf Mount)
MG36241A-0012	Option 12, Amplitude, Frequency, and Phase Modulation, Internal/External (Always requires Option 27. When ordered with Option 15, choose Option 45 instead of 26.)
MG36241A-0013	Option 13, Ultra Low Phase Noise (Requires Option 3.)
MG36241A-0015	Option 15, High Power Output (Choose option 45 when ordering with Option 26.)
MG36241A-0016	Option 16, Analog Power Sweep
MG36241A-0017	Option 17, Delete Front Panel (Requires Option 1 or 11. Cannot be ordered with Option 29.)
MG36241A-0018	Option 18, On-site User Level Calibration (Requires accessory kit 2000-2166-R and MA24350A USB power sensor, each sold separately.)
MG36241A-0025	Option 25, Pulse Train Modulation (Always Requires Option 27. Also requires Option 26, or When ordered with Option 15, requires Option 45.)
MG36241A-0026	Option 26, Pulse Modulation, Internal/External (Always requires Option 27. When ordered with Option 15, choose Option 45 instead of 26.)
MG36241A-0027	Option 27, Modulation Hardware (Requires at least one of Option 12 and/or Option 26, or Option 45.)
MG36241A-0029	Option 29, Front Panel Modulation Input Output Access (Always requires Requires Option 27. Requires either Option 12 and/or Option 26. Cannot order with Option 17. When ordered with Option 15 requires Option 45 and/or Option 12.)
MG36241A-0030	Option 30, 600 Ω External AM/FM Input Impedance (Requires Option 12 and 27.)
MG36241A-0033	Option 33, Phase Noise, Export Option (Cannot be ordered with Options 3, 13, and 56.)
MG36241A-0037	Option 37, Removable SDIO memory
MG36241A-0045	Option 45, High Power Pulse Modulation (Requires Option 27, cannot be ordered with Option 15 or Option 17.)
MG36241A-0056	Option 56, Ultra Stability Time Base (Requires Option 3 or 13.)
MG36241A-0066	Option 66, GNSS Atomic Clock Receiver (Requires Option 3 or 13.)
MG36241A-0082	K(f) Connector
MG36241A-0097	Accredited Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data
MG36241A-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate
MG36241A-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data

MG36271A Options

MG36271A-0001	Option 1, Rack Mount with Slides (Cannot be ordered with Option 11)
MG36271A-0002	Option 2, Mechanical Step Attenuator, 90 dB
MG36271A-0003	Option 3, Low Phase Noise and High Stability
MG36271A-0010	Option 10, User Defined Modulation (Always requires Option 27. Also requires Option 26 and Option 12 when ordering without Option 15. When ordering with Option 15, requires Option 45 and Option 12.)
MG36271A-0011	Option 11, Rack Mount without Slides (Shelf Mount)
MG36271A-0012	Option 12, Amplitude, Frequency, and Phase Modulation, Internal/External (Always requires Option 27. When ordered with Option 15, choose Option 45 instead of 26.)
MG36271A-0013	Option 13, Ultra Low Phase Noise (Requires Option 3.)
MG36271A-0015	Option 15, High Power Output (Cannot be ordered with Option 26. Choose Option 45 when ordering with Option 26.)
MG36271A-0016	Option 16, Analog Power Sweep
MG36271A-0017	Option 17, Delete Front Panel (Requires Option 1 or 11. Cannot be ordered with Option 29.)
MG36271A-0025	Option 25, Pulse Train Modulation (Always requires Option 27. Also requires Option 26, or When ordered with Option 15, requires Option 45.)
MG36271A-0026	Option 26, Pulse Modulation, Internal/External (Always requires Option 27. When ordered with Option 15, choose Option 45 instead of 26.)
MG36271A-0027	Option 27, Modulation Hardware (Requires at least one of Option 12 and/or Option 26, or Option 45)
MG36271A-0029	Option 29, Front Panel Modulation Input Output Access (Always requires Requires Option 27. Requires either Option 12 and/or Option 26. Cannot order with Option 17. When ordered with Option 15 requires Option 45 and/or Option 12.)
MG36271A-0030	Option 30, 600 Ω External AM/FM Input Impedance (Requires Option 12 and 27.)
MG36271A-0033	Option 33, Phase Noise, Export Option (Cannot be ordered with Options 3, 13, and 56.)
MG36271A-0037	Option 37, Removable SDIO memory
MG36271A-0045	Option 45, High Power Pulse Modulation (Requires Option 27, cannot be ordered with Option 15 or Option 17.)
MG36271A-0056	Option 56, Ultra Stability Time Base (Requires Option 3 or 13.)
MG36271A-0066	Option 66, GNSS Atomic Clock Receiver (Requires Option 3 or 13.)
MG36271A-0097	Accredited Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data
MG36271A-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate
MG36271A-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate, test report, and uncertainty data

Standard Accessories (included)

11410-00976	Getting Started with Anritsu Products and Services Flyer
2000-1732-R	CAT-7 shielded, twisted-pair, Ethernet cable, 10 ft
Miscellaneous	Power cord with plug-type and rating determined by destination country 1-year Factory Warranty Options and Accessories

Upgrades

Economical upgrades are available to upgrade any model to any higher performing model. Consult Anritsu for details.

MG362x1A Option Configuration Matrix

Models	Options													
	1 ^a	2	3	6	9	10 ^b	11 ^a	12 ^c	13 ^d	15 ^e	16	17 ^f	18	23 ^g
MG36221A	X	X	X	X	X	X	X	X	X	X	X	X	X	X
MG36241A	X	X	X	X	X	X	X	X	X	X	X	X	X	
MG36271A	X	X	X		X	X	X	X	X	X	X	X		
	25 ^h	26 ⁱ	27 ^j	29 ^k	30 ^l	33 ^m	37	45 ⁿ	56 ^o	66 ⁱ	82	97	98	99
MG36221A	X	X	X	X	X	X	X	X	X	X	X	X	X	X
MG36241A	X	X	X	X	X	X	X	X	X	X	X	X	X	X
MG36271A	X	X	X	X	X	X	X	X	X	X		X	X	X

a. Options 1 and 11 cannot be ordered together.

b. Always Requires Option 27. Also requires Option 26 and Option 12 when ordering without Option 15. When ordering with Option 15, requires Option 45 and Option 12.

c. Always requires Option 27. When ordered with Option 15, choose Option 45 instead of 26.

d. Must be ordered with Option 3.

e. Cannot be ordered with Option 26. Choose option 45 when ordering with option 26.

f. Requires Option 1 and 11, cannot be ordered with Option 29.

g. Must be ordered with Option 3 and 13.

h. Always Requires Option 27. Also requires Option 26, or When ordered with Option 15, requires Option 45.

i. Always requires Option 27. When ordered with Option 15, choose Option 45 instead of Option 26.

j. Requires at least one of Option 12 and/or Option 26, or Option 45.

k. Always requires Requires Option 27. Requires either Option 12 and/or Option 26. Cannot order with Option 17. When ordered with Option 15 requires Option 45 and/or Option 12.

l. Must be ordered with option 12 and 27.

m. Cannot be ordered with Options 3, 13, 23, and 56.

n. Requires option 27, cannot be ordered with option 15 or option 17.

o. Must be ordered with Option 3 or 13.

Technical Data

Rubidium Signal Generator

USB Power Sensors

Accessory	Description
	MA24330A USB Power Sensor, CW Avg, 10 MHz to 33 GHz USB Power Sensor, 10 MHz, -70 dBm to +20 dBm.
	MA24340A USB Power Sensor, CW Avg, 10 MHz to 40 GHz USB Power Sensor, 10 MHz, -70 dBm to +20 dBm.

Transit Case

Accessory	Description
	760-297-R Transit case (16 kg, 79.4 cm x 61.5 cm x 44.4 cm, roll-away on four wheels)

Accessories

Accessory	Description
	2000-2166-R MG36221A/41A Opt 18 kit includes: 110-145-R, DC to 43.5 GHz, 50 Ω, 5W, K(f) to K(m) attenuator 33KFKF50C, DC to 43.5 GHz, 50 Ω, K(f) to K(f) adapter (Use with the MG36221A) 34VFKF50A, DC to 43.5 GHz, 50 Ω, V(f) to K(f) adapter (Use with the MG36241A)
	01-200 Calibrated Torque End Wrench, GPC-7 and Type N
	01-201 Torque End Wrench, 5/16 in, 0.9 N.m (8 lbf-in) (for tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors)

Accessory	Description
	MA24350A USB Power Sensor, CW Avg, 10 MHz to 50 GHz USB Power Sensor, 10 MHz, -70 dBm to +20 dBm.

Accessory	Description
	01-203 Torque End Wrench, 13/16 in, 0.9 N.m (8 lbf-in) (for tightening ruggedized SMA, 2.4 mm, K and V test port connectors)
	01-204 End Wrench, 5/16 in, Universal, Circular, Open-ended (for SMA, 3.5 mm, 2.4 mm, K, and V connectors)

Coaxial Adapters

Accessory Description



1091-26-R
SMA(m) to N(m), DC to 18 GHz, 50 Ω



1091-27-R
SMA(f) to N(m), DC to 18 GHz, 50 Ω



1091-80-R
SMA(m) to N(f), DC to 18 GHz, 50 Ω



1091-81-R
SMA(f) to N(f), DC to 18 GHz, 50 Ω



1091-172-R
BNC(f) to N(m), DC to 1.3 GHz, 50 Ω

1091-315-R
DC to 18 GHz, TNC(m) to N(f), 50 Ω

33KKF50C
Calibration Grade Adapter, K(f) to K(f),
DC to 43.5 GHz, 50 Ω

33KKF50C
Calibration Grade Adapter, K(m) to K(f),
DC to 43.5 GHz, 50 Ω

1091-323-R
DC to 18 GHz, TNC(m) to TNC(f), 50 Ω

1091-325-R
DC to 18 GHz, TNC(m) to N(m), 50 Ω



1091-465-R
DC to 6 GHz, 4.3-10(f) to N(f), 50 Ω



71693-R
DC to 18 GHz, Ruggedized adapter, K(f) - N(f), 50 Ω



34NK50
Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω

Accessory Description



510-102-R
N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle



510-90-R
7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 Ω



510-91-R
7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 Ω



510-92-R
7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 Ω



510-93-R
7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 Ω



510-96-R
7/16 DIN(m) to 7/16 DIN (m), DC to 7.5 GHz, 50 Ω



510-97-R
7/16 DIN(f) to 7/16 DIN (f), DC to 7.5 GHz, 50 Ω

33KKF50C
Calibration Grade Adapter, K(m) to K(f),
DC to 43.5 GHz, 50 Ω

1091-324-R
DC to 18 GHz, TNC(f) to N(m), 50 Ω

1091-326-R
DC to 8 GHz, TNC(m) to TNC(m), 50 Ω



1091-467-R
DC to 6 GHz, 4.3-10(m) to N(f), 50 Ω

33KK50C
Calibration Grade Adapter, K(m) to K(m),
DC to 43.5 GHz, 50 Ω



34VFK50A
DC to 43.5 GHz, V(f) to K(m), 50 Ω

Technical Data

Accessory	Description
	34NKF50 Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω
	34NFK50 Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω
	34NFKF50 Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω
	34VV50 DC to 65 GHz, V(m) to V(m), 50 Ω
	34VVF50 DC to 65 GHz, V(f) to V(m), 50 Ω
	34VVF50 DC to 65 GHz, V(f) to V(f), 50 Ω

Rubidium Signal Generator

Accessory	Description
	34VKF50A DC to 43.5 GHz, V(f) to K(f), 50 Ω
	34VKF50A Precision Adapter, V(m) to K(f), DC to 43.5 GHz, 50 Ω
	34VK50A Precision Adapter, V(m) to K(m), DC to 43.5 GHz, 50 Ω
	2000-1880-R DC to 18 GHz, N(m) to V(f), 50 Ω
	2000-1881-R DC to 18 GHz, N(f) to V(f), 50 Ω

Precision Adapters

Accessory Description



34NN50A
N(m) to N(m), DC to 18 GHz, 50 Ω



K220B
DC to 40 GHz, K(m) to K(m), 50 Ω



K224B
DC to 40 GHz, K(m) to K(f), 50 Ω

Accessory Description



34NFnF50
N(f) to N(f), DC to 18 GHz, 50 Ω



K222B
DC to 40 GHz, K(f) to K(f), 50 Ω

Attenuators (up to 18 GHz)

Accessory Description



1010-121-R
40 dB, 100 W, D to 18 GHz, N(f) to N(m),
Uni-directional



3-1010-122
20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)



3-1010-123
30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)



3-1010-124
40 dB, 100 W, DC to 8.5 GHz, N(f) to N(m),
Uni-directional

ANO 62-0502-20
Attenuator 1.85mm Female to 1.85mm Female, 5W Bi
Directional, DC - 67 GHz

Accessory Description



42N50-20
20 dB, 5 W, DC to 18 GHz, N(m) to N(f)



42N50A-30
30 dB, 50 W, DC to 18 GHz, N(m) to N(f)



1010-127-R
30 dB, 150 W, DC to 3 GHz, N(m) to N(f)



1010-128-R
40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

Fixed Attenuators			
Accessory	Description	Accessory	Description
	41KB-3 Precision, K(m) to K(f), 3 dB, DC to 26.5 GHz, 2W		41VA-3 DC to 70 GHz, 2W, 3 dB, V(m) to V(f)
	41KB-6 Precision, K(m) to K(f), 6 dB, DC to 26.5 GHz, 2W		41VA-6 DC to 70 GHz, 2W, 6 dB, V(m) to V(f)
	41KB-10 Precision, K(m) to K(f), 10 dB, DC to 26.5 GHz, 2W		41VA-10 DC to 70 GHz, 2W, 10 dB, V(m) to V(f)
	41KB-20 Precision, K(m) to K(f), 20 dB, DC to 26.5 GHz, 2W		41VA-20 DC to 70 GHz, 2W, 20 dB, V(m) to V(f)
	41KC-3 Precision, K(m) to K(f), 3 dB, DC to 40 GHz, 2W		43KC-3 DC to 26.5 GHz, 2W, 3 dB, K(m) to K(f)
	41KC-6 Precision, K(m) to K(f), 6 dB, DC to 40 GHz, 2W		43KC-6 DC to 26.5 GHz, 2W, 6 dB, K(m) to K(f)
	41KC-10 Precision, K(m) to K(f), 10 dB, DC to 40 GHz, 2W		43KC-10 DC to 26.5 GHz, 2W, 10 dB, K(m) to K(f)
	41KC-20 Precision, K(m) to K(f), 20 dB, DC to 40 GHz, 2W		43KC-20 DC to 26.5 GHz, 2W, 20 dB, K(m) to K(f)

Test Port Cables, Flexible, Ruggedized, Phase Stable		Accessory	Description
	N120-6		3671KFK50-60
	RF Cables, Semi-Rigid, 0.01 to 18 GHz, N(m) to N(m), 15 cm (5.9 in), 50 Ω , 1 each		Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(m), 63.5 cm (25 in), 50 Ω
	NS120MF-6		3671KFKF50-60
	RF Cables, Semi-Rigid, 0.01 to 18 GHz, N(f) to N(f), 15 cm (5.9 in), 50 Ω , 1 each		Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(f), 63.5 cm (25 in), 50 Ω
	15NNF50-1.0B		3671KFK50-100
	Test Port Cable, Flexible, Phase Stable, DC to 18 GHz, N(m) to N(f), 1.0 m (39 in), 50 Ω		Test Port Cable, Flexible, Phase Stable, DC to 40 GHz, K(f) to K(m), 1 m (38 in), 50 Ω
	15NNF50-1.5B		806-206-R
	Test Port Cable, Flexible, Phase Stable, DC to 18 GHz, N(m) to N(f), 1.5 m (59 in), 50 Ω		Cable, Flexible, Phase Stable, DC to 70 GHz, V(m) to V(f), 61 cm (24 in), 50 Ω
	15NN50-1.0B		806-209-R
	Test Port Cable, Flexible, Phase Stable, DC to 18 GHz, N(m) to N(m), 1.0 m (39 in), 50 Ω		Cable, Flexible, Phase Stable, DC to 70 GHz, V(m) to V(f) 91.5 cm (36 in), 50 Ω
	15LLF50-1.0A		806-304-R
	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m (39 in), 50 Ω		Cable, Flexible, Phase Stable, DC to 40 GHz, K(m) to K(f), 91.5 cm (36 in), 50 Ω
	15KKF50-1.0A		806-396-R
	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m (39 in), 50 Ω		Cable, Flexible, Low Loss, Phase Stable, DC to 70 GHz, V(m) to V(f), 91.5 cm (36 in), 50 Ω
	3670K50A-1		3670N50-1
	0.3 m (12 in), DC to 40 GHz, K(f) to K(m), 50 Ω		0.3 m (12 in), DC to 18 GHz, N(f) to N(m), 50 Ω
	3670K50A-2		3670N50-2
	0.6 m (24 in), DC to 40 GHz, K(f) to K(m), 50 Ω		0.6 m (24 in), DC to 18 GHz, N(f) to N(m), 50 Ω
	3670NN50-1		3671KFS50-60
	0.3 m (12 in), DC to 18 GHz, N(m) to N(m), 50 Ω		Test Port Cable, Flexible, Phase Stable, DC to 26.5 GHz, K(f) to 3.5 mm (m), 63.5 cm (25 in), 50 Ω
	3670NN50-2		
	0.6 m (24 in), DC to 18 GHz, N(m) to N(m), 50 Ω		

≥

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training.



• United States

Anritsu Americas Sales Company
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.
Americas Sales and Support
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Brazil

Anritsu Elettronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada, Mexico, Ciudad de Mexico,
11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Limited
900 Capability Green,
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu SA
12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.R.L.
Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

• Sweden

Anritsu AB
Kistagångan 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB
Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5.),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• Denmark

Anritsu A/S
c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Spain

Anritsu EMEA Ltd.
Representation Office in Spain
Calle Manzanares 4, Primera planta, 28005
Madrid, Spain
Phone: +34-91-572-6761

• Austria

Anritsu Pty Ltd
Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• United Arab Emirates

Anritsu EMEA Ltd.
Anritsu A/S
Office No. 164, Building 17, Dubai Internet City
P. O. Box - 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

• India

ANRITSU INDIA PRIVATE LIMITED
6th Floor, Indique ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road,
Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

ANRITSU PTE LTD
1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre
Singapore 159303
Phone: +65-6282-2400
Fax: +65-6282-2533

• Vietnam

ANRITSU COMPANY LIMITED
16th Floor, Peakview Tower, 36 Hoang Cau Street,
O Cho Dua Ward, Dong Da District, Hanoi, Vietnam
Phone: +84-24-3201-2730
Fax: +84-24-3201-2740

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.
Room 2701-2705, Tower A, New Caohejing
International Business Center No. 391 Gui Ping Road
Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

ANRITSU COMPANY LIMITED
Unit 1302, 13th Floor, New East Ocean Center,
No.9 Science Museum Road, TsimShaTsui East,
Kowloon, Hong Kong
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Limited
8F, A TOWER, 20, Gwacheondaero 7-gil, Gwacheon-si,
Gyeonggi-do, 13840, Republic of Korea
Phone: +82-2-6259-7300
Fax: +82-2-6259-7301

• Australia

Anritsu Pty. Ltd.
Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

ANRITSU COMPANY, INC.
7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20251202