




DM3068 ^{6 1/2} digits Digital Multimeter

- Real 6 1/2 digits readings resolution (2,200,000 Count)
- Up to 10 K rdgs/s of measurement speed and 512 K rdgs Volatile Memory
- True-RMS AC Voltage and Current measurement
- Built-in 10 groups data storage, 10 groups setup storage
- Built-in Thermcouple compensate in Cold terminal, support customized any sensor measurement and 3 types of temperature sensors: TC, RTD and THERM
- Clone or backup all the c ions within instrument into other DM3068 via U-disc
- UltraSensor software: Easy "Any sensor" measurements
- Real time Trend and Histogram Display functions
- Standard interface: USB Device, USB Host, LAN, RS-232, GPIB, support U-disc storage and Web remote control (LXI-C)
- Remote control with SCPI commands
- 256 × 64 LCD
- Support double display, waveform display, Chinese and English menu
- Push-help makes information acquire more easier
- File management (support for U-disc and local storage)

DM3068 is a digital multimeter designed with 6 1/2 digits readings resolution especially fitting to the needs of high-precision, multifunction and automatic measurement. It adopts many today's new technologies to achieve high performance, abundant features in the same class. It's designed to aim at the requirements of the largest DMM market from the research, education, industrial electronics, consumer electronics and automotive industries with its innovative technology, industry leading, powerful measurement functions and broad analysis capabilities.

DM3068 6½ Digits Digital Multimeter

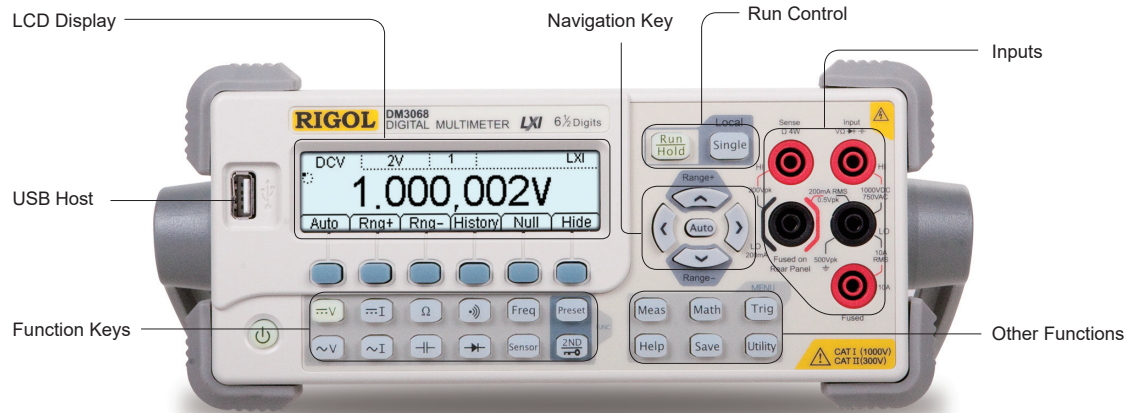


Size (W×H×D): 231.6 mm×107.0 mm×290.5 mm Weight: ~3.2 kg (Without package)




Standard interfaces: USB Device, RS-232, GPIB, LAN (LXI-C)




Real 6½ digits readings resolution




Easy to measure AC signal with double display

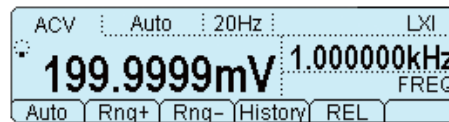


Standard Capacitor measurement function




10 groups Preset function




"Any sensor" function

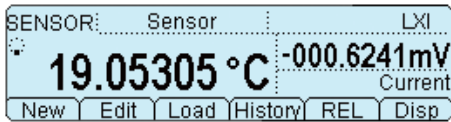


Support multiple temperature sensors

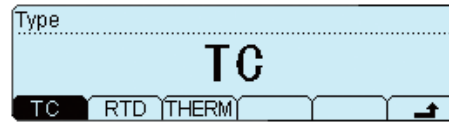


Support multiple commands

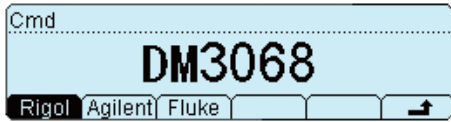


File management (support for U-disc and local storage)

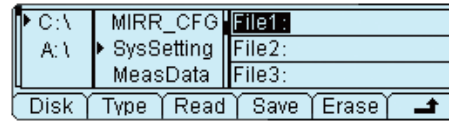

Math function

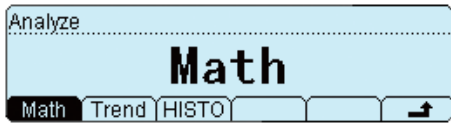


Statistic function

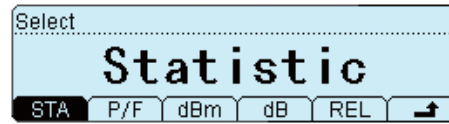

Histogram display





Trend display

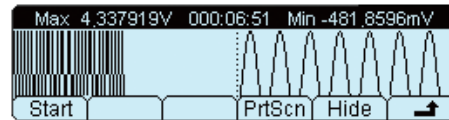


► Application example

Use the histogram function searching for abnormal signal :

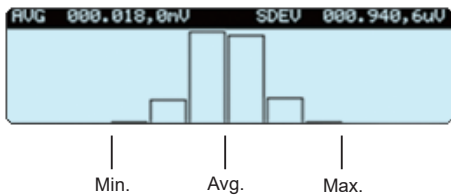

White Noise Histogram

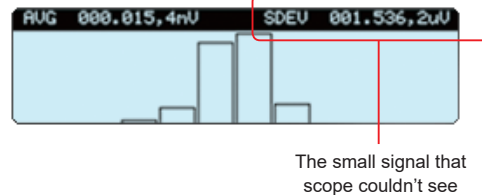


The small signal that scope couldn't see




Submerged Pulse Noise Histogram

Use Trend graphics to detect temperature trends during a long time:

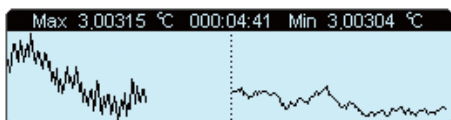


Long term trends

Abundant basic measurement functions:

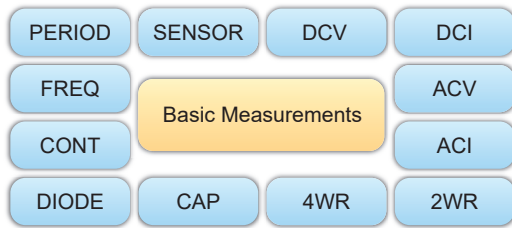


DCV Range: -1000 V ~ 1000 V
 DCI Range: -10 A ~ 10 A
 ACV Range(True-RMS): 0 V ~ 750 V
 ACI Range(True-RMS): 0 A ~ 10 A
 R Range: 0 Ω ~ 100 M Ω
 C Range: 0 F ~ 100 mF
 F Range: 3 Hz ~ 1 MHz


Extended Measurement Ranges

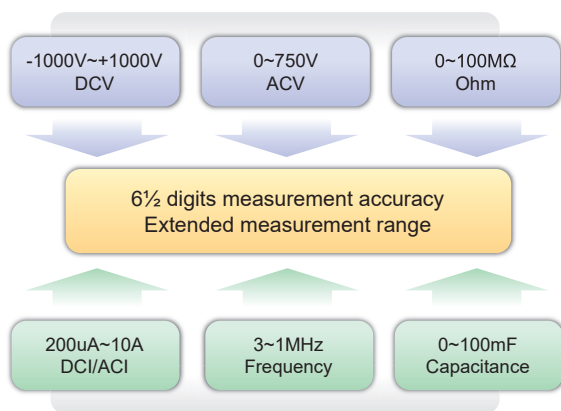


Real Time statistic analysis functions

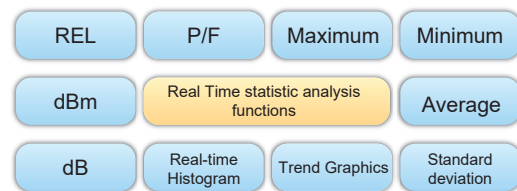

► eb remote control

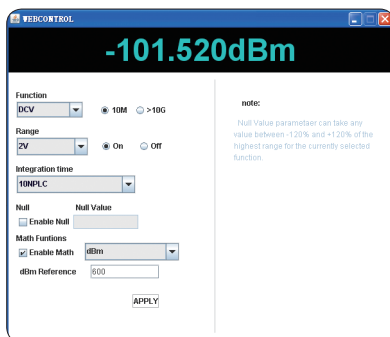

► UltraSensor Software for any types of electrical sensor measurements

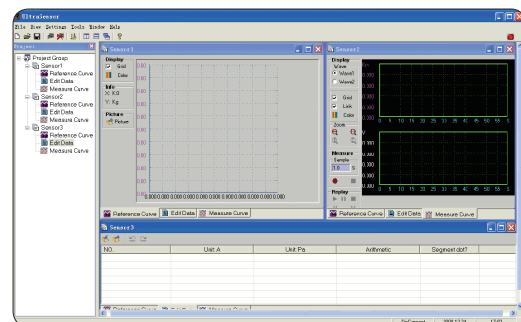

DC Characteristics

[1]

Function	Range ^[2]	Test Current or Burden Voltage	24 Hour ^[3] T _{CAL} °C ± 1 °C	90 Day T _{CAL} °C ± 5 °C	1 Year T _{CAL} °C ± 5 °C	T 0 °C to (T _{CAL} °C - 5 °C) (T _{CAL} °C + 5 °C) to 50 °C
DC Voltage	200.0000mV		0.0020 + 0.0020	0.0030 + 0.0025	0.0040 + 0.0025	0.0005 + 0.0005
	2.000000V		0.0015 + 0.0005	0.0020 + 0.0006	0.0035 + 0.0006	0.0005 + 0.0001
	20.00000V		0.0020 + 0.0004	0.0030 + 0.0005	0.0040 + 0.0005	0.0005 + 0.0001
	200.0000V		0.0020 + 0.0006	0.0040 + 0.0006	0.0050 + 0.0006	0.0005 + 0.0001
	1000.000V ^[4]		0.0020 + 0.0006	0.0040 + 0.0010	0.0055 + 0.0010	0.0005 + 0.0001
DC Current	200.0000uA	<0.03V	0.010 + 0.012	0.040 + 0.015	0.050 + 0.015	0.0020 + 0.0030
	2.000000mA	<0.25V	0.007 + 0.003	0.030 + 0.003	0.050 + 0.003	0.0020 + 0.0005
	20.00000mA	<0.07V	0.007 + 0.012	0.030 + 0.015	0.050 + 0.015	0.0020 + 0.0020
	200.0000mA	<0.7V	0.010 + 0.002	0.030 + 0.003	0.050 + 0.003	0.0020 + 0.0005
	2.000000A	<0.12V	0.050 + 0.020	0.080 + 0.020	0.100 + 0.020	0.0050 + 0.0010
	10.00000A ^[5]	<0.6V	0.100 + 0.010	0.120 + 0.010	0.150 + 0.010	0.0050 + 0.0020
Resistance ^[6]	200.0000Ω	1mA	0.0030 + 0.0030	0.008 + 0.004	0.010 + 0.004	0.0006 + 0.0005
	2.000000kΩ	1mA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	20.00000kΩ	100uA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	200.0000kΩ	10uA	0.0020 + 0.0005	0.008 + 0.001	0.010 + 0.001	0.0006 + 0.0001
	1.000000MΩ	2uA	0.002 + 0.001	0.010 + 0.001	0.012 + 0.001	0.0010 + 0.0002
	10.00000MΩ	200nA	0.015 + 0.001	0.030 + 0.001	0.040 + 0.001	0.0030 + 0.0004
	100.0000MΩ	200nA 10MΩ	0.300 + 0.010	0.800 + 0.010	0.800 + 0.010	0.1500 + 0.0002
Diode Test	2.0000V ^[7]	1mA	0.002 + 0.010	0.008 + 0.020	0.010 + 0.020	0.0010 + 0.0020
Continuity Test	2000.0Ω	1mA	0.002 + 0.010	0.008 + 0.020	0.010 + 0.020	0.0010 + 0.0020

For integration time <100NPLC, add the appropriate "RMS Noise Adder" listed in the following table.

[2] 10% overrange on all ranges except DCV 1000V and DCI 10A range.

[3] Relative to calibration standards.

[4] For each additional volt over ± 500 V, add 0.03mV error.

[5] For continuous current > 7A DC or 7A AC RMS, 30 seconds ON and 30 seconds OFF.

resistance measurement using REL operation. Without REL operation, add 0.2 Ω additional error in 2-wire resistance measurement.

[7]

only. 1 mA test current is typical. Variation in the current source will create some variation in the voltage drop across a diode junction.

Performance Versus Integration Time – 50 Hz (60 Hz) Power-line Frequency

Integration Time	Resolution ^[1]	NMRR ^[2]	Readings/s ^[3]		RMS Noise Adder ^[4] (% of Range)			
Number of Power line Cycles (NPLC)	(ppm Range)	(dB)	50Hz	60Hz	DCV 20V	DCV 2V 200V Resistance 2 kΩ	DCV 1000 V DCI 2 mA	DCV 200 mV Resistance 200 Ω DCI 10 A
0.006	2.7	0	10000	10000	0.0006	0.0007	0.0015	0.0040
0.02	1.6	0	2500	3000	0.0004	0.0004	0.0008	0.0025
0.06	1	0	833	1000	0.0003	0.0003	0.0006	0.0025
0.2	0.5	0	250	300	0.0001	0.0002	0.0003	0.0015
1	0.22	60	50	60	0	0.0001	0.0002	0.0004
2	0.17	60	25	30	0	0	0.0001	0.0003
10	0.08	60	5	6	0	0	0	0.0002
100	0.035	60	0.5	0.6	0	0	0	0

[1] T

[2] Normal mode rejection ratio for power-line frequency ± 0.1%. For power-line frequency ± 1%, subtract 20 dB. For ± 3%, subtract 30dB.

[3] Maximum rate for DCV, DCI, 2-wire resistance and 4-wire resistance functions.

[4]

SFDR & SINAD^[1]

Function	Range	Spurious-Free Dynamic Range (SFDR)	Signal-to-Noise-and-Distortion (SINAD)
DCV	200 mV	81	76
	2 V	79	78
	20 V	79	75
	200 V	83	80
DCI	1000 V	86	82
	200 uA	89	69
	2 mA	86	81
	20 mA	88	69
	200 mA	81	79
	2 A	69	64

[1] Typical value. -1dBFS, 1kHz single tone. 100 us aperture time, zero trigger delay, auto zero off and 4096 samples.

Measuring Characteristics

DC Voltage	
Input Resistance	200 mV, 2 V, 20 V ranges: Selectable 10 MΩ or > 10 GΩ (For these ranges, input beyond ±26V are clamped through 106 kΩ (typical) 200 V and 1000 V ranges: 10 MΩ ± 1%
Input Protection	1000 V
Input Offset Current	50 pA, at 25 °C, typical
CMRR (common mode rejection ratio)	140 dB for 1 kΩ unbalance in LO lead, ± 500 VDC peak maximum
Resistance	
Measurement Method	Selectable 4-wire or 2-wire resistance
Open-circuit Voltage	Current source referenced to LO input Limited to < 10V
Max. Lead Resistance (4-wire)	10% of range per lead for 200 Ω, 2 kΩ ranges, 1 kΩ per lead on all other ranges
Input Protection	1000 V on all ranges
Offset Compensation	Available on 200 Ω, 2kΩ and 20 kΩ ranges
DC Current	
Shunt Resistor	100 Ω for 200 uA, 2 mA 1 Ω for 20 mA, 200 mA 0.01 Ω for 2 A, 10 A
Input Protection	Externally accessible 500 mA, 250 V fast blow fuse at the rear panel for 200 uA, 2 mA, 20 mA and 200 mA ranges. Internal 10 A, 250 V slow blow fuse for 2 A and 10 A ranges
Continuity/Diode Test	
Response Time	300 samples/sec, with audible tone
Continuity Threshold	Adjustable from 1 Ω to 2000 Ω
Autozero OFF Operation (typical value)	
Following instrument warm-up at the environment temperature ±1°C and <5 minutes, add 0.0001 % range + 2 uV for DCV and 2 mΩ for resistance.	
Settling Time Considerations	
Reading settling times are affected by source impedance, cable dielectric characteristics and input signal changes. The default	
Measurement Considerations	
Telon or other high-impedance, low-dielectric absorption wire insulation is recommended for these measurements.	

AC Characteristics

[1]

Function	Range ^[2]	Frequency Range	24 Hour ^[3] T _{CAL} °C ± 1 °C	90 Day T _{CAL} °C ± 5 °C	1 Year T _{CAL} °C ± 5 °C	T 0 °C to (T _{CAL} °C - 5 °C) (T _{CAL} °C + 5 °C) to 50 °C
True RMS AC Voltage ^[4]	200.0000 mV	3Hz - 5Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
		5Hz - 10Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004
		10Hz - 20kHz	0.04 + 0.03	0.05 + 0.04	0.06 + 0.04	0.005 + 0.004
		20kHz - 50kHz	0.10 + 0.05	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
		50kHz - 100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
	2.000000 V	100kHz - 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
		3Hz - 5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5Hz - 10 Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10Hz - 20kHz	0.04 + 0.02	0.05 + 0.03	0.06 + 0.03	0.005 + 0.003
		20kHz - 50kHz	0.10 + 0.04	0.11 + 0.05	0.12 + 0.05	0.011 + 0.005
	20.00000 V	50kHz - 100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz - 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
		3Hz - 5Hz	1.00 + 0.03	1.00 + 0.04	1.00 + 0.04	0.100 + 0.004
		5Hz - 10Hz	0.35 + 0.03	0.35 + 0.04	0.35 + 0.04	0.035 + 0.004
		10Hz - 20kHz	0.04 + 0.04	0.07 + 0.04	0.08 + 0.04	0.008 + 0.004
	200.0000 V	20kHz - 50kHz	0.10 + 0.05	0.12 + 0.05	0.15 + 0.05	0.012 + 0.005
		50kHz - 100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz - 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.20 + 0.02
		3Hz - 5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5Hz - 10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
	750.000 V ^[5]	10Hz - 20kHz	0.04 + 0.02	0.07 + 0.03	0.08 + 0.03	0.008 + 0.003
		20kHz - 50kHz	0.10 + 0.04	0.12 + 0.05	0.15 + 0.05	0.012 + 0.005
		50kHz - 100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz - 300kHz	4.0 + 0.50	4.0 + 0.50	4.0 + 0.50	0.20 + 0.02
		3Hz - 5Hz	1.00 + 0.02	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
True RMS AC Current ^[8]	200.0000 uA	5Hz - 10Hz	0.35 + 0.02	0.35 + 0.03	0.35 + 0.03	0.035 + 0.003
		10Hz - 20kHz	0.04 + 0.02	0.07 + 0.03	0.08 + 0.03	0.008 + 0.003
		20kHz - 50kHz	0.10 + 0.04	0.12 + 0.05	0.15 + 0.05	0.012 + 0.005
		50kHz - 100kHz	0.55 + 0.08	0.60 + 0.08	0.60 + 0.08	0.060 + 0.008
		100kHz - 300kHz	4.0 + 0.50	4.0 + 0.50	4.0 + 0.50	0.20 + 0.02
	2.000000 mA	3Hz - 5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.200 + 0.006
		5Hz - 10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.100 + 0.006
		10Hz - 5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
		5kHz - 10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.006
		3Hz - 5Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.006
	20.00000 mA	5Hz - 10Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.006
		10Hz - 5kHz	0.12 + 0.04	0.12 + 0.04	0.12 + 0.04	0.015 + 0.006
		5kHz - 10kHz	0.20 + 0.25	0.20 + 0.25	0.20 + 0.25	0.030 + 0.006
		3Hz - 5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.200 + 0.006
		5Hz - 10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.100 + 0.006
	200.0000 mA	10Hz - 5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
		5kHz - 10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.006
		3Hz - 5Hz	1.00 + 0.04	1.00 + 0.04	1.00 + 0.04	0.100 + 0.006
		5Hz - 10Hz	0.30 + 0.04	0.30 + 0.04	0.30 + 0.04	0.035 + 0.006
		10Hz - 5kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.015 + 0.006
	2.000000 A	5kHz - 10kHz	0.20 + 0.25	0.20 + 0.25	0.20 + 0.25	0.030 + 0.006
		3Hz - 5Hz	1.10 + 0.06	1.10 + 0.06	1.10 + 0.06	0.100 + 0.006
		5Hz - 10Hz	0.35 + 0.06	0.35 + 0.06	0.35 + 0.06	0.035 + 0.006
		10Hz - 5kHz	0.15 + 0.06	0.15 + 0.06	0.15 + 0.06	0.015 + 0.006
		5kHz - 10kHz	0.35 + 0.70	0.35 + 0.70	0.35 + 0.70	0.030 + 0.006
	10.00000 A ^[6]	3Hz - 5Hz	1.10 + 0.08	1.10 + 0.10	1.10 + 0.10	0.100 + 0.008
		5Hz - 10Hz	0.35 + 0.08	0.35 + 0.10	0.35 + 0.10	0.035 + 0.008
		10Hz - 5kHz	0.15 + 0.08	0.15 + 0.10	0.15 + 0.10	0.015 + 0.008

Additional Low Frequency Errors (% of reading)				Additional Crest Factor Errors (non-sinewave) ^[7]	
Frequency	AC Filter			Crest Factor	Error (% of reading)
	Slow	Medium	Fast		
10Hz - 20Hz	0	0.74	--	1 - 2	0.05
20Hz - 40Hz	0	0.22	--	2 - 3	0.2
40Hz - 100Hz	0	0.06	0.73	3 - 4	0.4
100Hz - 200Hz	0	0.01	0.22	4 - 5	0.5
200Hz - 1kHz	0	0	0.18		
>1kHz	0	0	0		

[2] 10% overrange on all ranges except ACV 750 V and ACI 10 A ranges.

[3] Relative to calibration standards.

and 5% of range and <50 kHz, add 0.1% of range additional error. For 50kHz to 100kHz, add 0.13% of range additional error.

[5] ACV 750 range limited to 8x10⁷ Volt-Hz. For input over 300V rms, add 0.7mV error for each additional volt.

[6] For continuous current > DC 7A or AC RMS 7A, 30 seconds ON and 30 seconds OFF.

sinewave input.

5% of range, add 0.1% of range additional error values for 200uA and 2mA, 2A and 10A ranges when frequency >1kHz.

Measuring Characteristics

True RMS AC Voltage	
Measurement Method	AC-coupled True-RMS measurement with up to 400 V DC of bias at on any range.
Crest Factor	≤ 5 at full range
Input Impedance	1MΩ ± 2% in parallel with <150pF capacitance on any range
Input Protection	750V rms on all ranges
AC Filter Bandwidth	Slow: 3 Hz - 300 kHz Medium: 20Hz - 300kHz Fast: 200 Hz - 300 kHz
CMRR (common mode rejection ratio)	70 dB, for the 1 kΩ unbalance in LO lead, < 60 Hz, ± 500 VDC peak maximum
True RMS AC Current	
Measurement Method	Direct coupled to the fuse and shunt; AC-coupled True RMS measurement (measure the AC component only).
Crest Factor	≤ 3 at full range
Max. Input	DC + AC current peak value < 300% of range. The RMS current < 10 A rms including the DC component.
Shunt Resistor	100Ω for 200uA, 2mA 1Ω for 20mA, 200mA 0.01Ω for 2A, 10A
Input Protection	Externally accessible 500mA, 250V fast blow fuse at the rear panel for 200uA, 2mA, 20mA and 200mA ranges. Internal 10A, 250 V slow blow fuse for 2A and 10A ranges.
Settling Time Considerations	

has been fully settled (about 1s) before accurate measurement.

Applying > 300 Vrms (or > 5Arms) will cause self-heating in signal-conditioning components and these error are included in the

The

additional error will be lower than 0.02% of reading and will generally dissipate within a few minutes.

Frequency and Period Characteristics

[1][2]

Function	Range	Frequency Range	24 Hour ^[3] T _{CAL} °C±1°C	90 Day T _{CAL} °C±5°C	1 Year T _{CAL} °C±5°C	T 0°C to (T _{CAL} °C-5°C) (T _{CAL} °C+5°C) to 50°C
Frequency, Period	200 mV to 750 V	3 Hz - 5 Hz	0.07	0.07	0.07	0.005
		5 Hz - 10 Hz	0.04	0.04	0.04	0.005
		10 Hz - 40 Hz	0.02	0.02	0.02	0.001
		40 Hz - 300 kHz	0.005	0.006	0.007	0.001
		300 kHz - 1 MHz	0.005	0.006	0.007	0.001

Additional Low Frequency Errors: (% of reading)

Frequency	Gate Time (Resolution)			
	1 s (0.1ppm)	0.1 s (1ppm)	0.01 s (10ppm)	0.001 s (100ppm)
3 Hz-5Hz	0	0.12	0.12	0.12
5 Hz-10Hz	0	0.17	0.17	0.17
10 Hz-40Hz	0	0.20	0.20	0.20
40 Hz-100Hz	0	0.06	0.21	0.21
100 Hz-300Hz	0	0.03	0.21	0.21
300 Hz-1 kHz	0	0.01	0.07	0.07
>1kHz	0	0	0.02	0.02

10% of range of the

20% to 110% of range of the AC input voltage. The maximum input is limited to 750V rms or 8 × 10⁷ Volts-Hz (whichever is less). 200 mV range is full range input or input that is larger than the full range. For 20mV to 200mV, multiply % of reading error ×10.

[3] Relative to calibration standards.

Measuring Characteristics

Frequency and Period	
Measurement Method	Reciprocal-counting technique, AC-coupled input using the AC voltage function.
Input Impedance	1 MΩ ± 2% in parallel with < 150 pF capacitance on any range
Input Protection	750 V rms on all ranges
Measurement Considerations	
All frequency counters are susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors.	
Settling Time Considerations	
Errors will occur when attempting to measure the frequency or period of an input following a dc offset voltage change. Make sure the RC circuit of input terminal has been fully settled (about 1s) before accurate measurement.	

Capacitance Characteristics

[1][2]

Function	Range ^[2]	Test Current	1 Year	T
			$T_{CAL}^{\circ}C \pm 5^{\circ}C$	0°C to ($T_{CAL}^{\circ}C - 5^{\circ}C$) ($T_{CAL}^{\circ}C + 5^{\circ}C$) to 50°C
Capacitance	2.000nF	200nA	2 + 2.5	0.05+0.05
	20.00nF	2uA	1 + 0.3	0.05+0.01
	200.0nF	10uA	1 + 0.3	0.01+0.01
	2.000uF	100uA	1 + 0.3	0.01+0.01
	20.00uF	1mA	1 + 0.3	0.01+0.01
	200.0uF	1mA	1 + 0.3	0.01+0.01
	2.000mF	1mA	1 + 0.3	0.01+0.01
	20.00mF	1mA	1 + 0.3	0.01+0.01
	100.0mF	1mA	3 + 0.2	0.05+0.02

operation.

10% of range on 2nF range and 10% to 110% of range on all other ranges.

Measuring Characteristics

Capacitance Measurement	
Measurement Method	Apply constant current into the capacitance, and measure the voltage changing rate.
Connection Type	2-wire
Measurement Considerations	
Since small capacitance measurements are susceptible to the external noise, shielding inputs from external noise pickup is critical for minimizing measurement errors.	

Temperature Characteristics

[1]

Function	Probe Type	Type	Optimum Range	1 Year	T
				$T_{CAL}^{\circ}C \pm 5^{\circ}C$	0°C to ($T_{CAL}^{\circ}C - 5^{\circ}C$) ($T_{CAL}^{\circ}C + 5^{\circ}C$) to 50°C
Temperature	RTD ^[2] (R0 is within 49 Ω and 2.1 kΩ)	$\alpha = 0.00385$	-200°C to 660°C	0.16°C	0.01 °C
		$\alpha = 0.00389$	-200°C to 660°C	0.17°C	0.01°C
		$\alpha = 0.00391$	-200°C to 660°C	0.14°C	0.01°C
		$\alpha = 0.00392$	-200°C to 660°C	0.15°C	0.01°C
	Thermal Resistance	2.2 kΩ	-40°C to 150°C	0.08°C	0.002°C
		3 kΩ	-40°C to 150°C	0.08°C	0.002°C
		5 kΩ	-40°C to 150°C	0.08°C	0.002°C
		10 kΩ	-40°C to 150°C	0.08°C	0.002 °C
		30 kΩ	-40°C to 150°C	0.08°C	0.002 °C
	Thermocouple ^[3]	B	0°C to 1820°C	0.76°C	0.14 °C
		E	-270°C to 1000°C	0.5 °C	0.02 °C
		J	-210°C to 1200°C	0.5 °C	0.02 °C
		K	-270°C to 1372°C	0.5 °C	0.03 °C
		N	-270°C to 1300°C	0.5 °C	0.04 °C
		R	-270°C to 1768.1°C	0.5 °C	0.09 °C
		S	-270°C to 1768.1°C	0.6 °C	0.11 °C
		T	-270°C to 400°C	0.5 °C	0.03 °C

[3] Relative to cold junction temperature, accuracy is based on ITS-90. Built-in cold junction temperature refers to the temperature inside the banana jack and its accuracy is ± 2.5 °C.

REL operation.

Measuring Characteristics

Measurement Considerations	
The built-in cold junction temperature tracks the temperature inside the banana jack. The change of the temperature in banana jack might cause additional error. When using the built-in cold junction compensation, connect the sensor terminal of the thermocouple to the banana jack and warm it up for more than 3 minutes to minimize the error.	

Measurement Rate

Function	Setting	Integration Time	Readings/s 50Hz (60Hz)
DC Voltage	0.006 NPLC Integration Time	100 (100) μ s	10000 (10000)
DC Current	0.02 NPLC	400 (333) μ s	2500 (3000)
2 - wire Resistance	0.06 NPLC	1.2 (1) ms	833 (1000)
4 - wire Resistance	0.2 NPLC	4 (3.33) ms	250 (300)
	1 NPLC	20 (16.7) ms	50 (60)
	2 NPLC	40 (33.3) ms	25 (30)
	10 NPLC	200 (167) ms	5 (6)
	100 NPLC	2 (1.67) s	0.5 (0.6)
AC Voltage	3 Hz AC Filter		0.2
AC Current ^[2]	20 Hz		1.5
	200 Hz		10
	200 Hz		50 ^[3]
Frequency and Period ^[4]	1 s Gate Time		1
	0.1 s		10
	0.01 s		80
	0.001 s		500
Capacitance ^[5]			25

[1] Auto trigger, zero trigger delay, auto zero off, auto range off, math function off and external interface off.

[2] Use the default trigger delay setting.

[3] The maximum rate available when trigger delay is set to 0.

, 1kHz input.

[5] Measure 20 nF capacitance on 200 nF range. The measurement period changes with the capacitance under test. The maximum measurement period on 100mF is 4 s (typical value).

Other Measurement Characteristics

Triggering and Storage	
Trigger	Pre-trigger or Pos-trigger, Internal Trigger or External Trigger, Rising Edge Trigger or Falling Edge Trigger
Time Base Resolution	33.333 μ s, 0.01% Accuracy
Trigger Delay	0 to 3600 s available (about 33 μ s step size)
Sample Timer	0 to 3600 s available (about 33 μ s step size)
Internal Trigger Level Accuracy	$\pm$ 1% of range
Reading Hold Sensitivity	0.01%, 0.1%, 1% or 10% of reading
Single Trigger Samples	1 to 50000
External Trigger Input	Level: 5 V TTL compatible
	Impedance: > 30 k Ω in parallel with 500 pF
	Delay: < 50 μ s
	Jitter: < 50 μ s (ACV, ACI, FREQ and PREIOD < 2ms)
	Polarity: selectable rising edge or falling edge
	Maximum Rate: 300/s
	Minimum Pulse Width: 2 μ s
VMC Output	Level: 5 V TTL compatible
	Output Impedance: 100 Ω , typical
	Output Polarity: Falling Edge
	Pulse Width: about 2 μ s
History Record and Storage	
Nonvolatile Memory	512 k reading history data record
Non-volatile Memory	10 sets history data storage (5000 readings/group)
	5 sets sensor data storage (5000 readings/group)
	10 sets instrument setup storage
	5 sets Anysensor setup storage

Display	256 × 64 LCD, dual display, graphical menu, selectable Chinese or English, online help.
Power Supply	AC 100 V - 120 V, 45 Hz - 440 Hz
	AC 200 V - 240 V, 45 Hz - 66 Hz
	Detect the power-line frequency automatically at power-on, 400Hz defaults to 50Hz
Power Consumption	25 VA Max
Working Environment	Full accuracy for 0 °C to 50 °C
	Full accuracy to 40 °C, 80% R.H., Non-coagulation
Storage Temperature	- 40 °C to 70 °C
Operation Altitude	Up to 2000 m
Safety	IEC 61010-1; EN 61010-1; UL 61010-1; CAN/CSA-C22.2 No. 61010-1
	Measurement CAT I 1000 V/CAT II 300 V
	Pollution Degree 2
EMC	EN 61326-1
Weight	About 3.2 kg (without package)
Dimension	(height × width × length): 107.0mm × 231.6mm × 290.5mm
Remote Interface	
Programming Language	SCPI
LXI Compatibility	LXI Class C, Version 1.2
Warm-up Time	90 minutes

DM3068 Ordering Information

Model	Description	Order Number
Standard Accessories	DM3068 (6 ½, dual-display)	DM3068
	Power Cord conforming to the standard of the country	-
	Two Test Leads (black and red)	-
	Two Alligator Clips (black and red)	-
	USB Cable	CB-USB-150
	Four Spare Fuses (two kinds):	-
	2 AC, 250 V, T250 mA fuses	
	2 AC, 250 V, T125 mA fuses	
	Quick Guide	
	Resource CD (User's Guide and Application Software)	-
Optional Accessories	Kelvin Test Clip	-
	RS232 Cable	-
	Rack Mount Kit	RM-DM-3

NOTE: All the standard or optional accessories can be ordered from you local RIGOL



CalPlus GmbH
 Zentrale Berlin
 Heerstraße 32 • 14052 Berlin
 Tel.: 030 214982-0 • Fax: 030 214982-50
 office@calplus.de • www.calplus.de

CalPlus GmbH
 Niederlassung ScopeShop
 Normannenweg 30 • 20537 Hamburg
 Tel.: 040 3039595-0 • Fax: 040 3039595-50
 scopeshop@calplus.de • www.calplus.de