

- GPS
- Yagi
- Horn
- Mag Mount
- Wideband
- Log Periodic
- Whip
- Loop
- Dipole



Table of Contents

Omnidirectional Antennas . . . . . 3

    Portable Antennas . . . . . 3

    GNSS (GPS) Antennas . . . . . 4

    Magnet Mount Broadband Antennas . . . . . 5

    Wideband Antennas . . . . . 6

Directional Antennas . . . . . 7

    Yagi Antennas . . . . . 8

    Loop Antennas . . . . . 12

    Log Periodic Antennas . . . . . 13

    Horn Antennas . . . . . 15

Definitions

All antenna accessories have a warranty period of 90 days, unless otherwise stated.

All coaxial antenna connectors have a nominal 50 Ω impedance.

All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: [www.anritsu.com](http://www.anritsu.com)

## Omnidirectional Antennas

**Portable Antennas** Anritsu portable antennas are designed for rugged field use, featuring ABS plastic, polyurethane, or rubberized bodies with nickel plated brass or all brass connectors. All specifications typical.

| Frequency Range (MHz)                      | Input Power (Watts)  | Gain (dBi) | VSWR (max)      | Antenna Length (cm) | Connector Type | Antenna Model Number |
|--------------------------------------------|----------------------|------------|-----------------|---------------------|----------------|----------------------|
| 617 to 5000 MHz                            | 2                    | 0.5 to 3.7 | 1.8 at 2400 MHz | 13.2                | N(m)           | 2000-2183-R          |
| 698 to 960<br>1710 to 2170<br>2500 to 2700 | 3                    | 0 to 2.0   | 2.5:1           | 22.8                | SMA(m)         | 2000-1751-R          |
| 2400 to 2500<br>5000 to 5900               | 5                    | 3.0        | 2.0:1           | 7.6 to 10.2         | SMA(m)         | 2000-1361-R          |
| VHF through UHF                            | NA<br>(receive only) | variable   | variable        | 10.2 to 48.2        | BNC(m)         | 2000-1487-R          |

### 2000-2183-R Multiband Dipole antenna.

|                 |                 |
|-----------------|-----------------|
| Frequency Range | 617 to 5000 MHz |
| Input Power     | 2 watts         |
| Gain            | 0.5 to 3.7 dBi  |
| VSWR (max)      | 1.8 at 2400 MHz |
| Antenna Length  | 13.2 cm         |
| Connector Type  | N(m)            |



### 2000-1361-R Half wave thin-blade style antenna, with knuckle elbow.

|                 |                                              |
|-----------------|----------------------------------------------|
| Frequency Range | 2400 MHz to 2500 MHz<br>5000 MHz to 5900 MHz |
| Input Power     | 5 watts                                      |
| Gain            | 3.0 dBi                                      |
| VSWR            | 2.0:1 max                                    |
| Antenna Length  | 17.2 cm to 19.7 cm                           |
| Connector Type  | SMA(m)                                       |



### 2000-1487-R Telescoping whip antenna, with knuckle elbow.

|                 |                    |
|-----------------|--------------------|
| Frequency Range | VHF through UHF    |
| Input Power     | NA (receive only)  |
| Gain            | NA                 |
| VSWR            | variable           |
| Antenna Length  | 10.2 cm to 48.2 cm |
| Connector Type  | BNC(m)             |



### 2000-1751-R 4G thin-blade style antenna, with knuckle elbow.

|                 |                                                                    |
|-----------------|--------------------------------------------------------------------|
| Frequency Range | 698 MHz to 960 MHz<br>1710 MHz to 2170 MHz<br>2500 MHz to 2700 MHz |
| Input Power     | 3 Watts                                                            |
| Gain            | 0 to 2.0 dBi                                                       |
| VSWR            | 2.5:1 max                                                          |
| Antenna Length  | 22.8 cm                                                            |
| Connector Type  | SMA(m)                                                             |



**GNSS (GPS) Antennas** Magnet and connector mount active GNSS (GPS) antennas for increased performance.

| Frequency Range (MHz) | Gain (dBi) | VSWR (max) | Cable Length (m) | Connector Type | Antenna Model Number |
|-----------------------|------------|------------|------------------|----------------|----------------------|
| 1575                  | 26 (LNA)   | 2.0:1      | 3                | SMA(m)         | 2000-2185-R          |
| 1575                  | 26         | 2.0:1      | 0.3              | SMA(m)         | 2000-1652-R          |
| 1575                  | 25         | 2.0:1      | NA               | SMA(m)         | 2000-1760-R          |

**2000-2185-R** Magnet mount active GNSS antenna (active 2.7 - 5 V).

|                 |                 |
|-----------------|-----------------|
| Frequency Range | 1575.42 ± 4 MHz |
| Gain            | 26 dB LNA       |
| VSWR            | 2.0:1 Max       |
| Cable Length    | 3 m             |
| Connector Type  | SMA(m)          |
| Case Size       | 45 x 50 x 15 mm |



**2000-1652-R** Magnet mount active GNSS (GPS) antenna, requires 3.3 VDC or 5 VDC.

|                 |                |
|-----------------|----------------|
| Frequency Range | 1575 MHz (GPS) |
| Gain            | 26 dBi         |
| VSWR            | 2.0:1          |
| Cable Length    | 0.3 m          |
| Connector Type  | SMA(m)         |



**2000-1760-R** Active GNSS (GPS) antenna, requires 2.5 VDC or 3.7 VDC.

|                  |                |
|------------------|----------------|
| Frequency Range  | 1575 MHz (GPS) |
| Gain             | 25 dBi         |
| VSWR             | 2.0:1          |
| Antenna Length   | 2.6 cm         |
| Antenna Diameter | 2.1 cm         |
| Connector Type   | SMA(m)         |



## Magnet Mount Broadband Antennas

| Frequency Range (MHz)                                        | Input Power (Watts)  | Gain (dBi)                           | VSWR (max) | Cable Length (m) | Connector Type      | Antenna Model Number |
|--------------------------------------------------------------|----------------------|--------------------------------------|------------|------------------|---------------------|----------------------|
| 694 to 894<br>1700 to 2700                                   | 10                   | 3.0                                  | 2.0:1      | 3                | SMA(m)              | 2000-1645-R          |
| 750 to 1250<br>1650 to 2700                                  | 10                   | 3.0<br>5.0                           | 2.0:1      | 3                | SMA(m)              | 2000-1646-R          |
| 698 to 2700<br>3000 to 6000<br>1575 (GPS)                    | NA<br>(receive only) | 2.0 to 5.0<br>+26 dB<br>(GPS preamp) | 3.5:1      | 3                | N(m) (x2)<br>SMA(m) | 2000-1647-R          |
| 617 to 960 and<br>1710 to 3700<br>3000 to 6000<br>1575 (GPS) | NA<br>(receive only) | 2.0 to 5.0<br>+26 dB<br>(GPS preamp) | 3.5:1      | 3                | N(m) (x2)<br>SMA(m) | 2000-1946-R          |
| 1700 to 6000                                                 | 10                   | 3.0                                  | 2.0:1      | 3                | N(m)                | 2000-1648-R          |

### 2000-1645-R Magnet mount multiband broadband antenna.

|                 |                                            |
|-----------------|--------------------------------------------|
| Frequency Range | 694 MHz to 894 MHz<br>1700 MHz to 2700 MHz |
| Input Power     | 10 W                                       |
| Gain            | 3.0 dBi                                    |
| VSWR            | 2.0:1                                      |
| Size            | 6.7 cm x 9.2 cm                            |
| Cable Length    | 3 m                                        |
| Connector Type  | SMA(m)                                     |




### 2000-1646-R Magnet mount multiband broadband antenna.

|                 |                                             |
|-----------------|---------------------------------------------|
| Frequency Range | 750 MHz to 1250 MHz<br>1650 MHz to 2700 MHz |
| Input Power     | 10 W                                        |
| Gain            | 3.0 dBi (band 1), 5.0 dBi (band 2)          |
| VSWR            | 2.0:1 (max)                                 |
| Size            | 4.3 cm x 9.2cm                              |
| Cable Length    | 3 m                                         |
| Connector Type  | SMA(m)                                      |




### 2000-1647-R Magnet mount broadband integrated GPS antenna, requires 3 V to 5 V for GPS.

|                 |                                                                                                                                      |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range | 698 MHz to 2700 MHz<br>3000 MHz to 6000 MHz<br>1575 (GPS)                                                                            |
| Input Power     | NA (receive only)                                                                                                                    |
| Gain            | 2.0 dBi (750 to 1200 MHz)<br>5.0 dBi (1700 to 2700 MHz)<br>5.0 dBi (3000 to 6000 MHz)<br>5.0 dBi (GPS antenna), 26.0 dB (GPS preamp) |
| VSWR            | 3.5:1                                                                                                                                |
| Cable Length    | 3 m                                                                                                                                  |
| Connector Type  | N(m) (x2), SMA(m) (GPS)                                                                                                              |



### 2000-1946-R Magnet mount broadband integrated GPS antenna, requires 3 V to 5 V for GPS.

|                 |                                                                                                                                     |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range | 617 MHz to 960 MHz and 1710 MHz to 3700MHz (Global LTE)<br>3000 MHz to 6000 MHz<br>1575 (GPS)                                       |
| Input Power     | NA (receive only)                                                                                                                   |
| Gain            | 3.0 dBi (617 to 960 MHz)<br>4.0 dBi (1710 to 3700 MHz)<br>5.0 dBi (3000 to 6000 MHz)<br>5.0 dBi (GPS antenna), 26.0 dB (GPS preamp) |
| VSWR            | 3.5:1                                                                                                                               |
| Cable Length    | 3 m                                                                                                                                 |
| Connector Type  | N(m) (x2), SMA(m) (GPS)                                                                                                             |



## Specifications

## Omnidirectional Antennas

|                    |                                           |  |
|--------------------|-------------------------------------------|--|
| <b>2000-1648-R</b> | Magnet mount multiband broadband antenna. |  |
| Frequency Range    | 1700 MHz to 6000 MHz                      |  |
| Input Power        | 10 W                                      |  |
| Gain               | 3.0 dBi                                   |  |
| VSWR               | 2.0:1 (max)                               |  |
| Size               | 6.7 cm x 9.2 cm                           |  |
| Cable Length       | 3 m                                       |  |
| Connector Type     | N(m)                                      |  |



### Wideband Antennas

| Frequency Range (MHz) | Input Power (Watts) | Gain (dBi)   | VSWR (average) | Cable Length (m) | Connector Type | Antenna Model Number |
|-----------------------|---------------------|--------------|----------------|------------------|----------------|----------------------|
| 20 to 21000           | 10                  | -17.0 to 7.0 | <2.0:1         | NA               | N(f)           | 2000-2141-R          |

|                       |                                                |  |
|-----------------------|------------------------------------------------|--|
| <b>2000-2141-R</b>    | Ultrawide broadband antenna.                   |  |
| Frequency Range (MHz) | 20 MHz to 21 GHz                               |  |
| Input Power           | 10 Watts                                       |  |
| Gain                  | 1 to 7 dBi > 230 MHz<br>-17 to 1 dBi < 230 MHz |  |
| VSWR                  | 2.0:1 average                                  |  |
| Length                | 46.99 cm                                       |  |
| Width                 | 11.43 cm                                       |  |
| Weight                | 1.08 kg                                        |  |
| Connector Type        | N(f)                                           |  |



**Directional Antennas** Anritsu offers a complete line of high-performance directional antennas. The Yagi antennas operating below 1 GHz are constructed from welded, solid aluminum elements. The Yagi antennas operating above 1 GHz are constructed from solid brass soldered elements. The design and construction help prevent intermodulation and yield very sturdy antennas that are well-suited for use in tracking interfering signals.




| Frequency Range (MHz) | Gain (dBi)       | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of Elements | Antenna Type | Anritsu Part Number |
|-----------------------|------------------|------------|-------------|------------|-------------|--------------------|--------------|---------------------|
| 0.009 to 20           | -160 to -42      | -          | 39.8        | 29.0       | 0.46        | NA                 | Loop         | 2000-1777-R         |
| 20 to 200             | -40 to -3        | 2.5:1      | 39.5        | 32.0       | 0.58        | NA                 | Loop         | 2000-1778-R         |
| 200 to 500            | -13 to -4        | 2.5:1      | 24.5        | 16         | 0.36        | NA                 | Loop         | 2000-1779-R         |
| 380 to 430            | 7.1              | 1.5:1      | 52.8        | 34.9       | 0.68        | 3                  | Yagi         | 2000-1825-R         |
| 450 to 512            | 7.1              | 1.5:1      | 43          | 33         | 0.5         | 3                  | Yagi         | 2000-1812-R         |
| 698 to 787            | 10.1             | 1.5:1      | 70          | 20         | 1.4         | 6                  | Yagi         | 2000-1659-R         |
| 824 to 896            | 12.3             | 1.5:1      | 58.4        | 27.9       | 1.4         | 7                  | Yagi         | 2000-1411-R         |
| 885 to 975            | 12.6             | 1.5:1      | 72.4        | 19.1       | 1.4         | 7                  | Yagi         | 2000-1412-R         |
| 1425 to 1535          | 14.3             | 1.4:1      | 66          | 13         | 1           | 12                 | Yagi         | 2000-1660-R         |
| 1710 to 1880          | 12.3             | 1.5:1      | 48.3        | 7.6        | 2.3         | 8                  | Yagi         | 2000-1413-R         |
| 1850 to 1990          | 11.4             | 1:3:1      | 29.8        | 8.9        | 0.45        | 6                  | Yagi         | 2000-1414-R         |
| 1920 to 2170          | 14.3             | 1.5:1      | 61          | 9.5        | 0.53        | 12                 | Yagi         | 2000-1416-R         |
| 2400 to 2500          | 14.1             | 1.5:1      | 45.1        | 8.9        | 0.57        | 10                 | Yagi         | 2000-1415-R         |
| 2500 to 2700          | 14.1             | 1.5:1      | 43          | 7.6        | 0.5         | 12                 | Yagi         | 2000-1726-R         |
| 1000 to 18000         | 6.0 <sup>a</sup> | 2:1        | 50          | 24         | 0.9         | NA                 | Log Periodic | 2000-1748-R         |
| 20 to 8.5 GHz         | See Plots        | 3.5:1      | 50          | 32         | <1.8        | NA                 | Log Periodic | 2000-2107-R         |

**Notes**



For vertical polarization, the H-plane is the Azimuth (horizontal angle) and the E-plane is the Elevation (vertical angle). The E- and H-planes are swapped for horizontal polarization, so the H-plane is Elevation and the E-plane is Azimuth.

## Yagi Antennas



| 2000-1411-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 824 to 896                              | 12.3          | 1.5:1      | 58.4        | 27.9       | 1.4         | 7                     | N(f)              |

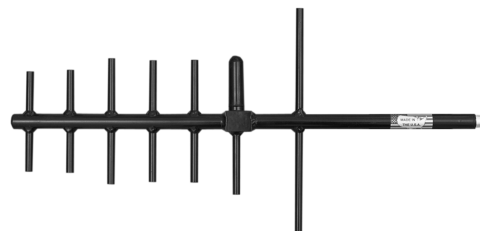

| 2000-1412-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 885 to 975                              | 12.6          | 1.5:1      | 72.4        | 19.1       | 1.4         | 7                     | N(f)              |




| 2000-1413-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 1710 to 1880                            | 12.3          | 1.5:1      | 48.3        | 7.6        | 2.3         | 8                     | N(f)              |




## 2000-1414-R

| Frequency Range (MHz) | Gain (dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of Elements | Connector Type |
|-----------------------|------------|------------|-------------|------------|-------------|--------------------|----------------|
| 1850 to 1990          | 11.4       | 1:3:1      | 29.8        | 8.9        | 0.45        | 6                  | N(f)           |

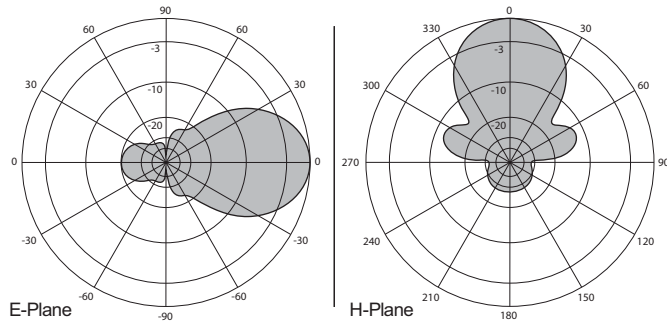


## 2000-1415-R

| Frequency Range (MHz) | Gain (dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of Elements | Connector Type |
|-----------------------|------------|------------|-------------|------------|-------------|--------------------|----------------|
| 2400 to 2500          | 14.1       | 1.5:1      | 45.1        | 8.9        | 0.57        | 10                 | N(f)           |

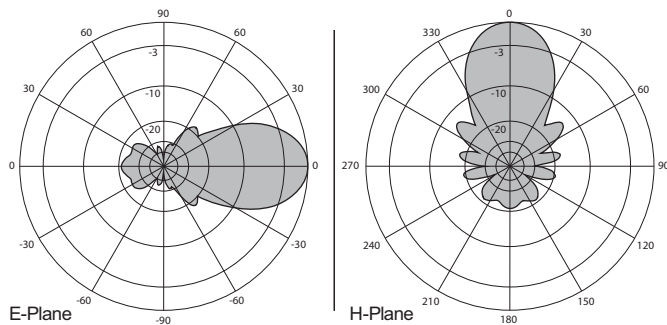

## 2000-1416-R



| Frequency Range (MHz) | Gain (dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of Elements | Connector Type |
|-----------------------|------------|------------|-------------|------------|-------------|--------------------|----------------|
| 1920 to 2170          | 14.3       | 1.5:1      | 61          | 9.5        | 0.53        | 12                 | N(f)           |

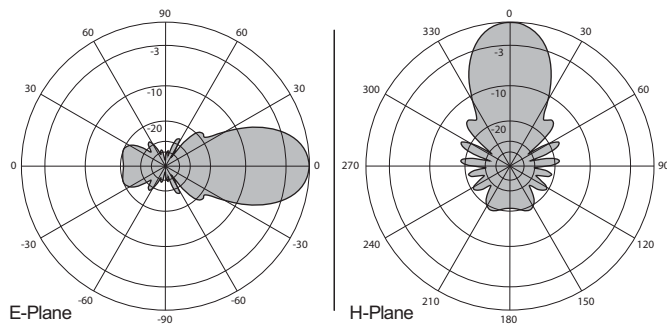



## Specifications

## Directional Antennas



| 2000-1659-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 698 to 787                              | 10.1          | 1.5:1      | 70          | 20         | 1.4         | 6                     | N(f)              |




| 2000-1660-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 1425 to 1535                            | 14.3          | 1.4:1      | 66          | 13         | 1           | 12                    | N(f)              |




| 2000-1726-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 2500 to 2700                            | 14.1          | 1.5:1      | 43          | 7.6        | 0.5         | 12                    | N(f)              |



| 2000-1812-R                         | Gain (dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of Elements | Connector Type |
|-------------------------------------|------------|------------|-------------|------------|-------------|--------------------|----------------|
| Frequency Range (MHz)<br>450 to 512 | 7.1        | 1.5:1      | 43.2        | 33         | 0.5         | 3                  | N(f)           |


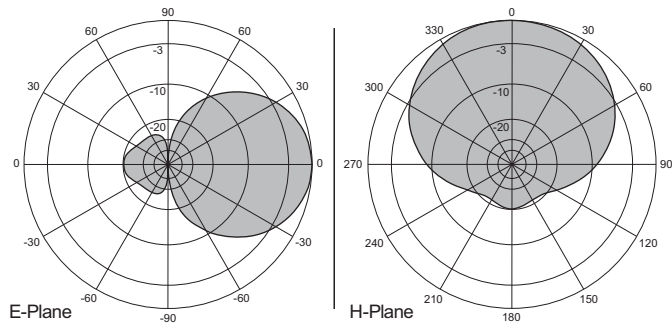


| 2000-1825-R                         | Gain (dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of Elements | Connector Type |
|-------------------------------------|------------|------------|-------------|------------|-------------|--------------------|----------------|
| Frequency Range (MHz)<br>380 to 430 | 7.1        | 1.5:1      | 52.8        | 34.9       | 0.68        | 3                  | N(f)           |


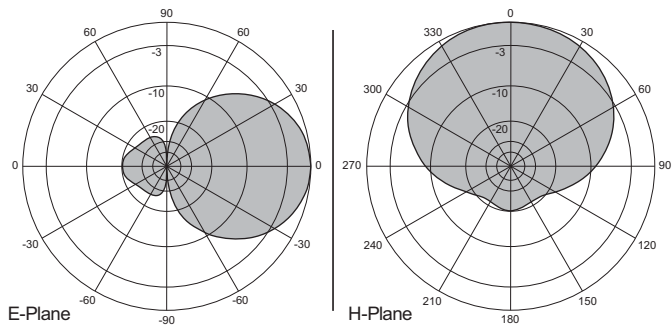


## Loop Antennas



| 2000-1777-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 0.009 to 20                             | -160 to -42   | -          | 39.8        | 29.0       | 0.46        | NA                    | N(f)              |



| 2000-1778-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 20 to 200                               | -40 to -3     | 2.5:1      | 39.5        | 32.0       | 0.58        | NA                    | N(f)              |



| 2000-1779-R<br>Frequency<br>Range (MHz) | Gain<br>(dBi) | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of<br>Elements | Connector<br>Type |
|-----------------------------------------|---------------|------------|-------------|------------|-------------|-----------------------|-------------------|
| 200 to 500                              | -13 to -4     | 2.5:1      | 24.5        | 16         | 0.36        | NA                    | N(f)              |



## 760-271-R

Transit Case (for Portable Directional Antennas and Port Extender  
P/N 2000-1777-R, 2000-1778-R, 2000-1779-R, and 2000-1798-R)

Case can contain all three loop antennas at once.






## Log Periodic Antennas







## 2000-1748-R

| Frequency Range (MHz) | Gain (dBi)       | VSWR (max) | Length (cm) | Width (cm) | Weight (kg) | Number of Elements | Connector Type |
|-----------------------|------------------|------------|-------------|------------|-------------|--------------------|----------------|
| 1000 to 18000         | 6.0 <sup>a</sup> | 2:1        | 50          | 24         | 0.9         | NA                 | N(f)           |

a. Typical

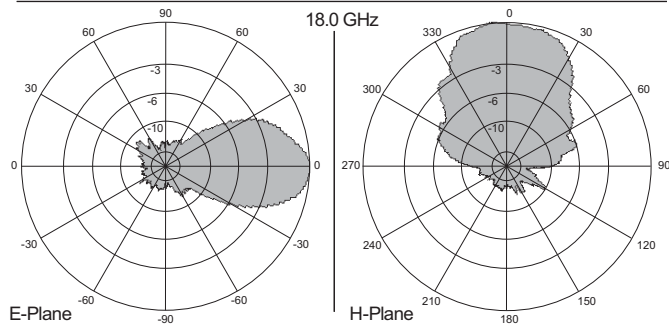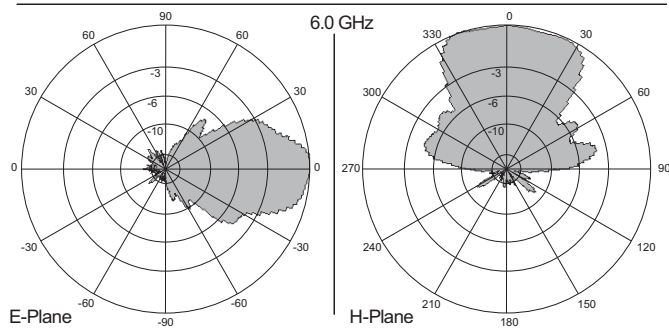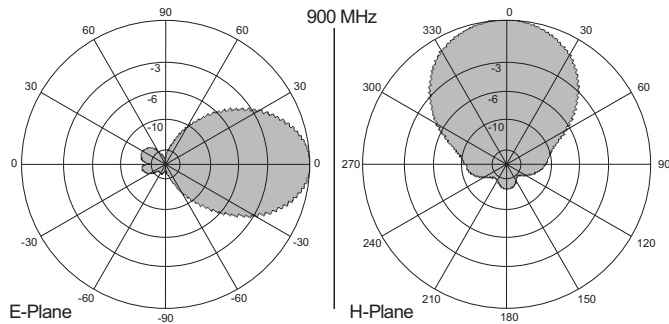


| 2000-2107-R<br>Frequency<br>Range | Gain<br>(dBi) | VSWR<br>(typical) | Length<br>(cm) | Width<br>(cm) | Height<br>(cm) | Weight<br>(kg) | Connector<br>Type |
|-----------------------------------|---------------|-------------------|----------------|---------------|----------------|----------------|-------------------|
| 20 MHz to 8.5 GHz                 | See Plots     | 3.5:1             | 50             | 32            | 6              | < 1.8          | N(f)              |

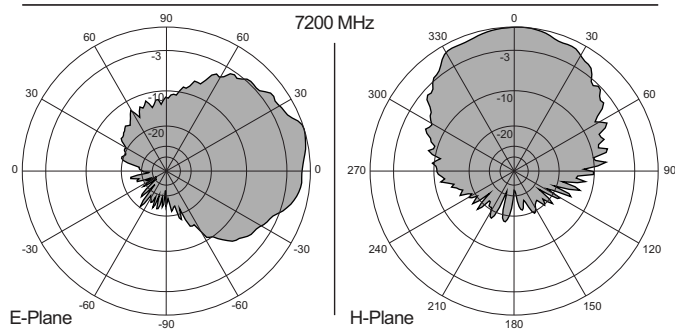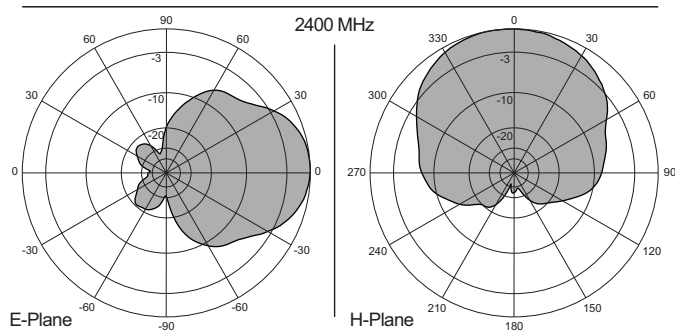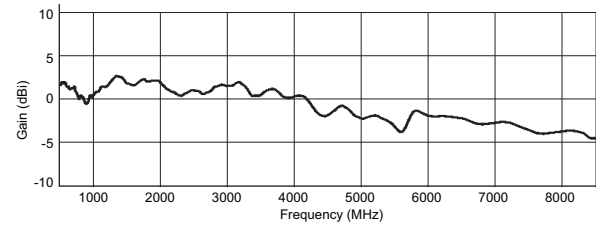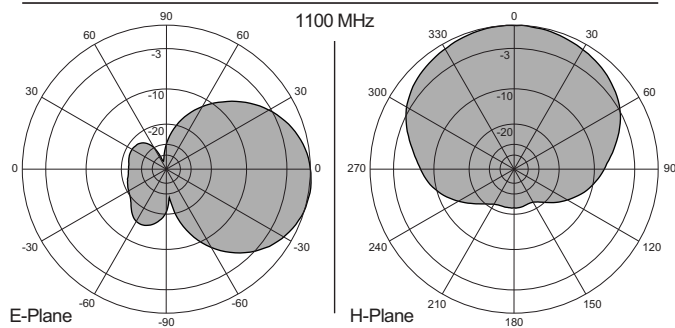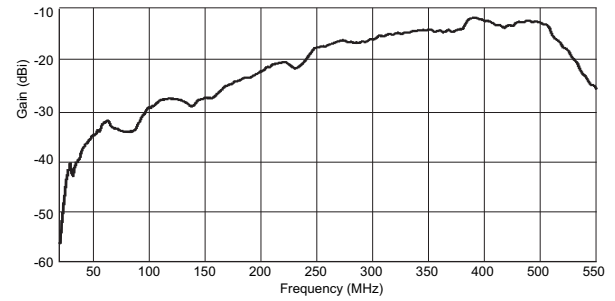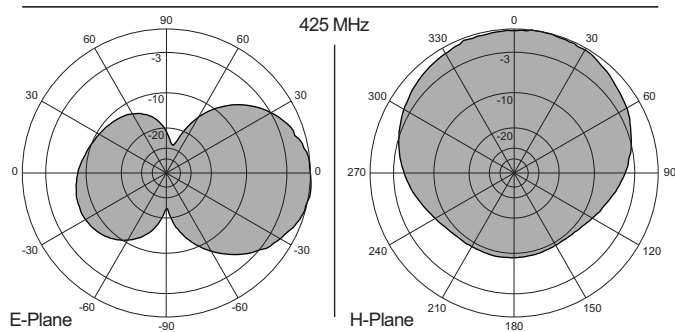


## Horn Antennas

| Frequency Range (GHz) | Gain (dBi) | VSWR (max)         | Flange       | Dimensions A x B x C (mm) | Designator     | Anritsu Part Number |
|-----------------------|------------|--------------------|--------------|---------------------------|----------------|---------------------|
| 17.6 to 26.7          | 25         | 1.2:1              | UG-595/U     | 393.6 x 102.06 x 75.60    | WG20 WR42 R220 | 2000-1867-R         |
| 24 to 40              | 17 to 19   | 1.5:1 <sup>a</sup> | UG-599/U     | 110 x 80 x 40             | WG22 WR28 R320 | 2000-2003-R         |
| 26.4 to 40.1          | 25         | 1.2:1              | UG-599/U     | 263.00 x 68.10 x 50.40    | WG22 WR28 R320 | 2000-1868-R         |
| 33 to 50.1            | 25         | 1.2:1              | UG-383/U     | 235.00 x 50.00 x 37.00    | WG23 WR22 R400 | 2000-1869-R         |
| 39.3 to 59.7          | 25         | 1.2:1              | UG-383/U-Mod | 181.00 x 41.06 x 30.00    | WG24 WR19 R500 | 2000-1870-R         |
| 49.9 to 75.8          | 25         | 1.2:1              | UG-385/U     | 140.10 x 35.66 x 26.00    | WG25 WR15 R620 | 2000-1871-R         |
| 60.5 to 92.0          | 25         | 1.2:1              | UG-387/U     | 134.00 x 28.00 x 21.00    | WG26 WR12 R740 | 2000-1872-R         |
| 73.8 to 112.0         | 25         | 1.2:1              | UG-387/U-Mod | 104.50 x 24.11 x 18.00    | WG27 WR10 R900 | 2000-1873-R         |

a. Typical

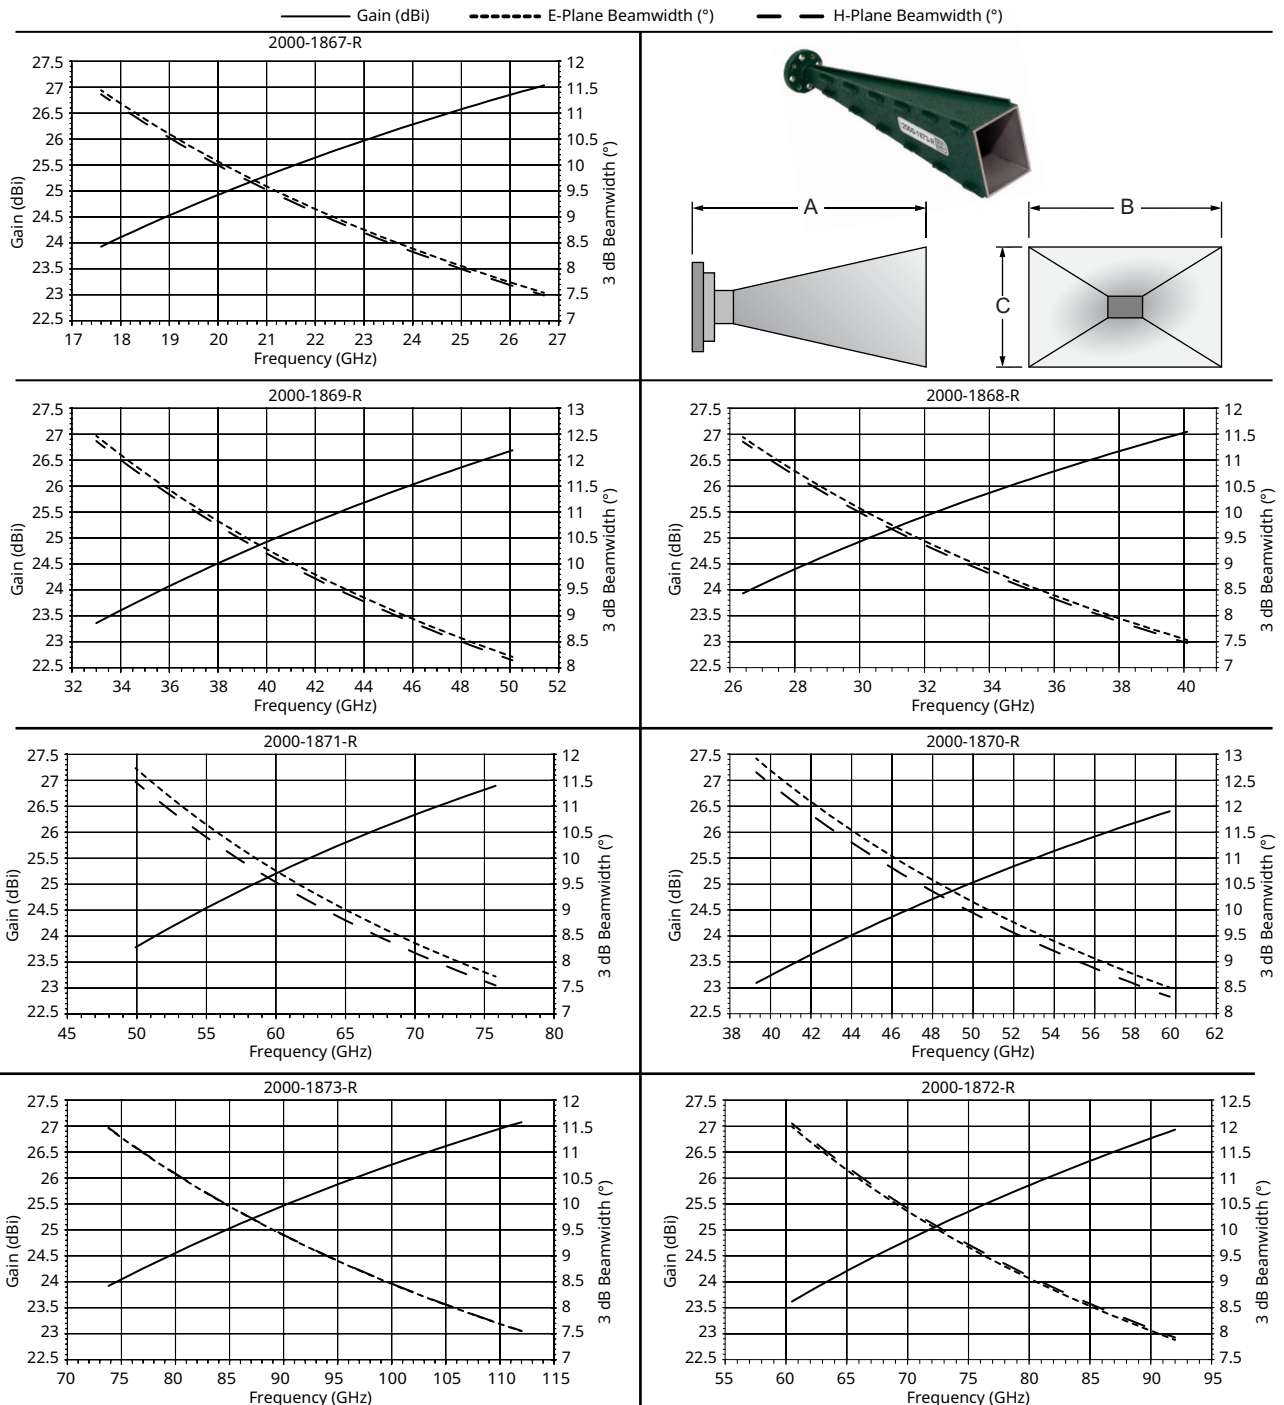

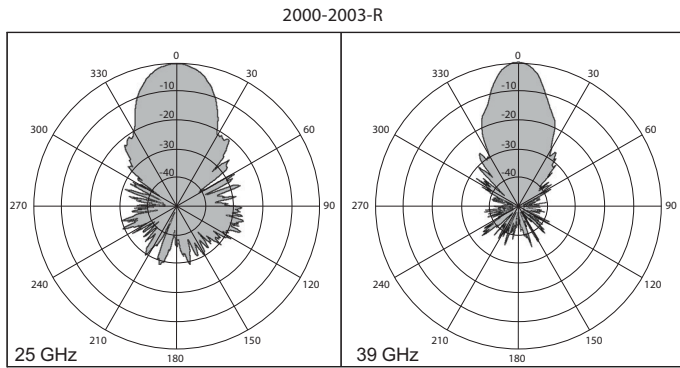

Typical Patterns



Includes a mounting bracket, K(f) to WR28 adapter, and carrying case.

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com](http://www.anritsu.com) and search for training and education.



### • United States

#### **Anritsu Americas Sales Company**

490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

### • Canada

#### **Anritsu Electronics Ltd.**

#### **Americas Sales and Support**

490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

### • Brazil

#### **Anritsu Eletronica Ltda.**

Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP, Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

#### **Anritsu Company, S.A. de C.V.**

Blvd Miguel de Cervantes Saavedra #169 Piso 1,  
Col. Granada, Mexico, Ciudad de Mexico,  
11520, MEXICO  
Phone: +52-55-4169-7104

### • United Kingdom

#### **Anritsu EMEA Limited**

900 Capability Green,  
Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

#### **Anritsu SA**

12 avenue du Québec, Immeuble Goyave,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50

### • Germany

#### **Anritsu GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1,  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

#### **Anritsu S.R.L.**

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy  
Phone: +39-6-509-9711

### • Sweden

#### **Anritsu AB**

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00

### • Finland

#### **Anritsu AB**

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5.),  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100

### • Denmark

#### **Anritsu A/S**

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

### • Spain

#### **Anritsu EMEA Ltd.**

#### **Representation Office in Spain**

Calle Manzanares 4, Primera planta, 28005  
Madrid, Spain  
Phone: +34-91-572-6761

### • Austria

#### **Anritsu Pty Ltd**

Am Belvedere 10, A-1100 Vienna, Austria  
Phone: +43-(0)1-717-28-710

### • United Arab Emirates

#### **Anritsu EMEA Ltd.**

#### **Anritsu A/S**

Office No. 164, Building 17, Dubai Internet City  
P. O. Box - 501901, Dubai, United Arab Emirates  
Phone: +971-4-3758479

### • India

#### **ANRITSU INDIA PRIVATE LIMITED**

6th Floor, Indigube ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road,  
Bengaluru - 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

### • Singapore

#### **ANRITSU PTE LTD**

1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre  
Singapore 159303  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • Vietnam

#### **ANRITSU COMPANY LIMITED**

16th Floor, Peakview Tower, 36 Hoang Cau Street,  
O Cho Dua Ward, Dong Da District, Hanoi, Vietnam  
Phone: +84-24-3201-2730  
Fax: +84-24-3201-2740

### • P.R. China (Shanghai)

#### **Anritsu (China) Co., Ltd.**

Room 2701-2705, Tower A, New Caohejing  
International Business Center No. 391 Gui Ping Road  
Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

#### **ANRITSU COMPANY LIMITED**

Unit 1302, 13<sup>th</sup> Floor, New East Ocean Center,  
No.9 Science Museum Road, TsimShaTsui East,  
Kowloon, Hong Kong  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

#### **Anritsu Corporation**

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • South Korea

#### **Anritsu Corporation, Limited**

8F, A TOWER, 20, Gwacheondaero 7-gil, Gwacheon-si,  
Gyeonggi-do, 13840, Republic of Korea  
Phone: +82-2-6259-7300  
Fax: +82-2-6259-7301

### • Australia

#### **Anritsu Pty. Ltd.**

Unit 20, 21-35 Ricketts Road,  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

#### **ANRITSU COMPANY, INC.**

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

List Revision Date: 20250812