



Precision Impedance Analyzers 6500B Series

Accuracy Charts

Issue B

Wayne Kerr Electronics Limited Worldwide

UK – GLOBAL HQ

Wayne Kerr Electronics
Vinnetrow Business Park
Vinnetrow Road
Chichester
West Sussex PO20 1QH

Tel: +44 (0)1243 792200

Fax: +44 (0)1243 792201

Email: sales@wayne-kerr.co.uk

Email: service@wayne-kerr.co.uk

USA

Wayne Kerr Electronics Inc.
165L New Boston Street
Woburn MA 01801-1744

Tel: 781 938 8390

Fax: 781 933 9523

Email: sales@waynekerrusa.com

China

Wayne Kerr Asia
A604 Pengdu Building,
Guimiao Road,
Nanshan District,
Shenzhen, Guangdong
China

Tel: +86 138 2525 7230

Fax: +86 755 2652 3875

Email: sales@waynekerr.com

service@waynekerr.com

Europe

Wayne Kerr Europe GmbH
Märkische Str. 38 - 40
58675 Hemer
Germany

Tel: +49 (0) 2372 557 870

Fax: +49 (0) 2372 557 8790

E-mail: info@waynekerr.de

Taiwan

Wayne Kerr Electronics Corporation
No228-21, Sec 2, Bei Hsin Rd
Hsin Tien City
Taipei 231
Taiwan

Tel: +886 (2) 2915 8990

Fax: +886 (2) 2915 5775

E-mail: sales@waynekerrtest.com.tw

India

Wayne Kerr Electronics Pvt Ltd
FF-73, Amrit Plaza Commercial Complex
B Block, Surya Nagar
Ghaziabad (UP)
India

Tel: +91 (0) 12 0262 9612

Fax: +91 (0) 12 0262 9613


E-mail: waynekerrindia@gmail.com

© Wayne Kerr Electronics 2008


The copyright in this work is vested in Wayne Kerr Electronics and this document is issued for the purpose only for which it is supplied. No licence is implied for the use of any patented feature. It must not be reproduced in whole or in part, or used for tendering or manufacturing purposes except under an agreement or with the consent in writing of and then only on the condition that this notice is included in any such reproduction. Information furnished is believed to be accurate but no liability in respect of any use of it is accepted by Wayne Kerr Electronics.

Wayne Kerr Electronics Limited reserves the right to change specifications without prior notice.

6500B Impedance Measurement Accuracy

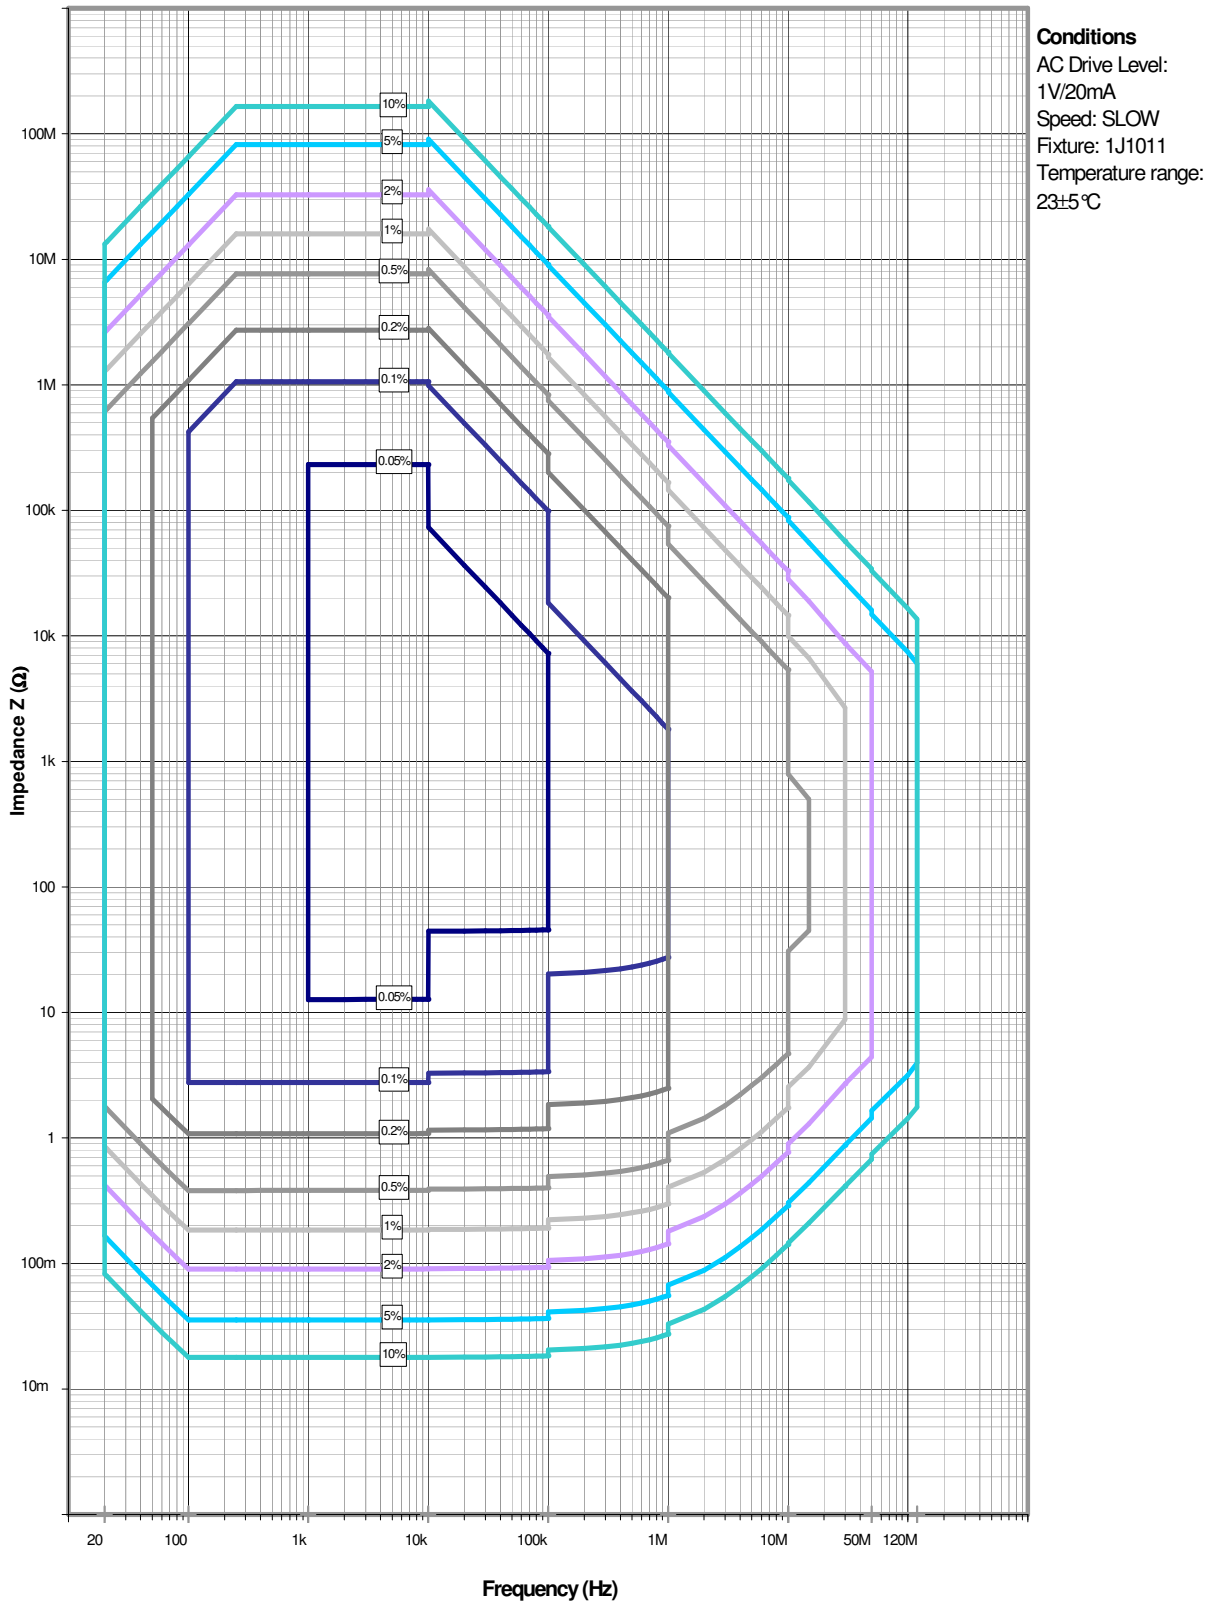

6500B Capacitance Measurement Accuracy

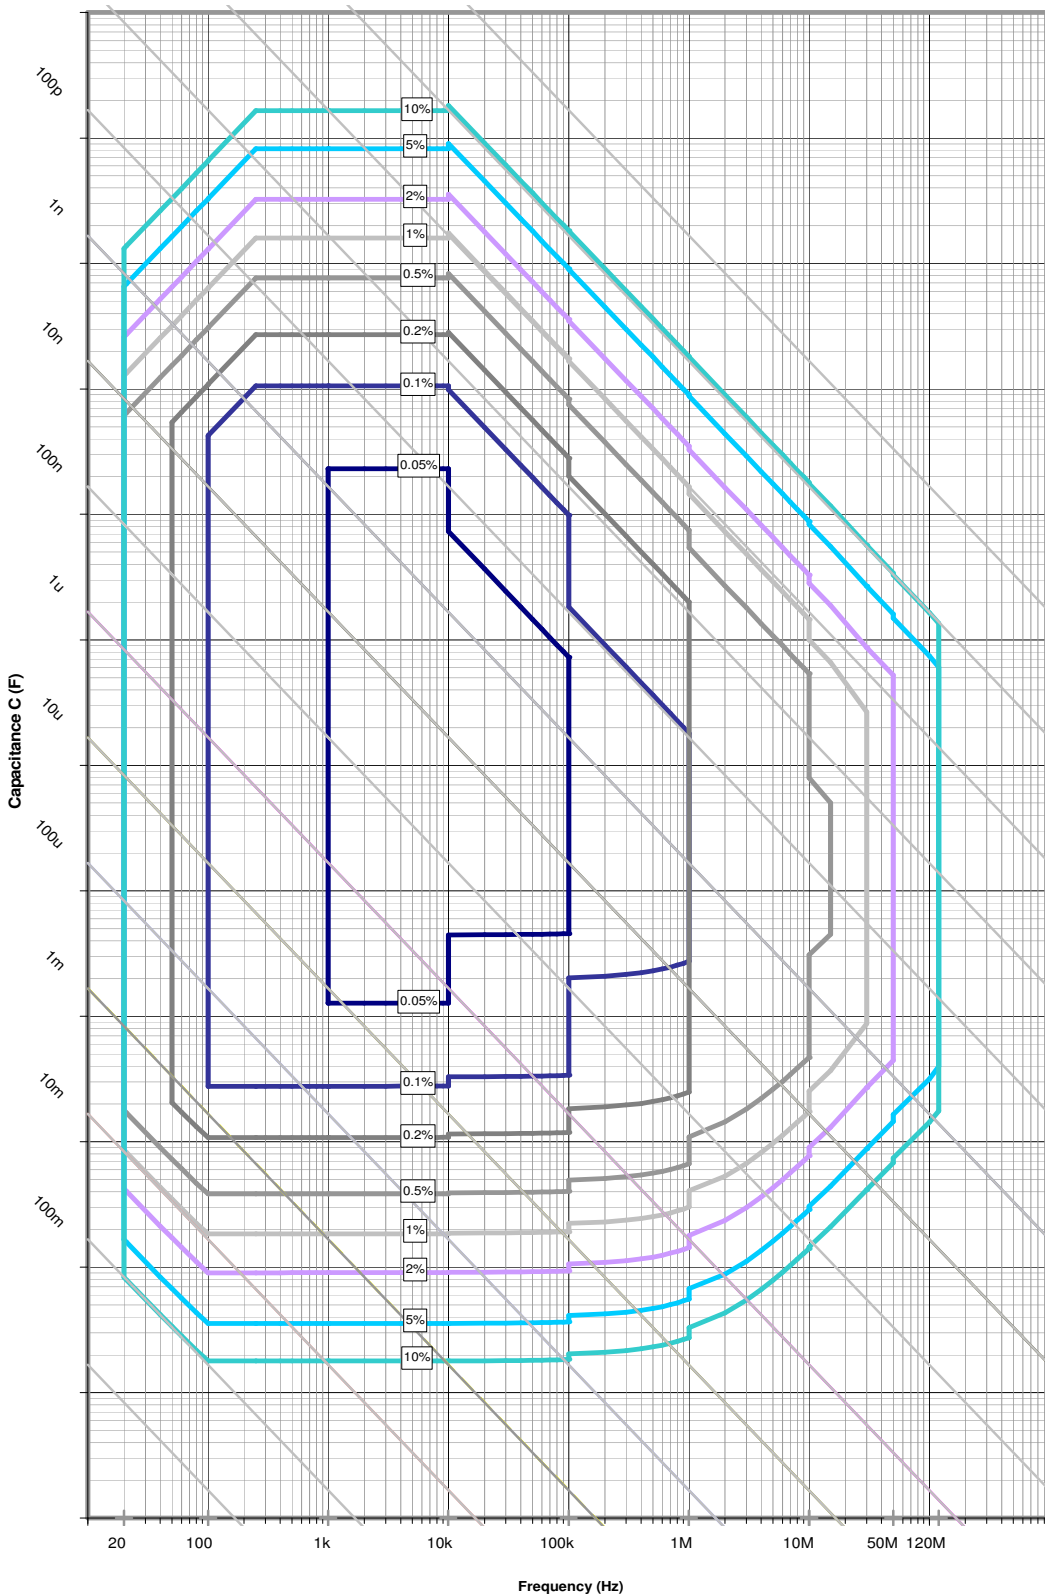

Conditions
AC Drive Level: 1V/20mA
Speed: SLOW
Fixture: 1J1011
Temperature range: 23±5 °C



6500B Inductance Measurement Accuracy

