


# Applications for AWG70000A Series and SourceXpress®

## Optical Signals Datasheet

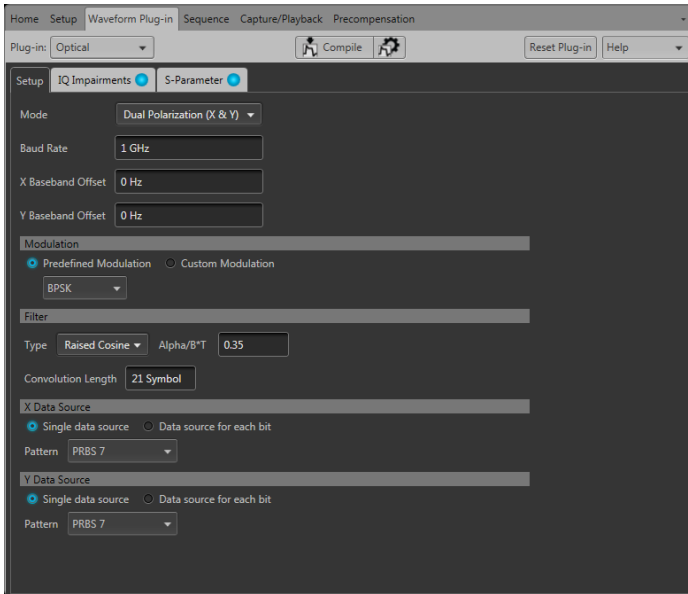

The Tektronix Optical Signals Plug-in is a waveform creation tool that is optimized for the generation of waveforms with complex modulation schemes for the purpose of testing optical communications components and other devices.

The Optical Signals Plug-in integrates into both the SourceXpress waveform creation platform and the AWG70000A series arbitrary waveform generator.

### Key features

- Simple definition of single or dual polarization modulation
  - Easily define complex dual polarization modulation schemes with separately configured baseband data. Independently adjust baseband offset for both X and Y data streams.
- Pre-loaded access to commonly used modulations
  - Define optical waveforms using a variety of predefined modulation schemes such as, BPSK, QPSK, OQPSK, OOK, NRZ, up to 8 PAM, and up to QAM1024 - including QAM8.
- Support for Custom Modulation
  - Define custom constellation points (IQ Symbols/ Magnitude Phase) or modify pre-defined constellation points.
- Flexible data source selection
  - Generate data streams from variety of predefined patterns, a PRBS 31 generator, or define your own custom arbitrary data stream.

- S-Parameter emulation (requires license)
  - Scattering parameters can be directly convolved with the base pattern to recreate the channel characteristics. By applying an inverse filter, the effects of the channel can be de-embedded from the circuit. Cascading S-Parameters allows you to cascade up to six Touchstone files of the same format to emulate a cascaded channel.
- System level precompensation (requires license)
  - Compensate for the first and second Nyquist zones of the AWG. Define the LO frequency and choose to get correction coefficients for either lower side band or upper side band, as well as define the carrier frequency.
  - The pre-compensation plug-in works for a variety of modulations, waveform types, and applications including RF, IF, or IQ and NRZ signals IQ.
- Offline Mode
  - Plug-ins are designed to also run on an external PC via the SourceXpress PC application, thereby reducing the time taken to synthesize large waveforms and leaving the AWG70000A instruments free for continued testing.
- Seamless transition between design and playback
  - The easy to use graphical user interface integrates seamlessly with the Tektronix AWG70000A series user interface and the SourceXpress PC application.
- Designed for integration for automated test or manufacturing
  - The Optical Signal Plug-in has support for a Programmatic Interface, allowing for immediate integration into existing workflows.

## Simplify optical signal creation

High speed telecommunications networks are moving towards faster and more complex modulated signals. The Tektronix Optical Signals Plug-in simplifies your waveform creation to reduce design iteration intervals and accelerate your solutions. Easily define single or dual polarization modulation schemes with user-defined or a variety of preloaded modulation formats including: BPSK, QPSK, OQPSK, OOK, NRZ, up to 8 PAM, QAM8 and many more. Select baseband data from a number of predefined patterns, user defined patterns or from a PRBS 31 generator. Define each N-bit word with symbols from N unique data streams.

## Wide eyes, low jitter

The Optical Signals Plug-in uses both S-Parameter emulation and system-level Precompensation to deliver exceptionally clean signals with industry leading EVM numbers. S-Parameter emulation (separate software license required) allows you to de-embed your signal from any components found in your signal path. Precompensation (separate license required) compensates for the effects and roll off that occurs when working in the AWG's first and second nyquist zones to create pristine optical signals with wide eyes and low EVM figures.

## Requirements

- Plug-in installed with SourceXpress on PC:
  - SourceXpress software version 5.2 or greater
  - PC operating systems: Windows 7 (64 bit), Windows 8 (64 bit), Windows 10 (64 bit)
- Plug-in installed on AWG70000A Series instrument:
  - AWG70000A firmware version 5.2 or greater

## Ordering information

### Models

**OPTICALFL-SS01** Optical Signals plug-in with a floating license that can be reassigned to different Tektronix instruments or PCs.

**OPTICALNL-SS01** Optical Signals plug-in with a node locked license tied to a single instrument or PC.

Information on the Optical Signals plug-in for SourceXpress or the AWG70000A Series along with free software download and trial licenses is available at [www.tektronix.com/product-software/optical-plug-in](http://www.tektronix.com/product-software/optical-plug-in).

An S-Parameter license is required to enable the S-Parameter feature of the Optical Signals application.

### How to purchase

To purchase, visit the Tektronix web site to request a quote or contact your nearest sales representative.

### Additional information

Refer to the SourceXpress web site ([www.tek.com/sourceexpress](http://www.tek.com/sourceexpress)) for information about:

- additional application plug-ins available for SourceXpress and the AWG70000A Series
- free software downloads and trial licenses

### Licensing

Each application plug-in for SourceXpress and AWG70000A Series instruments requires the purchase of a license before they are fully functional. Some plug-ins may require additional licenses to unlock certain plug-in features. Licenses are managed within the Tektronix Asset Management System (Tek AMS). The Tek AMS web site address is [www.tektronix.com/products/product-license](http://www.tektronix.com/products/product-license). Product license management requires a login account.

There are two types of licenses available: node-locked (NL) and floating (FL).

- Node Locked Licenses provide your own copy of the application on your instrument or personal computer and are permanently assigned to a specific Hostid or product model/serial number.
- Floating licenses can be moved between different Hostids or product models.

Use the Tektronix Asset Management system to check in and check out floating licenses.

### Certifications



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

ASEAN / Australasia (65) 6356 3900  
Belgium 00800 2255 4835\*  
Central East Europe and the Baltics +41 52 675 3777  
Finland +41 52 675 3777  
Hong Kong 400 820 5835  
Japan 81 (3) 6714 3086  
Middle East, Asia, and North Africa +41 52 675 3777  
People's Republic of China 400 820 5835  
Republic of Korea +822 6917 5084, 822 6917 5080  
Spain 00800 2255 4835\*  
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835\*  
Brazil +55 (11) 3759 7627  
Central Europe & Greece +41 52 675 3777  
France 00800 2255 4835\*  
India 000 800 650 1835  
Luxembourg +41 52 675 3777  
The Netherlands 00800 2255 4835\*  
Poland +41 52 675 3777  
Russia & CIS +7 (495) 6647564  
Sweden 00800 2255 4835\*  
United Kingdom & Ireland 00800 2255 4835\*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777  
Canada 1 800 833 9200  
Denmark +45 80 88 1401  
Germany 00800 2255 4835\*  
Italy 00800 2255 4835\*  
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90  
Norway 800 16098  
Portugal 80 08 12370  
South Africa +41 52 675 3777  
Switzerland 00800 2255 4835\*  
USA 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tek.com](http://www.tek.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



24 Aug 2016 76W-60819-0

[www.tek.com](http://www.tek.com)

**Tektronix®**

**CalPlus GmbH**  
Zentrale Berlin  
Heerstraße 32 • 14052 Berlin  
Tel.: 030 214982-0 • Fax: 030 214982-50  
office@calplus.de • www.calplus.de

**CalPlus GmbH**  
Niederlassung ScopeShop  
Normannenweg 30 • 20537 Hamburg  
Tel.: 040 3039595-0 • Fax: 040 3039595-50  
scopeshop@calplus.de • www.calplus.de